



# Play Billiards!

## Keep the Home Fires Burning

Carom and Pocket Billiards are an all-year sport—brimful of fresh surprises every game! This is not forced exercise, but healthful fun; and it brings to players life-long benefits.

Shared by boys and girls, and mothers and "old boys"—billiards instils the love of home in all. With practice you can soon control the balls, but not the merry flow of jest that often makes the best of players lose.

Give your home Carom and Pocket Billiards—not "some-time," but NOW—this Christmas. A small part payment puts a scientific Brunswick Table in your home. Pay the balance monthly—as you play.

## BRUNSWICK HOME BILLIARD TABLES

Life, speed, accuracy and lightning action—beautiful cabinet work in rosewood, mahogany, oak and walnut. Brunswick "Quick Demountable" Tables fit all size rooms, and are easily folded when not in play.

"Baby Grand" home-size regulation styles for spare-rooms, lofts, basements, or private billiard rooms. Balls, Cues, Rack, Markers, Tips, Cue-Clamps, expert book of 33 games, etc., all included free.

Write at once for handsome color-book—"Billiards—The Home Magnet" and pick out the size and style best fitted to your home.

Low prices, easy terms and home trial offer included. Mail the coupon for this interesting book at once.

**THE BRUNSWICK-BALKE-COLLENDER CO.**

Dept. 59M 623-633 S. Wabash Avenue, Chicago

Dealers, Write for Attractive Agency Proposition

Send  
Your Address  
For Billiard  
Book FREE

THE BRUNSWICK-BALKE-COLLENDER CO.

Dept. 59M 623-633 S. Wabash Avenue  
Chicago, Ill.

Send me one of the free color-books—  
"BILLIARDS—The Home Magnet" and  
tell me about your home trial offer.

Name \_\_\_\_\_

Address \_\_\_\_\_



HE WHO USES CYPRESS LUMBER BUILDS BUT ONCE



SO MANY PEOPLE KNOW  
so little about woods  
(and their relative values—How is it with you?)

SO MANY PEOPLE THINK  
that "LUMBER IS LUMBER"—(How often do YOU  
specify the kind of wood you want used by your builder?)



SO MANY PEOPLE BELIEVE

that frequent *Repair Bills* are "*Necessary Evils*"—

that we believe we are doing a public service in informing you and other intelligent people on

**CYPRESS**

("THE WOOD ETERNAL")

**HERE IS CYPRESS VS. AN IRON PLUG:**

About 110 years ago, when Louisiana was a French Province, the Water Mains of New Orleans were CYPRESS logs, 18 feet long by 22 inches diameter, with a 5-inch hole bored lengthwise. These were joined by short iron tubes, tapered at both ends. A few years ago these were replaced by the most modern system. Below is a photograph of a section of one of the CYPRESS mains just as it was dug up—as sound as ever after 100 years' contact with wet earth.

Below is a photograph of one of the iron connections just as dug up—most of them rusted past all usefulness.



**HERE IS CYPRESS VS. WEATHER.**

A photograph of a CYPRESS SHINGLE from the Austen Homestead, Staten Island, N.Y. built in 1710, and at last accounts still occupied by descendants of its original builders, with the original CYPRESS roof practically intact.

"He who uses CYPRESS builds but once."



CYPRESS is in truth "the wood eternal." If you are putting up a palace or a pasture-fence, and want to build it "**FOR KEEPS**"—USE CYPRESS.

There is an unusually liberal education (and a wonderful INVESTMENT value for you) in this CYPRESS advertising—and in the detailed information and reliable counsel to be had promptly *WITHOUT COST*, if you will *WRITE US YOUR OWN NEEDS* (big or little), and *ASK YOUR OWN QUESTIONS* of the "**ALL-ROUND HELPS DEPARTMENT**" of the

**SOUTHERN CYPRESS MANUFACTURERS' ASSOCIATION**

1249 Hibernia Bank Building, New Orleans, La.

or

1249 Heard National Bank Building, Jacksonville, Fla.

Probably your lumber man sells CYPRESS; if not *WRITE US*, and we will tell you the dealer handiest to you

When writing to Advertisers please mention Popular Science Monthly



# Popular Science Monthly

239 Fourth Ave., New York

Volume 91

Waldemar Kaempffert, Editor

No. 6

## Contents for December, 1917

AERONAUTICS		Page
Fishing in the Air.....		803
A Biplane Which Crashed Through a Roof.....		838
Sixteen Airplanes Against One Destroyer.....		850
The Sun, an Enemy to Airplanes.....		857
Testing Airplane Engines at Factory.....		861
Dummy Airplane Targets.....		866
Commuting by Airplane.....		879
Our Aviation Problems.....		894
Aviators Now Can Carry Their Telephones Under Their Hats.....		907
Testing Airplanes in a Man-Made Storm.....		910
AGRICULTURAL SCIENCE		
Hatching Chickens in Glass Globe by Electricity.....		806
The War Gardens of Railroad Employees and Station Agents.....		893
His Majesty, the Turkey.....		902
Cattle-Guard Made of Cactus.....		905
Raising Terrapins on the Farm.....		906
Consider the Rat.....		916
ASTRONOMY		
A Parsec—The Greatest Unit of Measurement.....		807
Chained to Our Earth!.....		835
ARCHITECTURE		
A Folding Staircase for the Fire Escape.....		839
House Numbers in Concrete.....		875
A Miniature Hotel with Two Thousand Rooms.....		878
A Chimney with Windows.....		892
CHEMISTRY		
Making Money Out of a Nuisance. The Industrial Rise of Acetylene Ash.....		848
Oleomargarine Glorified.....		877
Sausage Made from Cottonseed.....		909
CIVIL ENGINEERING		
Two Billion Paving Bricks a Year.....		855
Measuring the Flow of Rivers.....		867
ELECTRICITY		
A New Way of Oiling Machinery by Electricity.....		825
Illuminated Muffs.....		881
Combining an Electric-Elevator with the Shoe-Shining Chair.....		888
Applying the Principle of the Phonograph to the Telegraph Sounder.....		889
Reducing Packing Costs in Handling Telephone Sets.....		908
A Telephone Conversation May Be Almost "Private" Nowadays.....		913
Telephone Conversation Made Easy by a New Device.....		919
Charging Storage Batteries with Direct Current.....		947
Simple Method of Making Storage Cells.....		947
Auto-Transformer in Headlight Circuit on a Magnet.....		952
Making a Good Outdoor Ground to a Pipe.....		952
Finding the Combined Value in Parallel Resistances.....		959
Heating a Soldering Iron with an Electric Arc.....		960
HOUSEKEEPING MADE EASY		
Keeping the Shampooing Soap Suds Out of Your Eyes.....		804
Storing Needles and Thread in the Handles of Scissors.....		828
Solving Kitchen Problems Electrically.....		830
Abolishing the Garbage Can.....		833
Rocking the Baby Fore and Aft.....		842
New Shoe-Polishing Kit.....		857
Improved Office Appliances.....		870
Electric Fish-Scaler.....		873
Baby's Wheeled Dressing Table.....		877
Housekeeping Made Easy.....		890-91
A Pelican in Your Wardrobe to Hold Your Coat.....		904
Want to Go to the Attic? Just Pull Down the Stairs.....		912
MECHANICAL ENGINEERING		Page
A New Siphon That Starts Itself Without Suction or Pumping.....		832
Turning Valves on Their Seats Automatically.....		859
Furnace Burns Soft Coal and Cleans Its Own Radiator.....		867
Largest Direct-Current Power Plant.....		868
Improved Mechanical Appliances.....		871
Running the Oven by the Hot-Air Furnace.....		879
Making Flour from Pigskin.....		882
Barking Wood by Machinery.....		883
A Dipper Dredge That Served as a Drydock.....		893
Two Locomotives to the Aid of a Shivering Manufacturing Plant.....		899
Doing the Work of Three Hands with Two, on a Soldering Job.....		900
Which Way Will the Tree Fall?.....		901
New Looms for Old—A Wartime Necessity.....		904
A Collapsible Concrete Form Which Works on the Principle of an Umbrella.....		905
The Smallest Bandsaw.....		907
Another Biggest Thing in the World—This Time a Riveting Machine.....		913
Hot Water in an Instant.....		920
MEDICINE, SURGERY AND HYGIENE		
Artificial Lungs for New Born Babies.....		807
It Bathes, Massages, and Dries Us.....		832
The Old Indian Priests Had No Easy Time of It.....		837
Toe Spring for Enlarged Joints and Bunions.....		838
A Disappearing Crutch.....		854
Curing Wounds with Sugar.....		867
Fracture Setting Machine.....		875
Employing Destructive Gases in the Warfare Against the Sleeping Sickness.....		888
Using Brine Baths as a Cure for Shell Shock.....		899
Examining Recruits for Tuberculosis.....		909
Treating the Wounds of the War by Electricity.....		918
MILITARY AND NAVAL SCIENCE		
How a Fighting Dummy Teaches Men to Use the Bayonet.....		824
Steel Castings for Modern Dreadnoughts.....		827
Reaching the Soldiers, Wounded Far Up in the Mountains.....		839
The Unsinkable Submarine.....		840
The Possibilities of a 60-Inch Gun.....		844
Testing Shells for Hardness.....		847
The French "Horizon Blue" Is the Best Color for Uniforms.....		848
What Defective Ammunition Means.....		849
New Motor Truck Kitchen.....		851
Blinding the Enemy with Searchlights.....		859
A Bomb in a Piano.....		865
Dummy Airplane Targets.....		866
A German Military Obstacle.....		869
The Latest Sea Camouflage.....		876
Protecting Battleships with Compressed Air.....		886
German Trenches as Comfortable as Houses.....		889
England's Great Under-Sea Walls of Bombs.....		915
MOTOR VEHICLES AND THEIR ACCESSORIES		
A New Way of Cushioning the Front Spring Action of an Automobile.....		828
Three-Purpose Electric Drill.....		828
The Automobile Driver Must Know What to Do in Case of Accident.....		831
Bell Gives Warning When Automobile Backs Up.....		834
A Powerful Motor Sprinkler.....		849
New Motor Truck Kitchen.....		851
Automobile Accessories.....		852-53
Mirrors to Avoid Auto Accidents.....		855
Burning Distillate in Your Auto Engine.....		864
Keeping Auto Engine at Right Temperature.....		866
Turning the Headlights Electromagnetically.....		919
Forty-Five Miles an Hour on This Motorcycle Sleigh.....		920
An Automobile Steering Wheel for a Bob-Sled.....		928



## NATURAL SCIENCE

## PICTURE PAGES

## PHOTOGRAPHY AND MOTION PICTURES

## PRACTICAL WORKERS' DEPARTMENT

## RADIO COMMUNICATION

## RAILWAYS

SHIPS AND SHIP BUILDING

## SPORTS AND PASTIMES

## MISCELLANY

A Device for Keeping Bananas Clean .....	804
The War Price on Monkeys .....	804
A Badge Which Tells the Story of Your Life.....	807
The Largest Ball of Twine.....	824
The Most Expensive Coat in All the World.....	831
How the "Ship of the Desert" Is Anchored When the Caravan Rests.....	831
Is This the Secret of the Earth's Magnetism.....	843
Rice for Face Powder .....	854
A New Method of Learning to Play the Violin... ..	860
Protecting Your Shoes from Mud.....	861
A Palace of Corn.....	874
Wealth in Scrap Piles.....	883
Wearing Spikes on Your Feet to Prevent Slipping on Ice.....	889
The "Complex Dinner" Container for Long Trips.....	900
Pull Out a Cigarette and a Lighted Match with One Motion.....	901
We Boycott the Chinese but Not His Hair.....	904
To Open a Stubborn Knife-Blade, Throw It from You.....	907
Arrowhead Lamp Posts Mark the Arrowhead Trail.....	908
Filtering Out the Harsh Tones from a Phonograph.....	911
We Use Eighteen Times as Much Light as Did Our Great-Grandfathers.....	914
Matches? Take One at a Time, Please.....	914
Sharpening Your Pencil Without Soiling Your Fingers.....	918

**MODERN PUBLISHING COMPANY, 239 Fourth Avenue, New York City**



# New Oliver Typewriters At Half Price

**Latest Model  
Number Nine**

**Was \$100  
Now \$49**

**FREE TRIAL—  
No Money Down  
Over a Year to Pay**



## Save \$51

**By This New Plan—Be Your Own Salesman**

**A \$2,000,000 Guarantee That This \$49 Typewriter Was \$100**

Since March 1st The Oliver Typewriter Company has had no expensive sales force of 15,000 salesmen and agents, no high office rents in 50 cities, no idle stocks, no costly subsidies, no excessive distribution costs.

By selling direct from the factory to you, we save \$51 in sales costs.

This now goes to you. The \$49 Oliver is the identical machine that was formerly \$100. Not one change has been made in design or materials. Each machine is brand new—not second-hand nor rebuilt.

### The \$100 Model

The Oliver Nine is the finest, the costliest, the most successful model we ever built. If any typewriter is worth \$100, it is this handsome machine, the greatest Oliver triumph.

Over 600,000 have been sold. This is the same commercial machine used by the U. S. Steel Corporation, the Standard Oil Company, the National City Bank of New York, Montgomery Ward & Co., the National Biscuit Company, the Pennsylvania Railroad, and a host of others. Any operator can use the Oliver.

### Free Trial; No Money Down

Here is our plan: We ship an Oliver Nine to you for five days' free trial. No money down. Use it in your office or at home. Try it—without anyone to influence you.

If you want to keep it, send us \$3 per month.

If you want to send it back, we even refund the transportation charges you paid.

That is the entire plan. You are the sole judge. At no time during the trial are you under the slightest obligation to buy. Superiority and economy alone must convince you.

*Canadian Price, \$62.65*

### Amazing Facts

We have just published a startling book, entitled "The High Cost of Typewriters—The Reason and the Remedy," which reveals the inside history of the typewriter world—old customs of selling—secrets never before divulged—all about price inflation—subsidies, etc. All the follies of \$100 pricing are exposed. Readers are astounded.

Mail the coupon now. You will be surprised.

This book tells everything. With it we send our catalog, free trial order blanks, etc. After reading it, you may order a free-trial Oliver.

One copy of this expose will be sent to each person who mails the coupon below.

**The Oliver Typewriter Co.**  
1109 Oliver Typewriter Bldg., Chicago

**THE OLIVER TYPEWRITER CO.**  
1109 Oliver Typewriter Bldg.  
Chicago, Ill.

**FREE  
BOOK**

☐ Ship me a new Oliver Nine for five days free inspection. If I keep it, I will pay \$49 at the rate of \$3 per month. The title to remain in you until fully paid for.

My shipping point is.....

This does not place me under any obligation to buy. If I choose to return the Oliver, I will ship it back at your expense at the end of five days.

☐ Do not send a machine until I order it. Mail me your book—"The High Cost of Typewriters—The Reason and the Remedy," your deluxe catalogs and further information.

Name.....

Street Address.....

City.....State.....

When writing to Advertisers please mention Popular Science Monthly



# Every Electrical Man Wants These Books and we ship them for your inspection **FREE**



**10**  
Volumes  
**3500**  
Pages  
**4700**  
Pictures  
**\$1 Per**  
Volume  
**\$1 Per**  
Month

**Flexible**  
Covers  
**Handy**  
Pocket-  
Size  
Volumes

**Just what you need to know to succeed in ELECTRICITY**

When writing to Advertisers please mention Popular Science Monthly



**E**VERY electrician, every engineer, every mechanic should know about these wonderfully helpful and instructive books, which give in plain words a complete working knowledge of electrical engineering in all its phases.

You run into some new electrical prob-

lem almost every day. It may be some trouble that you can't locate, or some electrical principle that you don't know just how to apply. It's up to you to find the right way out. There's no need to spend hours trying to "dope it out," no need to ask somebody else, or do a makeshift job. The information you need to help you in your every day work is in

## What Electrical Men Say About—

### Helped Him Make Good

"It is only right for me to recommend highly the Hawkins Guides, for they have been of the greatest assistance to me in placing me in my present position as Superintendent of Construction Department of one of Ohio's largest Electrical Companies. I would like to see every man have a set of Hawkins Guides." Geo. Knecht, Columbus, Ohio.

### The Trouble With Them

"The only trouble I find with the Hawkins Guides is that everybody is always borrowing them. My set was even borrowed by a high school instructor for reference work in a physics class.

Carl Haenwinkle, Hettinger, N. D.

### First Aid

"Number 10 Guide arrived all O. K. and completes the set, which I am very proud of. I don't think it would be possible to find a better set for either the beginner or the professional electrician."

Elmer A. Stevens,

U. S. S. Nebraska, Postmaster, N. Y.

### In the Naval Electrical Dept.

"The Hawkins Guides are great help to me in the Naval Electrical Department, which they cover very thoroughly."

C. J. Cornell,

U. S. Receiving Ship, Brooklyn, N. Y.

### Handy to Carry

"The great beauty of them is that you can carry them in your pocket. That suits me, for I never want to be without them."

F. S. Collins,

Richardson Engineering Co., Hartford, Conn.

### Saved Him Money

"Hawkins Guides saved me just \$3.50 the first time I looked through No. 10 Book. I had a spark coil played out, and that book showed me how to rewind it; and I made it as good as new. Hawkins Guides are the best ever."

H. F. Ramey, Piedmont, Mo.

### Superintendent

"I am now superintendent of the Dunnville Hydro-Electric Systems, and Hawkins Guides were a great help to me in holding down a responsible position."

W. E. Swartz, Dunnville, Ontario.

### Even in College

"I am attending Cornell University, but I use the Hawkins Guides every day for general information which I cannot get in recitation work or in laboratory experiments. I'll always speak a good word for the every-ready Guides."

J. Winfield Kurta, Joanna, Berke Co., Pa.

### Wireless Operators

"I have worked wireless for ten years—but I wish I had these books years ago, as they have saved me a great deal of trouble."

H. Marshall,

Steamer M & B No. 2, Walkersville, Ont.

# HAWKINS ELECTRICAL GUIDES

These books place electricity at your fingers' ends. They cover every imaginable subject, principle, theory, problem, trouble, and way of doing things electrically. Every subject is indexed so that you can turn right to it. They are a study course and a reference guide in one, written in plain every day language—no wasted words—only what you need to know—chock full of up-to-the-minute electrical knowledge. The guides are a complete course in electrical engineering. They will help you in every detail of the day's electrical work. You can't ask an electrical question that Hawkins Guides can't answer.

## Pocket-Size Flexible Covers

The books are small enough to slip into your coat pocket—handsomely bound in flexible black covers.

You can carry each volume with you until you have mastered its contents. 3,500 pages of actual information and 4,700 illustrations. Once you see these books and put them into actual use you will never again want to be without them. Try it at our expense.

## SEND NO MONEY

It will cost you nothing to receive these books—to look them over—ask them all the questions you can think of—use them in your work—study them—pick up some information that will increase your earning ability. We will ship you the entire set of 10 volumes entirely FREE.

This is a sign of our confidence in the guides. Pure gold does not object to being tested. Keep them for seven days and if you do not decide that you can't get along without them, return them to us and owe us nothing.

When you decide to keep them you only have to pay \$1.00 down and remit the balance of \$9.00 on the easy payment of \$1.00 a month till paid for.

Use this coupon to get the books. It will pay you many times over.

**THEO. AUDEL & CO.**

72 Fifth Ave.

New York, N. Y.

**SEND NO MONEY—USE THE COUPON**

## Read This Partial List of Contents

**No. 1** Contains 348 pages, 388 illustrations. Electrical signs and symbols—static and current electricity—primary cells—conductors and insulators—resistance and conductivity—magnetism—induction coils—dynamo principles—classes of dynamos—armatures—windings—commutation—brushes, etc.

**No. 2** Contains 348 pages, 394 illustrations. Motor principles—armature reaction—motor starting—calculations—brake horsepower—selection and installation of dynamos and motors—galvanometers—standard cells—current measurement—resistance measurement—voltmeters—wattmeters—watt hour meters—operation of dynamos—operation of motors, etc.

**No. 3** Contains 300 pages, 423 illustrations. Distribution systems—wires and wire calculations—inside, outside and underground wiring—sign flashers—lightning protection—rectifiers—storage battery systems, etc.

**No. 4** Contains 270 pages, 379 illustrations. Alternating current principles—alternating current diagrams—the power factor—alternator principles—alternator construction—windings, etc.

**No. 5** Contains 320 pages, 614 illustrations. A. C. Motors—synchronous and induction motor principles—A. C. commutator motors—induction motors, transformers: losses, construction, connections, tests—converters—rectifiers, etc.

**No. 6** Contains 298 pages, 472 illustrations. Alternating current systems—switching devices—circuit breakers—relays—lighting protector apparatus—regulating devices—synchronous condensers—indicating devices—motors—power factor indicators—wave form measurement—switch boards, etc.

**No. 7** Contains 316 pages, 379 illustrations. Alternating current, wiring power stations—turbines: management, selection, location, erection, testing, running, care and repair—telephones, etc.

**No. 8** Contains 332 pages, 436 illustrations. Telegraph—simultaneous telegraphy and telephony—wireless—electric bells—electric lighting—photometry, etc.

**No. 9** Contains 322 pages, 627 illustrations.

Electric railways—electric locomotives—car lighting—trolley car operation—miscellaneous applications—motion pictures—gas engine ignition—automobile self-starters and lighting systems, electric vehicles, etc.

**No. 10** Contains 513 pages, 599 illustrations. Elevators—cranes—pumps—air compressors—electric heating—electric welding—soldering and brazing—industrial electrolyses—electro plating—electro-therapeutics—X-rays, etc.

Also a complete 126-page ready reference index of the complete library. This index has been planned to render easily accessible all the vast information contained in the 10 electrical guides. There are over 13,500 cross references. You find what you want to know instantly.

Signature .....

Occupation .....

Business Address .....

Residence .....

Since we have not yet had the pleasure of business relations with you, we shall appreciate your giving us name of reference on line below.

Reference.....P. S. M. Dec. '17

**THEO.  
AUDEL & CO.**  
72 Fifth Avenue  
New York, N. Y.

Please submit me for examination Hawkins Electrical Guides (price \$1 each). Ship at once, prepaid, the 10 numbers. If satisfactory I agree to send you \$1 within seven days and to further mail you \$1 each month until paid.



# The Lazy Muscles That Cause Constipation

By R. H. SINCLAIR

It is now agreed by all of the great authorities that constipation is not a disorder of the stomach or even of the small intestine, but of the large intestine or colon.

Under normal conditions, this large colon, which is about five feet long and shaped like a horse-shoe, extracts the liquids from the waste matter entrusted to its care and promptly passes the residue on.

But unfortunately, due to our sedentary lives, the colon has gradually become so lazy from lack of exercise, that it is unable to perform its functions.

If we were able to live outdoors and to exercise vigorously every day, our colons would handle their work properly; for exercise is the greatest and most satisfactory colon stimulant known.

To most of us, sufficient daily exercise, however, is not possible. We have neither the time nor the inclination. Instead, we dose ourselves with laxative drugs, mineral waters, and other nostrums, with the result that, while we get temporary relief, we not only aggravate the condition, but find that repetitions of the same dose later fail to produce results.

But relief, even when obtained, is not sufficient. To maintain health and efficiency, it is absolutely of paramount importance to create and maintain, day in and day out freedom from intestinal poisons; and this is impossible with laxatives.

There is a new way, however, to keep the colon sweet and clean—a way which has the same effect as vigorous exercise, yet without the inconvenience or time-consuming features of exercise. And the results are even better because the treatment is localized.

The principle upon which this new method is founded is the same as that used in massage. We all know that massage has the same effect as exercise—it stimulates the nerves and strengthens the mus-

cles. Colon massage as practiced by osteopaths has proved wonderfully effective.

This new method of massaging the colon involves the use of a device called the Kolon Motor—a mechanical masseur, the face of which is shaped to fit over the colon when placed against the abdomen. You merely put the Kolon Motor on a door or wall, lean up against it and turn the handle for a few moments. The face rotates with a scientific waving motion which immediately stimulates the colon and causes proper functioning. A couple of minutes in the morning each day is all that is required and unless your experience is different from the hundreds of other users you will feel like a new person after the very first application.

Before the Kolon Motor was offered to the public a number of well-known physicians were acquainted with its merits and used it in their practise. Without exception the results were most gratifying—in fact, every physician who has tested the Kolon Motor endorses it most highly.


Martin's Method, Incorporated, Department 5312, 105 East 30th Street, New York, has prepared a booklet called Colon Cleanliness, which they will be pleased to send gratis to all readers of this magazine. In this booklet the Kolon Motor is clearly illustrated and its application shown. It also contains a scientific discussion of auto-intoxication, and explains why and how the Kolon Motor produces such assured results. Letters from well-known physicians relating their experience with the Kolon Motor also form a part of the book.

There may be some who scoff at the idea of colon hygiene and its direct relation to health and efficiency, but the wiser ones will write for this free book and learn what this wonderful device is accomplishing for so many others.

When writing to Advertisers please mention Popular Science Monthly



# These Are The Hours That Count

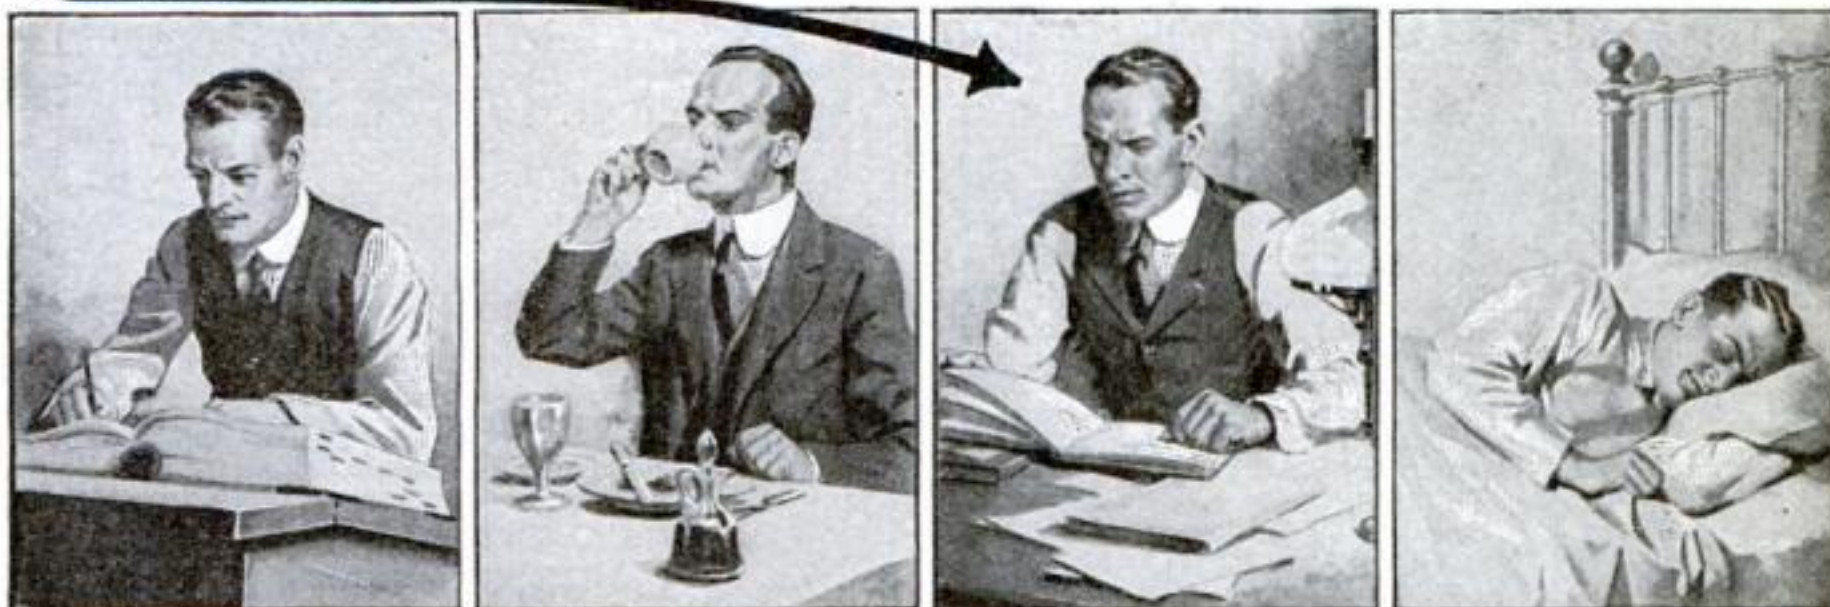

**M**OST of your time is mortgaged to work, meals and sleep. But the hours after supper are *yours*, and your whole future depends on how you spend them. You can fritter them away on profitless pleasure, or you can make those hours bring you position, money, power, *real success* in life. Thousands of splendid, good-paying positions are waiting in every field of work for men *trained to fill them*. There is a big job waiting for *you*—in your present work or any line you choose. Get ready for it! You can do it without losing a minute from work or a wink of sleep, without hurrying a single meal, and with plenty of time left for recreation. You can do it in one hour after supper each night, right at home, through the International Correspondence Schools.

## Yes—You Can Win Success in an Hour a Day

Hundreds of thousands have proved it. The designer of the Packard "Twin Six," and hundreds of other Engineers, climbed to success through I. C. S. help. The builder of the great Equitable Building, and hundreds of Architects and Contractors, won their way to the top through I. C. S. spare-time study. Many of this country's foremost Advertising and Sales Managers prepared for their present positions in spare hours under I. C. S. instruction.

For 25 years men in offices, stores, shops, factories, mines, railroads—in every line of technical and commercial work—have been winning promotion and increased salaries through the I. C. S. Over 130,000 men are getting ready *right now* in the I. C. S. way for the bigger jobs ahead.

## Your Chance Is Here!

No matter where you live, the I. C. S. will come to *you*. No matter what your handicaps, or how small your means, we have a plan to meet your circumstances. No matter how limited your previous education, the simply written, wonderfully illustrated I. C. S. textbooks make it easy to learn. No matter what career you may choose, some one of the 280 I. C. S. Courses will surely suit your needs.

## Make Your Start Now!

When everything has been made easy for you—when one hour a day spent with the I. C. S. in the quiet of your own home will bring you a bigger income, more comforts, more pleasures, all that success means, can you afford to let another single priceless hour of spare time go to waste? Make your start right now! This is all we ask: Without cost, without obligating yourself in any way, put it up to us to prove how we can help you.

## Just Mark and Mail This Coupon

### INTERNATIONAL CORRESPONDENCE SCHOOLS BOX 5836, SCRANTON, PA.

Explain, without obligating me, how I can qualify for the position, or in the subject, before which I mark X.

- |   |  |
|---|--|
| <input type="checkbox"/> ELECTRICAL ENGINEER        | <input type="checkbox"/> SALESMANSHIP            |
| <input type="checkbox"/> Electric Lighting          | <input type="checkbox"/> ADVERTISING             |
| <input type="checkbox"/> Electric Railways          | <input type="checkbox"/> Window Trimmer          |
| <input type="checkbox"/> Electric Wiring            | <input type="checkbox"/> Show Card Writer        |
| <input type="checkbox"/> Telegraph Engineer         | <input type="checkbox"/> Sign Painter            |
| <input type="checkbox"/> Telephone Work             | <input type="checkbox"/> Railroad Trainman       |
| <input type="checkbox"/> MECHANICAL ENGINEER        | <input type="checkbox"/> ILLUSTRATING            |
| <input type="checkbox"/> Mechanical Draftsman       | <input type="checkbox"/> Cartooning              |
| <input type="checkbox"/> Machine Shop Practice      | <input type="checkbox"/> BOOKKEEPER              |
| <input type="checkbox"/> Gas Engine Operating       | <input type="checkbox"/> Stenographer and Typist |
| <input type="checkbox"/> CIVIL ENGINEER             | <input type="checkbox"/> Cert. Public Accountant |
| <input type="checkbox"/> Surveying and Mapping      | <input type="checkbox"/> TRAFFIC MANAGER         |
| <input type="checkbox"/> MINE FOREMAN OR ENGINEER   | <input type="checkbox"/> Railway Accountant      |
| <input type="checkbox"/> Metallurgist or Prospector | <input type="checkbox"/> Commercial Law          |
| <input type="checkbox"/> STATIONARY ENGINEER        | <input type="checkbox"/> GOOD ENGLISH            |
| <input type="checkbox"/> Marine Engineer            | <input type="checkbox"/> Teacher                 |
| <input type="checkbox"/> ARCHITECT                  | <input type="checkbox"/> Common School Subjects  |
| <input type="checkbox"/> Contractor and Builder     | <input type="checkbox"/> Mathematics             |
| <input type="checkbox"/> Architectural Draftsman    | <input type="checkbox"/> CIVIL SERVICE           |
| <input type="checkbox"/> Concrete Builder           | <input type="checkbox"/> Railway Mail Clerk      |
| <input type="checkbox"/> Structural Engineer        | <input type="checkbox"/> AUTOMOBILE OPERATING    |
| <input type="checkbox"/> PLUMBING AND HEATING       | <input type="checkbox"/> Auto Repairing          |
| <input type="checkbox"/> Sheet Metal Worker         | <input type="checkbox"/> Navigation              |
| <input type="checkbox"/> Textile Overseer or Supt.  | <input type="checkbox"/> AGRICULTURE             |
| <input type="checkbox"/> CHEMIST                    | <input type="checkbox"/> Poultry Raising         |
|   | <input type="checkbox"/> Spanish                 |
|   | <input type="checkbox"/> German                  |
|   | <input type="checkbox"/> French                  |
|   | <input type="checkbox"/> Italian                 |

Name \_\_\_\_\_

Present Occupation \_\_\_\_\_

Street and No. \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_





**The Partition of Poland** was the greatest national tragedy in history. The country was divided between Austria, Russia and Prussia shown herewith by the three crowned eagles. Poland is shown by the fallen soldier, the flag of his country trailing in the dust, while the Goddess of Liberty is defending the nation. It is altogether probable this ancient nation may again be re-established as a result of the present European War. All the underlying causes of this mighty struggle may be learned from the pages of the world famed publication

## Ridpath's History of the World

On account of the tremendous increase in the cost of paper and leather, occasioned by the European war it becomes necessary to advance the price in order to cover the increased cost of manufacture. This is your last opportunity to buy Ridpath's History of the World at our present low prices and easy terms of payment. We are closing out the remaining sets of the last edition

### At a Bargain

We will name this bargain price only in direct letters to those who mail us the coupon below. Tear off the coupon, write our name and address plainly and mail now before you forget it. You incur no obligation whatever. We employ no agents as our low price does not permit the payment of an agent's commission. The beautiful sample pages will give you some idea of the splendid illustrations and wonderfully beautiful style in which the history is written. Mail the coupon.



#### Notice

On account increased cost of manufacture price will soon advance. Mail coupon now for present Bargain Offer.

Napoleon

4000 Pages  
2000 Pictures

### Six Thousand Years of History

Ridpath takes you back to the dawn of history long before the Pyramids of Egypt were built; down through the romantic troubled times of Chaldea's grandeur and Assyria's magnificence; of Babylonia's wealth and luxury; of Greek and Roman Splendor; of Mohammedan culture and refinement; of French elegance and British power, to the dawn of yesterday. He covers every race, every nation, every time and holds you spellbound by his wonderful eloquence.

### Ridpath's Graphic Style

Ridpath pictures the great historical events as though they were happening before your eyes; he carries you with him to see the battles of old; to meet kings and queens and warriors; to sit in the Roman Senate; to match against Saladin and his dark-skinned followers; to sail the southern seas with Drake; to circumnavigate the globe with Magellan. He combines absorbing interest with supreme reliability. Mail the following coupon for free sample pages.

### FREE COUPON

WESTERN NEWSPAPER ASSOCIATION (12-17)  
140 So. Dearborn St., Chicago, Ill.

Please mail your 32-page free sample booklet of Ridpath's History of the World, containing photogravures of Napoleon, and Caesar, map of European War Zone, and write me full particulars of your special offer to Popular Science Monthly readers.

NAME .....  
ADDRESS .....

## LEARN MUSIC

## AT HOME

### MUSIC LESSONS FREE

Become most popular person in your set! LEARN TO PLAY BY NOTE:—Piano, Organ, Violin, Banjo, Mandolin, Trombone, Flute, Guitar, Ukelele, Saxophone, Clarinet, Piccolo, Cornet, Harp, Cello, or to sing. Special Limited offer of free weekly lessons. You pay only for music and postage, only 12 1-2 cents a week. No extras. Beginners or advanced pupils. Everything illustrated, plain, simple, systematic. Free lectures each week. 19 years' success. WRITE POSTAL TODAY for Free Booklet. Over 200,000 successful pupils all over the country.  
U. S. SCHOOL OF MUSIC, 812 Brunswick Bldg., New York



## Learn How to WRESTLE

In Your Own Home  
By Mail

Yes, learn to become an expert wrestler right in your own home, by mail, from the greatest wrestlers the world has ever known. Be an athlete, be strong, be healthy. Learn how to throw and handle big men with ease. Learn to defend yourself. All taught in our course of lessons, and illustrated with hundreds of charts and actual photographs by

### Farmer Burns and Frank Gotch

Farmer Burns, "the grand old man of the mat," taught Frank Gotch, the present World's Champion, all he knows about wrestling, so Gotch says. He will now teach you Scientific Wrestling—Physical Culture—Jiu-Jitsu—Self Defense. Every man and boy in America, no difference what age, needs this wonderful course of lessons. Write today—your name, age and address on a postcard or letter brings you our fine book absolutely free—no obligations of any kind. A splendid book on wrestling and physical culture. Write today stating your age.

Farmer Burns School of Wrestling, 1209 Range Bldg., Omaha

This Wrestling Book FREE

## BIG MONEY IN Show Card Writing

Litholia System of Lettering. 512 Flatiron Bldg., New York



### Raise Mushrooms

Profits Astonishing. Easy to grow in spare time at home, in cellars, barns, sheds, boxes, etc. I furnish market. Success guaranteed. Free illustrated booklet. Read how a beginner took \$131.50 from cellar bed. Write to-day.

HIRAM BARTON

Desk 3, 329 W. 48th Street, New York

## Stop Forgetting

## Memory the Basis of All Knowledge

The Key to Success  
The secret of business and social success is the ability to remember.

I can make your mind an infallible classified index from which you can instantly select thoughts, facts, figures, names, faces. Enables you to concentrate, develop self control, overcome bashfulness, think on your feet, address an audience. Easy. Simple. The result of 20 years' experience developing memories of thousands.

Write Today for free booklet, "How to Remember" and Copyrighted Memory Test, also how to obtain my FREE book, "How to Speak in Public."

DICKSON SCHOOL OF MEMORY,  
1929 Hearst Bldg., Chicago, Ill.



Prof. Henry Dickson, Principal





# BE A TRAFFIC MANAGER

*\$2,000 to \$40,000 Yearly Now Earned*

No profession on earth is so short of trained men as Traffic. Right now the railroads, manufacturers and shippers are in urgent need of 100,000 trained traffic men—experts who can prevent the costly mistakes in rates, routings, demurrage and handling charges, classifications, etc. Become a traffic expert and you enter the largest single business in the United States, where the **salaries run as high as \$40,000 a year!** Transportation now employs over 4,000,000 men, and over 2000 million dollars is paid as freight each year to 1000 railroads. Each day traffic grows bigger—and each day the need for trained traffic managers becomes greater and more urgent. Decide now to train for a traffic management position!

## READ

**What Prominent Traffic Men Say About A. C. A. Training**

**H. L. Derly, Traffic Counsellor to a number of big firms**—"I owe more to the American Commerce Association than to any other factor that enters into the problems of traffic management. I have gained much from the information that has come to me from them."

**H. G. Wilson, Commissioner Toledo Commerce Club**—"Your Association is better equipped to advance the efficiency of traffic men than any other."

**A. T. Waterfall, Traffic Commissioner, Detroit, Mich.**—"You are to be congratulated on this splendid and important work."

**F. A. Barber, Chief of Tariff Bureau, Wabash Railroad**—"I do not see how anyone can help but be benefited thereby."

Let us send you full copies of many other letters.

## Your Spare Time

Use your spare time in becoming a Traffic Expert. Our practical method of training

you by mail makes everything easy for you. You will acquire efficiency in a few months because you will have the assistance of America's most prominent traffic men. Don't pass up this opportunity. It's the biggest and best you ever had.

Write today for full particulars.

## Special Training is the Thing!

The old way of acquiring traffic knowledge was through long years of tedious experience. But this is the day of **special training!** In traffic as in other fields. Our modern method of training you by mail makes you efficient in a very few months. Through membership in the **AMERICAN COMMERCE ASSOCIATION** you have a decided advantage for the big position of big pay. No previous experience necessary.

## Book Free!

Regardless of what kind of work you are now engaged in, you owe it to yourself to learn fully what A. C. A. training in traffic will do for you. See how we teach you how to determine the tariff which names the lowest legal rate on the shipment of commodities. This is the basis of all traffic knowledge. Having it, you can be sure of success in traffic management. Our free book explains everything. Write for it today. Mail a postcard or letter or the coupon. Write now, before you turn this page.

American Commerce Association  
Dept. 912 American Commerce Bldg.,  
Chicago, Ill.

## Mail This Today-Now

American Commerce Association,  
Dept. 912, American Commerce Bldg.  
Chicago, Ill.

Send me FREE and without obligation complete information concerning the Association and how I can train as a traffic man.

Name .....

Occupation .....

Address .....

City ..... State .....

When writing to Advertisers please mention Popular Science Monthly





# Wanted— Men Who Know the Science of Aviation!

The fact that the United States government plans to send 30,000 flying men to Europe and spend possibly a billion dollars in aviation means something more than a big demand for flying men.

## It Means the Sudden Building Up of a Vast New Industry!

There will be urgent need for thousands of men who thoroughly understand the science of aviation—men who can serve as airplane designers, builders, engineers, assemblers, salesmen, repairmen, mechanics, contractors, inspectors, instructors.

## Learn at Home!

Start now to master the science of aviation. Help to meet this tremendous demand for trained men. You can learn at home, in your leisure time, without giving up your employment—and you do not need a college education.

The National Aero Institute offers you a mail course of 53 lessons in the principles of aviation. Your training will be under the supervision of aeronautical experts—men like Walter L. Brock, the famous aviator who won the great London to Paris race. While you cannot, of course, learn to fly by mail, this great home course gives you all the ground work which is so necessary to successful flying—and all the basic training needed to fit you for any of the positions mentioned above.

### This Course Gives You

all the basic training needed to fill such positions as:  
Airplane Designer;  
Builder; Salesman;  
Assembler; Contractor; Repairman; Instructor; Inspector; Mechanic

When you have completed the course you will need only actual working experience to make you an aviation expert. Aviation experts command big salaries.

Authorities agree that after the war aviation is bound to become a vast means of transportation—passenger—freight—mail. Orville Wright says, "There is no means of transportation that is so safe." Be a pioneer in this great new industry. Pioneers have the best chance of being leaders. The sudden rise of the automobile industry turned poor men into millionaires. YOU may be the future "Henry Ford" of aviation!

## Write at Once

### For Special Offer

National Aero  
Institute  
Dept. 1209 — Morton  
Building, Chicago, Ill.

Gentlemen: Please send me, free and prepaid, full particulars of your mail course in the principles of aviation, and details of your special limited offer.

Name.....

Address.....

Send for our special limited offer. Just now we are offering this Complete Mail Course in the Principles of Aviation at a greatly reduced price. We also furnish free, to every student who enrolls now, a complete flying model and all materials for a scale model. Tear out the coupon and mail it at once—before this offer is withdrawn. Do it right away—NOW.

NATIONAL  
Aero Institute  
Dept. 1209  
Morton Bldg.,  
CHICAGO



Learn a Paying Profession  
that assures you a good income and position for life. For  
twenty-four years we have successfully taught

## PHOTOGRAPHY

Photo-Engraving and Three-Color Work  
Our graduates earn \$20 to \$50 a week. We assist them to secure these positions. Learn how you can become successful. Terms easy—living inexpensive. Write for catalogue—NOW!  
ILLINOIS COLLEGE OF PHOTOGRAPHY  
Box PS, 511 Wabash Ave., Effingham, Ill.


## Be an Artist

interfering with present work.

10 LESSONS FREE TO YOU.  
Write for full particulars, FREE CERTIFICATE, list of successful pupils, illustrated prospectus, etc., to  
ASSOCIATED ART STUDIOS, 37-A Flatiron Building, New York, N. Y.



I won the World's First Prize for best course in Penmanship. Under my guidance you can become an expert penman. Am placing many of my students as instructors in commercial colleges at high salaries. If you wish to become a better penman, write me. I will send you FREE one of my Favorite Pens and a copy of the Ransomerian Journal. Write me today. Address  
G. W. RANSOM, 340 Essex Bldg., Kansas City, Mo.



FREE BOOK  
famous Written Method is endorsed by leading musicians and heads of State Conservatories. Successful 25 years. Play chords at once and complete piece in every key, within 4 lessons. Scientific yet easy to understand. Fully illustrated. For beginners or teachers, old or young. All music free. Diploma granted. Write today for 64-page free book, "How to Study Music." M. L. QUINN CONSERVATORY, Studio Z L, Social Union Bldg., Boston, Mass.

## Learn Piano!

### This Interesting Free Book

shows how you can become a skilled player of piano or organ in your own home, at one quarter usual cost. Dr. Quinn's famous Written Method is endorsed by leading musicians and heads of State Conservatories. Successful 25 years. Play chords at once and complete piece in every key, within 4 lessons. Scientific yet easy to understand. Fully illustrated. For beginners or teachers, old or young. All music free. Diploma granted. Write today for 64-page free book, "How to Study Music." M. L. QUINN CONSERVATORY, Studio Z L, Social Union Bldg., Boston, Mass.



## IF YOU STAMMER

Attend no stammering school until you get my big FREE book and special rate. Largest and most successful institution of its kind in the world. Two large modern school buildings fully equipped for treatment of stammering under my advanced natural method. No sing songing or time beating. Established 14 years. Known everywhere as the best. Personal instruction given each student. Write today for full particulars. Lee Wells Millard, Pres. North-Western School for Stammerers, 2318 Grand Ave., Milwaukee, Wis.



## Better Your Position

\$125-\$250 a Month


Are you under 55? War has taken the youth of the country. Railroads demand Traffic Inspectors—young men, old men, but trained men. \$125 a month and expenses to start.

What is a Traffic Inspector? Briefly, he roams the continent in a Pullman to safeguard our lives and his Company's money. He is in a position to grasp opportunities. If he is efficient he is bound to gain positions of trust. Hundreds wanted now. There is no excuse for failure today. This is your chance. You can do this with proper training. F. P. S. qualifies you in 3 months home study, and arranges for position. Write for explanatory booklet K-9.

Frontier Preparatory School  
BUFFALO, N. Y.



# Free Test Lesson in Draftsmanship

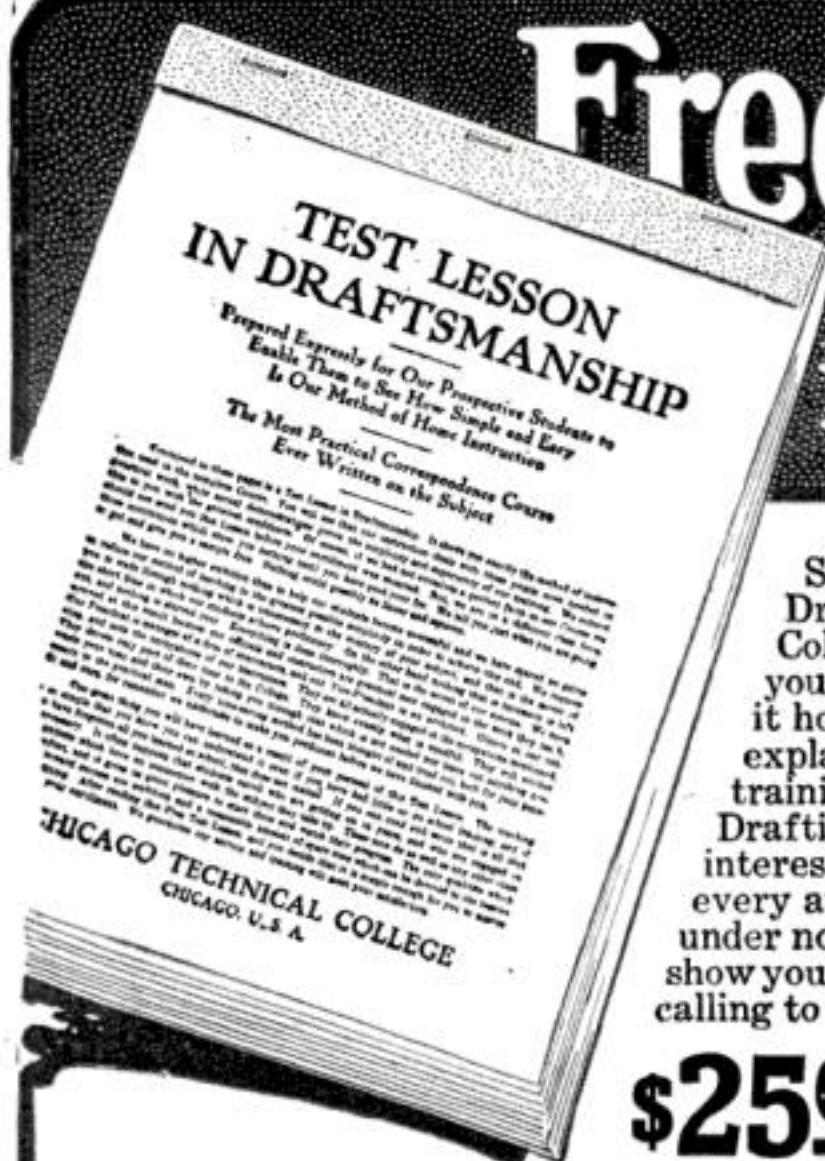

Special offer now. Pay nothing for this Test Lesson in Drafting prepared by the experts of the Chicago Technical College. Learn from a study of this lesson how well equipped you are to take up drafting as a profession. Also see from it how clearly the Chicago "Tech" Course in Draftsmanship explains every point—and how it will give you a practical training in Architectural, Electrical, Structural Steel, Machine Drafting or any other branch of Drafting in which you may be interested. No charge whatever for this lesson. We invite every ambitious man to send for it. To ask for it places you under no obligation. Get it while the offer holds good and let it show you whether or not you are a man who can study this technical calling to advantage. Just sign and mail coupon. Send no money.

## \$25<sup>00</sup> to \$100<sup>00</sup> a Week

Positions are always open to competent draftsmen and the war conditions are sure to create an extra demand. These positions pay good salaries and the well trained man always has the best opportunity for advancement. Our course gives this training in the shortest time consistent with thoroughness. Its practical value is proved by the success of our graduates. If you are in a position where the future looks doubtful, if you want to be a technical expert, if you want to be master of a calling which will make you independent, at least get the Free Lesson and the information we send upon request.

## Come to the College or Study at Home

You need not leave your present occupation to get this expert training in Draftsmanship. We will teach you by mail and you can study at home in your spare time. The work is the same as given in our Day and Evening Classes at the College here in Chicago. Your instruction will be given directly by men who are engaged in the very work they teach. They will teach you how to do just what is being done in the drafting rooms of big organizations where Chicago "Tech" graduates are always in demand at good salaries.

## Easy Payments

Pay for the course as you go along. The fee is so small the terms so easy that no matter how moderate your income may be, you can afford to get this training in Draftsmanship which will prepare you for an important paying position. Catalog and all particulars sent free with the Test Lesson.

## See For Yourself

This Free Lesson is an absolute test, pure and simple. Send for it today. In the privacy of your home study it, then you will know for yourself whether you are proper material for a successful Draftsman. Other institutions will ask for your money first. You find out later at your own expense, whether you can adapt yourself to the work and succeed in the profession.

We do not charge you one cent for the Test Lesson, either now or later. It is absolutely FREE. Nor do we obligate you in any way whatever by writing for the Free Test Lesson, so send coupon or write postal request today. If you do nothing else but secure the Free Test Lesson you will gain such valuable knowledge as will be beneficial to you through life, for the Free Lesson gives the very fundamentals of draftsmanship which are helpful to every man. Mail the coupon.

**CHICAGO TECHNICAL COLLEGE**  
1231 Chicago "Tech" Building Chicago, Ill.

## FREE Instruments

Every student of the Chicago "Tech" Course in Draftsmanship receives this set of instruments, or a cash credit in case he already has a set. We start our students at once in practical work with necessary equipment.



## Builders' Course

Men in the Building Trades whether working now as mechanics or contractors should get information about our Courses in Plan Reading and Estimating. We teach men how to make money through knowing more about their business. We want to tell carpenters, bricklayers, stone masons, and other men engaged in building work about these courses. Write for free Lesson in Plan Reading, Builders' Catalog and other instructive information.

**Chicago Technical College,**  
1231 Chicago "Tech" Building, Chicago

Without obligation to me, please send me your FREE Test Lesson in Draftsmanship and other interesting literature covering the subject indicated below.

Mark X opposite work in which you are specially interested.

- |   |   |
|---|---|
| <input type="checkbox"/> Architectural Drafting | <input type="checkbox"/> Builders' Course |
| <input type="checkbox"/> Machine Drafting       | <input type="checkbox"/> Plan Reading     |
| <input type="checkbox"/> Electrical Drafting    | <input type="checkbox"/> Estimating       |
| <input type="checkbox"/> Structural Drafting    | <input type="checkbox"/> Surveying        |
| <input type="checkbox"/> Sheet Metal Drafting   | <input type="checkbox"/> Map Drafting     |

Name.....

Address.....

City..... State.....

College or Home Study? State which.....





## High School Course in Two Years!

Here's a thorough, complete, simplified High School Course that you can complete in **two years**. A liberal education, of incalculable value, by spare time study, at home. Course prepared by leading professors in Universities and Academies.

### Meets Entrance Requirements of Colleges and Universities

Fits you for Harvard, Yale, Princeton and other institutions of highest standing. Helps you to win in business and social life. Spend the hours you would otherwise waste, in profitable study of this fascinating course.

The man who **knows** is the leader. Knowledge gives you assurance, turns your natural ability into actual power.

This course gives you the **key to success and power**.

### Don't Stop Growing

Keep on going! Train your brain! Broaden your mental vision! Make the most out of your life before too late. Cash in "on your natural ability."

### Choice of 20 Courses

We have helped 50,000 men and women to win! Let us help you, too.

**YOU**  
Can Make Up  
for Lost Time!

Men and women who were denied a high school training can "catch up" by taking this simplified course at home. Hundreds have profited by this remarkable opportunity.

**SEND COUPON TODAY**

for **FREE** Book and Full Information

## American School of Correspondence, Chicago, U.S.A.

Dept. P1209. Gentlemen: Please send me booklet and tell me how I can fit myself for the position marked X.

- |                           |                              |
|---------------------------|------------------------------|
| ..... High School Course  | ..... Shop Superintendent    |
| ..... Electrical Engineer | ..... Lawyer                 |
| ..... Telephone Engineer  | ..... Business Manager       |
| ..... Architect           | ..... Auditor                |
| ..... Draftsman           | ..... Certified Public Acc't |
| ..... Building Contractor | ..... Stenographer           |
| ..... Structural Engineer | ..... Bookkeeper             |
| ..... Mechanical Engineer | ..... Fire Ins. Adjuster     |
| ..... Civil Engineer      | ..... Sanitary Engineer      |
| ..... Steam Engineer      | ..... Automobile Engineer    |

Name.....

Address.....

When writing to Advertisers please mention Popular Science Monthly

## A New Book on the Ford

PUBLISHED SEPTEMBER 1, 1917


## The Ford Motor Car

AND

## Truck and Tractor Attachments

By H. P. MANLY

Author "Automobile Starting and Lighting," "Oxy-Acetylene Welding and Cutting."

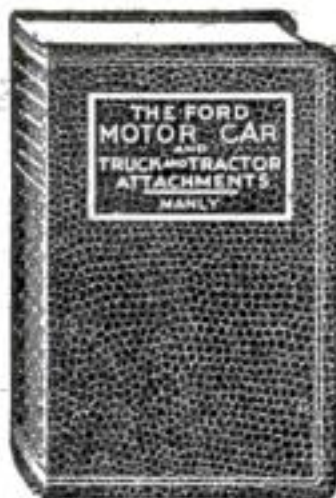

A complete Instruction Book on every feature of the Ford car, including Truck and Tractor Attachments. It covers the Ford power plant; transmission system; running gear; control; adjustment and repair; upkeep and care; trouble symptoms and remedies; driving; starting and lighting; truck attachments; tractor attachments. Fully illustrated.

Limp cloth, prepaid - - - \$1.00  
Leather, prepaid - - - 1.50

For sale at all bookstores, or send for our catalogue of practical mechanical books for Electricians, Engineers Telephone Men, Machinists, Railroad Men, Automobileists, Carpenters, Plumbers, Sign and Card Writers, Scene Painters, etc. It is **FREE**

**FREDERICK J. DRAKE & CO., 1003 Michigan Ave., CHICAGO**

**NATIONAL  
TRADE**



**DENTAL  
SCHOOL**

506 S. Wabash Ave., CHICAGO, ILL.

**LEARN MECHANICAL DENTISTRY—DEMAND UNLIMITED**

Earn \$1200 to \$4000 yearly in mechanical dentistry. A big and growing demand everywhere for mechanical dentists—like a gold mine unexplored. Attend this school any time of the day or evening; be taught individually and learn by actual practice, without book study. Our System, the most complete in the world, is used exclusively in this school. We are constantly called upon to fill high-salaried positions. Why not qualify for one? Be fair to yourself; find out more about exceptional opportunity we offer. Visit the school or write for booklet A.

## BE A DETECTIVE

Excellent opportunity for ambitious men. Good pay. Many earn up to \$300 monthly. Travel and unlimited opportunities. Write at once for full particulars—**FREE**.

**C. T. LUDWIG, 410 Westover Bldg., Kansas City, Mo.**



## DO YOU LIKE TO DRAW?

Cartoonists are well paid

We will not give you any grand prize if you answer this ad. Nor will we claim to make you rich in a week. But if you are anxious to develop your talent with a successful cartoonist, so you can make money, send a copy of this picture, with 6 cents in stamps for portfolio of cartoons and sample lesson plate, and let us explain.

The W. L. EVANS SCHOOL OF CARTOONING  
825 Lender Bldg., Cleveland, Ohio



## WANTED—More Salesmen

—Salesman Earns

**\$6500 THIS YEAR**

—only an ordinary record. Thousands of successful members. Even greater opportunities are yours as a City or Traveling Salesman. Increased prosperity, enlistments and the "Draft" have created thousands of good positions. Experience unnecessary.

Write for large list of lines in which good positions are open and how to obtain them. Address nearest office. Dept. 15-W

**NAT'L SALESMEN'S TR. ASS'N**  
Chicago San Francisco New York


**BE A TRAVELING SALESMAN**



(JUST ISSUED)

# The New Library of Practical Electricity

a New McGraw-Hill Home Study Course

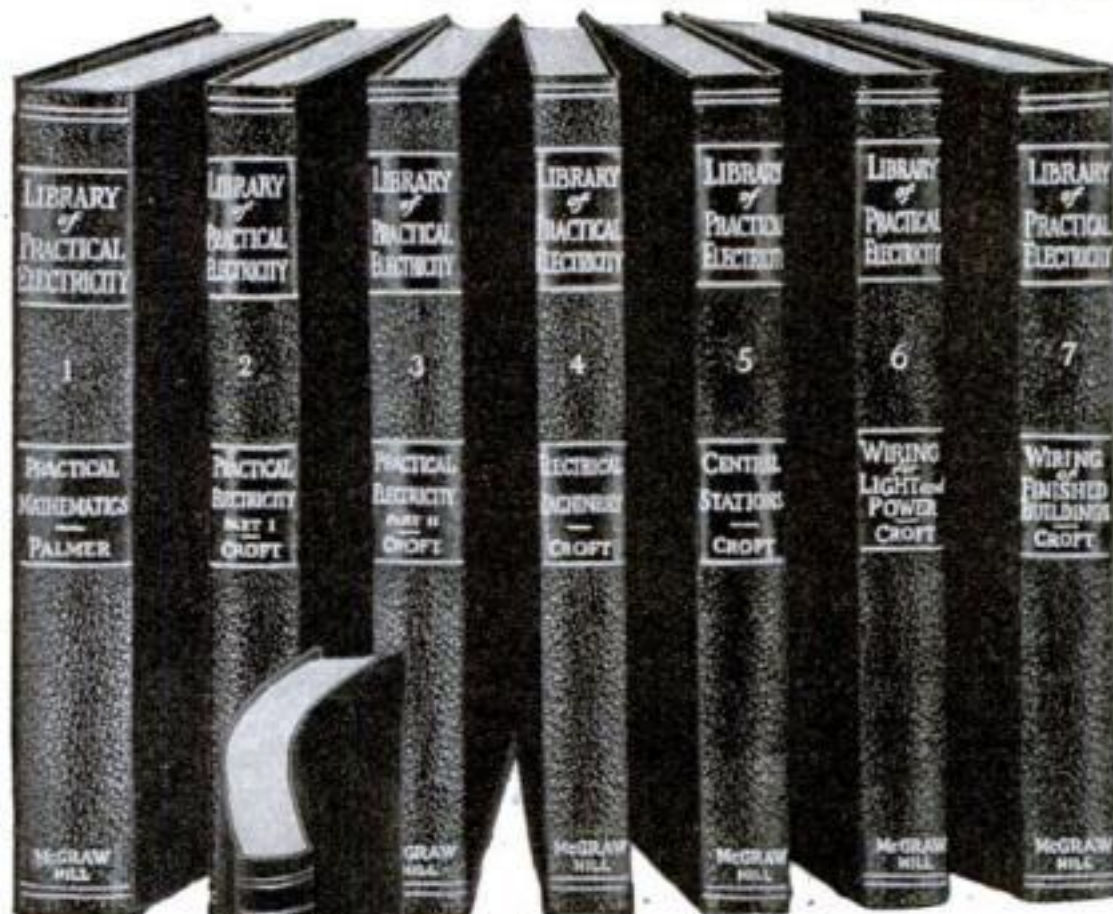

**THE NEW LIBRARY OF PRACTICAL ELECTRICITY** by Terrell Croft marks a new era in electrical literature.

The great field of electrical engineering, with its limitless possibilities of earning power, is brought to you in a form that makes the conquest easy. Yet the Library is a creation—an achievement that is without parallel in technical literature.

Terrell Croft, author of seven of these volumes, stands without peer in his field. He rose from dynamo tender, through the ranks, to electrical engineer with the Westinghouse Company. He gained his experience with his sleeves rolled up. He gives it to you in books that are technically of the highest order, yet free from involved theory and complex mathematics. And in the excellence of the illustrations and printing, the flexibility and convenience of the thin paper, pocket-size volumes, and the richness of the morocco grained Karatol binding, they are fittingly dressed for this great achievement.

**Not a Correspondence Course**

The New Library of Practical Electricity contains all the facts you will ever need in electrical work—vastly more than you could gain by experience. Yet all this valuable information on modern electrical practice is now yours for the small sum of 50c per week or \$16 for the complete course—payable \$2 per month. An hour or less per day with the Library will give you a thorough working knowledge of the whole field.

## The Secrets of Practical Electricity

sent for 10 days free examination

**Only \$2 per month**


**8 vols. Complete. \$16 for the Course**

illustrations made specially for this flexibly bound, thin paper edition—3000 pages of actual PRACTICE


This new Library of Practical Electricity will do every thing to help you succeed in electricity. Here are 8 books flexibly bound in rich, morocco-grained Karatol, pocket size, containing just the facts you must know to succeed—all in practical, handy form for instant reference. The course contains nearly 3000 pages, size 4 $\frac{1}{4}$  in. x 7 $\frac{3}{4}$  in. with as many illus-

### Send No Money

Examine this new Library for 10 full days at our expense, and find out for yourself why they improve working methods and form a sure, short-cut to BIGGER PAY. The coupon below is for your convenience in examining these practical books. It obligates you in no way; on the other hand it may easily mean permanent success for you in the well paid field of practical electricity—so mail the coupon today—right now if possible.

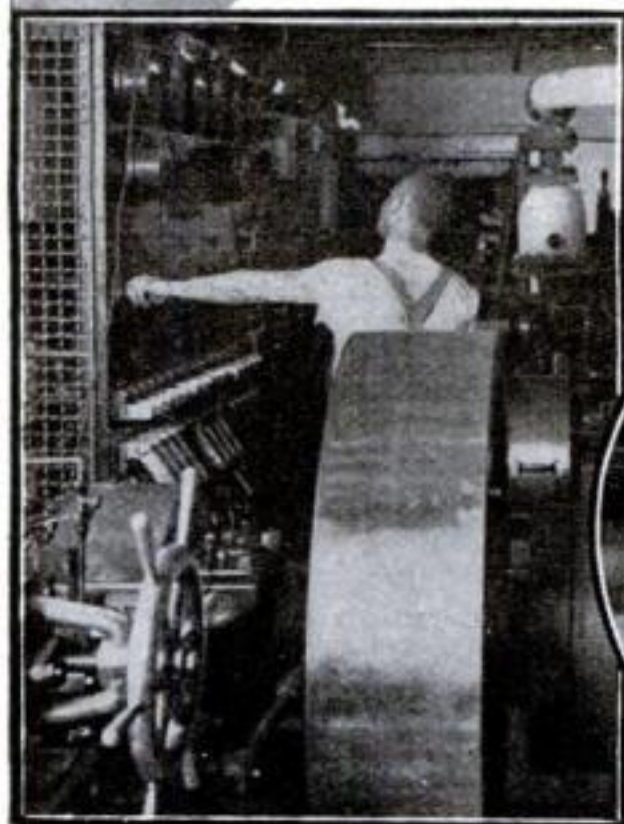

Copyright, Underwood & Underwood, N.Y.

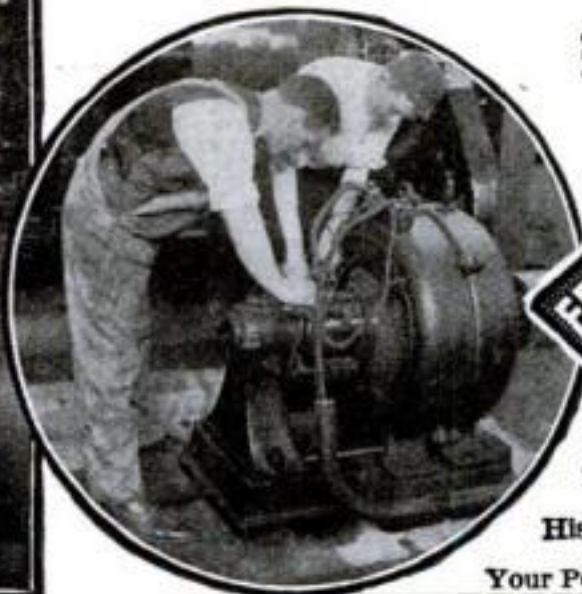

Copyright, Brown Bros., N.Y.

**FREE EXAMINATION COUPON**

McGraw-Hill  
Book Co., Inc.  
239 W. 39th St.  
New York

Gentlemen:

Please send me the Library of Practical Electricity (shipping charges prepaid) for 10 days free examination. If satisfactory, I will send \$2 in ten days and \$2 per month until \$16 has been paid. If not wanted I will write you for return shipping instructions.

Name .....

Home Address .....

City and State .....

Name of Employer .....

His Address .....

Your Position ..... P.S. Dec-17

When writing to Advertisers please mention Popular Science Monthly



# Auto Books



## 50c a Week

Only 50c a week buys this brand-new automobile library. It is called **Automobile Engineering**, and in it you will find everything about modern automobiles. Almost two entire volumes are devoted to the new systems of ignition, starting and lighting. Welding, vulcanizing, and public garage equipment and operation are thoroughly covered. Five thick volumes, 5 1/2 x 8 inches, flexibly bound in genuine morocco leather, gold stamped. 2,400 pages; 2,000 illustrations, tables and diagrams. Written in simple, easily-understood English, and carefully cross-indexed for quick reference.

## Shipped Free

Don't send a penny. Just put your name and address in the coupon and we'll send all five volumes to you, express prepaid. Read them—study them—examine them carefully before you decide to buy. If you don't like them after 7 days—write us and we'll take them back at our expense. If you keep them, send only \$2.00 within 7 days, and then \$2.00 a month—50c a week—until the introductory price of \$17.50 has been paid. The regular price of this set will be \$25.00.

## Consulting Service FREE

In addition to the books you get free of all charge a \$12.00 Consulting Membership. If any question puzzles you—write us. Our corps of auto experts will solve any auto problem. Ask all the questions you want for a whole year. This service is absolutely free.

### Partial List of Subjects

Motors, Welding, Motor Construction and Repair, Carburetors, Valves, Cooling, Lubrication, Fly-Wheels, Clutch, Transmission, Final Drive, Steering, Tires, Vulcanizing, Ignition, Starting and Lighting Systems, Wiring Diagrams, Shop Kinks, Commercial Garage Equipment, Electric Storage Batteries, Motorcycles, Commercial Trucks, Glossary.

AMERICAN TECHNICAL SOCIETY  
Dept. A-1209, Chicago, U. S. A.

Please send me a set of **Automobile Engineering** for 7 days' free examination. If I decide to buy, will send \$2 in 7 days and balance \$2 a month until \$17.50 has been paid, when books and Consulting Membership will be mine. Otherwise will notify you and hold books subject to your order. Title not to pass until fully paid.

NAME .....

ADDRESS .....

REFERENCE .....

## MAIL

### This Coupon

See these books before you decide to buy. Remember—don't send us a penny. Just fill in and mail the coupon. This offer is open to any person living within the boundaries of the U. S. and Canada.

AMERICAN  
TECHNICAL  
SOCIETY  
Dept. A-1209,  
Chicago, U. S. A.

**BEGIN TODAY**  
WRITE FOR MY FREE BOOK

I can make a good penman of you at home during spare time. Write for my free book, "How to Become a Good Penman." It contains specimens and tells how others mastered penmanship by the Tamblin System. Your name will be elegantly written on a card if you enclose stamp to pay postage.

F. W. Tamblin, 437 Meyer Bldg., Kansas City, U. S. A.

**FREE**

Write for it Today

**BOOK**

## LEARN TELEGRAPH

Morse and Wireless—R. R. Accounting (Station Agency) also taught. Tremendous Demand—much greater than supply—Permanent Positions Secured. Big Salaries—recently raised. Ideal Working Conditions—short hours, vacations with pay sick and death benefits, etc.—prevailing. Great Opportunities for Advancement. Women Operators also greatly desired by Railways and Western Union. Tuition reasonable. Cheap living expenses—can be earned. Oldest and largest school—two large school buildings, investment exceeds \$25,000.00—established 43 years. Endorsed by railway, Western Union and Marconi Telegraph officials. Large illustrated catalogue free. Correspondence courses also. Write today. Enroll immediately.

Dodge's Telegraph, Ry. & Wireless Institute  
21st Street, Valparaiso, Ind.

## Grow Mushrooms



Start right, have good paying business month in and month out, right at home. Costs little to start, grow fast. Mushrooms in big demand everywhere. Men, women and children can grow them, in sheds, cellars, boxes, etc., in spare time. Learn expert facts about successful growing, right spawn, etc., from America's great authority. Send for free illus. publication "TRUTH ABOUT MUSHROOMS," today.

Bureau of Mushroom Industry, Dept. 448, 1342 N. Clark St., Chicago

## Learn Watch Repairing

Be a watchmaker—you can learn this profitable trade by correspondence in a few weeks in your own home by the DeSelms Chart System. After you complete the course you will know a watch from A to Z. You will know just what the matter is and how to repair one. When you graduate you will be a practical watchmaker and repairer and competent to fill any position. Positions for our graduates.

Ask for our Free Book. It explains our system and terms.

THE DeSELMS WATCH SCHOOL  
687 Perry St., ATTICA, IND.



## GOV'T JOBS

Short hours. Easy work. No strikes. No hard times. Steady. Lifetime positions, \$75 to \$150 a month to start. Quick promotion.

### MEN WANTED!

If you are an American Citizen 18 or over write for FREE book that tells about these and many other wonderful advantages offered by U. S. Government. Railway Mail, Post Office, Custom House, Panama Canal and other divisions. Prepare under former Civil Service Secretary-Examiner. You can qualify. Write for FREE BOOK and Special 20 Day Offer NOW.

PATTERSON CIVIL SERVICE SCHOOL, 1612 News Bldg., Rochester, N. Y.




## This Man Specialized in Electrical Meter Engineering!

Now he is superintendent of instruments and meters for a large Electric Light and Power Co. and has 25 men under him. The training he got from our easily mastered, home study course enabled him to step into this big job after only a few months study. What he has done YOU CAN DO!

**Write Today for Free Literature** with this man's own story of his success. Find out about the exceptional opportunities in this interesting, fascinating, profitable profession. Your name and address is enough. The book is free. No obligations. Write today—NOW. You can have a job like this.

Fort Wayne Correspondence School, Dept. 1209 Fort Wayne, Ind.



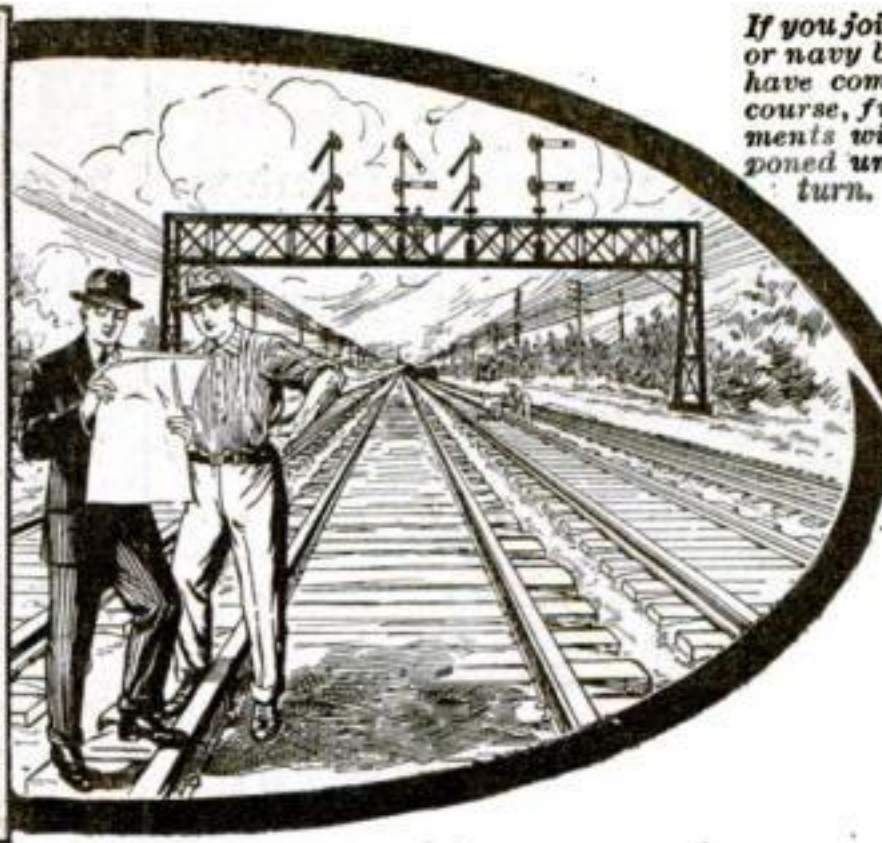

If you join the army or navy before you have completed the course, further payments will be postponed until you return.

## 3 Promotions in 5 Months! This Coupon Did It!

**T**HIS coupon brought George Yeck of Dixon, Cal., advancement beyond his expectations. This is what he wrote to the school the other day: "The first month I had to do all the hard work. I think that the Signal foreman and supervisor wanted to find out what I was made of, but the second month I got promoted with a raise in salary. On May 16th, I got promoted again with another raise in salary. On Sept. 7th I was again promoted with another raise in salary. Now I am one of the highest paid men in the Signal gang and am Assistant Signal Repair man, thanks to your wonderful course. There is one man who has been working here for four years, and all the rest of the men have been working here longer than I have but they don't receive the salary that I do. They say I have a pull with the boss, but I know better. It is the splendid training that I received from you that is doing the work." *And what Mr. Yeck did, you can do.*

**Learn At Home** You can learn at home during your spare time. It is not necessary to give up your position to take up this profitable profession. Just a little time in the evening—it does not interfere with your work during the day. Put your spare time to advantage. Send the coupon today—NOW—for Free Book.

## Men Are Needed to Accept High Salaried Positions!—

quire automatic block signals on all railroads. To superintend these installations and maintain the systems now in use, thousands of men are necessary. Golden opportunities are offered. The work is big and broad—high salaries are paid. \$250.00 a month is an ordinary salary for a Signal Engineer.

Men are needed in the profession of Signal Engineering. There are thousands of miles of railroads that must be equipped with block signal systems. States are passing laws that re-



## Free Book!

Put your name and address in the coupon in a letter or post card now and get the free book about Signal Engineering. It will be sent to you prepaid—without obligation. Every ambitious man in America should write for this free book on Signal Engineering. Find out about the opportunities that are offered you. You are under no obligations in sending this coupon, so write for this book today—now.

**Department of Signaling**

Dept. 1209 — 1810 Wilson Ave., Ravenswood Sta., CHICAGO

**Department of Signaling,**

Dept. 1209 — 1810 Wilson Avenue

**Ravenswood Station, CHICAGO**

Gentlemen:—Please send me absolutely, free and prepaid, your big new book on Signal Engineering. Also full particulars about your great special free outfit offer. It is distinctly understood that I assume no obligation of any kind.

Name.....

Address.....

Occupation.....Age.....

When writing to Advertisers please mention Popular Science Monthly





## Resolve to Win!

Determination made Grant one of the greatest generals in history. The world knows his story. It knows, too, the stories of thousands of other determined men, who succeeded because they had a purpose and stuck to it.

*Do you want to succeed? Do you want that better job? Do you want that increase in pay?*

If you *do* want to get out of the rut—if you *are* determined to make something of yourself, send the International Correspondence Schools the attached coupon. Tell them what kind of position you want and they will show you how you can fit yourself to get it.

More than 100,000 determined men and women are getting ready for better positions right now through I. C. S. training. They are securing this training in their own homes, at small cost and without losing an hour from their everyday work.

**Determine to mark and mail the coupon to-day**

### INTERNATIONAL CORRESPONDENCE SCHOOLS BOX 5839, SCRANTON, PA.

Explain, without obligating me, how I can qualify for the position, or in the subject, before which I mark X.

- |   |  |
|---|--|
| <input type="checkbox"/> ELECTRICAL ENGINEER        | <input type="checkbox"/> SALESMANSHIP            |
| <input type="checkbox"/> Electric Lighting          | <input type="checkbox"/> ADVERTISING             |
| <input type="checkbox"/> Electric Railways          | <input type="checkbox"/> Window Trimmer          |
| <input type="checkbox"/> Electric Wiring            | <input type="checkbox"/> Show Card Writer        |
| <input type="checkbox"/> Telegraph Engineer         | <input type="checkbox"/> Sign Painter            |
| <input type="checkbox"/> Telephone Work             | <input type="checkbox"/> Railroad Trainman       |
| <input type="checkbox"/> MECHANICAL ENGINEER        | <input type="checkbox"/> ILLUSTRATING            |
| <input type="checkbox"/> Mechanical Draftsman       | <input type="checkbox"/> Cartooning              |
| <input type="checkbox"/> Machine Shop Practice      | <input type="checkbox"/> BOOKKEEPER              |
| <input type="checkbox"/> Gas Engine Operating       | <input type="checkbox"/> Stenographer and Typist |
| <input type="checkbox"/> CIVIL ENGINEER             | <input type="checkbox"/> Cert. Public Accountant |
| <input type="checkbox"/> Surveying and Mapping      | <input type="checkbox"/> TRAFFIC MANAGER         |
| <input type="checkbox"/> MINE FOREMAN OR ENGINEER   | <input type="checkbox"/> Railway Accountant      |
| <input type="checkbox"/> Metallurgist or Prospector | <input type="checkbox"/> Commercial Law          |
| <input type="checkbox"/> STATIONARY ENGINEER        | <input type="checkbox"/> GOOD ENGLISH            |
| <input type="checkbox"/> Marine Engineer            | <input type="checkbox"/> Teacher                 |
| <input type="checkbox"/> ARCHITECT                  | <input type="checkbox"/> Common School Subjects  |
| <input type="checkbox"/> Contractor and Builder     | <input type="checkbox"/> Mathematics             |
| <input type="checkbox"/> Architectural Draftsman    | <input type="checkbox"/> CIVIL SERVICE           |
| <input type="checkbox"/> Concrete Builder           | <input type="checkbox"/> Railway Mail Clerk      |
| <input type="checkbox"/> Structural Engineer        | <input type="checkbox"/> AUTOMOBILE OPERATING    |
| <input type="checkbox"/> PLUMBING AND HEATING       | <input type="checkbox"/> Auto Repairing          |
| <input type="checkbox"/> Sheet Metal Worker         | <input type="checkbox"/> Navigation              |
| <input type="checkbox"/> Textile Overseer or Supt.  | <input type="checkbox"/> AGRICULTURE             |
| <input type="checkbox"/> CHEMIST                    | <input type="checkbox"/> Poultry Raising         |

Name \_\_\_\_\_  
Present Occupation \_\_\_\_\_  
Street and No. \_\_\_\_\_  
City \_\_\_\_\_ State \_\_\_\_\_

# MONEY

## Write for it

HUNDREDS of people make BIG MONEY writing Photoplays, Stories, Articles, Etc.! Rowland Thomas, an "unknown writer," received \$5,000 for one story! Elaine Sterne, another beginner, received \$1,000 for a single play! Why don't YOU write something? YOU have ideas. If you go to the Movies, if you read magazines—then you know the kind of material editors want. YOUR happy thoughts may bring Big Rewards! No Instruction Courses needed. We accept your bare ideas in ANY FORM—either as finished scripts or as mere outlines of plots. If your ideas need correction before they can be sold, we revise, improve, perfect and typewrite them. Then promptly submit to Leading Film and Fiction Editors. A small commission is charged for selling. This is YOUR OPPORTUNITY! So get busy! Send us your Bare Ideas, Plots, Articles, Poems, Finished Stories. And write us TODAY for Full Details. We will send you absolutely FREE a fascinating story, "How New Writers Get Their Names In Print," and a beautiful, illustrated booklet entitled, "A Service That Helps New Writers Succeed." SEND FOR THEM AT ONCE! WRITER'S SERVICE, Dept. 34, Auburn, N. Y.



## Music Lessons

**Book Sent FREE** Wonderful home-study music lessons under great American and European teachers given by the University Extension Method. The lessons are a marvel of simplicity and completeness, endorsed by Paderewski and other great authorities. You, too, can now quickly and easily satisfy your musical ambitions.

### Any Instrument or Voice

Write, telling us the course you are interested in, age, how long you have taken lessons if at all, etc., and we will send you our Free Book containing text and illustrations covering Lessons in PIANO (students' or teachers' courses) by the great Wm. H. Sherwood, HARMONY by Dr. Protheroe and Rosenbecker, VOICE COURSE (with aid of Phonograph) by Crampton, PUBLIC SCHOOL MUSIC by Frances E. Clark, VIOLIN, CORNET, MANDOLIN, GUITAR, BANJO, REED ORGAN, CHORAL CONDUCTING, by equally eminent teachers.

**Send NOW** for Free Book and learn how easily you can become a fine singer, or a skillful player. See how quickly you can become successful. Our Free Book tells you how. Write for it today. A few Special Introductory Scholarships now being awarded by our faculty. Full particulars sent with Free Book. Investigate without cost or obligation. Write today.

**University Extension Conservatory**

Proprietor Siegel-Myers School of Music

3161 Siegel-Myers Building

Chicago, Ill.





# You Can Earn \$90 to \$300 a Month

## The Auto and Tractor Business Is Calling for Thousands of Trained Men

**G**ET out of the "little job" class with its low wages and long working hours and step into the ranks of big pay men. Never before in the history of the auto and tractor business has there been such a shortage of trained men—never before such a tremendous demand for men with proper training to fill the thousands of waiting positions. Every day the demand increases. My school constantly has more calls than we can possibly supply. This field offers the average man an unlimited opportunity for lasting success and financial independence.

## Rahe Method Insures Success

For over 11 years I have been teaching men with no previous experience to master the principles of motor mechanics—training them in all branches of the work by my Original Practical Method—the simplest, easiest-to-understand and easiest-to-acquire ever developed. From a little 20 x 40 room,

with one man and a little second-hand motor, my school has grown until today it requires **four huge buildings**, filled with the latest and best equipment—floor space equal to a 14-story sky-scraper. Thousands of men from all parts of the United States and many foreign countries have come and are now coming to my big school because the Rahe Method insures success.

## Thousands of Successful Graduates

My graduates are in all branches of the business today. Hundreds are making big money running their own garages and repair shops, selling autos and motor trucks, tractors, etc. Hundreds are Garage Managers, Salesmen, Demonstrators, Testers, Self-Starting and Ignition Experts, Repair Men, Chauffeurs, Drivers, etc. Their success sends their friends here for the same practical training. My four huge buildings are filled with an enormous amount of equipment—scores of Practice Motors—12's, 8's, 6's, 4's, etc.; scores of Complete Oxy-acetylene and Oxy-hydrogen Outfits; all types of Starting and Lighting Equipment, engine-mounted; everything you can imagine to help you learn quickly and easily and become an expert.

### \$50 Tractor Course Free

If you enroll at once for my Regular Automobile Training, I will give you a Free \$50 Scholarship for Complete Tractor, Stationary and Farm Power Engineering. Limited number of scholarships available now. Big Tractor Farm completely equipped with tractors of all kinds. Tractor mechanics in big demand at high pay. Get this valuable training without charge.

H. J. RAHE, President

## Rahe's Auto School

(The World's Greatest)

2889 Oak St., Kansas City, Mo.

## SEND FOR BIG BOOK TODAY

The coupon below or a postal will bring you my 80-page book, free and postpaid. Read the letters from graduates telling how they are making big money and how I started them.

## This Brings Free Book

H. J. RAHE, President,  
Rahe's Auto School,  
2889 Oak St.,  
Kansas City, Mo.

Send me your newest book "Make Money in the Auto and Tractor Business," also reserve a Free Tractor Course Certificate, without obligations on my part.

Name.....

Postoffice.....

Street or R. F. D.....State.....

**Make Big  
Money in  
Work You  
Like!**



When writing to Advertisers please mention Popular Science Monthly



## ORDER BOOKS BEFORE ADVANCE IN PRICE

### SEND TODAY—SAVE 50%

The present low price on this great work will be withdrawn when the few sets left are sold. Quick action saves 50%.

### 10-VOLUME LIBRARY OF ARCHITECTURE Carpentry and Building

4760 Pages, 7 x 10—4000 Plates and Diagrams

These books answer 10,000 questions on carpentry and building. Written by 26 architects, contractors, carpenters, and engineers.

**50c. a Week**

Only \$2 a month if you decide to keep them. Coupon explains special offer, good only within the boundaries of U. S. and Canada.

**Shipped FREE on  
7 Days' Trial**

**Consulting Service Free**  
Solves your difficult problems for entire year—(regular price \$12)—free with the set. Rush the coupon today.

**American Technical Society**  
Dept. R 1203, Chicago, U. S. A.

Please send Architecture, Carpentry and Building for seven days' examination, express prepaid. I will send \$2.00 within seven days and \$2.00 a month until I have paid \$24.80 or notify you and hold books subject to your order. Title not to pass until fully paid.

Name.....

Address.....

Reference.....

**COPY THIS SKETCH**  
and let's see what you can do with it. Cartoonists and illustrators earn from \$20.00 to \$125.00 or more per week. My practical system of personal individual lessons by mail will develop your talent. Fifteen years' successful work for newspapers and magazines qualifies me to teach you. Send sketch of Uncle Sam with 6c in stamps for test lesson plate; also collection of drawings showing possibilities for YOU. State your age.



**The Landon School** of Illustrating  
and Cartooning  
1451 Schofield Bldg., Cleveland, O.

### Driver Agents Wanted

Five-Pass., 34.7 H. P. Drive and demonstrate the Bush Car. Pay for 82 x 3 1-2 Tires. It out of your commissions on sales, my agents are making money. Shipments are prompt. Bush Cars guaranteed or money back. Write at once for my 48-page catalog and all particulars. 1918 models now ready. Address J. H. Bush, Pres. Dept. 1280. **BUSH MOTOR COMPANY, Bush Temple, Chicago, Ill.**

## Make this car your office—

there is \$900.00 to \$1800.00  
a year in it for you

Examinations will likely be held  
everywhere soon


Rapid advancement to higher Government Positions. "No layoffs" because of STRIKES, FINANCIAL FLURRIES or the WHIMS OF SOME PETTY BOSS. THE POSITION IS YOURS FOR LIFE.

Country residents and city residents stand the same chance for immediate appointment. Common-sense education sufficient. Political influence NOT REQUIRED.

We will prepare 25 Write immediately for schedule showing the places and candidates FREE! dates of all coming Gov't examinations. Don't delay. Every day you lose means the loss of just so much coaching before the rapidly approaching examinations.

**FRANKLIN INSTITUTE, Dept. J 110, Rochester, N. Y.**

Gov't Wants Hundreds  
Clerks for War Work

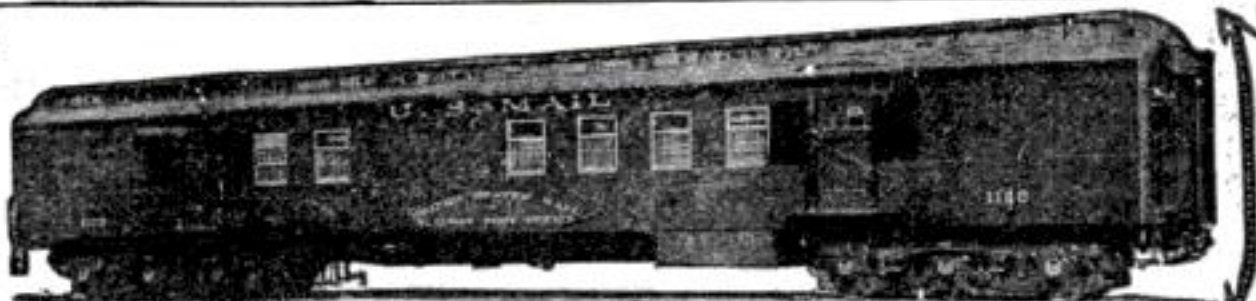

### COUPON

Franklin Institute (The pathway to plenty), Dept. J 110, Rochester, N. Y.

This coupon, filled out as directed, entitles the sender to (1) free specimen questions, (2) a free copy of our copyrighted book, "Government Positions and How to Get Them," (3) a list of positions now easily obtainable, and (4) to consideration for Free Coaching for the examination here checked.

Railway Mail Clerk (\$900 to \$1800) .. Customs Positions (\$800 to \$1500)  
Postoffice Clerk (\$800 to \$1200) .. Stenographer .. (\$800 to \$1500)  
Postoffice Carrier (\$800 to \$1200) .. Clerk in the Departments  
Rural Mail Carrier (\$500 to \$1100) .. at Washington (\$800 to \$1500)

Name..... Address.....  
Use this before you lose it. Write plainly.

## FRENCH MILITARY CONVERSATION



By the MILITARY LANGUAGE-PHONE METHOD and Disc Records. A practical, phonetic short course for Army, Navy, Red Cross and all others engaged in Military Service.

Also Spanish, French, Italian, German by the

### LANGUAGE-PHONE METHOD And Rosenthal's Practical Linguistry

The living voice of a native professor pronounces the foreign language, over and over, until you know it. Family and friends can use it. Our Disc Phonograph Records fit all Talking Machines. Write for Military Circular, Booklet and Free Trial Offer. Easy Payments.

The Language Phone Method, 946 Putnam Bldg., 2W. 45th St., N.Y.

## Be An ARTIST

Earn \$25 to \$100 a week as Cartoonist—Illustrator—Commercial Artist. Learn quickly at home by new instruction method. Easy terms. Outfit FREE to new students. Write today for free Booklet, and Special Offer NOW.

**WASHINGTON SCHOOL OF ART, 1297 H St., N. W., WASHINGTON, D. C.**

## ENGINEERING MECHANICAL ELECTRICAL

One Year Practical Courses. Day and Evening classes. Splendid equipment and instruction. Low tuition. For particulars address

**DETROIT TECHNICAL INSTITUTE**  
Box 306, Y. M. C. A. Building, DETROIT, MICH.

## SHORTHAND IN 30 DAYS

Boyd Syllabic System—written with only nine characters. No "positions"—no "ruled lines"—no "shading"—no "word-signs"—no "cold notes." Speedy, practical system that can be learned in 30 days of home study, utilizing spare time. For full descriptive matter, free, address, Chicago Correspondence Schools, 949 Unity Bldg., Chicago, Ill.

## Learn to PAINT SIGNS and SHOW CARDS

I teach you personally, by mail, in a short time. Oldest and largest School. Big field, work interesting. You can **EARN \$18 TO \$45 A WEEK**. Fritzer, Minn., wrote, "Did job after first lesson, got \$10, profit \$7.05." Crawford, B. C., says: "Earned \$200.00 while taking course." Get literature, samples, guarantee; all FREE. **DETROIT SCHOOL OF LETTERING** Established 1899 52 D. S. of L. Bldg. Detroit, Mich.



Write for a Copy of our Classified Rate Card. It gives full particulars about Classified Advertising in this magazine, and contains a complete list of headings which are arranged to cover thoroughly the numerous subjects that may be advertised effectively in this section. Popular Science Monthly, 239 Fourth Avenue, New York City.



# LEARN ELECTRICITY

In Four Months

Earn \$125<sup>00</sup> to \$300<sup>00</sup> a Month

**Act Now** Now you men who have not been drafted, help your country by learning one of these big professions at once for there will be a big scarcity of men in these lines. The places made vacant by the thousands of skilled men who have answered the call of our President must be filled. Do your duty. Start your training NOW and prepare yourself for a big future. Our experts train you, not by books, but in our big shops under actual working conditions. You are bound to succeed.



America's Largest Practical Institution

**BIG Demand For Men In**  
**DRAFTING**  
**PLUMBING**  
**BRICKLAYING**  
**MOV. PIC. OPERATING**

BENNETT WELLINGTON COOKE  
 Director  
 Dept. 1409, 39-51 E. Illinois Street, Chicago, Ill.

Get into one of these big professions that is not overcrowded. Make up your mind NOW to start at once. Don't let the question of money stand in your way. If you are ambitious we'll help you to earn your way. You owe it to your country and to yourself to be a skilled expert, a success. Your opportunity is right here NOW, so act at once. Send the coupon NOW for complete information. Be sure to check the course you are interested in.

**COYNE TRADE and ENGINEERING SCHOOLS**  
 Dept. 1409, 39-51 E. Illinois Street, Chicago, Ill.

## MAIL TODAY

Name.....  
 Address.....

Coyne Trade and Engineering Schools  
 39-51 East Illinois St., CHICAGO, ILL.  
 DEPT. 1409

Without cost or obligation to me, send your Manual of Trades covering the trade checked below:

- ☐ Electricity ☐ Bricklaying  
☐ Plumbing ☐ Drafting  
☐ Motion Picture Operating

## EARN \$100 A WEEK

Send in now for amazing free book of facts about wonderful opportunities open to you. Read how to become a Certified Public Accountant, Cost Accountant, Banker, Broker, Corporate Secretary, Business Organizer, Advertising, Sales and Real Estate Expert. Learn at home, in spare time through remarkable, easy methods. State course which interests you.

UNIVERSAL BUSINESS INSTITUTE  
 76 Madison Avenue New York



## ELECTRICAL

men with training are always in demand. Having trained over 2000 young men in the past 23 years in the fundamentals of Applied Electricity, The Bliss Electrical School, with its well-equipped shops and laboratories, is peculiarly well qualified to give a condensed course in Electrical

## ENGINEERING



Including Mathematics, Steam and Gas Engines, Mechanical Drawing, Shop Work, and Theoretical and Practical Electricity, in all branches. Students actually construct dynamos, install wiring and test efficiency of electrical machinery. Course, with diploma, complete

## IN ONE YEAR

For practical young men with limited time. 25th year opens Sept. 27th. Catalog on request. 102 Takoma Ave., Washington, D.C.

## Stronger, Clearer Voice for You!



Weakness, huskiness and harshness banished. Your voice given a wonderful strength, a wider range, an amazing clearness. This done by the Feuchtinger Method, endorsed by leading European musicians, actors and speakers. Use it in your own home. Simple, silent exercises taken a few minutes daily impart vigor to the vocal organs and give a surpassing quality to the tones. Send for the facts and proofs.

## Do You Stammer?

If you have any voice impediment this method will help you. You need not stammer or lisp—if you will follow our instructions.

## WRITE

Send the coupon and get our free book and literature. We will tell you just what this method is, how it is used and what it will do for you. No matter how hopeless your case may seem the Feuchtinger method will improve your voice 300 per cent. No obligation on you if you ask for this information. We gladly send it free, postage prepaid. Just mail the coupon.

Perfect Voice Institute  
 Studio 1209 - 1772  
 Wilson Ave., Chicago

Send me the book and facts about the Feuchtinger Method. Have put X opposite subject that interests me most.  
☐ Singing ☐ Speaking  
☐ Stammering ☐ Lipping

Perfect Voice Institute  
 1772 Wilson Av.  
 Studio 1209  
 CHICAGO

Name.....  
 Address.....

## This Fob FREE

Are you interested in the mechanical side of an automobile, its proper operation and economical maintenance?

Owners—Garagemen—Chauffeurs

The *American Chauffeur* is a live monthly magazine featuring articles in common sense language, by "men who know," on instructive topics, which will be interesting and of great value to every auto owner, chauffeur and garageman.

## FREE OFFER

To introduce the *American Chauffeur*, we are offering this plated lacquered watch fob, with seal grain leather strap, as illustrated, ABSOLUTELY FREE, with a 3 months' subscription to the *American Chauffeur* at the regular price of 25c.

Your money refunded if either the magazine or fob does not come up to your expectation.

THE AMERICAN CHAUFFEUR  
 132 Butler Bldg., Cincinnati, Ohio




This is the exact size

When writing to Advertisers please mention Popular Science Monthly



# Our 21 Jewel SMASHES PRICES

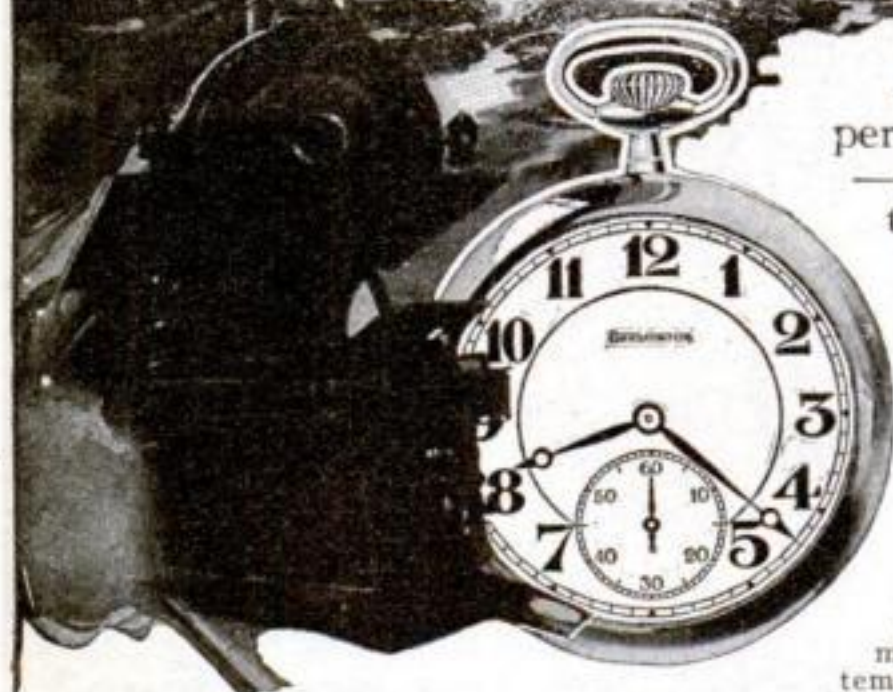

## Look!

- Q 21 Ruby and Sapphire Jewels—
- Q Adjusted to the second—
- Q Adjusted to temperature—
- Q Adjusted to isochronism—
- Q Adjusted to positions—
- Q 25-year gold strata case—
- Q Genuine Montgomery Railroad Dial—
- Q New Ideas in Thin Cases.

# Only \$2.50 A Month

And all of this for \$2.50—only \$2.50 per month—a great reduction in watch prices—direct to you—positively the exact prices the wholesale dealer would have to pay. Think of the high-grade, guaranteed watch we offer here at such a remarkable price. And, if you wish, you may pay this price at the rate of \$2.50 a month. Indeed, the days of exorbitant watch prices have passed.

## See It First

You don't pay a cent to anybody until you see the watch. You don't buy a Burlington Watch without seeing it. Look at the splendid beauty of the watch itself. Thin model, handsomely shaped—aristocratic in every line. Then look at the works! There you will see the masterpiece of the watch-makers' skill. A perfect timepiece adjusted to positions, temperature and isochronism.

Every fighting vessel in the U. S. Navy has the Burlington Watch aboard. Many have over 100 Burlingtons—a few over 200. This includes every torpedo boat—every submarine as well as the big Dreadnaughts.

### Burlington Watch Co.

19th St. and Marshall Blvd.  
Dept. 9209 Chicago, Ill.

Please send me (without obligation and prepaid) your free book on watches with full explanation of your cash or \$2.50 a month offer on the Burlington Watch.

## Send Your Name on This Free Coupon

Get the Burlington Watch Book by sending this coupon now. You will know a lot more about watch buying when you read it. You will be able to "steer clear" of the over-priced watches which are no better. Send the coupon today for the watch book and our offer.

### Burlington Watch Co.

19th St. & Marshall Blvd., Dept. 9209, Chicago, Ill.

Name .....

Address .....

When writing to Advertisers please mention Popular Science Monthly



# QUICK-ACTION ADVERTISING

HERE OUR READERS AND ADVERTISERS MEET TO TRANSACT BUSINESS

**RATE 15 CENTS A WORD.** Remittance in the form of currency, check, money order or stamps **MUST ACCOMPANY THE COPY.** The January issue will close November 20th.

## AUTOMOBILES AND ACCESSORIES

\$125.00 each: Regal 40, E.M.F. 30, Buick 17; Cadillacs, Overlands, Kissel-Kars, Ramblers, in touring or roadsters. These are in serviceable condition, good tires, etc. Other makes, including trucks up to \$1000. What you want may be in stock. 200 engines, 20 H.P. to 90 H.P. \$25.00 up. Tell us what you need. Also full line parts, etc. Presto tanks B. \$6.00. Bosch magnetos \$7.00 up. D.U. 4 \$20.00. Splittorf or Remy \$5.00; new spark-plugs 30 cents. Radiators, carburetors, axles, transmissions, cylinders, gears, bearings, etc. Send in old part and we will duplicate it for 15% less than others. Down Town Auto & Parts House, 1137 Wabash Avenue, Chicago.

CONVERT your bicycle into a motorcycle at small cost by using Shaw Motor Attachment. Catalog free. Shaw Mfg. Co., Dept. 180, Galesburg, Kansas.

POWER Increased; Carbon Eliminated; results guaranteed. Write for folder S. Automobile Accessories Co., Baltimore, Md.

AUTO Tops at one-half usual price. Fit any car. Prices \$6.25, \$8.00, \$11.50 without frame. One man Tops complete \$20.00 and up. Seat covers for Fords \$8.25, \$11.50, \$12.25 up. Overlands \$9.25, \$12.00, \$18.25 up. Buicks \$8.25, \$10.50, \$18.25 up. Others similar prices. "Frost King" Asbestos Insulated Radiator and Engine Covers \$2.75, \$3.25, \$5.00 up. Repair broken light in ten minutes with "Stik-tite" Window. Our local representative will give you expert advice free and save you money. Write for his address, free catalog and samples. Limited territory still open for a few more exclusive agents. Write, The Cincinnati Auto Specialty Co., Dept. M, SA127, Elm St., Cincinnati, Ohio.

HERCULES Carbon Remover, equals 9c gasoline. Sample 15c. G. W. Ashton Co., Clinton, Iowa.

WANTED one man in each county to sell new combination Business and Pleasure Car paying bigger than average profit, several sold paying for yours. 25c brings literature and fairest plans ever offered to secure a car. Kearns Motors Co., Dept. S., Beavertown, Pa.

IF you want to succeed—if you want to get ahead in the world, you must read. Are you interested in electricity, automobiles, gas engines, aeroplanes, metal work, drawing, engineering, chemistry or any mechanical subject? Write for the new Book Catalogue of the Popular Science Monthly. It describes the best and simplest and most easy to understand books on all these subjects. It is free. Popular Science Monthly, 225 West 39th, Street, New York.

AUTO top roof for any model car \$6 to \$15 parcel post paid. Easy to apply, you save ¾ price of new top. Samples and catalog free. S. & H. Top Co., 414 Hunt St., Cincinnati, O.

"GAS-SOL" gives you 15 to 40% more mileage and eliminates carbon. Money back Guarantee. 100 tablets treat one hundred gallons gasoline. Price One Dollar. Live Agents wanted. Gas-Sol, Dept. B, Wakefield, Mass.

STARTER—Generators, magnetos, coils repaired, sold, bought, exchanged. Why pay exorbitant prices for repairs. Send it to us. Jobs returned in 48 hours. Absolute guarantee. Onody Automobile Electric Service, 334-338 Oak Street, Buffalo, N. Y.

**TIRES**—Double Tread Guaranteed for good service. Absolutely Puncture-Proof Big—Strong—Extra, heavy 30x3 tire \$5.00; 30x3½ \$6.00; 33x4 \$9.00; 34x4 \$9.25; 36x4½ \$12.00; 37x5 \$13.00. Big saving on other sizes and tubes also. Trade in your old tires. Discount to dealers. 10% deposit required on C. O. D. orders. Send for list now! State size and bead of tire. Max Liben & Co., 205P West 48th Street, New York.

**PATENTS**—For automobiles are in great demand. We have special Automobile Department in charge of experts who are in touch with demands of trade. Write for What to Invent and List of Patent Buyers, sent free. Victor J. Evans & Co., 172 Ninth, Washington, D. C.

**BATTERY** Charging pays big profits. City current or gas engine operates. Easy terms. Hoberts, Troy, Ohio.

Popular Science Monthly,  
225 West 39th Street,  
New York City.

Gentlemen:

About a month ago we wrote you to discontinue our advertisement under "Business Opportunities," reading: "Inventors can interest us in salable articles, whether patented or not. Send details in first letter."

We note that this advertisement appeared in your last issue and are sorry that you did not get our instructions in time to stop the ad. Please be advised that we wish you to discontinue this advertisement at once as we have received thousands of answers and are not able to begin to reply or take care of them properly.

Yours very truly,  
**HARRIS ENGINEERING CO.**

**TIRES**—At wholesale; send at once for our price list of first quality guaranteed tires and tubes. We ship C. O. D. subject to examination without one cent deposit. Overton Tire Co., Box P, Oelwein, Iowa.

**CYLINDER** Grinding. Quality, price and service are the result of specializing exclusively in a single line. New oversize pistons and individually cast rings properly fitted will give your motor more power than when new. "The grinding that puts the punch in your motor." Write for prices, giving make, year, bore and number of cylinders. You won't regret it. Bridgeport Piston Ring Co., Third St., Bridgeport, Conn.

**DOUBLE** Service Tires—almost puncture-proof. Sizes 30x3 \$5.50, 30x3½ \$6.60, 33x4 \$8.80, 34x4 \$9.90, 36x4 \$9.90, 36x4½ \$11, 36x5 \$12.10, 37x5 \$12.10. Non-skid, \$1.00 extra. 10% required on C.O.D. orders. State if Q.D. straight-bead or clincher type. Special discount to dealers. We also carry a full line of new tires at special prices. I. Jaffess, 1319 D 5th Avenue, New York. Branch—241 W. 54th Street.

**CONSERVE** Gasoline, price is advancing. Cold hard-starting engines are causing trouble. "Gidz" overcomes these conditions. Registered United States Patent Office, August 3, 1915, as follows: ("Gidz") a Fuel for increasing efficiency of Gasoline Engines. Experts endorse "Gidz" as gasoline saver and carbon preventative. One Dollar can by prepaid mail will convince you. Fine dealers proposition. Quick action means Quick Profits. Write today. "Gidz," Galesburg, Illinois.

## FORD ACCESSORIES

IMPROVE Your Ford 1000%. Irreversible Worm Steering Gear, style used on all high-priced cars, holds your Ford straight ahead and steady—prevents turning turtle, leaving the road or twisting past center. Makes steering easy through mud or sand or on bumpy roads. Easily attached. Price \$12.00. Money refunded if not satisfied. Put one on your Ford. Sell them in your vicinity. Good proposition. Write E. H. Sprague Mfg. Co., Dept. 3, Omaha, Neb.

**DISTRIBUTORS** Wanted: Big discounts—L-H Gasoline Saver for Fords. No bonus for territory. Retail \$3.50. Lincoln Holland, Los Angeles.

BE our agent. Buy Ford Demountables \$10.00, retails \$15.00. Illustrated Circular. Kable, West End, Pittsburgh.

## CYCLECARS AND SMALL CARS

CYCLECAR and small cars fully assembled, or in parts. Motors, transmissions, wheels, axles, etc. Hundreds of these cars in use all over the world. Catalog 10 cents. Complete working drawings 35 cents. Tribune Engineering Co., Dept. M, Owego, Tioga County, New York.

## WELDING

WELDING Plants, \$25.00 to \$300.00. Designed for all purposes. Small cash payment, balance three to six months. Every mechanic or shop should have one. Bermo Welding Co., Omaha, U. S. A.

## DUPLICATING DEVICES

"MODERN" Duplicator—a Business Getter. \$1 up, 50 to 75 copies from pen, pencil, type-writer; no glue or gelatine. 35,000 firms use it. 30 days' Trial. You need one. Booklet Free. J. V. Durkin & Reeves Company, Pittsburgh, Pa.

## WIRELESS

"HOW to Make Wireless Instruments"—This book will give you just the information you need. It is a treatise for the experimenter and amateur on the construction of wireless instruments and apparatus. Contains 94 Pages, 30 Different Instruments and 80 Illustrations. Price 25 Cents. Book Department, Popular Science Monthly, 225 West 39th Street, New York.

## BOATS AND LAUNCHES

DARROW'S Steel Boats. Finished parts or patterns. Catalogue, 78 models. F. H. Darrow, 604 Erie St., Albion, Mich.

## TOOLS AND SUPPLIES

**TOOLS**—For shop, factory, garage and home.—many high-class tools attractively priced in our "Odds and Ends" pamphlet—which is mailed free on request by Montgomery & Co., Inc., 111 Fulton St., New York City.

THE L. E. B. Pocket Tool Kit. A handy tool for any possible necessity that may arise. Most practical, complete, convenient and best pocket tool-kit ever devised. Is only 4¼ inches long and can be carried at all times; 37 practical tools of finest steel; useful in the home, garage, at the bench, in the office or factory, and on the road. Just the thing for the bicycle or motorcycle. Send for yours today. Price 50c. Efficiency Company, 225 West 39th Street, New York

**TOOL** Cases for carpenters and machinists; write for catalog. Keystone Case Co., 4020 Lake St., Chicago.

**DYNAMO** charging and lighting; used tools. Model Works, Salineville, Ohio.



## MOTORCYCLES, BICYCLES AND SUPPLIES

**MOTORCYCLE** Bargains, Second-hand and Rebuilt Motorcycles. Henderson, Harleys, Indian, Excelsiors, Emblems, Thorns, all in A-1 shape tuned up, ready to ride, \$35 to \$100. Motorcycle tires \$3. Automobile tires \$3. Best Motorcycle belts \$5. Second-hand bicycles \$5. Tandems \$20. Old Motorcycles taken in trade, highest prices allowed for them. Swap in yours. Deninger, The Price Cutter, Rochester, N. Y.

**LARGE** stock of rebuilt motorcycles, new parts for all makes 25% discount; second-hand parts, good as new, 50% discount. Motorcycle Parts Mfg. Co., Chicago, Illinois.

**BARGAINS** in used motorcycles—All machines guaranteed and in A-1 condition ready for use. Write for terms and new bulletin. Photos free. Harley-Davidson Sales Company, Birmingham, Alabama.

**WANT** to sell your motorcycle? I have a method that has sold many. Write me today for full particulars. D. W. Coutlee, 225 West 39th Street, New York.

**END-SEASON** bargains in used motorcycles. Now is the time to buy a slightly used motorcycle. Our stock consists of over 75 motorcycles of all makes, perfect condition, included are the well known Indians, Harley-Davidsons, Excelsiors, Hendersons, etc., 1916 and 1917 models, prices \$35 up. If you want a real bargain in a good machine send today for our bulletin No. 6 describing in detail all machines we have, with prices. Gotham Sporting Goods Company, 57 Warren St., New York City.

**CONVERT** your bicycle into a motorcycle at small cost by using Shaw Motor Attachment. Catalog free. Shaw Mfg. Co., Dept. 68, Galesburg, Kansas.

**MOTORCYCLES—\$40** and up. Guaranteed rebuilt Harley-Davidsons, Excelsiors, Indians, etc. Every machine in good running order and all equipped with good tires. We also have several used sidecars in fine shape. Write today for list 8A. Carl W. Bush Company, 518 Broad Street, Newark, New Jersey.

**35 New and Used Indian Motorcycles** at a sacrifice to close estate. All in A1 condition. Write for list, Albert Hanson, 210 Shukert Bldg., Kansas City, Mo.

**IF** you want to succeed—if you want to get ahead in the world, you must read. Are you interested in electricity, automobiles, gas engines, aeroplanes, metal work, drawing, engineering, chemistry or any mechanical subject? Write for the new Book Catalogue of the Popular Science Monthly. It describes the best and simplest and most easy to understand books on all these subjects. It is free. Popular Science Monthly, 225 West 39th Street, New York.

## MISCELLANEOUS

**ELECTRIC** Tattooing Machine \$1.25. Hand outfits complete 50c. 20 page illustrated Catalog free. Werner Mfg. Co. 1321 Bremen, Cincinnati, Ohio.

## FOR SALE

**MULTIGRAPH** duplicating and printing machine. Cost \$300. Rebuilt price \$105. Guaranteed two years. Russell Ernest Baum, Bourse Bldg., Philadelphia.

**UNIVERSAL** Knitting Machines. Many styles, hand or power. For Catalogue, address Daniel Booker, Peabody, Mass.

## TELEPHONE APPLIANCES

**TELEPHONE** Holder. Phone hands free, \$5-\$3. Convenient method. Farewell tiresome way. Kallajian Mfg., Boston, Mass.

## FIREARMS AND ANTIQUES

**BUY, sell, exchange** old-time and modern Fire-arms. Antiques wanted. Stephen Van Rensselaer, 805 Madison Avenue, New York.

## MANUFACTURING

**CLEVELAND** Specialty & Mfg. Co., Cleveland, Ohio, design or make special metal articles to order. Tools, Models, Stampings. Inventions developed.

## AVIATION

**AERIAL** Age, America's leading illustrated weekly, presents the latest developments in aeronautics throughout the world. Up to the minute technical information concerning aero-engines, aeroplanes, accessories and patents. Complete model news and instruction. Trial subscription six months, twenty-six issues, One Dollar. Sample copy 10c. Aerial Age, 280 Madison Avenue, New York City, New York.

**AVIATION** Dictionary, \$1, cloth, \$1.50. Languages, 143 West 47th, New York.

**LEARN** practical aeronautics in a genuine airplane factory. My students actually build military type biplanes. Pay part of tuition upon enrolling; remainder when you have found position. Pay \$10 a day. Write quickly for this special offer. This is not a correspondence course. Bud Morris Airplane & Motor School 2848 Broadway, Chicago.

**PATENTS** wanted in Aeronautics. U. S. Government spending millions in this class for Army and Navy. Our Aeronautic Department will give full information on this subject upon inquiry. Write for What to Invent, sent free. Victor J. Evans & Co., 179 Ninth, Washington, D. C.

**AVIATION.** Send for Free and prepaid literature on Aviation. Courses in Practical Aeronautics and Flying. Learn how you may prepare yourself for this fascinating and big paying profession at home. Special Limited Offer to all who write immediately. American School of Aviation, Dept. 7592, 431 South Dearborn St., Chicago.

**FRENCH** Aeroplane Company, Not Incorporated, manufacturers of aeroplanes, aeronautical and model aeroplane supplies, 908 Wells Street, Chicago. Open to Nine P. M. daily.

**AEROPLANE** Mechanics Wanted—Thousands needed right now. Will give thorough, practical course on modern aeroplanes for \$110. No book study, actual work only. Aero Exchange, 36 Park Row, New York City.

**CHICAGO** Aero Works—The only source. Blue prints—all machines. Home engineering course, equivalent to college.

**FOR** Sale at Bargain. New 50 H.P. Roberts aeroplane motor with magneto, carburetor, radiator, gas tank, paragon propeller, new fuselage, landing gear, imported shock absorber. Price \$450.00. Gus Segfried, 67 Cook St., San Francisco, Cal.

## TRADE SCHOOLS

**HILES'** Watchmaking and Engraving School, the largest and best equipped school in the West. 717 Market Street, San Francisco, Cal.

**LEARN** Sign Painting, Showcard Writing, Paperhanging, Graining, Decorating, by practical training. Send for free catalogue. Chicago Painting School, 131 North Fifth Avenue, Chicago. Established 1901.

## MODELS AND MODEL SUPPLIES

**WE** carry a complete line of brass gears and model supplies. Send for catalogue. The Pierce Model Works, 3495 Pierce Ave., Chicago, Ill.

**WANTED—New Ideas.** Write for list of Patent Buyers and Inventions Wanted. \$1,000,000 in prizes offered for inventions. Our Four Books sent free upon request. Victor J. Evans & Co., 176 Ninth, Washington, D. C.

## TELEGRAPHY

**TELEGRAPHY**—Both Morse and Wireless, also Station Agency, taught quickly. Tremendous demand—much greater than supply—permanent positions secured. Big salaries—recently raised. Ideal working conditions—short hours, vacations with pay, sick and death benefits, etc.—prevailing. Great opportunities for advancement. Women operators also greatly desired by Railways and Western Union. Tuition reasonable. Cheap living expenses—can be earned. Oldest and largest school—established 43 years. Endorsed by railway, Western Union and Marconi Telegraph officials. Large illustrated catalogues free. Correspondence courses also. Write today. Enroll immediately. Dodge's Institute, 16th Street, Valparaiso, Indiana.

## MOTORS, ENGINES AND MACHINERY

**EXCEPTIONAL** values, alternating and direct current motors from 1-30 H.P. upwards. All guaranteed for one year. Motors bought and repaired. Tell us your needs. Illustrated catalog supplies and motors. Hyre Electric Co., 629 KR South Dearborn St., Chicago.

**A. C. Motors**— $\frac{1}{4}$  H.P. 110 volts—used as demonstrators—practically new, \$14.00; also large quantity small generators for lighting, charging and moving picture arc. All sizes small motors, one and three phase in stock for immediate shipment. Write for list. Johnston, West End, Pittsburgh, Pa.

**GENERATORS**, 32 volt, for Farm Lighting Plants. Also switchboards complete. Goodlite Company, Indianapolis, Indiana.

## BOOKS AND PERIODICALS

**WORLD-ROMIC** System, Masterkey to Languages. 56c. Languages, 143 West 47th, New York.

**THE Secret.** Energy—Force—Magnetism—Success: depend upon the Vital Spark of Personal Power. Do you possess that power? If yes, then throw this advertisement into the waste basket; if not, then read "The Secret." Price \$1—postpaid; pamphlet free. Th. Arrow, 66 Pinehurst Avenue, New York.

**WE** can furnish any book in print. Tell us exactly what you want in first letter. Unless you mean business, save your postage. Criterion Service, Woodcliff, New Jersey.

**MAGAZINES** at Rock Bottom Prices. Send today for our free catalog "A." S. C. Hanson Magazine Agency, 4926 Kinzie, Chicago.

**USED** Books. Bargains. Catalog. Higenes K-2441 Post, San Francisco. (Books Bought.)

**30 Different** Magazines, value \$3.00. All late issues. Yours for 25c. Eastern Bureau, New Egypt, New Jersey.

**"FORESIGHT"** teaches face-reading on sight; "Puts you wise" to character of friends; "Reading" their tell-tale "bumps" makes fun for everybody; Illustrated, 75c. Circular free. Mellen, Publisher, 611 Times Building, Chicago.

## ELECTRICAL SUPPLIES

**ELECTRIC** Supplies, Motors, Lamps, Wire, Switches, Sockets, Flashlights. Eight-light Christmas tree outfit with lamps, 11 volt, special price \$2.90; 6 volt, special price \$2.25. Get our regular \$2.00 Flashlight for a Christmas gift, specially priced for 30 days at \$1.15. Auto Electric Co., not Inc., 6333 S. Marshfield Ave., Chicago, Illinois.

**ILLUSTRATED** Catalog, just issued. Electrical supplies and motors, wire, switches, loom, plugs, tape, rosettes, lamps, fuses, sockets. Send for free copy today. Hyre Electric Co., 629 PM, South Dearborn St., Chicago.

## PICTURES AND POSTCARDS

**RECEIVE** pretty cards from everywhere. Membership and six pretty cards, 10c. Riverside Exchange, Knoxville, Md.

**PHOTOS**, fascinating studies from living models. No trash. The kind you have been looking for. Large sample and particulars, 10 cents. Jorst Company, Box 253, Saginaw, Mich.

**RECEIVE** pretty postcards from far and near. Best club membership, 10c. Jolly Card Exchange, Eight A-St., Decatur, Indiana.

**EXQUISITE** Art Photographs, Post Cards and Pictures, suitable for Bachelor Apartments, Dens, Clubs, Barber Shops, Cafes, Buffets, etc. Adults, send your name and 4 cent stamp. Do It Now. O. W. Miller, 105 Chambers Street, New York.

**10 nice** postcards, club membership and catalog, 10c. Stewart Company, Providence, Rhode Island.

**RECEIVE** pretty cards from everywhere. Membership, 10c (Silver). Princess, Lock Box 812, Burlington, Vermont.

**25 Beautiful** Post Cards prepaid 15c. Burg, Commercial, Gary, Indiana.

**DEN** Pictures: Sample and catalogue 10c. Vim Company, East St. Louis, Illinois.

**100** Magazines, circulars, art rug, life chart, coupons value \$3. All 10c. Barrys, 2409 Pacific, Atlantic City, N. J.

When writing to Advertisers please mention Popular Science Monthly



**PRINTING, ENGRAVING AND MULTIGRAPHING**

AT Last! Beautiful Lithography for small users. 1,000 Letterheads, 1,000 Billheads and 1,000 Statements \$9.90. Engraving Free. Kaydee Lithographing Co., 772 Teutonia, Milwaukee.

Good Printing at low prices; 1,000 good letterheads, envelopes, cards, billheads, labels, circulars, \$2.50; samples free; catalogues, booklets and circulars our specialty. Ernest L. Fantus Co., 523 S. Dearborn St., Chicago, Ill.

I want to send you proof of the wonderful pulling power of the Classified Columns of this magazine. If you want to buy something, sell something or exchange something, write today for full particulars. D. W. Coutlee, Manager Classified Advertising, Popular Science Monthly, 225 West 39th Street, New York.

**SERVICEABLE** Pre-used Printing Presses, Type, Supplies. Lowest prices. List for stamp. P. Bargains, Richmond, Pa.

\* **PERFECT** Letter Shop, Muncie, Indiana. Multigraphs 500 purple letters with black letterheads \$2.15. Samples for stamp.

**EMBOSS** Stationery—Trifle more than Common. Samples. Commercial Embossing Company, Wilkes-Barre, Penn.

50 Classy Calling Cards and patented card case, 25c. Extra grade, linen, 35c. Samples. Retter, 302 Fourth, Tippecanoe City, Ohio.

**NEW** Large Catalog of Attractive Gummed Labels and Advertising Stickers Free. 3000, 75c upwards. Royal Label Company, 414 Cherry, Philadelphia.

100 Panel Cards, Leatherette Case 45c. Agent's 50% proposition. Wolfe Cards, Philadelphia.

3000 Gummed Labels for \$1.00, size 1 in. x 2 in. Circular free. Catalogue 2c stamp. The Helmers Company, Hoboken, New Jersey.

**ENVELOPES**, Statements, Billheads, Cards printed \$1.75 per thousand. Other printing low. Samples free. J. M. Hunt, Printer, Lambertville, N. J.

**YOUR** name and address printed on 50 "Styloprint Cards" for 35c. Card case free. Bridgen Company, Waltham, Mass.

500 Bond Letterheads and 500 Envelopes, \$3.00 prepaid. Samples Free. Slarb Printing Co., Hamilton, Ohio.

**PRINTING**, Engraving and Multigraphing at lowest rates. Tell us your needs. Criterion Service, Woodcliff, New Jersey.

**GRANDFATHER'S CLOCKS**

**GRANDFATHER'S** Clock Works \$5.00. Build your own cases from our free instructions. Everybody wants a hall clock. You can make good profit building artistic clocks for your friends. We replace worn-out works in old clocks with works having chimes at money saving prices. Write for folder describing the most beautiful hall clock ever sold at \$25.00. Clock Co., Nicetown, Pa.

**CHRISTMAS SUGGESTIONS**

"**PATRIOTIC** Readings and Recitations"—the choicest, newest and most complete collection published. Includes all the well known selections, together with the best utterances of all the eminent statesmen. 200 Pages, Cloth Covers, 50 Cents. Paper, 25 Cents. Criterion Service, Woodcliff, New Jersey.

**CHRISTMAS** Greetings. 90 Assorted, beautifully finished, may be hand colored—50c. 10 Handsome embossed assorted cards—20c. worth 50c. E. B. Winslow, Dept. P., Tuckahoe, N. Y.

**WATCHES AND JEWELRY**

**COLORED** Bead Rings. An attractive, durable novelty. 25c and 50c. Clifford Peck, Union St., Braintree, Massachusetts.

**NEWS CORRESPONDENTS**

**WRITE** for newspapers and magazines. Big Pay. Experience unnecessary; details free. Press Reporting Syndicate, 400, St. Louis.

**POULTRY AND LIVE STOCK**

**EARN** \$20 weekly raising Belgian Hares. Particulars 10c. Ulysses Anderson, 2421 Ogden, Denver, Colorado.

**CAMERAS, PHOTOGRAPHY AND SUPPLIES**

**INVENTIONS**—Wanted in Motion Pictures and Photography. Special Department for these classes of invention. Advice, What to Invent and List of Patent Buyers sent free. Victor J. Evans & Co., 173 Ninth, Washington, D. C.

**FILMS** Developed, 10c, all sizes. Prints 2 1/4 x 3 1/4, 3c; 4 1/4 x 4 1/4, 4c. We give Profit Sharing Coupons. 24 hour service, work guaranteed. Send negatives for samples. Girard's Com. Photo Shop, 316 High St., Mills Alderman Bldg., Holyoke, Mass.

**FILMS** developed 10c roll. Six prints free. Ask for descriptive booklet. Roanoke Photo Finishing Company, 212 Bell Avenue, Roanoke, Virginia.

**KODAK** Pictures Wanted. I can get good prices for your prints. Any size. Send stamp for particulars. Henry Shaw, Dept 33 44 Boylston St., Boston, Mass.

**FREE** 5 x 7 enlargement. Send negative and 5c. Virginia Art Co., 717 1/2 Pine Street, Richmond, Va.

**HANDSOME**, Hand Colored 8 x 10 enlargements. Made from negatives or films, mounted 65c prepaid. J. Gonder, 319 Tremont Ave., East Orange, New Jersey.

"**PHOTOGRAPHY** Self-Taught." Complete instructions on how to operate the camera, develop the plate or film, print and finish the picture. Paper, 25c; Cloth, 50c. (No Stamps). Criterion Service, Woodcliff, New Jersey.

"**PERFECT** Pictures"—How and where to get them. Write to-day for this interesting, free booklet. David Stern Company, 1027-1029 W. Madison Street, Chicago, Ill. In Business Since 1885.

**FILMS** developed the better way. 20c for developing and printing No. 2 Brownie size. Schaeffer Co., Adj., Y.M.C.A., Newark, New Jersey.

**BEST** developing, printing in country. Send 3c for circulars or 15c and roll for sample developing, printing. Rare bargains used cameras. Miles P. Greenwood, Melrose, Massachusetts.

**AMATEUR** Photographer's Weekly—the Journal That Teaches How. Special—3 months (13 issues) for 25c stamps or coin. Established 1912. Cleveland, Ohio.

**OPTICAL GOODS**

**MICROSCOPE**, magnifies 3,600 times, for 25c. Catalog for stamp. Specialty Mfg. Co., 19, Milton, Pennsylvania.

**PRESS CLIPPINGS**

**ROMEIKE** reads 3,000 newspapers, searches 1,000 magazines, employs 100 people, operates 7 departments, but, above all, satisfies 5,000 subscribers. 110 Seventh Avenue, New York.

**MUSIC AND SHEET MUSIC**

**SONG** Writers' "Manual and Guide" sent free. Get real facts. We revise poems, compose and arrange music, copyright and facilitate Free Publication, or sale. Submit poems for examination. Knickerbocker Studios, 168 Gaiety Bldg., New York City.

**SONG POEMS WANTED**

**WRITE** the Words for a Song. We write music and guarantee publisher's acceptance. Submit poems on war, love or any subject. Chester Music Co., 1039 Wilson Ave., Suite 111, Chicago.

**THEATRICAL GOODS**

**SCENERY** supplied—anywhere, everywhere. Moderate rental. Amelia Grain, 819 Springgarden, Philadelphia, Pennsylvania.

**LITERARY**

**ORATIONS**, debates, speeches, special papers. Original, accurate compositions with true ring prepared for all events. 500 words \$1. Ephraim Buchwald, Dept. X, 113 East 129th St., New York.

**SPEECHES** written to order. Any subject. Confidential. Particulars free. Speechcraft, Box 1024, Washington, D. C.

**SPECIAL** articles prepared for all occasions; speeches written, typed and criticized. Criterion Service, Woodcliff, New Jersey.

**TYPEWRITERS AND SUPPLIES**

**LARGEST** stock of Typewriters in America. Underwoods, one-fourth to one-half manufacturer's prices, rented anywhere, applying rent on purchase price; free trial. Installment payments if desired. Write for catalogue 11. Typewriter Emporium (Estab. 1892). 34-36 West Lake Street, Chicago, Illinois.

**GOOD** Serviceable Typewriters \$10 and up. Post card brings list. First-class ribbons, any standard machine 35c. Hub Typewriter Co., 286 Devonshire St., Boston.

**NEW**, rebuilt and slightly used Typewriters \$8 up. Portable Machines \$10 up. Write for our Catalog 25P. Beran Typewriter Co., 58 W. Washington St., Chicago.

**RUBBER STAMPS**

**RUBBER** Stamps: send stamp for catalog. Box 458-P, Middletown, New York.

**SHORT STORIES—POEMS**

**WANTED**—Stories, Articles, Poems for publication. We pay on acceptance. Handwritten MSS. acceptable. Submit MSS. to Cosmos Magazine, 1402 Stewart Bldg., Washington, D. C.

**WANTED**—Stories, articles, poems for new magazine. We pay on acceptance. Handwritten MSS. acceptable. Send MSS. to Woman's National Magazine, Desk 35, Washington, D. C.

**AUTHORS—MANUSCRIPTS**

**MANUSCRIPTS** typewritten, carefully and promptly, 50 per thousand words, with one carbon. We also read and criticize, \$1.00 for 5000 words or under. A trial will insure your future patronage. Criterion Service, Woodcliff, New Jersey.

**WRITERS**: Stories, poems, plays, etc., are wanted for publication. Literary Bureau, 117, Hannibal, Mo.

I want to send you proof of the wonderful pulling power of the Classified Columns of this magazine. If you want to buy something, sell something, or exchange something, write to-day for full particulars. D. W. Coutlee, Manager Classified Advertising, Popular Science Monthly, 225 West 39th Street, New York.

**MANUSCRIPTS** edited, revised. Typing fee forty cents thousand words. G. Payne, 320 Sixth Street, Brooklyn, N. Y.

**MOTION PICTURE PLAYS**

**SEND** us your Ideas for photoplays, stories, etc. We accept them in any form—correct free—sell on commission. Big rewards! Make Money. Get details now! Writer's Selling Service, Desk 6, Auburn, N. Y.

**WRITE** Photoplays; \$50 each. Experience unnecessary; details free to beginners. Producers' League 194, St. Louis.

**SEE** Here! We want your Ideas for photoplays and stories! Criticized Free. Sold on commission. Big money. Send for Guide. Manuscript Sales Co., Dept. 6, Poughkeepsie, N. Y.

**I'LL** start you writing Photoplays. Free literature tells how. Harsh, 123-K So. Third, Harrisburg, Pennsylvania.

**MOTION PICTURE BUSINESS**

**\$35.00** Profit Nightly. Small capital starts you. No experience needed. Our machines are used and endorsed by Government institutions. Catalog free. Atlas Moving Picture Co., 414 Franklin Bldg., Chicago.

**ELECTRIC** Arc Generator halves expense. Your engine operates. Easy terms. Roberts, Troy, Ohio.

**PHONOGRAPHS AND RECORDS**

**BUILD** your Phonograph, any type. Big saving. Works \$5.00 and up. Full instructions, blue prints, parts—price list, 25c. Circulars free—Arion Phonograph Supply, South Bend, Indiana.

**BUILD** your Phonograph. Highest quality motors, tone arms, reproducers, cabinets. Big saving. Handsome catalog free. Indiana Phonograph Supply Co., Indianapolis, Indiana.

**FORMULAS AND TRADE SECRETS**

**FORMULA**—Guaranteed. Never been published. Family secret for generations. Every man and woman should know it. Worth its weight in gold. Remit a dollar bill to O. Henry, Gordon, Kansas.

When writing to Advertisers please mention Popular Science Monthly



## FOR MEN AND WOMEN

YOU can turn your spare time into dollars by taking subscriptions from your friends and acquaintances. You, as a regular reader of POPULAR SCIENCE MONTHLY, know its good points and can present its attractive features in a way which will readily secure a large number of subscribers. Convince me that you are in earnest and willing to take advantage of this opportunity, and I will gladly send you full particulars as to how to go about the work, and also special appointment papers for your territory. Don't wait until your neighbor has secured the appointment—write today. Circulation Director, Popular Science Monthly, 225 West 39th Street, New York.

INDIAN Baskets—Wholesale and retail. Catalogue. Gilham, Highland Springs, California.

"SEXUAL Philosophy," 12c. Clear, specific, authoritative, complete, best satisfies. Fred B. Kaessmann, Lawrence, Mass.

WHAT will coming year bring to you? Reliable scientific forecast from planetary aspects. Send 10c and date of birth for trial reading. L. Thomson, Dept. 100, Kansas City, Mo.

HOME Study leading to degrees from old residential college. B. W., 6922 Stewart Ave., Chicago.

BE a Detective. Excellent opportunity, good pay, travel. Write C. T. Ludwig, 424 Westover Bldg., Kansas City, Mo.

ZODIAC Horoscope Reading showing Character, Talents, Future Possibilities, etc. Invaluable for your Future Welfare. Send birth-date and ten cents (coin) for Trial Reading. E. M. Heath, Dept. P., Fairbanks Bldg., Chicago.

DIVORCE and Marriage Laws every State. Send \$1.00. Box M568, Reno, Nevada.

WATERPROOF your shoes and clothing cheaply, makes them last longer, materials obtained anywhere. Either formula one Dollar. Snively, Bloomfield, New Jersey.

THEORIZER, Improver. Systems, plans, literature, etc. C. August Dial, Box 566, Granite City, Illinois.

NOT Like Others! Questions, Birthdate, \$1.00. Dreams Interpreted 25c, Clairvoyant. Genealogical Records written of Previous Incarnations. All your questions answered. Nellie Lewis, Psychologist, Teacher of Theosophy, Silver Lake, Oregon.

YOGHURT removes intestinal auto-intoxication, constipation, faulty digestion, poor circulation, prolongs life. Vegetable Compound: Are you sick, bilious, nervous, feeling ill in any way? You lack minerals in blood and tissues. Supply the lacking elements and a quick return to health is assured. Particulars, free. Will open your eyes. Yoghurt Co., (P. S.), Bellingham, Washington.

\$3.00 Aluminum Percolator, \$1.50 Beautiful Lavalliere free to ladies. For particulars and exceptionally meritorious article send dime. Satisfaction guaranteed or Money Back. Mincke Co., Alhambra, California.

WE will prepare an advertisement for you that will produce big results in this section, for \$1.00. Write today and let us increase your orders. Criterion Service, Woodcliff, New Jersey.

THE electricity from the batteries will turn a needle through your table or hand. For Rheumatism, Liver and Kidney Disease, Weak and Lame Back, Headache, Weakness, Grip, Dyspepsia, Coldness, Nervousness, Dizziness, Numbness, Poor Circulation, etc. For advertising purposes we will give One Belt Free to one person in each locality. Address E. J. Smead & Co., Dept. 2, Vine-land, N. J.

## FOR BOYS AND GIRLS

EARN \$1.00. Sell 25 collections Xmas postcards, seals, etc., at 10c each. Send 40c postage, reference. E. B. Winslow, Dept. P., Tuckahoe, N. Y.

THE Boy Electrician contains practical plans for Electrical Apparatus for work and play with an explanation of the principles of every day electricity. Tells of the actual experiences of a boy who gained a practical education in electricity by making his own Static Machines, Electromagnets, Cells and Batteries, Binding Posts, Switches and Cut-outs, Measuring Instruments, Induction Coils, Transformers, Motors, Dynamos, Wireless Telephone, etc. 394 Pages, 350 Illustrations, Price \$2.00. Book Department, Popular Science Monthly, 225 West 39th Street, New York.

## FOR ADVERTISERS 1

IF your advertisement in this section is not producing the best possible results, let us prepare one for you that will. Strong, forceful sales letters, circulars, folders, booklets and advertising literature written, at attractive rates. What is Your Problem? Criterion Service, Woodcliff, New Jersey.

IF you have hesitated to try Classified Advertising for fear your lack of experience in writing advertisements might stand in the way of your success you need delay no longer. Write a letter to the Classified Department of Popular Science Monthly, 225 West 39th Street, New York, and state fully what you want to put into your advertisement and the amount of space you want it to occupy. Copy will be at once submitted for your approval, together with full particulars as to rates, classification and closing date of next available issue.

ADVERTISE! 25 words 3 months in 120 monthlies, \$1.50; 220 magazines, \$2.75. Southwestern, 1413-2 Berendo, Los Angeles.

## COLLECTIONS AND ADJUSTMENTS

COLLECTIONS everywhere. Promptness our watchword. Phoenix Mercantile Bureau, Omaha, Nebraska.

DEBTS collected quickly! Established 25 years. William H. Dodd, 87 Nassau St., New York.

KENTUCKY, Louisville. General collections. Prompt remittances. J. K. Claxton, Attorney.

LET us collect your bad accounts. No collection—no pay. Amaco, 11216 Itaska, Cleveland, Ohio.

## EDUCATIONAL AND INSTRUCTION

ELECTRICAL instruction given by practical engineer. Learn this wonderful profession at home by practical instruction. By my improved method of learning you can become a Certified Electrician in a few months. Satisfaction guaranteed. Electrical outfit of instruments, tools and materials furnished free to each student. Earn money while learning. Write me for Electrical book and full particulars. Everything free if you answer now. Chief Engineer, Chicago Engineering Works, 465 Cass St., Chicago.

ORNAMENTAL Casting, make moulds yourself, two hundred illustrations free. Mahler, Woodhaven, Long Island, N. Y.

"SPANISH-IN-A-WEEK," by T. S. Romero. The best text-book to the great language of Latin-America. Embodying a new method, scientific, exact, comprehensive, by an expert teacher of pure Castilian Spanish. This book contains the elements of the language, easily grasped and of sufficient vocabulary to enable anyone to obtain a working knowledge of Spanish. Every word phonetically pronounced. Widely used by export houses, engineers, salesmen, students, teachers and travelers. Price 50 Cents. Book Department, Popular Science Monthly, 225 West 39th Street, New York.

WANTED—New Ideas. Write for list of Patent Buyers and Inventions Wanted. \$1,000,000 in prizes offered for inventions. Our Four Books sent free upon request. Victor J. Evans & Co., 178 Ninth, Washington, D. C.

LEARN Landscape Architecture and Gardening—uncrowded profession; inexpensive; easily mastered. Begin earning three weeks after enrollment; information free. American Landscape School, 46A Newark, New York.

BUSINESS Letter Writing taught in ten lessons by practical correspondents. \$100 weekly is not uncommon for expert letter-writers. Prepare now to earn it. Send \$1 for first lesson or write for particulars. Puffer & Walsh, 120 Greenfield St., Buffalo, New York.

FRENCH Pronunciation-Key, 37c; Spanish, 37c. Languages, 143 West 47th, New York.

ARMATURE Rewinding—Learn at home easily by our plain simple course for Automobile Electric Starting Motor and Generator Armatures. We furnish working model, etc. Good armature winders earn big pay. Free literature. S-A Electric Works, 1904 Emmet St., Omaha, Nebraska.

STENOGRAPHY or Bookkeeping, simplified method, 25c; practical, complete Mail Course, \$5. Marr, B 285, Nashville, Tenn.

ARCHITECTURAL Drafting, Mechanical Drafting, Illustrating. Practical correspondence courses by instructors in active practice. The Technical Institute, 4752 Cote Brillante Ave., St. Louis.

"AUS NAH UND FERN"—quarterly for students of German. Illustrations, Vocabulary, Simple. Loyal to America. Nafern, 330 Webster Avenue, Chicago.

## FOR INVENTORS

STAMPINGS in Aluminum, Copper, Brass, Celluloid and Steel, at very low rates, by the single piece or in quantities. We also design and build precision machinery and instruments to order, and make Good models, drawings and blue-prints. Expert and confidential experimental work. J. B. Murphy, Lock Box, 673, Plainfield, New Jersey.

INVENT Something! Your ideas may bring wealth; free book tells what to invent and how to obtain a patent, through our credit system. Talbert & Parker, 4691 Talbert Bldg., Washington, D. C.

PATENTS secured or all fees returned. See E. E. Vrooman & Company's advertisement, page 138.

FIND Out for Yourself what to invent and how to procure and sell a patent for the same. My book, "Inventor's Universal Educator," covers the matter from A to Z. 140 pages, elegantly bound. Also contains 600 mechanical movements and 50 perpetual motions. Price \$1.00, postage free. F. G. Dieterich, 601 Ouray Bldg., Washington, D. C.

PATENTS without advance attorney's fees. Free report and books. Frank Fuller, Washington, D. C.

INVENTIONS Commercialized on cash and royalty basis. Inventors and Manufacturers write at once. Adam Fisher Mfg. Co., 2183 Railway Exchange, St. Louis, Mo.

HAVE you an idea? If so, you should protect it by a patent. Send us a model or sketch for free opinion of patentability. Write for our Four Books sent free to any address. Victor J. Evans & Co., 166 Ninth, Washington, D. C.

INVENTORS—We specialize in manufacturing new patented articles, make models—dies—and do experimental work. Leo J. Gerding Mfg. Co., Dept. E., Opera Place, Cincinnati, Ohio.

PATENTS on easy payments. Send model or sketch for free search and certified registration of your invention for your protection. Free book tells what to invent and how to obtain a patent on easy payments. C. C. Hines & Co., 592a Loan and Trust Bldg., Washington, D. C.

INVENTORS Attention! Practical Patents developed—financed—promoted—for our members. New members wanted. Inventors write for details. Inventors' Co-operative Bureau, 709 Lankershim Bldg., Los Angeles, California.

WE will commercialize and manufacture that electrical or mechanical invention for you. Confidential development and experimental work. Precision Engineering Co., 2914 Woodburn Ave., Cincinnati, Ohio.

INVENTOR will buy patents. Write particulars. 603 Caswell Block, Milwaukee.

INVENTORS—Join National Institute of Inventors, 280 Broadway, New York. Membership, 1,400 strong, will help perfect, finance, secure, market patents, absolutely no charges, Mutual Society, not business enterprise. Write for particulars.

## PATENTS FOR SALE

FOR Sale—Amusement Device, Merry Go Round See-Saw; many other inventions. H. C. Tanabe, Marysville, California.

## REAL ESTATE—FARM LANDS

IS He Crazy? The owner of a plantation in Mississippi is giving away a few five-acre tracts. The only condition is that figs be planted. The owner wants enough figs raised to supply a Canning Factory. You can secure five acres and an interest in the Factory by writing Eubank Farms Company, 934 Keystone, Pittsburg, Pa. They will plant and care for your trees for \$6 per month. Your profit should be \$1,000 per year. Some think this man is crazy for giving away such valuable land, but there may be method in his madness.

BEAUTIFUL Seashore Homesites only \$20. Special sale lots at Alamo Beach, Texas, famous Bayshore resort. First 100 lots \$20. Terms \$1 cash, \$1 monthly. Lots 50 x 140 feet. Splendid investment. Write for free literature and views. Alamo Beach Company, 432 First National Bank, Houston, Texas.

MONEY making farms 15 States, \$10 an acre up; stock, tools, and crops often included to settle quickly. Write for Big Illustrated Catalogue. Strout Farm Agency, Dept. 12, New York.

When writing to Advertisers please mention Popular Science Monthly



**PATENTS AND PATENT ATTORNEYS**

**PATENTS:** Our practice before the Patent Office extends over seventy years. It pays to employ an attorney of reputation as a poor patent is a bad investment. Ability and Reliability are our special partners. We are also the publishers of the Scientific American and all patents secured by us are described without cost in the Scientific American. Your invention is thus brought to the attention of thousands of intelligent readers especially interested in such matters. To procure like publicity in any other manner would cost you many times the patent fees. Our Hand Book on Patents sent free on application. Munn & Co., Patent Attorneys, 624 Woolworth Building, New York, and 625 F St., Washington, D. C.

**PATENTS that Protect.** Write us for New Book, Patent Sense, worth more than all other patent books combined. Free. R. S. & A. B. Lacey, 127 Barrister Bldg., Washington, D. C. Est. 1869.

**PATENT Your Ideas.** Books, "How to Obtain a Patent," and "What to Invent," sent free. Send rough sketch for free report regarding patentability. Manufacturers constantly writing us for patents. Patents advertised for sale free. Established 20 years. Address Chandler & Chandler, Patent Attorneys, 403 7th St., Washington, D. C.

**SUCCESSFUL** inventions must be patented to assure protection while being perfected. Write for a free opinion as to the patentability of your idea. Beale & Park, 1422 F. Street, Washington, D. C.

**PATENTS secured.** Write for our booklet; it tells how to protect your ideas and how to proceed with your invention to make money. Featherstonhaugh & Co., 401 Victor Building, Washington, D. C. 35 years' practice in U. S. and Canada.

**SEND for Free Booklet, "All About Patents and Their Cost."** Shepherd & Campbell, Patent Attorneys, 734-E 8th St., N. W., Washington, D. C.

**PATENTS on easy payments.** Send model or sketch for free search and Certified registration of your invention for your protection. Free book tells what to invent and how to obtain a patent on easy payments. C. C. Hines & Co., 592a Loan and Trust Bldg., Washington, D. C.

**PATENTS Worth While.** No free searches, no free booklets, no premiums, no trading stamps. Samuel Herrick, Master of Patent Laws, Washington, D. C.

**DON'T** lose your rights to patent protection. Before proceeding further send for our blank form "Evidence of Conception" to be signed and witnessed. Book, suggestions and advice free. Lancaster & Allwine, 232 Ouray Building, Washington, D. C.

**PATENTS on easy time payments.** I will secure your patent—you pay while I work. Write for particulars now. H. Kaye Martin, Barrister Building, Washington, D. C.

**IDEAS are Valuable:** I help you market them; write to-day for books and manufacturer's wants. J. R. Kelly, 740-B Woodward Building, Washington, D. C.

**"CONSTRUCTION of Induction Coils and Transformers"**—The biggest 25 cents worth in the field of electrical literature. Tells how to design and build magnetic leakage transformers, high frequency apparatus, low voltage transformers, induction coils, condensers, gaps, etc., and gives dozens of valuable hints. Send for your copy today. Book Department, Popular Science Monthly, 225 West 39th Street, New York.

**AMERICAN Patents and Trade-Marks.** F. V. Winters, Patent Lawyer, 125 East 23rd Street, New York City. Secured patent protection everywhere. Telephone Connection.

**PATENT applications filed on partial payment plan.** We help sell the patent. Trade-marks, copyrights, etc. Milo B. Stevens & Co., 685-353 F St., Washington; 351 Monadnock Bldg., Chicago. Established 1864.

**FITZGERALD & Co., Patent Lawyers,** 801 F St., Washington, D. C. Est. 1880. "The Old Reliable Firm." Free Handbook.

I want to send you proof of the wonderful pulling power of the Classified Columns of this magazine. If you want to buy something, sell something, or exchange something, write to-day for full particulars. D. W. Coutlee, Manager Classified Advertising, Popular Science Monthly, 225 West 39th Street, New York.

**PATENT applications filed on partial payment plan.** We help sell the patent. Trade-marks, copyrights, etc. Milo B. Stevens & Co., 640 F St., Washington, 351 Monadnock Bldg., Chicago. Established 1864.

**NORMAN T. WHITAKER, Patent Lawyer, Attorney-at-Law and Mechanical Engineer.** Former Examining Official U. S. Patent Office. Suite 11, Legal Building, Washington, D. C.

**THE Patentome is free.** An education in obtaining patents. Established 1865. Anderson & Son, Attorneys, 712 7th St., Washington, D. C.

**INVENT Something.** Your ideas may bring wealth. Free book tells what to invent and how to obtain a patent through our credit system. Talbert & Parker, 4690 Talbert Bldg., Washington, D. C.

**PATENTS secured or fee returned.** Books and advice free. Send sketch for free search. We help market your invention. A. M. Buck & Company, 534 7th St., Washington, D. C.

**PATENTS Secured or fee returned.** Actual search free. Send sketch or model. 1917 Edition, 90-page patent book free. My patent sales service gets full value for my clients. It should never require more than two days to report upon the patentability of your invention; nor longer than ten days to prepare your application for filing. Longer delay amounts to gross neglect and the jeopardizing of your rights. For prompt personal service write: George P. Kimmel, 214 Barrister Building, Washington, D. C.

**PATENTS—Send sketch for free search and report.** Books on patents, book of reference letters, and dining table novelty sent free. John S. Duffie & Co., 608 F Street, Washington, D. C.

**NO Attorney fees until patent allowed.** Send sketch for free report. Books free. Frank Fuller, Washington, D. C.

**PATENTS obtained through D. Swift** are being sold to Large Manufacturers. Write today for free books of "Inventions needed" and surpassing references. D. Swift, 371 Seventh St., Washington, D. C. Established in 1889.

**PATENTS Bring Riches; Protect Your invention.** Attorney's fee payable when patent allowed. Plain advice and "Patent Facts" free. Trade-marks registered. Jaynes and Jaynes, 600 Kellogg, Washington, D. C.

**IDEAS Wanted—Manufacturers are writing for patents procured through me.** Four books with list hundreds of inventions wanted sent free. I help you market your invention. Advice Free. R. B. Owen, 44 Owen Bldg., Washington, D. C.

**PATENTS—Herbert Jenner, patent attorney and mechanical expert,** 608 F St., Washington, D. C. I report free of charge if a patent can be had and its exact cost. Send for circular.

**PATENTS Wanted—Write for List of Patent Buyers who wish to purchase patents and What to Invent with list of inventions wanted.** Send sketch for free opinion of patentability. Our Four Guide Books sent free upon request. Patents advertised free. We assist inventors to sell their inventions. Victor J. Evans & Co., 155 Ninth, Washington, D. C.

**PATENT—Advice and Books free; highest references; best results.** I procure patents that protect. Watson E. Coleman, Patent Lawyer, 622 F St., N. W., Washington, D. C.

**PATENT secured or fee returned.** Hundreds of inventions sold yearly. We will help you sell yours. Send model or sketch. Books and advice free. Sues & Co., Est. 30 years. 534 7th St., Washington, D. C.

**PATENTS secured or all fees returned.** See E. E. Vrooman & Company's advertisement, page 138.

**INVENTIONS of merit can be sold by our system.** For further particulars write American Investment Co., Washington, D. C.

**PATENTS, Trade-Marks and Copyrights.** Our handbook on patents will be sent free on request. All patents secured through us are described without cost to the patentee in the Scientific American. Munn & Co., Patent Attorneys, 624 Woolworth Bldg., N. Y. Washington, D. C., office, 625 F St.

**C. L. Parker, Patent Attorney,** McGill Building, Washington, D. C. Inventors' hand-book, "Protecting, Exploiting and Selling Inventions," sent free upon request.

**PATENTS.** R. Morgan Elliott & Co., Patent Attorneys, Mechanical, Electrical and Chemical experts, 714-722 Woodward Bldg., Washington, D. C.

**"PATENTS and Patent Possibilities"** is a 72-page treatise which tells all about patents, what to invent and where to sell it. It gives honest advice to inventors and tells about the successes of some of my clients, also explaining what are frequent causes of failure. Manufacturers are constantly writing for protective patents upon all kinds of sound inventions. Can you help supply their wants? The book is free. Write for it today. H. S. Hill, 929 McLachlen Building, Washington, D. C.

I want to send you proof of the wonderful pulling power of the Classified Columns of this magazine. If you want to buy something, sell something or exchange something, write to-day for full particulars. D. W. Coutlee, Manager Classified Advertising, Popular Science Monthly, 225 West 39th Street, New York.

**STAMPS AND RARE COINS**

**STAMPS—500 fine foreign, incl. Mex. War, Salvador, incl. officials, Guatemala, China, etc., only 10c.** Best App. Sheets 60 to 80% dis. We give Valuable extra Presents free! Big 120 page catalog free. We buy stamps. Hussman Stamp Co., St. Louis, Mo.

**OLD Coins.** Large Fall Coin Catalogue of coins for sale free. Catalogue quoting prices paid for coins, ten cents. William Hesslein, 101 Tremont St., Boston, Mass.

**FREE, 60 different stamps including New Foundland, China, Japan, Mexico, etc., to applicants for our high grade approvals.** Send 3c stamp for return postage. The Edgewood Stamp Company, Dept. M, Milford, Conn.

**STAMPS. 75 All Different, 2 cents.** Mention paper. Quaker Stamp Co., Toledo, Ohio.

**\$2 to \$600 paid for hundreds of old coins dated before 1895.** Send 10 cents at once for new illustrated coin value book. Size 4 x 7. It may mean your fortune. Clarke & Co., Coin Dealers, Box 76, LeRoy, N. Y.

**STAMPS—12 different from warring nations, 10c; 10 different foreign coins, 15c; 20 Belgian stamps, 10c.** Lists free. Toledo Stamp Co., Toledo, O.

**17 varieties Hayti stamps 20c.** List of 7000 varieties, low priced stamps free. Chambers Stamp Co., 111C, Nassau St., New York City.

**105, China, etc., Stamp Dictionary, list 2c.** Album, 500 illustrations, 3c. Bullard, Station AA, Boston.

**CALIFORNIA gold, quarter size 27c.** One half dollar size, 53c. Dollar size, \$1.10. Large cent before 1820. Columbian nickel coin and catalogue, 10c. Norman Shultz, King City, Missouri.

**FREE! 25 Different British Colonials to applicants for approvals.** Postage 2c. Nickles, Room 15, 122 Florida Ave., Washington, D. C.

**TWO Uncirculated Villa copper coins 25c.** Moore Coin Company, Commerce, Texas.

**SELECTIONS sent on approval, 70% discount.** Reference required. J. Emory Renall, Dept. M, Hanover, Pennsylvania.

**50 excellent stamps, 8c.** Lists free. Edwin Bailey, Farmingdale, N. Y.

**350 different stamps 35c.** Lutheran Club, Box 176, Terre Haute, Indiana.

**25 Varieties Cuban stamps, 10c.** Nickles, 122 Florida Ave., Washington, D. C.

**TEN different old bills, 50c.** Coin lists free. Moore Coin Company, Commerce, Texas.

**1000 Mixed Stamps; over 150 varieties, 12c.** Charles Peugh, Elma, Washington.

**150 Foreign stamps, album, hinges, gauge and list.** Eight cents. Gem Stamp, 674 E. 6th St., St. Paul, Minn.

**Coins, Stamps, Indian Relics and curious things exchanged for Profit Sharing Coupons.** Booklet for Stamps. V. Walter, New Rochelle, New York.

When writing to Advertisers please mention Popular Science Monthly



## AGENTS AND SALESMEN WANTED

**\$1,000 per Man per County:** Strange invention startles world—agents amazed. Ten inexperienced men divide \$40,000. Korstad, a farmer, did \$2,200 in 14 days. Schleicher, a minister, \$195 first 12 hours. \$1,200 cold cash, made, paid, banked by Stoneman in 30 days; \$15,000 to date. A hot or cold running water bath, equipped for any home at only \$6.50. Self-heating. No plumbing or waterworks required. Investigate. Exclusive sale. Credit given. Send no money. Write letter or postal today. Allen Mfg. Co., 387 Allen Bldg., Toledo, Ohio.

**AGENTS:** 500% profit. Sign letters for office and store fronts, samples and particulars free. Inter State Sign, 2422 N. Halsted St., Chicago.

**AGENTS—Ho-Ro-Co Skin Soap and toilet goods plan beats everything for agent's profits.** "Ho-Ro-Co," 133 Locust Street, St. Louis, Mo.

**SALESMAN—Acquainted with grocery trade; large demand, liberal commission, pocket sample.** Wirth Salesbook Co., Chicago.

**"EASY-Steps,"** scientific foot comforters; all sizes; quick, big sellers; dozen pairs \$2.25; profit 200%. Samples 25c. Manhattan Popular Products, Brooklyn, N. Y.

**AGENTS:** Our gold window letter proposition beats 'em all. Stalbrit Co., Dept. W., 1115 Second Avenue, New York City.

**233% Profit selling Jubilee Spark Intensifiers** to automobile owners, garages. Sure cure for spark plug troubles. Sells like wildfire. Brand new. Exclusive territory. Write today. Jubilee Mfg. Co., Dept. P11, Omaha, Nebraska.

**\$50.00 a week up.** All the Free Clothes you want to wear simply to advertise us. Write today for self-measuring blanks, style chart, big book of samples, etc. Send no money. A postal card brings all. We pay expressage on everything. American Woolen Mills Co., Dept. 12A51, Chicago.

**AGENTS** financially responsible who understand heating plants to sell Blasko Fuel Saving Devices on monthly payment plan. Every heating plant a prospect. Guaranteed to save 20%. Evaporation tests at two universities averaged 25% saving. Wolff Fuel Saver Company, 12 East Jackson, Chicago.

**WANTED—New Ideas.** Write for list of Patent Buyers and Inventions Wanted. \$1,000,000 in prizes offered for inventions. Our Four Books sent free upon request. Victor J. Evans & Co., 174 Ninth, Washington, D. C.

**SALESMEN** calling on manufacturing and factory trade to sell high-grade legitimate product as a side line. No samples to carry. Liberal commission proposition. Write North American Linseed Products Co., Cleveland, Ohio.

**AGENTS:** Big pay introducing wonderful winter automobile fuel. Reduces operating expense one third. Sample outfit free. L. Ballwey, Dept. 190, Louisville, Kentucky.

**NINETY Per Cent of Your Calls Turned into Sales!** Wonderful Enthusiasm Follows Every Demonstration! Write at Once for Full Particulars of Our Line of Eridium (Luminous) Articles. Startling! Mysterious! Everlasting! Novel! They Shine in the dark. Crucifixes, House Numbers, Bulbs, Match Boxes, Pictures, Switch Plates. Sole Manufacturers. The Pioneer Corporation, 1263 W. 63rd, Chicago.

**AGENTS:** We need men and women at once to take orders for Fast-Selling Goodyear Guaranteed Raincoats. Easy to sell, no delivering, profit in advance. Morgan making \$350 monthly. Carr made \$49 in three days, 4 average orders makes you \$10.00 daily. Full outfit and sample coat given. Write for wonderful offer. Goodyear Manufacturing Co., Dept. 122, Kansas City, Mo.

**OVER \$1.45 profit on every \$1.50 job** monogramming automobiles, etc., in 10 minutes with Transfer Initials. Samples free. Globe Decalcomanie Co., Dept. 1, Jersey City, N. J.

**STRETCHING Cuff Links,** remarkable convenience. Invisible. Laundry saver. Opens and closes instantly, when cuffs are raised or lowered. No unbuttoning. Meritorious. Guaranteed. Sell like wildfire, large profits. District representatives wanted. Expanding Button Corporation, Sheboygan, Wisconsin.

**INSYDE Tyres,** inner armour for Automobile Tires, prevent punctures and doubles mileage of any tire. Liberal profits. Details free. American Accessories Co., Dept. 97, Cincinnati, Ohio.

**AGENTS—Steady Income.** Large manufacturer of Handkerchiefs and Dress Goods, etc., wishes representative in each locality. Factory to consumer. Big profits, honest goods. Whole or spare time. Credit given. Send for particulars. Freeport Mfg. Co., 24 Main St., Brooklyn, N. Y.

**AGENTS:** Sell rich looking 36 x 68 imported rugs, \$1.00 each; Carter, Tenn., sold 115 in 4 days, profit \$57; you can do same. Write for sample offer selling plan; exclusive territory. Sample rug by parcel post prepaid, 98c. E. Condon, importer, 12 Pearl Street, Boston, Mass.

**NACMA repeat order household products** are big money makers. Catchy selling plan gets and holds the business. Free selling helps and samples. Exclusive territory. The Nacma Co., Dept. D-8, 20 W. Lake, Chicago.

**500% Profit putting initials on automobiles,** new transfer method, particulars free. Auto Monogram Co., 2025 East Monmouth St., Philadelphia, Pennsylvania.

**HEL-MIT the Kaiser Pin—Latest war novelty—Biggest hit out.** Made of oxidized silver, beautifully enamelled. Tremendous seller; good profit. Sample with agents terms 10c. O. Finch Company, 1002 S. Ionia Ave., Grand Rapids, Michigan.

**I will pay any honest man up to \$50 monthly** for part of spare time. No canvassing. No capital. Write today. Voorhes, Dept. P.S., Omaha, Nebraska.

**FASTEST Dollar Seller on the automobile market.** 100% to agents. Permanent repair for inner tubes. Every motorist will buy. Consumers Mfg. & Supply Co., Minneapolis, Minn.

**SELL Jollies' Funny Joke Novelties!** 16 samples 10c. Chambers Works, Plainwell, Mich.

**NEW Automatic Automobile Signal,** just patented; enormous seller; big profits. Particulars: Gordon, 1920 9th Street, Washington, D. C.

**PROSPERITY—Secure sales agency for** Leawerk Laundry Tablets; they repeat; satisfactory or money back. Leawerk Mfg. Co., 1228 Fulton Street, Brooklyn, New York.

**WORLD'S Fastest Selling Auto Accessory.** County distributors wanted; good profits; write today. G. L. W. Spring Oiler Co., San Diego, California.

**SELL Puzzles—Six best 10c sellers** postpaid, 20c. 2 Doz. postpaid, 50c. Western Puzzle Works, 158 E. 5th, St. Paul, Minn.

**WRITE for liberal free sample.** Get posted on biggest money-making combinations and specialties. Guaranteed tremendous sellers. Samples furnished free to distribute. Special large profit offers made now. R. G. Newberry, 206 Peoria, Chicago.

**RAINCOATS—Direct from factory.** Agent's price \$2.95 delivered. Retail price \$5.00. Agents average six coats daily. Rainy season now here. T. Lewis Raincoat Co., Cleveland, Ohio.

**MARVELOUS New Winner—Daylite** Mantle Oil Light. Different from all others. Better than electricity. Five times more efficient than common lamps. Uses common kerosene. Burns over 50 hours on 1 gallon. Guaranteed five years. Elegantly finished. To show it is to sell it. Men with rigs and autos making as high as \$325 every month. No Money No Experience needed. We furnish stock on credit to reliable men. Exclusive territory. Write quick. Get sample for free trial. Daylite Company, 642 Daylite Building, Chicago, Illinois.

**WANTED: Agents to handle Wayne** Automobile Accessories. Wayne Engineering Company, Honesdale, Pennsylvania.

**AGENTS—\$30 to \$100 a week.** Free samples. Gold and silver sign letters for stores and office windows. Anyone can put on. Liberal offer to general agents. Metallic Letter Co., 400 N. Clark, Chicago.

**AGENTS—200% Profit.** Wonderful little article. Something new; sells like wildfire. Carry right in pocket. Write at once for free sample. E. M. Feltman, Mgr., 5247 3rd St., Cincinnati, Ohio.

**TRAVELING Salesmen Wanted—Ex-**perience unnecessary. Earn while you learn. Hundreds of good positions open. Write today for large list of openings and testimonials from hundreds of members we have placed in positions paying \$100 to \$500 a month. Address nearest office. Dept. 1268, National Salesmen Training Association, Chicago, San Francisco, New York.

**HOSIERY and Underwear Manufacturer** offers permanent position supplying regular customers at mill prices. \$50.00 to \$100.00 monthly. All or spare time. Credit. J. Parker Mills, 2733 No. 12th St., Philadelphia.

**SELL De-Luxe Signs,** enormous profits. Sample and information. Two Dimes. De-Luxe Sign Co., Sta. E, Cincinnati, Ohio.

**MAKE and Sell your own goods.** Formulas by Expert Chemists. Manufacturing Processes and Trade Secrets. Formula Catalog for stamp. Elmer Mystic Company, Washington, D. C.

**GET Davis' Latest Proposition.** \$15.00 Daily a Cinch. No matter how often you have answered my advertisements in last 20 years get my 1917 "Prosperity Offer." E. M. Davis, Dept. 51, 900 Lake, Chicago.

**SALESMEN—Sell wholesale and retail,** new dimmer switch for automobiles. Just out, large commissions, easy sales. Apply immediately. Sills & Amidon, Oneida, N. Y.

**\$10 Daily refinishing chandeliers,** brass beds, automobiles, by new method; producing amazing results; no capital or experience necessary. Particulars free. Gunmetal Co., Avenue F, Decatur, Illinois.

**SALESMAN—\$6,000 Accidental Death,** \$30.00 Weekly Accident Benefit, \$25.00 weekly Sick Benefit, \$10.50 yearly, half amount \$5.50. \$250,000 deposited Insurance Department. Experience Unnecessary. Become Independent—own your business. Guaranteed steady income from renewals. Registration, Dept. A, Newark, New Jersey.

**RELIABLE People Wanted—Place Eggs** in stores and appoint agents. Takes place of eggs in baking and cooking at 9c doz. Large package and particulars 10c postpaid. Morrissey Company, 4407 Madison, Chicago.

**WE want Agents everywhere to handle our** Products. Splendid Opportunities. Stamp for particulars. Famous Products Co., Decatur, Illinois.

**AGENTS—\$50 a week to travel by auto-**mobile and introduce our 300 candle power coal-oil lantern. Write for particulars of our free auto offer. Thomas Co., 861 North St., Dayton, Ohio.

**AGENTS—Make a dollar an hour.** Sell Mendets, a patent patch for instantly mending leaks in all utensils. Sample package free. Collette Mfg. Co., Dept. 467, Amsterdam, N. Y.

**HUNDREDS of Agents are now making** goods to sell from Miller's Guaranteed Manufacturers' Formulas. Wizard Washing Tablets—no wax, potash, lye. Costs 5c pound. Brings 60c. Eggolene, only pure food substitute for eggs at 9c a dozen. Non-Alcoholic Tube Flavors. Many new sellers including latest Automobile Specialties. Carbo-Cide, the only recognized Gasolene Intensifier-Decarbonizer—800% profit. Enormous sales. Fibro-Vac Guaranteed Puncture Plugger. Exclusive territory. Particulars for stamp. Miller, Industrial Chemist, Tampa, Florida.

**WANTED: High Class Specialty Sales-**men to sell New Office System to Merchants. Sells for \$25.00. Your profit \$12.50. Exclusive territory given to producers. L. A. Calvin, 20 E. Jackson Blvd., Chicago.

**SWELL suit free for 2 hours' work.** Show it to your friends and make \$5.00 an hour in your spare time. We show how. Costs nothing to try. Write quick for measure blank and our handy sample outfit. All Free. We deliver everything free. Look into this. Paragon Tailoring Co., Dept. 12A51, Chicago.

**EVERY Home on farm, in small town or** suburb needs and will buy the wonderful Aladdin kerosene (coal-oil) mantle lamp; five times as bright as electric; tested and recommended by Government and 34 leading universities; awarded gold medal; one farmer cleared over \$500 in 6 weeks; hundreds with rigs or autos earning \$100 to \$300 per month; no capital required; we furnish goods on time to reliable men; write quick for distributor's proposition, and lamp for free trial. Mantle Lamp Co., 503 Aladdin Bldg., Chicago, Illinois.

**NEW Patriotic War Atlas Free with my** 1917 "Business Guide." Sells everywhere. Beginners clear \$7 daily. 50% commission. Outfit Free. Prof. Nichols, Box A-7, Naperville, Ill.


**GAS Fire—In any cook stove from com-**mon coal oil; agents coin money. Wonder Burner Co., Columbus, Ohio.

**RADIO Luminous Paint** at wholesale. Quarter pints 50c, stamps. Highest power, sole manufacturers. American Luminous Products Co., Huntington Park, California.

**AGENTS:** Big profits selling our latest model \$2.50 Automatic Adder. Does work of expensive machines. Pocket size. Absolutely guaranteed. Sells quickly. Ten daily, easy. No competition. Every business man buys. Demonstrations in two minutes, sales clinched on the spot at once. Bassett Company, 5921B Indiana Ave., Chicago.

**Additional Classified Advertisements on Page 32**



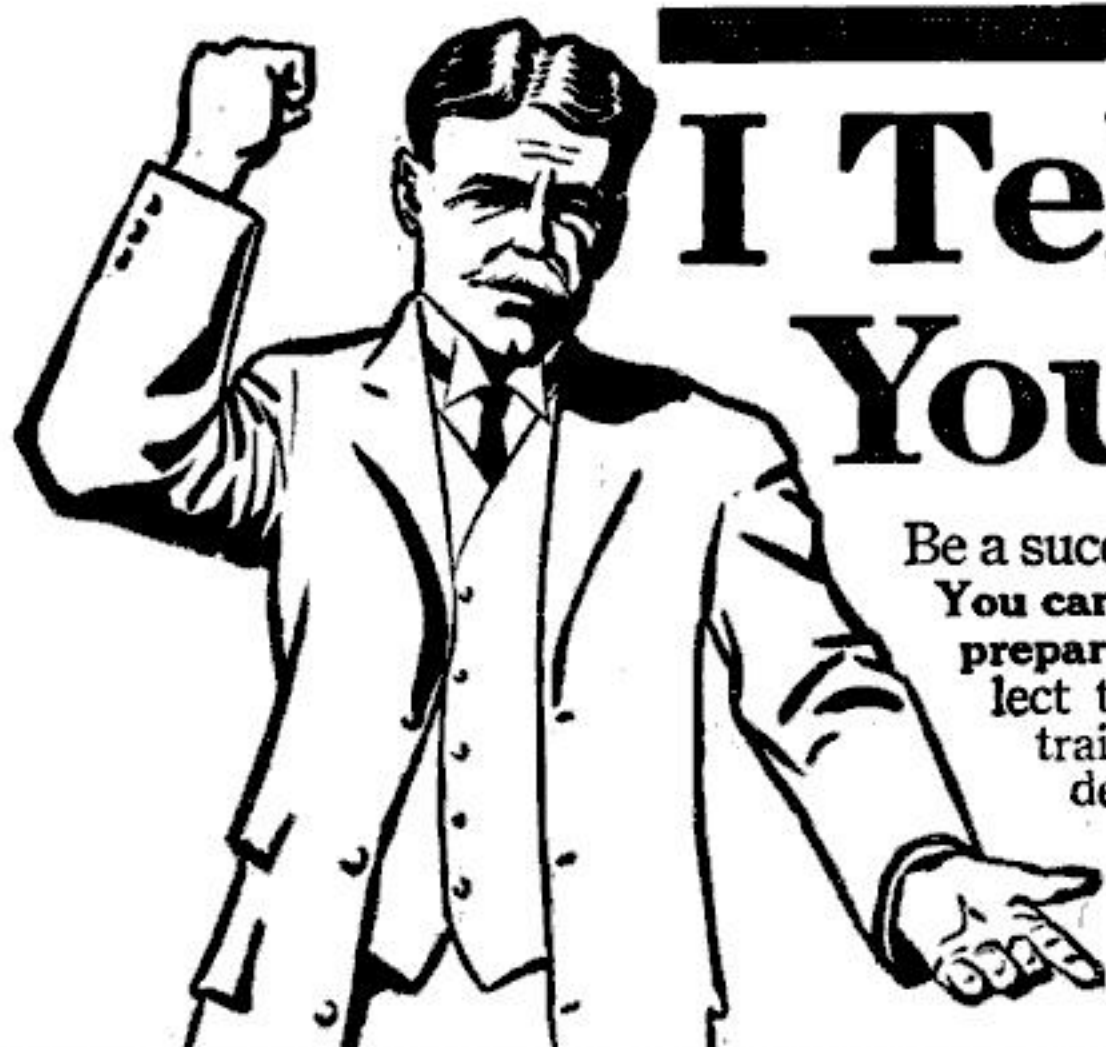

# I Tell You You Can!

Be a success and command big pay. You can easily do it if you will **only prepare yourself!** Why will men neglect to prepare themselves, when trained **Electricians** are always in demand at big pay? When employers are **searching** for \$3,000 and \$10,000 electrical men, while this country is crowded with poorly-paid men who could easily qualify for these positions!

## \$50 to \$200 a Week As a Trained ELECTRICIAN

If you have a common school education **you can** easily qualify **at home** by my new Course in Electricity, no matter if you know nothing at all about electricity now. My Course, while complete and absolutely scientific, explains everything so clearly that anyone can understand it and do the work. But this Course is designed to give you a **real** Electrical education, to help men become **bigger, better men**—men who can command big pay.

And remember, I give every student a **GUARANTEE BOND** which insures you satisfaction or every dollar of your money refunded. I can make such a guarantee because I know my Course and what it does for my students. Send for free illustrated book telling all about it. **PART OF YOUR SPARE TIME** devoted to this interesting work is all that is needed. You will find it most fascinating, and in a short time your earning power will be greatly increased.

### \$1700 Electrical Outfit Free:

Every student who enrolls with me now gets a \$17.00 outfit of electrical equipment, instruments and material—**FREE**; also my Quick Money-Making Electrical Course **FREE** as soon as enrolled, so that you can earn while learning; you also get **FREE** Employment Service; **FREE** 5-year Advisory Service. And besides all this I have a pleasant and **truly valuable surprise**, for every student who answers this ad. Send in coupon now. **You have one life to live**—and time is passing. Make the most of it. Prepare for success. Aim high; you can hit the mark if you will only try. Do it! **Tear off the coupon now!**

L. L. COOKE

**CHIEF ENGINEER**

Chicago Engineering Works

Room 32 441 Cass St., Chicago, Ill.

**CHIEF  
ENGINEER**

Room 32

Chicago Engineering Works

441 Cass St.

Chicago, Illinois

Without obligation on my part kindly send at once, fully prepaid, particulars of your complete Practical Home Study Course in Electricity.

**USE THIS FREE "OUTFIT" COUPON**

Name.....

Address.....

Town.....State.....

When writing to Advertisers please mention Popular Science Monthly



## HELP WANTED

**WANTED** three hundred young men to learn Watch-work, Jewelry-work, and Engraving, in order that we may be able to supply the demand on us for workmen. Address postal card to Bradley Polytechnic Institute, Department "M," Peoria, Ill., asking for our latest catalog giving full particulars.

**BE a Mirror Expert, \$3-\$10 a day;** spare time home at first; no capital; we train, start you making and silvering mirrors French method. Free prospectus. W. F. Derr, Pres., 579 Decatur Street, Brooklyn, N. Y.

**EARN \$10.00 to \$20.00 weekly** mailing letters at home. Outfit and particulars 10c. Morrisso, 2513 S. 2nd, Philadelphia, Penn.

**RAILROAD Traffic Inspectors Wanted.** \$125 a month and expenses to start; short hours; travel; three months' home study under guarantee; we arrange for position. No age limit. Ask for booklet L10. Frontier Prep School, Buffalo, N. Y.

**EARN \$900 to \$1800 per Year.** Government Railway Mail, Post Office and other "exams" coming. Prepare under Former Civil Service Examiner. Book free. Patterson Civil Service School, Box 3019, Rochester, N. Y.

**BE a detective.** Excellent opportunity, good pay, travel. Write C. T. Ludwig, 424 Westover Bldg., Kansas City, Mo.

**BECOME Detectives—Big wages,** wonderful opportunities; Wagner, 1243 Lexington Avenue, New York.

**WRITE Photoplays; \$50. each.** Experience unnecessary; details free to beginners. Producers' League, 194, St. Louis.

**INVENT Something:** Your ideas may bring wealth; free book tells what to invent and how to obtain a patent, through our credit system. Talbert & Parker, 4101 Talbert Bldg., Washington, D. C.

**BE a Finger Print Expert—\$25 to \$50 a week** in this new and fascinating profession. Write—find out how you can learn at home to supply the big demand for finger print experts in banks, big factories, detective agencies, etc. Special limited offer—write while it lasts. Evans University, Finger Print Dept., Room 1209, 1810 Wilson Ave., Chicago, Ill.

**FOREMEN, Shopmen, and Officers** wanted to work spare time as special representative of large well known mail order house, selling Watches, Diamonds and Jewelry on Credit. Liberal commissions and exclusive sales rights granted. No investment or deposit required for outfit or samples. Write at once for details. Address S. D. Miller, Dept. 23, Agency Division, Miller Bldg., Detroit, Mich.

**SILVERING Mirrors—Exclusive Tartaric method** opens enormously profitable business. Booklet free. P. Barstow, 514 23rd street, Oakland, California.

**BE a Draftsman—Big pay;** Tremendous demand. Study at home. Complete course; drawing instruments free. Our graduates filling good positions as Draftsmen and Chief Draftsmen with Government and private concerns. We help you secure position when qualified. Write for Free book. Columbia School of Drafting, 35 McLachlen Bldg., Washington, D. C.

**MEN or Women** wanting to learn Aviation—Government or exhibition—write Moler Aviation School, Inc., 105 S. 5th Ave., Chicago. Winter field, Jacksonville, Florida.

**WANTED—Men.** Become Automobile Experts. \$35 week. Learn while earning. Sample lessons free. Write immediately. Franklin Institute, Dept. H, 820 Rochester, N. Y.

**YOU can make a good living** in your back yard raising Belgian Hares. Particulars free. Mark Twain Stock Association, 102 Hannibal, Mo.

**DETECTIVES make big money!** Travel and see the country. We instruct you at a nominal cost. Write for free booklet. American School of Criminology, Scherer Bldg., Detroit, Mich.

**MEN—For detective work;** also instructed by former U. S. Government detective. Write J. Ganor, Danville, Ill.

**I will pay any honest man up to \$50 monthly** for part of spare time. No canvassing. No capital. Write today. Voorhies, Dept. P.S., Omaha, Nebraska.

**INCREASED Incomes.** No matter what your present employment may be, we can show you how to get more money for your services. Postal will do. National Efficiency League, 44 Boylston St., Boston, Dept. 12.

**EARN One Dollar every hour** during spare time, calling on doctors, coal dealers, general stores. Nothing to sell. Everything furnished. No money needed. National Credit Reporter, Delphos, Ohio.

**TEACHERS, Students, Housewives!** \$8.12 up to \$200 are the commissions we pay you just for your spare time. No house-to-house canvassing. We offer an interesting plan to increase the sales of the merchants in your town and county. One representative only for each county. You may be the one for yours, if you write for details today—Right Now. Address Dept. P, Almanac Advertising Agency, Woolworth Bldg., New York City.

**EARN \$25 weekly** mailing letters for us; spare time work. Send dime for contract and letters. Hile Company, Carey, Ohio.

**THE way to get a Government job** is through the Washington Civil Service School. We prepare you and you get a position or we guarantee to refund your money. Write to Earl Hopkins, President, Washington, D. C., for book FK-947 telling about 292,296 government positions with lifetime employment, short hours, sure pay, regular vacations.

**MEN—Become United States Railway Mail Clerks, \$75 to \$150 month.** Every second week off with pay. Education unnecessary. Sample examination questions free. Write immediately. Franklin Institute, Dept. J50, Rochester, N. Y.

## BUSINESS OPPORTUNITIES

**LETTERS that Land Orders—Big-man literature** and advertising copy at prices which insure continuous service. Circulars, folders and booklets prepared, illustrated and printed. Tell us your wants. Criterion Service, Woodcliff, New Jersey.

**BE a detective.** Excellent opportunity, good pay, travel. Write C. T. Ludwig, 424 Westover Bldg., Kansas City, Mo.

**FREE—3 Months** to get acquainted; devoted to news and opportunity. The Western Miner, 2541 W. 37th Ave., Denver, Colorado.

**ARTIFICIAL Marble, Sanitary Flooring,** complete instructions, \$1. Ornamental casting, concrete, plaster, papiermache, decorations, garden furniture, statuary, rubber moulds, electrometallurgy. Particulars, 200 illustrations free. Mahler, C-721 Woodland Ave., Woodhaven, L. I., New York.

**EXPERT Chemist** will furnish Formula and Trade Secrets in all lines. Lists free. W. L. Cummings, Ph.D., 217 Standart St., Syracuse, N. Y.

**TERRITORIAL Managers** wanted for the Century's Greatest Seller—Naspe! "The Polish that Silver Plates!" A Compound that actually cleans, polishes and replates with pure silver, articles of silver and nickel-plate. Wonderful opportunity for man of ability to establish large agency. Popular price; exclusive territory. Write for proposition. Naspe!, Dept. A, 410 La Fayette Street, New York.

**CONDUCT a Candy Kitchen;** very small capital required; booklet free. Kennon School, 509 Wells St., Dept. 103, Chicago.

**BE Business Broken; \$1,000 to \$10,000** yearly possible; practical without capital; particulars free. Miss Jack Eydman, 721 Olive, St. Louis, Missouri.

**BUILD up an Income in Oil—Others are doing it—Why not you?** Today is the opportunity. Join our easy monthly payment plan NOW—it may mean hundreds in profits. Write for information. National Oil Drilling Co., Dept. A, Houston, Texas.

**ADVERTISERS, Mail Dealers.** Our 1915 rate book lists 2,000 principal publications, rates, circulation. Includes 30 mail order plans. Price, 10c. Dearborn Advertising Agency, 500 Franklin Bldg., Chicago, Ill.

**MANY earning from \$1200 to \$10,000 a year.** Learn the investment security business. Opportunity not limited to big cities. Our instruction shows how any one anywhere can make good money. No capital required. Honesty and ambition necessary. Write for details. Kriebel & Co., Investment Bankers, 604 Home Insurance Bldg., Chicago.

**CAPITAL** wanted to manufacture a household article; entirely new; enormous demand. Big opportunity for film manufacturing metal articles. Described fully in editorial section. Frank Wyballie, 550 Jackson Avenue, Bronx, New York.

**\$25,000.** I made it with a small mail-order business. Started with \$3. Work evenings—Home. Free Booklet tells how. 2c postage. No canvassing. Al. Scott, Cohoes, New York.

**START original mail-order business.** New methods, exclusive rights, dignified, honest, profitable. Small capital. Clement Moore, Specialist, New Egypt, N. J.

**HAVE you \$10 to \$200 you would like** to invest profitably? Write for our "Investment Literature;" magnificent opportunity. Harrison Brothers, Branch 251, Poughkeepsie, N. Y.

**I will pay any honest man up to \$50 monthly** for part of spare time. No canvassing. No capital. Write today. Voorhies, Dept. P.S., Omaha, Nebraska.

**MAKE money in a "new idea" advertising business.** Small capital. Start in spare time. Complete \$1. twelve lesson course, profusely illustrated, only 10c. American Mailers Union, Brooklyn, N. Y.

**CHEMICAL analyses made.** Formulas furnished by experts. No lists. A. Laboratories, 332 South St., Jamaica, New York.

**I start men manufacturing important household article.** Big demand. Practically no capital needed. Profits 200% to 300%. Free book tells all. Write Protecto Co., 5014 Dorchester Ave., Dept. 212, Chicago, Ill.

**MULTIGRAPH Letters** build business. Most economical and effective advertising. Printing. Addressing. Low rates, careful work, service. Multigraph-Peerless Letter Company, 241 Fourth Avenue, New York.

**MANUFACTURERS, Promoters and Patent Buyers** are invited to write us stating the line of invention in which they are interested, as we can supply their wants in any class of patents. Victor J. Evans Co., 152 Ninth, Washington, D. C.

**WE Start You in Business,** furnishing everything; men and women, \$30.00 to \$200.00 weekly operating our "New System Specialty Candy Factories," home or small room anywhere; no canvassing. Opportunity lifetime; booklet free. H. Ragsdale Co., East Orange, N. J.

**WRITE for newspapers and magazines.** Big Pay. Experience unnecessary, details free. Press Reporting Syndicate, 4005, St. Louis.

**YOUNG Man:** Improve your mechanical efficiency. Send for my complete catalog of valuable books—it's free. I also have books on Human Nature, Thought Culture, Mind Power, Hypnotism, Mesmerism, Personal Magnetism, Seership, Spiritualism, Clairvoyance, Concentration, etc. Tell me your wants. A. W. Martens, P-77, Burlington, Iowa.

**FAMOUS French Face Cream formula,** \$1.00. Hawkins, Raton, New Mexico.

## GAMES AND ENTERTAINMENTS

**PLAYS, Vaudeville Sketches, Monologues,** Dialogues, Speakers, Minstrel Material, Jokes, Recitations, Tableaux, Drills, Entertainments. Make Up Goods. Large Catalog Free. T. S. Denison & Co., Dept. 26, Chicago.

**TRICKS, Puzzles, Jokes, Toys, Games,** Novelties, Doll and Cane Racks, Plays, Wigs, Stage Supplies, Escapes and Illusions. Large 1917 catalog free. Oaks Magical Co., Dept. 375, Oshkosh, Wis.

**MAGIC—Escapes—Illusions—Catalog of Parlor Tricks Free.** Professional Catalog with 500 Illustrations, 1000 Tricks, 10c. Hornmann Magic Co., Sta. 17, 470 8th Ave., New York.

**TRICKS and Greenbacks.** Big magic catalog 5c. Twenty greenbacks—10c. Gilmagico Co., 11135 So. Irving, Chicago.

**PLAYS for amateurs, Monologs, Recitations, Drills, Minstrel and Vaudeville Jokes and Sketches.** Home amusements, ideas for all kinds of entertainments. Send for free catalog. Dramatic Publishing Co., 542 S. Dearborn St., Chicago.





# WANTED Thousands of Trained Men for the AEROPLANE INDUSTRY



**BUD MORRISS**  
Chief Instructor  
**American School of Aviation**

This well-known aviator personally guides the progress of each student. He is assisted by a distinguished Staff of Aeronautical Engineers, Aviators and Aeroplane Manufacturers. These men give you practical, right down-to-the-minute, working knowledge of the very highest merit.

Let us tell you about the wonderful SPECIAL OFFER we are now making in our effort to supply the demand for trained men. This offer will be withdrawn without notice. Act AT ONCE—today.

**Money Back Guarantee** You risk absolutely nothing. We give you an iron clad guarantee that we will refund every cent paid for tuition if you are not satisfied on completion of the Course. Mail coupon now while this special offer lasts.

**AMERICAN SCHOOL OF AVIATION**

431 So. Dearborn St., Dept. 120C, CHICAGO, ILL.

If you read the newspapers, you know the facts. Right now new Aeroplane factories are being built everywhere. Soon they will be ready and looking for thousands of trained men who know and understand Practical Aeronautics and the Science of Aviation. Here is your chance. Aviation is the young man's profession—the richest field of opportunity ever opened to "live wires." Are you one? Then write, quick, for full information. Send the coupon below.

War has given to Aviation only its start. The return of peace will see this amazing new industry rivalling the rapid growth of the automobile business, with bigger opportunities for the pioneers, the men who get in NOW and are prepared to step into one of the thousands of big paying positions. You can do it.

## Learn in a Few Months By Mail

No matter who you are, where you live, or what your age, if you can read or write English, you can quickly and easily master this wonderful Course in Practical Aeronautics. Lessons are written in simple, non-technical easy-to-understand language, and illustrated with diagrams and blue prints. You are under the personal direction of practical aviators and aeronautical experts throughout the entire Course. Positively the most PRACTICAL, most interesting and fascinating Course of home study instruction ever prepared.

## HURRY! RUSH THIS COUPON

There's not a moment to lose. Send this coupon—or a postal today—this minute—for full particulars about this great School, its faculty of famous aviators and its remarkable training Course. We PROVE that we can quickly fit you for any branch of the Aviation Industry you wish to enter.

### Prepare NOW for One of These BIG JOBS

- Aeronautical Engineer \$100 to \$300 per week.
- Aeronautical Instructor \$60 to \$150 per week.
- Aeronautical Contractor Enormous Profits.
- Aeroplane Repairman \$60 to \$75 per week.
- Aeroplane Mechanic \$40 to \$60 per week.
- Aeroplane Inspector \$50 to \$75 per week.
- Aeroplane Salesman \$5000 per year and up.
- Aeroplane Assembler \$40 to \$65 per week.
- Aeroplane Builder \$125 to \$200 per week.

**American School of Aviation,**  
431 So. Dearborn St.,  
Dept. 120C, Chicago, Ill.


Without any obligation on my part, please send me full particulars of your Course in Practical Aeronautics and your Special LIMITED Offer.

Name.....

Address.....

When writing to Advertisers please mention Popular Science Monthly



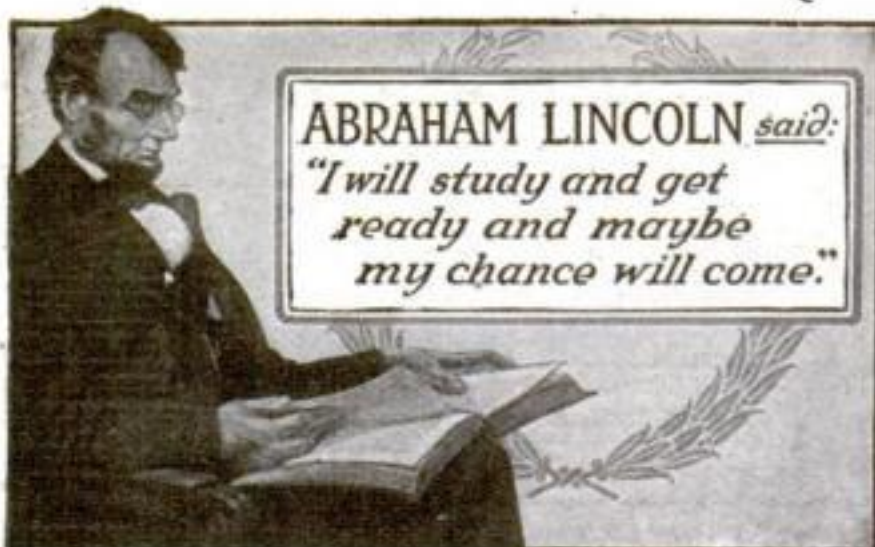

## YOUR Chance Will Come

Born in a log cabin, Abraham Lincoln had little chance to acquire an education. But he was determined to succeed. "Some day," he said, "my chance *will* come." So he studied and got ready. And his chance *DID* come.

*Your* chance will come. Some day you'll be considered for promotion or for a good job in some other line of work. If you are ready, you'll go up.

And you *CAN* get ready. No matter if your schooling was limited—if you do have to work long hours. If you really want a better job, the International Correspondence Schools can train you for it at home during your spare time.

Every month more than 400 I. C. S. Students voluntarily report promotions or salary increases due to I. C. S. help. What the I. C. S. have done for these men they can do for *YOU*. Mark and mail the coupon NOW.

INTERNATIONAL CORRESPONDENCE SCHOOLS, Box 5840, Scranton, Pa.

### INTERNATIONAL CORRESPONDENCE SCHOOLS

Box 5840, SCRANTON, PA.

Explain, without obligating me, how I can qualify for the position, or in the subject, before which I mark X.

- |   |  |
|---|--|
| <input type="checkbox"/> ELECTRICAL ENGINEER        | <input type="checkbox"/> SALESMANSHIP              |
| <input type="checkbox"/> Electric Lighting          | <input type="checkbox"/> ADVERTISING MAN           |
| <input type="checkbox"/> Electric Car Running       | <input type="checkbox"/> Window Trimmer            |
| <input type="checkbox"/> Electric Wiring            | <input type="checkbox"/> Show Card Writer          |
| <input type="checkbox"/> Telephone Expert           | <input type="checkbox"/> Outdoor Sign Painter      |
| <input type="checkbox"/> MECHANICAL ENGINEER        | <input type="checkbox"/> ILLUSTRATOR               |
| <input type="checkbox"/> Mechanical Draftsman       | <input type="checkbox"/> DESIGNER                  |
| <input type="checkbox"/> Machine Shop Practice      | <input type="checkbox"/> BOOKKEEPER                |
| <input type="checkbox"/> Gas Engineer               | <input type="checkbox"/> Stenographer and Typist   |
| <input type="checkbox"/> CIVIL ENGINEER             | <input type="checkbox"/> Cert. Public Accountant   |
| <input type="checkbox"/> Surveying and Mapping      | <input type="checkbox"/> Railway Accountant        |
| <input type="checkbox"/> MINE FOREMAN OR ENGINEER   | <input type="checkbox"/> Commercial Law            |
| <input type="checkbox"/> Metallurgist or Prospector | <input type="checkbox"/> GOOD ENGLISH              |
| <input type="checkbox"/> STATIONARY ENGINEER        | <input type="checkbox"/> Teacher                   |
| <input type="checkbox"/> Marine Engineer            | <input type="checkbox"/> Common School Subjects    |
| <input type="checkbox"/> ARCHITECT                  | <input type="checkbox"/> CIVIL SERVICE             |
| <input type="checkbox"/> Contractor and Builder     | <input type="checkbox"/> Railway Mail Clerk        |
| <input type="checkbox"/> Architectural Draftsman    | <input type="checkbox"/> AGRICULTURE               |
| <input type="checkbox"/> Concrete Builder           | <input type="checkbox"/> Textile Overseer or Supt. |
| <input type="checkbox"/> Structural Engineer        | <input type="checkbox"/> Navigator                 |
| <input type="checkbox"/> PLUMBING AND HEATING       | <input type="checkbox"/> Poultry Raising           |
| <input type="checkbox"/> Sheet Metal Worker         | <input type="checkbox"/> AUTO RUNNING              |
| <input type="checkbox"/> CHEMIST                    | <input type="checkbox"/> Auto Repairing            |

- |                                  |
|----------------------------------|
| <input type="checkbox"/> Spanish |
| <input type="checkbox"/> German  |
| <input type="checkbox"/> French  |
| <input type="checkbox"/> Italian |

Name \_\_\_\_\_  
 Occupation \_\_\_\_\_  
 & Employer \_\_\_\_\_  
 Street \_\_\_\_\_  
 and No. \_\_\_\_\_  
 City \_\_\_\_\_ State \_\_\_\_\_

## YOU NEED BOOKS IF YOU WANT TO SUCCEED

**Y**OU can't get on in the world unless you read—read the books which will make you more valuable to those for whom you work. You don't have to go to college. Edison never went to college. But he has probably the finest library of technical books in this country. If you want helpful, practical books on any subject, write for POPULAR SCIENCE MONTHLY'S new BOOK CATALOGUE. The books described in it have been carefully selected by experts.

Write today for the new Book Catalogue.  
It is Free to Our Readers

**POPULAR SCIENCE MONTHLY**  
 225 West Thirty-Ninth Street, New York

## EARN MONEY In Your Spare Time

Hundreds of active young men are working for POPULAR SCIENCE MONTHLY in their spare time. POPULAR SCIENCE MONTHLY is growing so fast that this winter it has opportunities for additional men in communities all over the country.

Now is the time to apply if you are ambitious and want to earn money in your spare hours.  
Address \_\_\_\_\_

**Business Manager,**  
**POPULAR SCIENCE MONTHLY,**  
 225 West Thirty-Ninth Street, New York

When writing to Advertisers please mention Popular Science Monthly





# **Imported Drawing Instruments Free!!**

**YES**, I will give you this exquisite set of imported drawing instruments absolutely free and I will give you a 20 x 25 inch drawing board, a 24-inch T square, a 12-inch rule, a supply of drawing paper, 2 triangles and a French curve, pencils, erasers, thumb tacks, etc. The instruments come in a superb plush lined leather case—they are genuine working instruments and I don't think you could duplicate this outfit for less than \$15. But I give it away *absolutely free* to the men who get my personal instruction.

## **Be a Draftsman!**

**Draw \$125 to \$175 Per Month**

There is an urgent demand for skilled draftsmen. Companies are issuing calls every day for men to fill positions paying from \$125.00 to \$175.00 per month. I will give you just the training you need to hold one of these big jobs—right in your own home. Write now.

## **Chief Draftsman Will Instruct You Personally**

I am Chief Draftsman of a large and well known firm. I have been doing the highest paying expert



drafting work for a quarter of a century and I know just the kind of training that is demanded from men who get the big salaries. During my spare time I will train a few ambitious men to hold big jobs, while they remain in their own homes. You will get actual work to do—practical instruction until you consider yourself competent regardless of how long it takes. Write today—now—act at once.

**Pay As  
You Wish**  
I want ambitious men. Don't worry about the small charge I make for my instruction. Write today.

**Chief  
Draftsman Dobe**

## **Send the Coupon for Big New Book**

Send this coupon or a letter or a post card and get my new book. No obligations. Act now.

**Chief Draftsman  
Dobe**

Engineer's  
Equipment  
Co., Inc.  
Div. 1209  
Chicago,  
Ill.

Name .....

Address .....

Engineer's Equipment Co.  
Div. 1209, Chicago, Ill.

Without any obligations on me whatsoever, please mail your book "Successful Draftsmanship" and full particulars of your liberal "Personal Instruction" offer to a few students. It is understood that I am obligated in no way whatever.

## **DOES YOUR STOMACH BALK?**



**ARE** you afraid of it? Is it a mystery? What do you know about it? What service is it giving you? You are no stronger than your stomach! Your capacity for work, your endurance, your mental keenness, are all dependent upon whether your stomach functions soundly and does its share in producing pure blood for the heart to send to all parts of the body, energizing the mind, and putting "Pep" in every thought and action.

## **DOES YOUR HEART MUR- MUR, SKIP, AND FLUTTER?**

Do you know that your heart is also menaced by a deranged stomach? If, instead of properly digesting your food, it is allowed to remain in the stomach to sour and ferment, the gases thus generated by the decomposition will swell your abdominal region unnaturally, interfering with all the organs, and bringing the pressure thus caused principally against the heart. It is this condition that is responsible for many of the fatal, so-called cases of Heart Failure.

## **YOU CAN CORRECT THIS WITH STRONGFORTISM—**

**BUT NOT WITH DRUGS OR PILL PIFFLE**

If your stomach is in good condition you can digest anything, and then your natural appetite will call for the food your body needs. The Stomach is a muscular organ and its perfect functioning depends upon maintaining a normal muscular activity. This is where

## **YOU NEED MY HELP!**

This is where my study of anatomy and the internal organs becomes so valuable. I have devised methods which bring about such an internal muscular development so that the functioning can be controlled, thus giving you full control of your health.

It is not what you eat, but what you are able to digest that gives you the vitality to do things. Stop pampering your stomach. It is the STRONGFORT Methods that you need, based on the true principles of Nature's laws of health and body building.

## **I AM A BUILDER OF MEN**

YOUR whole body can be rebuilt. I will show you how to help Nature and replace the old worn, decaying cell life and rebuild it with new vital tissue. No matter what your weakness may be, whether it has been brought on by indigestion, gassy stomach, nervousness, or by youthful indiscretions, my natural methods will correct it. If you are SKINNY, run down, bilious, always tired and sleepy, have headaches, rupture, no "Pep," you need the STRONGFORT Methods. Every bodily ill gives way to the gentle, healing and building influences of my System. Mark the ailment that interests you most on the coupon below, and I will send you personal information that will help you.

It will cost you nothing to consult me—it may save your life. Send TODAY for my book, "Intelligence in Physical and Health Culture." It is a liberal education on the subject and will show you the way to perfect Health, Long Life, Success and Happiness. It is FREE. Send 6 cents in stamps to cover mailing expenses. Write NOW!

## **LIONEL STRONGFORT**

Master of Physical Culture  
366 Park Building, Newark, N. J.  
Personal consultation by special appointment only.

## **FREE CONSULTATION COUPON**

Dear Strongfort:—Please send me your book "INTELLIGENCE IN PHYSICAL AND HEALTH CULTURE," for postage of which I enclose 6 cents in stamps. I have marked (X) before the subject in which I am interested and should like you to send me a personal talk on this subject.

- |                 |                     |                         |
|-----------------|---------------------|-------------------------|
| .. Thinness     | .. Colds            | .. Lung Trouble         |
| .. Obesity      | .. Catarrh          | .. Alcohol (366)        |
| .. Nervousness  | .. Poor Circulation | .. Tobacco or Other     |
| .. Insomnia     | .. Rheumatism       | .. Bad Habits and       |
| .. Biliousness  | .. Heart Weakness   | .. Weaknesses           |
| .. Indigestion  | .. Headache         | .. Despondency          |
| .. Constipation | .. Skin Disorder    | .. Poor Memory          |
| .. Neuritis     | .. Round Shoulders  | .. Flat Feet            |
| .. Short Wind   | .. Stoop Shoulders  | .. Increased Height     |
| .. Torpid Liver | .. Deformity        | .. Muscular Development |
| .. Flat Chest   | .. Rupture          | .. Great Strength       |

Name .....

Street .....

City.....State .....





## Why they chose a *law trained* man for manager

*The directors of an Indiana corporation met last August to choose a general manager from among three department heads. One of them had acquired a KNOWLEDGE OF LAW; and this man won the job. In the following, the chairman of this board of directors tells why.*

"IT is our conviction that even the most capable business man becomes a vastly better business man if he reads the law.

"He is a doer. He goes ahead with that courage and confidence that a man can have only when he knows his undertakings are legally right.

"Moreover, he is a *student*, in command of that power of logical analysis and broad-gauged thinking so common to the law trained man."

The demand for law trained men increases daily

To the man of real ambition and determination it is never too late to begin to read law. You can master our Course in your spare time—in the odds and ends of your time, which added together make for an education.

The Modern American Law Course and Service of the Blackstone Institute has been carefully prepared by eighty recognized legal authorities. This course gives you a thorough, practical grounding in the fundamental principles of law, under the personal guidance of experienced and able lawyers and law trained business men.

### "The Law Trained Man"

Our new 168-page book, "The Law Trained Man," tells you how a law training will help you become successful in business or public life. Mail coupon for your copy today.

## BLACKSTONE INSTITUTE

Dept. 129, 608 S. Dearborn St., Chicago

Send me "The Law Trained Man,"  
168-page book FREE

Name.....

Business Position .....

Address.....  
City State

Check with X { For Business.....  
                  { For Admission to the Bar.....

**Blackstone Institute**

Dept. 129, 608 S. Dearborn St., Chicago, Ill.



## How to Make Things Electrical

**Complete Directions for Building Over 100 Pieces of Electrical Apparatus, Together With a Series of Experiments.**

A WORKSHOP Manual for the student or experimenter showing the construction of everything electrical, from a simple battery cell to an electric starter for a balky horse. Shows you how to make such useful household appliances as Motors, Electric Toasters, Stoves, Clocks, Bell Transformers, Immersion Water Heater, Soldering Iron, etc., in addition to a wide range of new and novel devices that every experimenter would like to know how to make.

No other work contains in such compact form as many up-to-date designs of apparatus that can be made by the experimenter of ordinary ability. Only ordinary tools are required to do the work.

Clear, concise directions and careful drawings.

200 Pages, 184 Illustrations, Price \$1.00

Book Dept.

**Popular Science Monthly**

225 W. 39th St.,

New York City



**414 PAGES**  
**145 ILLUSTRATIONS**

I.C.S.  
ELECTRICAL ENGINEER'S  
HANDBOOK

**50¢**

# ELECTRICITY!

HERE'S just the book on Electricity that you need to answer your many questions—to solve your knotty problems, to teach you new kinks, to be your memory for tables, rules, formulas and other Electrical and Mechanical facts that some people try to carry in their heads—and fail.

With this "Little Giant" I. C. S. Electrical Engineer's Handbook in your pocket, tool chest, on your work bench, drawing table or desk, an hour or a day need not be lost "digging up" some forgotten rule, some unfamiliar fact; you'll just turn to the very complete index and get it "in a jiffy." Just a few of the subjects treated are:

Electricity and Magnetism; Electrical Symbols; Batteries; Circuits; Magnets; Direct and Alternating Currents; Dynamos and Motors; Belts; Shafting; Electroplating; Electrical Measurements; Meters; Arc and Incandescent Lamps; Mercury Arc Rectifiers; Transformers; Insulation; Electric Cars; Single and Multiple-Unit Control; Transmission; Rail Welding; Tables of Wires—Sizes, Capacities, etc.—Mathematical Rules, Formulas, Symbols; Tables of Constants, Equivalents, Roots, Powers, Reciprocals, Areas, Weights and Measures; Chemistry; Properties of Metals; Principles of Mechanics; First Aid, etc.

The Electrical Engineer's Handbook is one of 22 I. C. S. Handbooks covering 22 Technical, Scientific and Commercial subjects, all crowded with value. They have the contents of a full-size book condensed into pocket-size ready to go with you anywhere and be at your instant command. They are substantially bound in cloth, red edges, goldleaf stamping, printed from new, clear, readable type on good quality book paper. There is an illustration at every point where a picture will help. Hundreds of thousands have been sold on a money-back guarantee of satisfaction.

The regular price is \$1.25, but for a LIMITED TIME you can buy the ones you want, postpaid, delivery guaranteed, for only 50 cents each.

**You Run No Risk! Money back if Desired!**

**International Correspondence Schools**

Box 5843, Scranton, Pa.

**INTERNATIONAL CORRESPONDENCE SCHOOLS**

Box 5843, SCRANTON, PA.

I enclose \$\_\_\_\_\_ for which send me postpaid the Handbooks marked X, at 50c. each. I may return any or all and get my money back within ten days from receipt:

- |  |   |
|--|---|
| <input type="checkbox"/> Electrical Engineer's         | <input type="checkbox"/> Advertiser's               |
| <input type="checkbox"/> Teleph. and Teleg. Engineer's | <input type="checkbox"/> Business Man's             |
| <input type="checkbox"/> Mechanic's                    | <input type="checkbox"/> Bookkeeper's               |
| <input type="checkbox"/> Steam Engineer's              | <input type="checkbox"/> Steno. and Correspondent's |
| <input type="checkbox"/> Westinghouse Air Brake        | <input type="checkbox"/> Salesman's                 |
| <input type="checkbox"/> Civil Engineer's              | <input type="checkbox"/> Window Trimmer's           |
| <input type="checkbox"/> Coal Miner's                  | <input type="checkbox"/> Cotton Textile Worker's    |
| <input type="checkbox"/> Concrete Engineer's           | <input type="checkbox"/> Farmer's                   |
| <input type="checkbox"/> Building Trades               | <input type="checkbox"/> Poultryman's               |
| <input type="checkbox"/> Plumber's and Fitter's        | <input type="checkbox"/> Mariner's                  |
| <input type="checkbox"/> Chemist's                     | <input type="checkbox"/> Automobile                 |

Name \_\_\_\_\_

Street  
and No. \_\_\_\_\_

City \_\_\_\_\_

State \_\_\_\_\_

Never Mind How STRONG  
You are—

## What d'ye Know?



Today it's a battle of wits—and brains win. Muscle and brawn don't count so much as they used to.

The great question now is "What do you Know?" It draws the line between failure and success.

What do you know? Have you special ability in any one line? Could you "make good" in a big job right now?

For 25 years the International Correspondence Schools have been helping men to get ready for better work and bigger salaries. They can do the same for YOU. No matter where you live, what hours you work, or how little your education—the I. C. S. can train you for a more important and better-paying position.

Mark and mail the attached coupon—it won't obligate you in the least—it won't cost you anything to find out how you can get this salary-raising ability right in your own home, during your spare time.

**MARK THE COUPON NOW**

**INTERNATIONAL CORRESPONDENCE SCHOOLS**  
Box 5842 SCRANTON, PA.

Explain, without obligating me, how I can qualify for the position, or in the subject, before which I mark X.

- |   |  |
|---|--|
| <input type="checkbox"/> ELECTRICAL ENGINEER        | <input type="checkbox"/> SALESMANSHIP              |
| <input type="checkbox"/> Electric Lighting          | <input type="checkbox"/> ADVERTISING MAN           |
| <input type="checkbox"/> Electric Car Running       | <input type="checkbox"/> Window Trimmer            |
| <input type="checkbox"/> Electric Wiring            | <input type="checkbox"/> Show Card Writer          |
| <input type="checkbox"/> Telegraph Expert           | <input type="checkbox"/> RAILROADER                |
| <input type="checkbox"/> MECHANICAL ENGINEER        | <input type="checkbox"/> ILLUSTRATOR               |
| <input type="checkbox"/> Mechanical Draftsman       | <input type="checkbox"/> DESIGNER                  |
| <input type="checkbox"/> Machine Shop Practice      | <input type="checkbox"/> BOOKKEEPER                |
| <input type="checkbox"/> Gas Engineer               | <input type="checkbox"/> Stenographer and Typist   |
| <input type="checkbox"/> CIVIL ENGINEER             | <input type="checkbox"/> Cert. Public Accountant   |
| <input type="checkbox"/> Surveying and Mapping      | <input type="checkbox"/> Railway Accountant        |
| <input type="checkbox"/> MINE FOREMAN OR ENGINEER   | <input type="checkbox"/> Commercial Law            |
| <input type="checkbox"/> Metallurgist or Prospector | <input type="checkbox"/> GOOD ENGLISH              |
| <input type="checkbox"/> STATIONARY ENGINEER        | <input type="checkbox"/> Teacher                   |
| <input type="checkbox"/> Marine Engineer            | <input type="checkbox"/> Common School Subjects    |
| <input type="checkbox"/> ARCHITECT                  | <input type="checkbox"/> CIVIL SERVICE             |
| <input type="checkbox"/> Contractor and Builder     | <input type="checkbox"/> Railway Mail Clerk        |
| <input type="checkbox"/> Architectural Draftsman    | <input type="checkbox"/> AGRICULTURE               |
| <input type="checkbox"/> Concrete Builder           | <input type="checkbox"/> Textile Overseer or Supt. |
| <input type="checkbox"/> Structural Engineer        | <input type="checkbox"/> Navigator                 |
| <input type="checkbox"/> PLUMBING AND HEATING       | <input type="checkbox"/> Poultry Raising           |
| <input type="checkbox"/> Sheet Metal Worker         | <input type="checkbox"/> AUTOMOBILES               |
| <input type="checkbox"/> CHEMICAL ENGINEER          | <input type="checkbox"/> Auto Repairing            |

Name \_\_\_\_\_

Occupation  
& Employer \_\_\_\_\_

Street  
and No. \_\_\_\_\_

City \_\_\_\_\_

State \_\_\_\_\_

If name of Course you want is not in this list, write it below.

When writing to Advertisers please mention Popular Science Monthly



# WANTED! WE WANT 300 AGENTS AT \$35 TO \$70 A WEEK

## NEW INVENTION —just out. Needed in every home every day. Patent just applied for. Nothing else

like it. Supplies what every housewife has wished for for years. Perfected after long experimental work by mechanical experts. Low priced—anyone can use it—**sells on sight**. We want three hundred representatives at once—men or women hustlers—to advertise, accept orders and manage deliveries for our new **Quickedge Knife and Shear Sharpener**. Sharpens any kitchen knife, paring knife, carving knife, bread knife or shears and scissors in **ten seconds**. Agents are taking orders at every house—**wiring for rush shipments**. Write today for this opportunity to make \$10 to \$20 every day.

## MAKE \$300 NEXT MONTH

This little machine is a mechanical masterpiece. A child can use it. Just put knife in slot—turn crank—**grinds automatically**—draws blade to keen, sharp, perfect, lasting edge **at absolutely correct bevel for daily use**. Nothing to adjust—nothing to change, nothing to get out of order—**absolutely guaranteed**—will last for years. Once they see it and use it, women will not do without it for several times its cost. One agent wrote: "It was easier for me to learn to sell the **Quickedge** than it was to learn to tear open my pay-envelope in my former dollar-a-day job." Get out of the dollar-a-day class. Get this position, where profits start the first day.

## No Experience Required

Just take one of the machines to any house and show it—give a ten-second demonstration upon the dulllest knife in the house; **the order is yours right on the spot; instantly**. No talking necessary. No argument. The machine simply sells itself, **and stays sold**. Every customer becomes your friend. They tell others, your profits double and multiply. Leave one hundred on trial over night. Collect the cash for every one of them next day. **The machine will do its own talking**; it is so easy to operate, no explanations or instructions are necessary. Secure your county now; **free**. Get started right now and

**Only \$1.50**

**Selling Price**

Low price, ease of operation, astonishing quickness and absolute perfection of results, money-back guaranty. These things make the **Quickedge** the fastest seller of the age—the biggest money-maker for agents, general agents and managers ever invented.

### Make \$70 Next Week

Easy to start—easy to make big money if you will just follow instructions and work faithfully. **No charge for territory. 200% profit for agents.** Business supplies capital. Exclusive protection, co-operation and assistance. Failure impossible. Nothing to risk. Success assured.

**Easy to demonstrate**—and every woman is anxious to see it work—then she would not do without it. No talking necessary. Just show the machine and take the order—**one dollar profit on every call you make**.

Send for application blank and complete information today—**free**. Investigate. **Get the proof**. Don't delay. Write a postal card or letter right now. **Territory is being assigned very fast**. Get your county now—**free**. Write today.

**The Quick-edge Knife and Shear Sharpener**

Grinds any Kitchen Knife or Shears in 10 Seconds

**Absolutely Guaranteed**

## Make as Much Money Next Week as These Men are Making Now

J. C. Lewis, of Kansas, says: "**I have sold one hundred Sharpeners in four days.**" Hobart Kerr, of Md., writes: "The women can hardly wait till they get them." Herbert Cain, of Ky., sold nine after supper. At the end of his first day, J. W. Gordon, of Pa., writes: "**I sold two dozen, and I sold to every one I saw.**" Wm. G. Hall, of N. J., says: "I think it is great. I sold six in about one-half hour. The machine is a mighty fine proposition. **I am a mechanic and I know what I am talking about.**" Peter Courtland, of Mich., writes: "I received your sharpener and opened it in a barber shop. I ground his shears and I got an order for one right on the spot." H. A. Henkel, of Va., says: "I have examined it and find it a wonderful little machine. **The workmanship is simply perfect.**" Frank King, Colo., says: "Sample received Saturday. Sold ten today. Sell to most every house." Forest Webb, of Pa., says: "Went out Monday afternoon for about three hours and received one dozen orders. **Profit \$12.00.**" H. Tillery, of Tenn., wrote: "I took three orders first hour. When you sharpen an old, dull knife, dull as a hoe, in less than a minute, **they sit up and look.**" Ray Carter, of Mass., writes: "I went out two days and have orders for thirty sharpeners." **Profit \$30.00 for first two days.** John Durr, of Wis., also says: "**I have sold thirty in two days.**"

**You can make this money. Send now. Territory free.**

**GET BUSY. WRITE TODAY.**

**The Quickedge Sharpener Company**

No. 697 Sharpener Building  
215 N. Desplaines St., Chicago, Ill.

When writing to Advertisers please mention Popular Science Monthly



# Are You Equipped To Win?

**H**OW MANY unfamiliar names, new words, and puzzling war terms in this morning's paper meant nothing but a blank to you?

If you are asked the location of *Trieste*, the meaning of *futurism*, *air-sick*, *Diesel engine*, etc., are you able to give an accurate answer?

How many business letters to-day showed you examples of words wrongly used, carelessly divided or incorrectly spelled? *Business success* is based on accuracy.

What is a werewolf?  
 What is tufa?  
 What is a Musca?  
 Where is Flanders?  
 How is *Przemysl* pronounced?  
 What is the source of cork?  
 Is a peanut a nut?  
 What is a sun spot?  
 What is a continuous voyage?  
 What are the halogens?  
 Good night means what?  
 How high is Pikes Peak?

## WEBSTER'S NEW INTERNATIONAL DICTIONARY

is an all-knowing teacher, a universal question answerer, made by specialists to meet your needs.

Hundreds of thousands of successful business men, engineers, bankers, judges, architects, physicians, teachers, librarians, and clergymen use this "One Supreme Authority."

If you seek efficiency and advancement why not have the advantage of this vast fund of information?

Write for specimen pages of Regular and India-Paper Editions.  
 FREE—a set of Pocket Maps if you mention this magazine.

**G. & C. MERRIAM COMPANY, Springfield, Mass., U. S. A.**



### SALIENT FEATURES:

- 400,000 Vocabulary Terms.
- 30,000 Geographical Subjects.
- 12,000 Biographical Entries.
- Thousands of other References.
- 6,000 Illustrations. 2,700 Pages.

The only dictionary with the new divided page, characterized "A Stroke of Genius." Type matter is equivalent to that of a 15-volume encyclopedia.

**G. & C. MERRIAM CO.**  
 Springfield, Mass.

Gentlemen: Please send me specimens of Regular and India Papers, Illustrations, etc. Include FREE Pocket Maps per Pop. S. Mo.

Name.....

Address.....

## The New York Electrical School

## Men of All Ages

Whether Sixty or Sixteen, you are assured absolute success in the future if you attend the only school devoted to teaching every angle of Electrical Industry by a method of "actual practice." All ages enter this school on the same level, are shown "how" and "why," and make rapid progress under the watchful eye of a staff of highly trained and experienced men. No preparation needed to take this course and you can start any day of any week throughout the whole year.

At this "Learn by Doing" School a man acquires the art of Electrical Drafting; the best business methods of Electrical Contracting; together with the skill to install, operate and maintain all systems for producing, transmitting and using electricity.

Write for illustrated booklet and "be shown" what the N. Y. Electrical School can do for YOU.

**40 WEST 17TH STREET, NEW YORK**





# Come to Detroit

## The Automobile Center and

# LEARN THE AUTOMOBILE BUSINESS

DETROIT trained men get preference and get jobs quickly. No other city can give what Detroit offers. Think what it means to learn in the Michigan State Auto School. Factories endorse our school, glad to employ our graduates or offer them territory in which to sell cars and start garages. Unlimited opportunities.

71% of Automobiles are made in Detroit. You're right in the Heart of the Auto Industry. Men are needed everywhere as testers, repairmen, chauffeurs, garage men, and salesmen. Hundreds of our graduates start in business for themselves.

## Earn \$75 to \$300 a Month


We teach you to handle any auto proposition. You graduate in from ten to twelve weeks. Our equipment is new, up-to-the-minute, and complete. No old, obsolete motors, chassis or electrical equipment used. Students actually build cars from start to finish, getting factory training in assembling, block-testing, road-testing, everything. Special complete course in Oxy-Acetylene brazing, welding and cutting, separate from regular course. Learn to time motors, rebore cylinders, adjust carburetors, magnetos, valves and bearings quickly and accurately. Six-cylinder Lozier, Chalmers "6," Detroit "6," Overland, and 8-cylinder King

are used for road instruction. We have the following completely equipped chassis:

Chalmers "6-30" 1917 chassis	Metz "4" 1917 chassis
Detroit "6-45" 1917 chassis	Detroit Electric 1917 chassis
Buick Light "6" 1917 chassis	G. M. C. 2 Ton Truck
Willys-Knight 1917 chassis	Saxon "6" 1917 chassis
Studebaker "6" 1917 chassis	Maxwell 1917 chassis
Hudson Super-Six 1917 chassis	Oldsmobile "8" 1917 chassis
Cole "8" 1917 chassis	Winton "6" chassis
King "8" 1917 chassis	Packard Twin "6" 1917 chassis
	Chalmers "4" 1913 chassis

All completely equipped for students to work on. We have more than 20 motors in our block test department—2 cyl., 4 cyl., 6 cyl., 8 cyl., and 12 cyl. Our electrical department is complete, having every standard starting, lighting, and ignition system, including Delco System as used in Buick, Hudson, and Packard Twin "6."

**Follow the Crowd to the Michigan State Auto School. Come to Detroit**

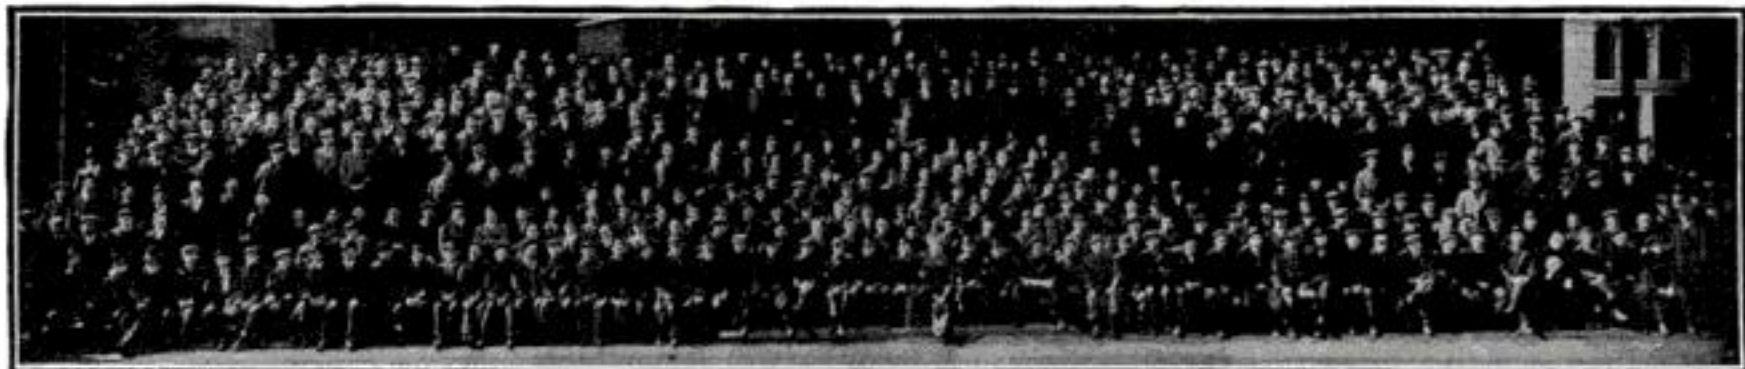

THIS IS ONE OF THE FEBRUARY 1917 CLASSES

## Detroit Is the Place to Learn—Start Any Time

There are 44 auto factories in Detroit and vicinity and 140 accessories and parts factories. Our students have the privilege of going through any or all of them. We operate Starting, Lighting, Ignition Service Station. This has added thousands of dollars' worth of equipment and makes our electrical department unequalled. Students get actual experience in handling all kinds of electrical auto equipment and taking care of trouble. We have just installed a Sprague Electric Dynamometer for block-testing purposes for students' use. Ours is the only Auto

school having this equipment. Auto factories need Dynamometer men constantly. Factories and garages are paying big salaries to men who know how to handle electrical equipment quickly and properly. Detroit is the automobile center. You get practical instruction. School open all the year. Enter classes any time, any day. Three classes daily: morning, afternoon, evening. All instructors are members of the Society of Automobile Engineers (S.A.E.) There is a great demand for Michigan State Auto School students. Auto factories write and phone for men constantly.

### Money-Back Guarantee

We guarantee to qualify you in a short time for a position as chauffeur, repair man, tester, demonstrator, auto electrician, garage man, or automobile dealer, paying from \$75 to \$300 monthly or refund your money. We have constantly more requests for Detroit trained men at GOOD salaries than we can supply.

## SEND THIS COUPON TODAY

**MICHIGAN STATE AUTO SCHOOL**  
592 Auto Bldg., 687-89-91 Woodward Ave.  
DETROIT, MICHIGAN, U. S. A.

Gentlemen: Send me absolutely FREE literature on Aeroplane Motor Mechanics Course, "Auto School News" and New Catalog, or better still, you can expect

me about.....

Name.....

Street.....

Town..... State.....

### Automobile Factories Endorse Our School

The Leading Automobile factories in Detroit, as well as in other cities, endorse our school. They have been watching our school and graduates for years and are satisfied. They are putting their latest model, complete chassis in our school for students to work on. They are employing our graduates in their factories and service stations and assisting them in opening garages and salesrooms. They allow our students to go through their factories. They need trained, competent men and are asking for more of our graduates constantly. The Michigan State Auto School in Detroit, the heart of the Auto Industry, is endorsed by the Leading Auto Factories, is receiving their hearty co-operation. What better endorsement could you ask?

### Act Quickly—NOW!

Fill in the coupon; get literature on aeroplane motor mechanics, "Auto School News" and New 128-Page Illustrated Catalog. All absolutely free. Or better still, jump on the train, as hundreds have done, and come to the "Heart of the Automobile Industry," and learn right. We have no branches. Write or come direct to this school.


### MICHIGAN STATE AUTO SCHOOL

The Old Reliable School      A. G. ZELLER, Pres.  
592 Auto Building, 687-89-91 Woodward Ave.  
DETROIT, MICH., U. S. A.





The War Will Be Won In The Air  
Aeroplane Motor  
Mechanics  
Needed

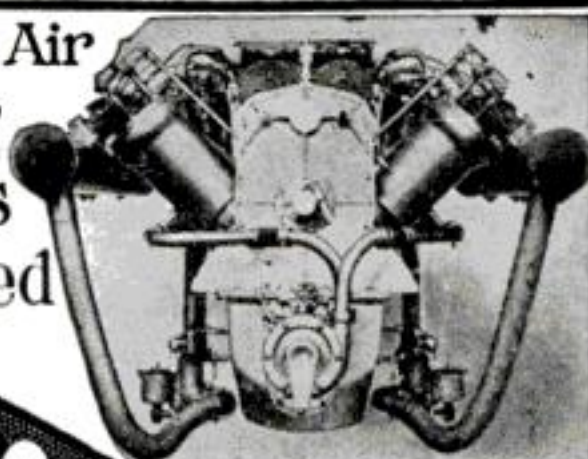

CURTISS  
200 Horse Power  
Aeroplane  
Motor

The war will be won in the air. A course in Aeroplane Motor Mechanics is now being taught at the Michigan State Auto School. We have secured, by special permission, Curtiss Aeronautical Motors for practice and study purposes. We have also arranged with the Curtiss Aeroplane Company for a complete Aeroplane and a great quantity of the aeroplane material. Students will be given practical instruction on the Aeroplane motor and will secure complete knowledge of the plane in general.

## Aeroplane Motor Course Started October 1st

The course is under direct supervision of a Curtiss expert who is an authority on aero-motors and aeroplanes as well as hydros and flying boats. Weeks have been spent in perfecting this course which is entirely separate from our Automobile course. Our plans are complete. A special price is made to those who enroll before November 15, 1917.



Prepare to Serve  
Your Country!

Become An Aeroplane Motor Mechanic

Aeroplanes will win the war. They are the eyes of the army. They must be in perfect running condition. Thousands of keen, well-trained men are needed by the Government to care for the aeroplanes and aeroplane motors. Men are needed in the aeroplane factories. Trained Aero-motor mechanics will get the preference.

## Get Into This New Industry Now

The men who become trained Aeroplane Motor Mechanics now will be big men in the aeroplane business. Only a short time ago the automobile business was starting, the men who got in then are now the Big Men. The Aeroplane business is in its infancy. The war will give it a big start. The men who train now will be the Big Men in the near future. The work is extremely interesting and will grow in interest as the business develops. Aeroplanes and Sea-planes will be used for every purpose. Trained Aero-motor mechanics will always be in big demand.

THE CURTISS AEROPLANE CO.  
AEROPLANES, HYDROAEROPLANES  
FLYING BOATS, AERONAUTICAL MOTORS  
BUFFALO, U. S. A.

September 17, 1917.

MR. A. G. ZELLER,  
Michigan State Auto School, Detroit, Mich.  
Dear Mr. Zeller:

I accordance with our conversation I have asked the Sales Department to send you a collection of motor and aeroplane parts which you can use in connection with your aeroplane mechanics' school. You will find, I think, a sufficient number of parts so that you will have no difficulty in explaining to your students the general principles of construction and operation.

These models, together with the literature which you now have will, I believe, furnish a valuable background upon which your new schoolwork can be based. There is going to be a big demand for good aeroplane mechanics and for that reason we believe that your activity along this line is very timely and commendable.

Very truly yours,

THE CURTISS AEROPLANE CO.  
F. L. FAUROT (Signed) F. L. FAUROT,  
W. F. W. Advertising Manager.

## Special Price Up to November 15th

As a special inducement to those who enroll before November 15th, 1917, we will make liberal discount in the price of the Aeroplane Motor Mechanics' Course. The rate will be raised after that date.

Don't hesitate; get into this new industry now. The far-sighted, keen fellows who enter at once will reap the big benefits.

Write Now for literature and use the coupon on opposite page.

No matter whether you join the colors or stay at home, you can do your bit best as a trained man.

The Old  
Reliable School

Michigan State Auto School

A. G. ZELLER  
President

592 Auto Bldg., 687-89-91 Woodward Ave.

DETROIT, MICHIGAN, U. S. A.

When writing to Advertisers please mention Popular Science Monthly





# Reach Up and Help Yourself!

**Train for a Better Job---Attractive Salaries in Many Trades and Professions Await Claimants**

Electrical Engineer,  
\$2000—\$5000

Steam Engineer,  
\$1500—\$2500

Civil Engineer,  
\$2000—\$5000

Shop Superintendent,  
\$2000—\$5000

Mechanical Engineer,  
\$2000—\$5000

Lawyer,  
\$2000—\$5000

Telephone Expert,  
\$2000—\$5000

Business Manager,  
\$2000—\$10,000

Architect,  
\$2000—\$7000

Sanitary Engineer,  
\$2000—\$5000

Fire Prevention Expert  
\$2000—\$5000

Contractor and Builder,  
\$2000—\$5000

Draftsman and Designer,  
\$1500—\$2500

Automobile Engineer,  
\$2000—\$5000

Bookkeeper and Accountant,  
\$1500—\$2500

Certified Public Accountant,  
\$2000—\$10,000

(Mark with an X the position you prefer)

Opportunity thunders at the door of every man who has ambition and natural ability. Industrial America is undermanned. War activities, on a scale so vast as to stagger the imagination, necessitate the quick training of a great secondary army of technical experts. These men must also help rebuild the world after the war is over. Get in training for one of the Big Jobs by taking an American Home Study Course in any one of 32 trades and professions.

## We Have Trained 50,000 Winners!

We offered them their chance—they grasped it! We helped them to better positions, larger incomes, broader opportunities, because they helped themselves.

You—today—have a better chance.

*Now the position seeks the man and salaries for high-class men are more liberal than were ever known before.*

### Mail This Ad for Free Book and Personal Analysis

Send us your name and address on the coupon. Just check the job that you want to hold and mail this advertisement to us.

We will tell you how you can get just the training you need, right in your own home. We will tell you how to line up your natural talents with your practical experiences.

Write today for the personal examination blank and bulletin of American home study courses. Do it now—you'll be under no obligations.

**American School**  
of Correspondence, Chicago, U.S.A.  
Dept. G 1209

Please tell me how I can qualify for the position marked X


Name.....

Address.....

When writing to Advertisers please mention Popular Science Monthly




**Imagine fourteen Woolworth buildings, each of them 792 feet in height, piled one on top of the other. What a column! And yet that would be the height of the stack made by piling the 275,000 copies constituting this December issue of the Popular Science Monthly one upon another. The topmost number would be lost in a cloud at a height of 11,000 feet. Airplanes do not reconnoiter at heights much greater.**

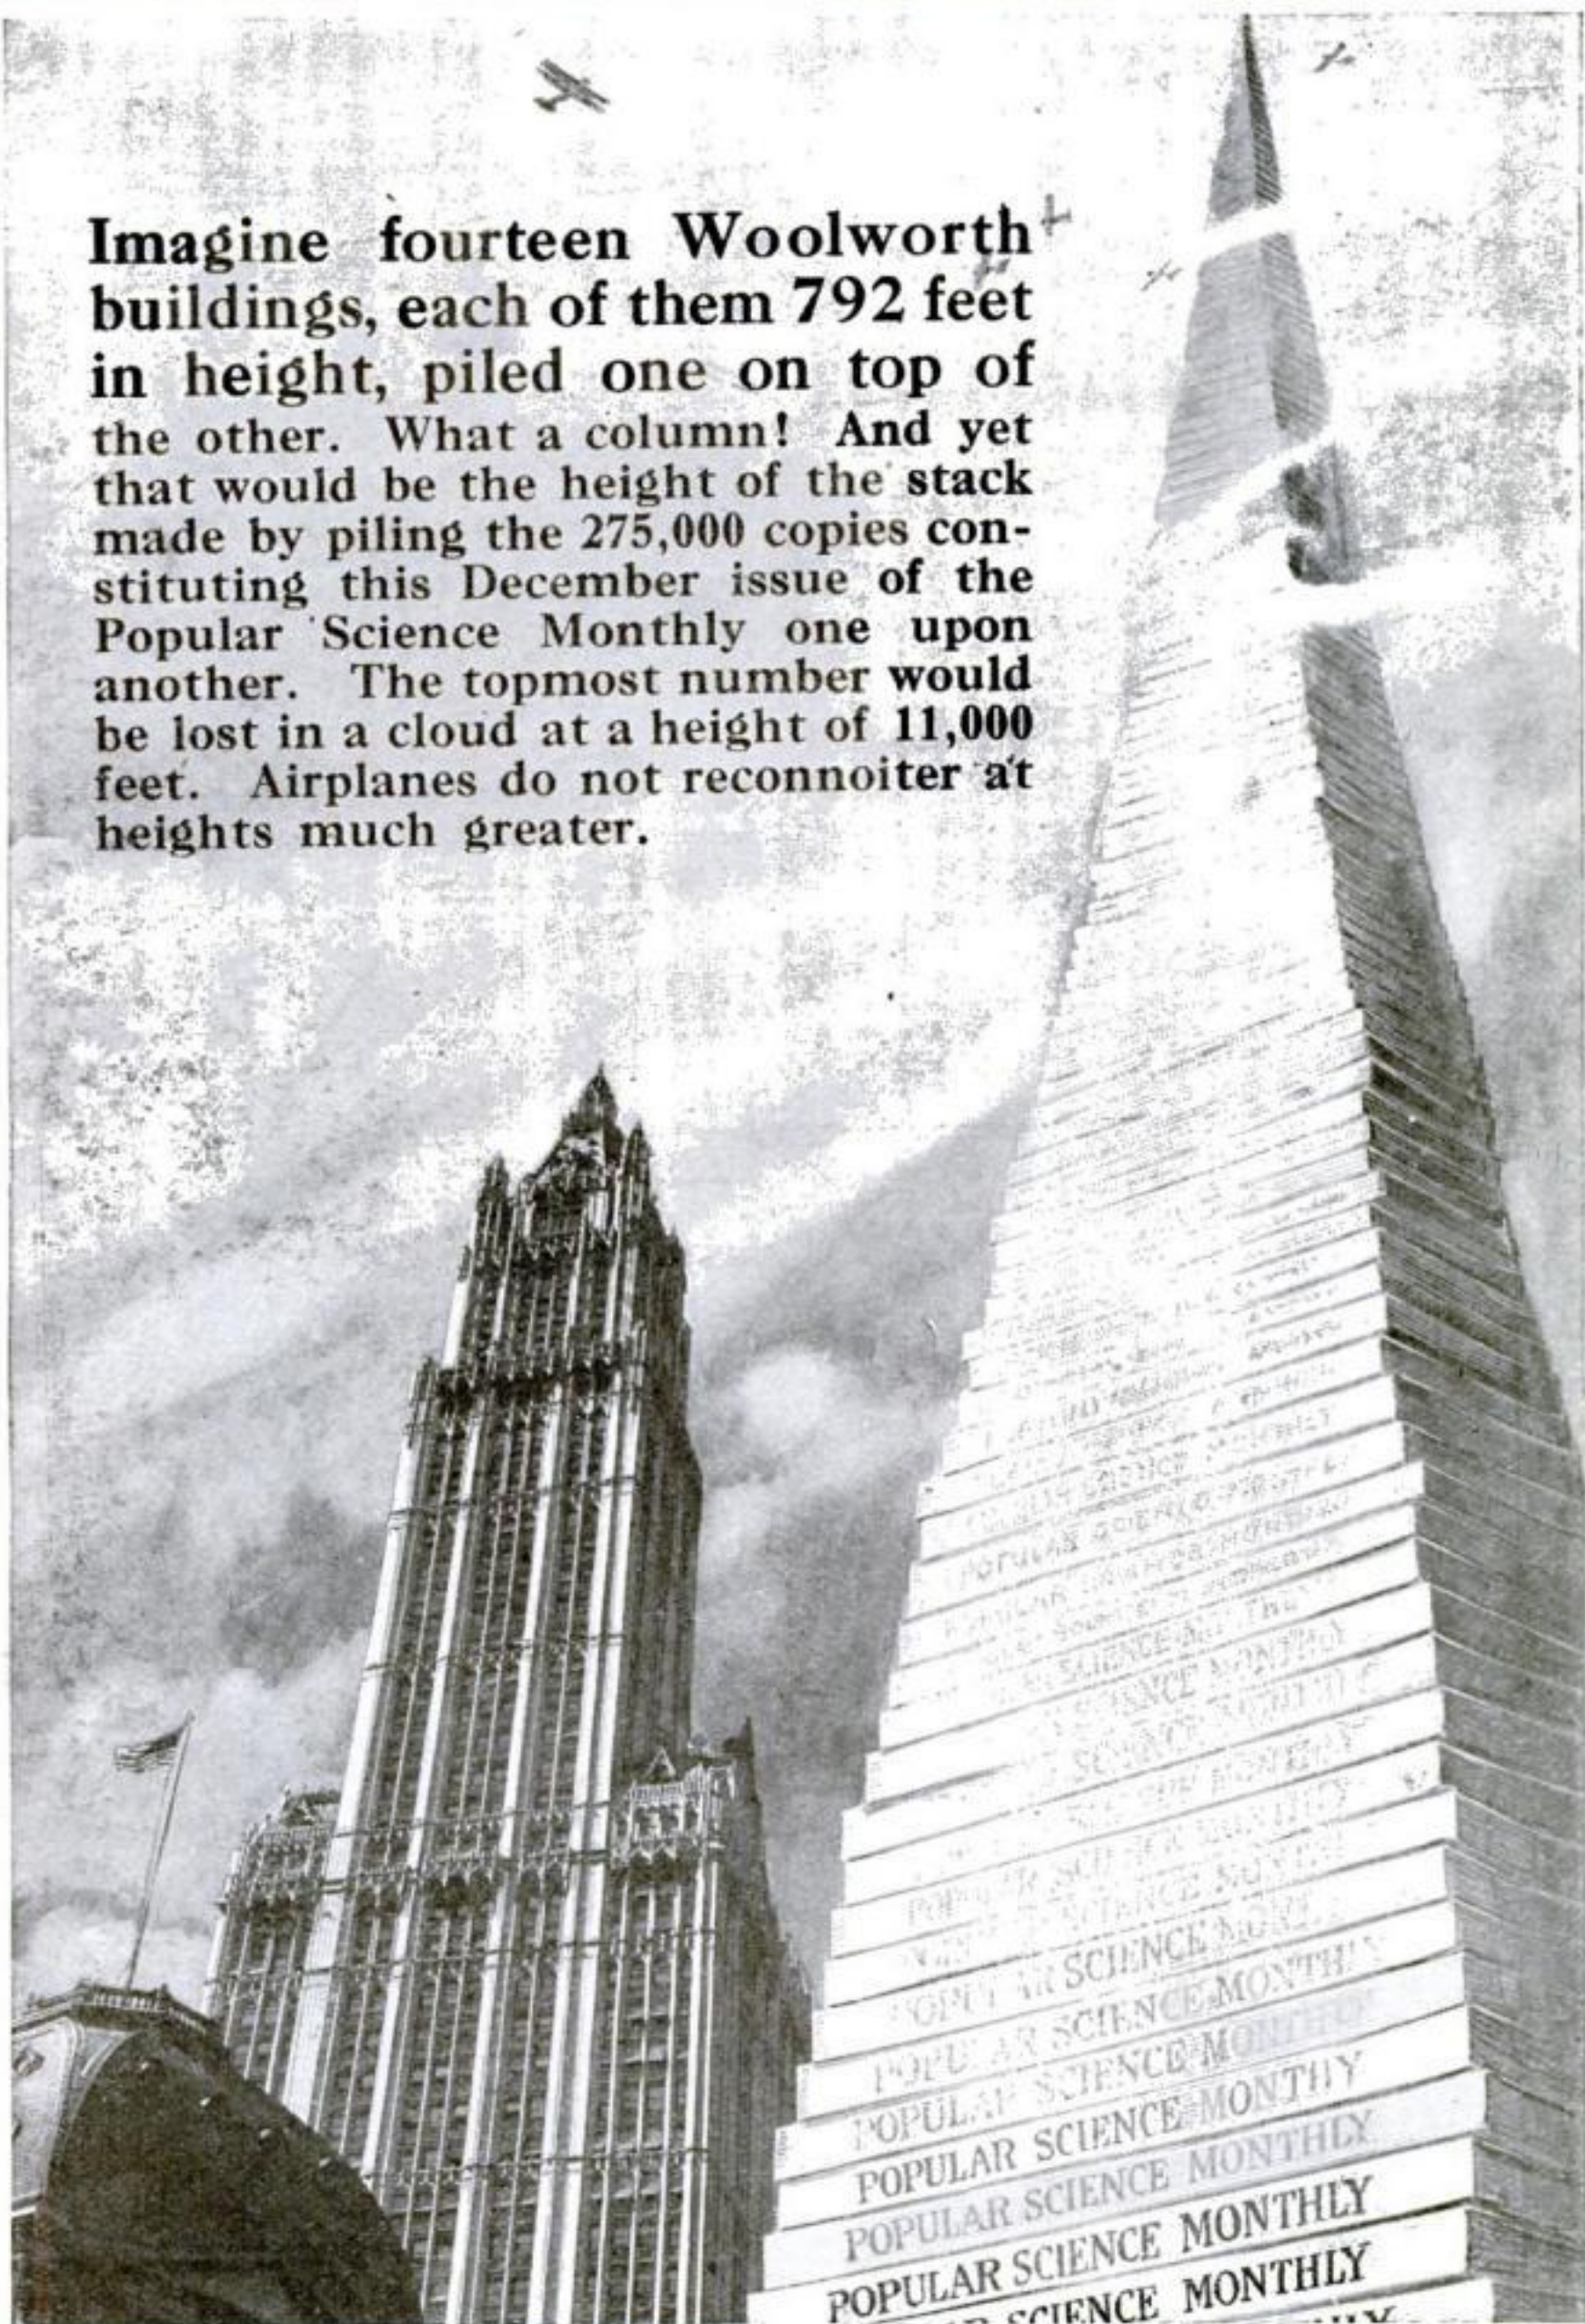



## Fishing for Eagles with Airplanes

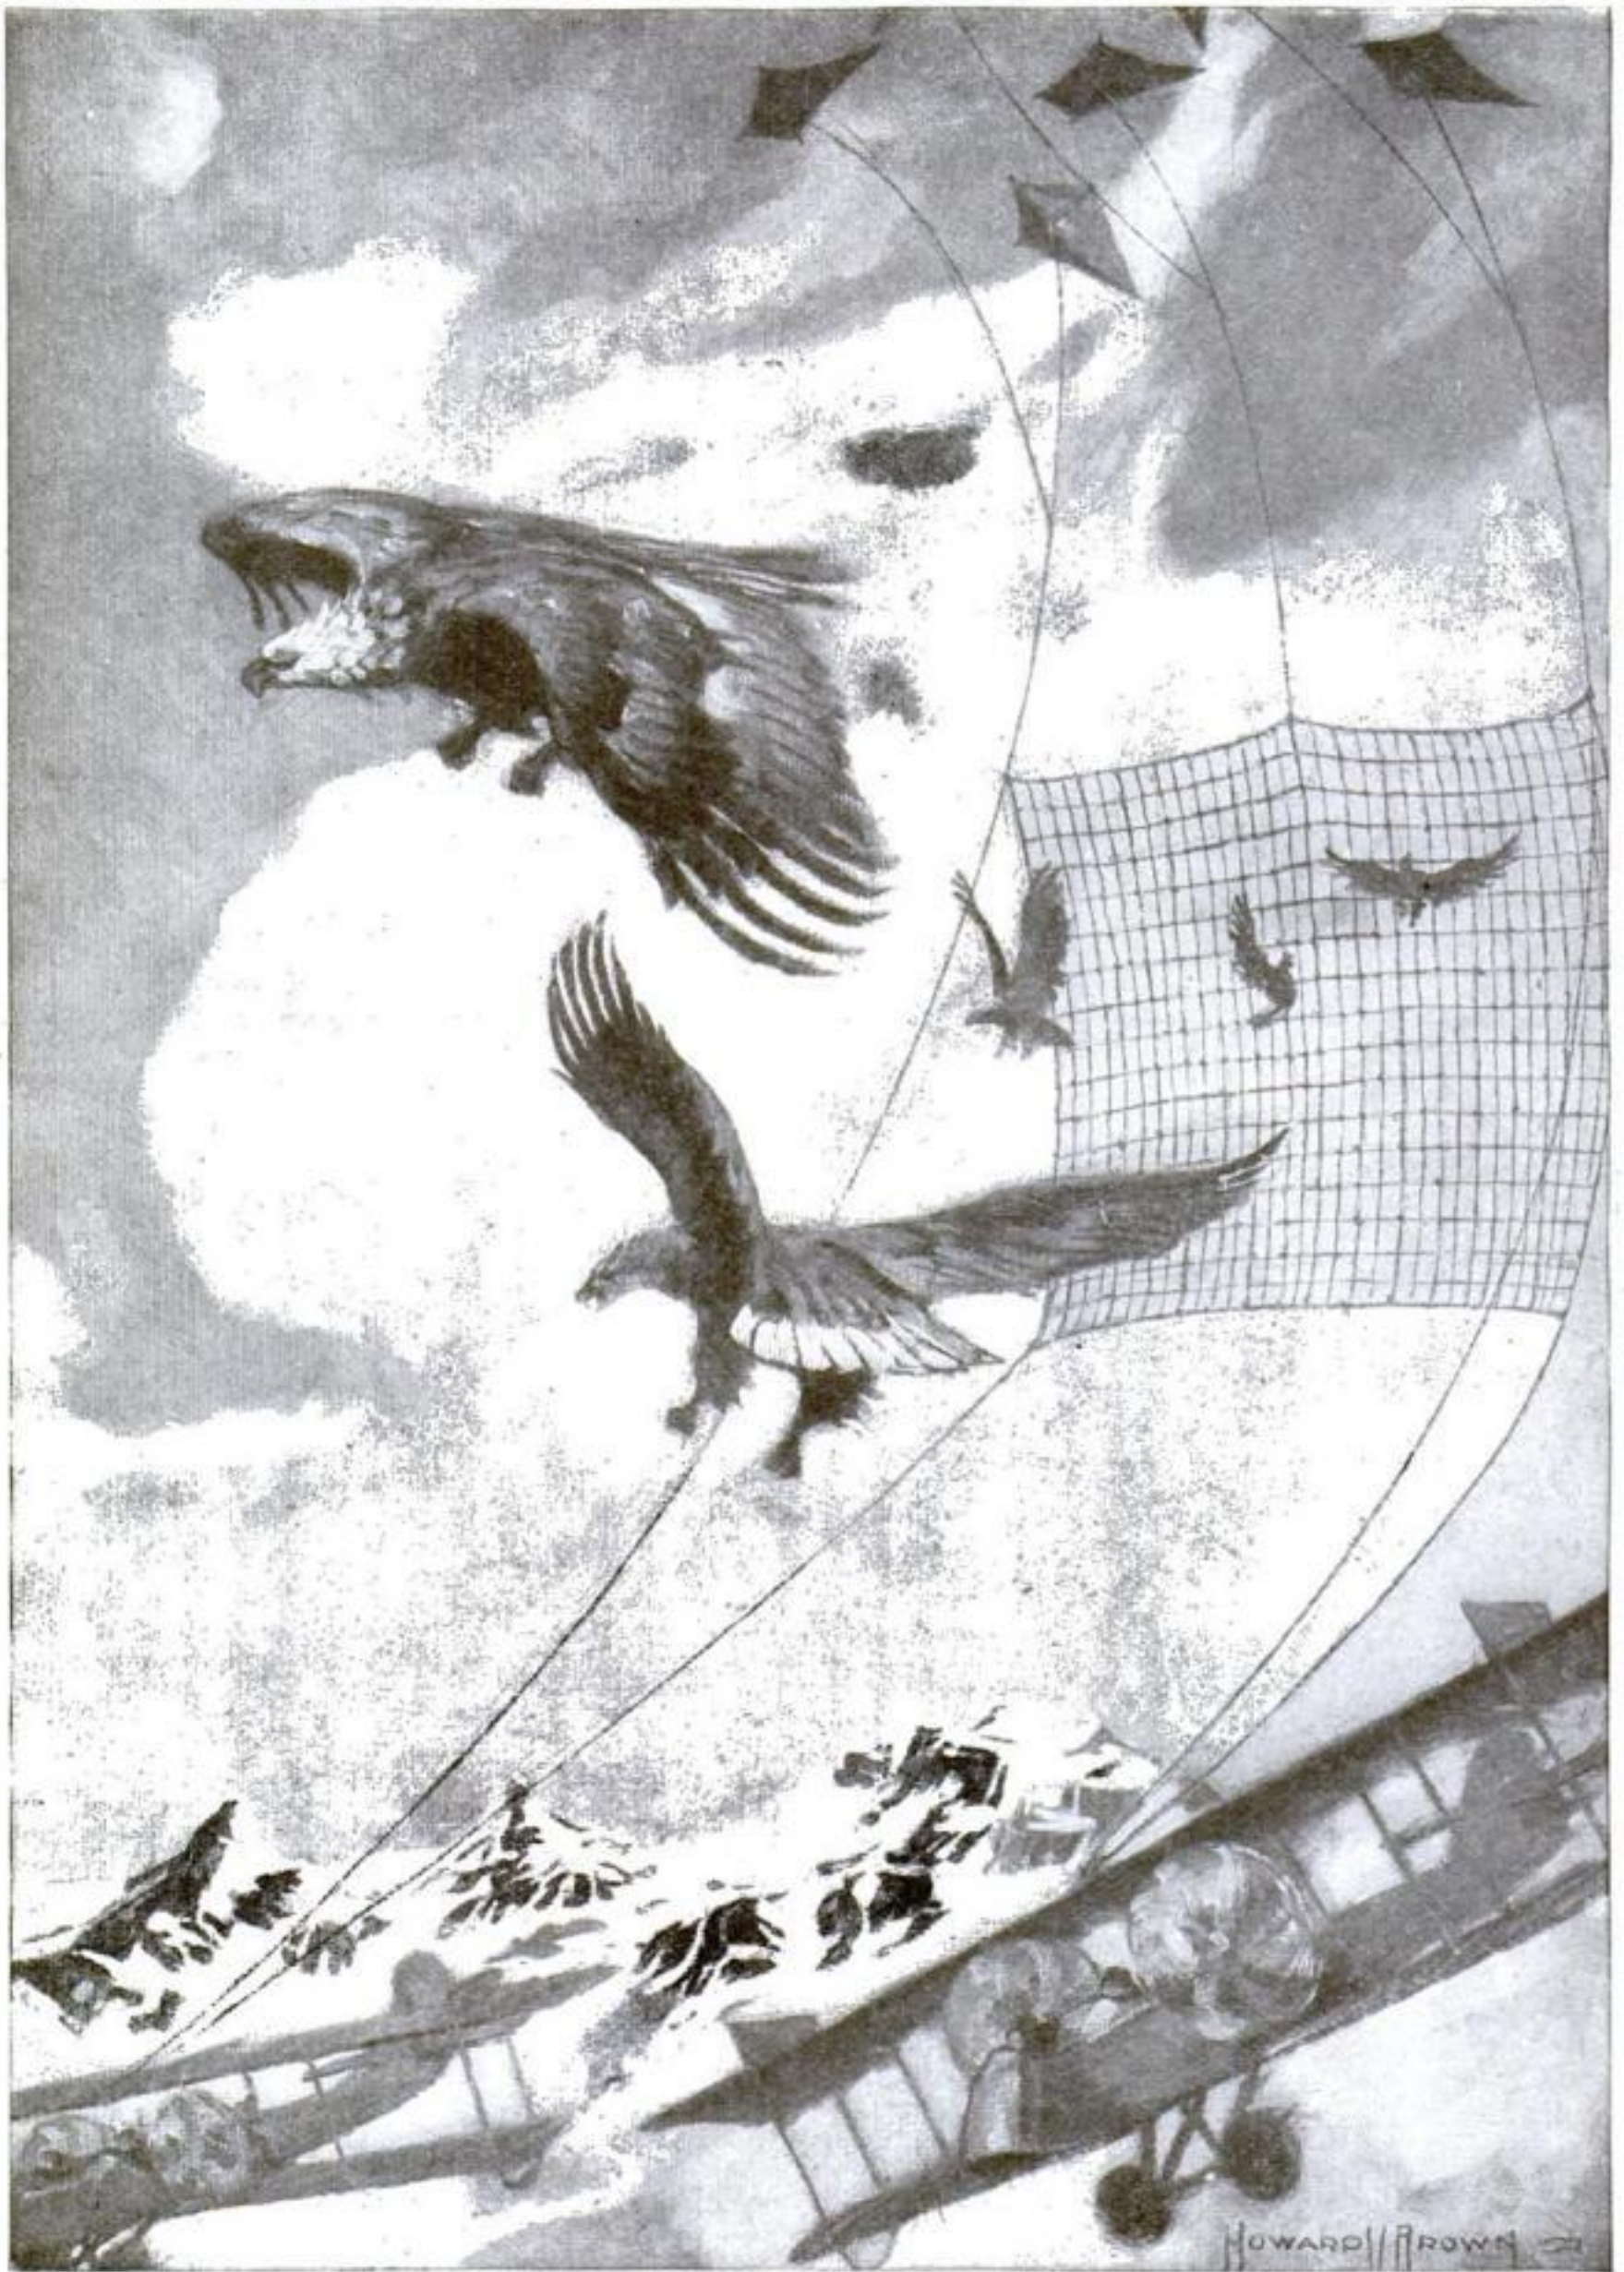

Why should it not be possible to trail fine piano-wire nets, spread by kite-buoys, between two airplanes connected by a long wire, and enmesh the condors and eagles that soar over mountains?



# Popular Science Monthly

239 Fourth Avenue, New York City

Vol. 9  
No. 6

December, 1917

\$1.50  
Annually

## Fishing for Birds of Prey in the Air

The possibilities of a new sport suggested  
by the killing of birds by flying machines

By Carl Dienstbach

**W**HAT is the speed of a bird? Mr. H. H. Clayton, of Bluehill Observatory, saw wild ducks flying at a height of 958 feet. He was at the time engaged in measuring the height and velocity of clouds and was able to estimate the speed of the birds as nearly forty-eight miles an hour. Prof. J. Stebbins and Mr. E. A. Fath made careful observations with the telescope and found that birds pass at rates varying from eighty to one hundred and thirty miles per hour and these were minimums. Heavy bomb-dropping airplanes travel at the rate of ninety miles an hour and fast fighters at nearly one hundred and forty miles. Clayton's ducks were poor airplanes, as flying speeds go. Is it any wonder, then, that even a fast bird should be overtaken in its flight by a still faster machine and killed in an aerial rear-end collision?

It is a wonder that birds are not more often overtaken as was the unfortunate creature which, as our photograph shows, was caught in a military flying machine. With its wide expanse of superposed wings, criss-crossed with stay-wires, a biplane is not unlike a very wide-meshed net. That being the case, why should it not be possible to trail fine piano-wire nets, spread by small kite-buoys between two

airplanes connected by a long wire, and enmesh the condors and eagles that soar over inaccessible mountain peaks? That ought to be a fascinating sport. Great birds of prey are fighting creatures. Vedrines found that out some years ago when he flew across the Pyrennes. He was actually attacked by eagles and had to shoot them with a pistol.

The sport is all the more possible when it is considered how dependable is the modern fast flying machine. Chavez, the first man

who ever flew across the Alps, was killed in some unknown manner as he descended into Italy. But the modern flying machine is more powerfully controlled and has a more dependable motor than the airplane in which Chavez made his tragic flight. Witness the daily performances of Austrian and Italian aviators in flying over the dizzy peaks of the Austrian battle-grounds. Vedrines' experience shows that an eagle regards an airplane much as a dog an automobile



© Underwood & Underwood

An eagle caught and held fast in the wire bracing of a modern airplane in its flight

—something not to be frightened at but to be challenged.

Think, too, of the possibilities of capturing with a net whole flocks of game ducks and geese as well as wild pigeons. Even the use of hook, line and bait, as well as of the net, appears feasible in the air.



### Caging the Bananas to Keep Them Clean

**C**HARLES P. ARTHUR, a grocer in Iowa Falls, Iowa, was impressed by the great need of a method of keeping bananas clean. He saw that flies and other insects crawled all over the bunch of bananas in the store.

After thinking the matter over he designed a case which will keep bananas fresh and clean and at the same time within easy reach of the grocer. This has been patented recently. The case stands a little higher than a man's head, so that the bananas suspended within it are in such a position that they can be cut off easily. The case is made of a metal frame covered with wire netting. This keeps insects away from the fruit and admits air.



A new method of keeping bananas clean. The wire case is of fine mesh and keeps flies and other insects away

### Even the Price of Monkeys Is Soaring

**W**HO would think that the European war would have anything to do with the price of monkeys? Well, it does, and a great deal, too. The price of monkeys has gone up with food, paper, shoes, etc., to the despair of the pathologist and to the sorrow of the hurdy-gurdy man. The causes for the sudden "corner" in monkeys is the closing of the world's principal wild animal market at Hamburg, Germany, and the lack of shipping facilities.

Not long ago the pathologists of the National Public Health Service at Washington, D. C., wanted a dozen South American monkeys for experimental purposes. They appealed to every wild animal dealer in this country, to the zoos, and to the sailors in port, and finally purchased six at \$18.00 each.

### Keeping the Shampooing Soap Suds Out of Your Eyes

**I**F Mr. Jones wishes a really comfortable shampoo at the barber's, or Mrs. Smith at her hair-dresser's, let them ask for one of the new types of special shampoo basins shown in the accompanying illustration. The basins are of the ordinary kind, but they have a special horizontal cup-shaped projection at the front in which the head may rest while Mr. Jones or Mrs. Smith leans back in a special chair set about half a foot in front of the basin. The water and soap used in the shampooing operation thus drains off from the hair directly into the basin without running into the eyes.

The upright portion of the device above the top of the basin proper is made into a tank to hold two gallons of soap lotion. This is heated by gas and is drawn out through the faucet.



The special shampooing basin has a cup-shaped projection in front in which the head rests

The January POPULAR SCIENCE MONTHLY will be on sale on all newsstands on Monday, December 10th. In the far west on December 26th.



## A Lizard That Squirts Jets of Blood from Its Eyes

WE have about fourteen species of horned lizards in this country, and most people still call them "horned toads." Some of their habits are extremely remarkable, but none more so than their ability to send at will a fine jet of blood from either eye. This fact is very rarely touched upon in literature, and the average reader of the life histories of our animals has never heard of this remarkable habit. Personally, I first noticed it in a small species of horned lizard that I captured many years ago in New Mexico; but I have never been able to satisfy myself as to whether the jet of blood was from a vein or from an artery.

Probably the habit has been most frequently noted in the Texas Horned Lizard (called by zoologists *Phrynosoma cornutum*). That species has the widest range of distribution and is found most frequently in captivity. Recently I have had specimens of it alive and have photographed them; a reproduction of one of these photographs is shown here. Blood-squirting is generally indulged in when the lizard is laboring under certain states of excitement. The attack comes on suddenly, at a time when you have the lizard in your grasp. It will suddenly stiffen its neck and throw the head upward, as the eyes bulge from their sockets. In another second you can plainly hear a peculiar hissing sound, followed immediately by the finest imaginable jet of pure blood from one or the other of its eyes. With such force is this squirted that the tiny stream, lasting a couple of seconds, may be thrown to a distance of fully five feet. As the blood strikes, it


lands in an array of numerous little spots about the size of a No. 8 shot. Often there are over one hundred of these spots, which fact will give some idea of the amount of blood ejected at one time. Following this most extraordinary operation, the lizard tightly shuts its eyes, re-

sisting all attempts to open them; though, in a very few minutes the eyes, as well as their lids, appear to be perfectly normal again, with a complete subsidence of the swelling.

The cause for the blood-squirting is purely conjectural. It is possible that the animal becomes frightened and uses this method of protecting itself from any further handling.

The loss of blood seems to have no special physical effect upon the lizard, or else it recuperates with exceptional rapidity from any resultant weakness.

—R. W. SHUFELDT.

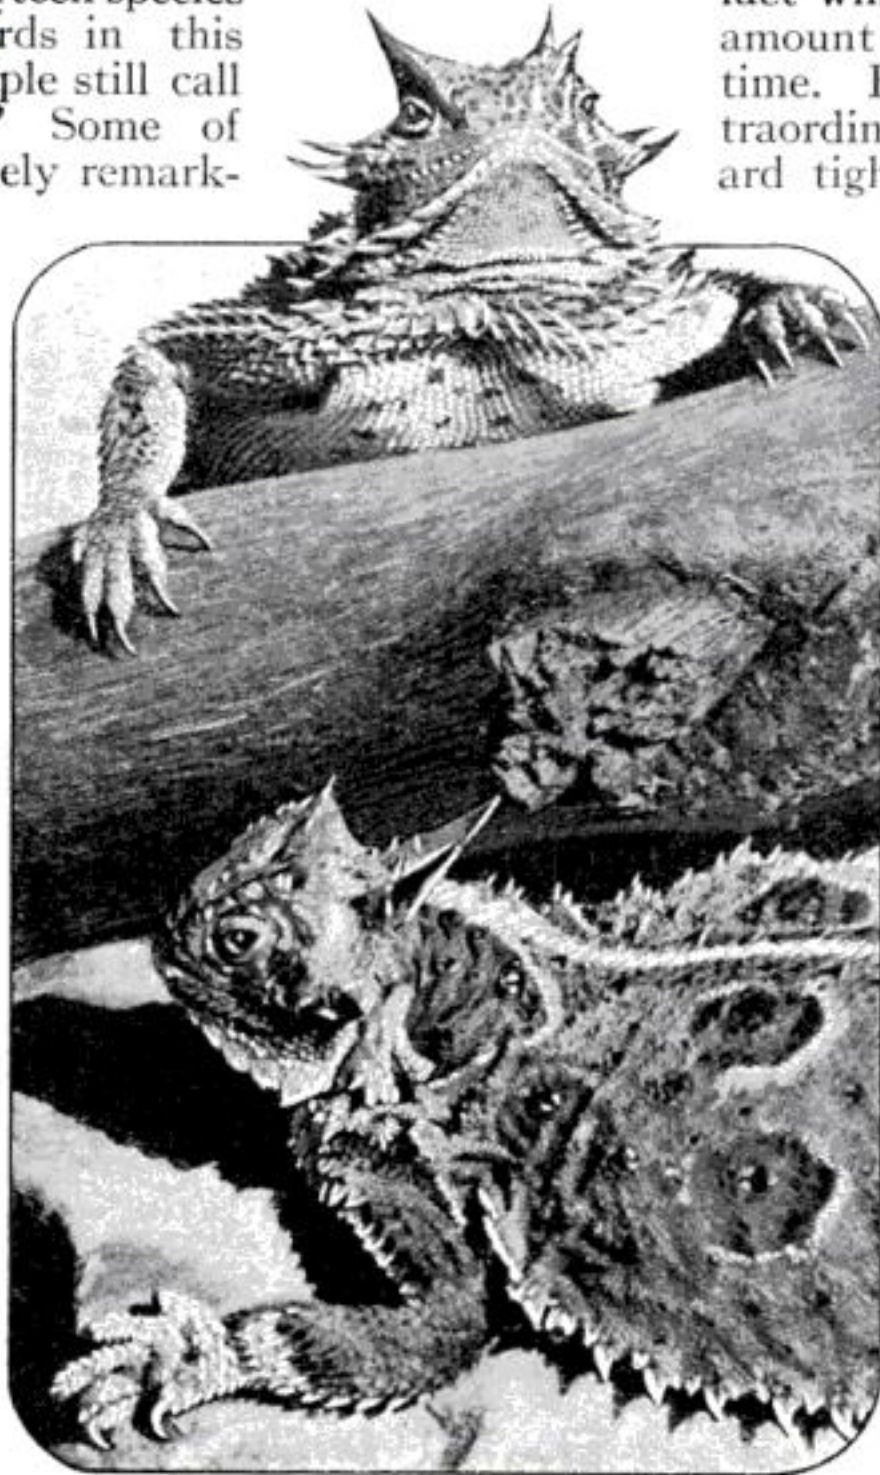

The Texas horned lizard, which shoots—not daggers—but streams of blood from its eyes

## A Little Bit of the Tropics in Our Own United States

ONLY at one place in the United States is there real tropical vegetation. Florida and California have what is called "sub-tropical" vegetation. In the midst of a desert in the extreme southern part of California is a true oasis. The oasis, Palm Springs, lies two hundred and fifty feet below the sea level. So hot is it there that there is a riot of vegetation all the year round. Enormous fig trees and mammoth grape fruit and oranges are always to be had. The lemons that grow there weigh two and a half pounds apiece. The responsibility for all this may be laid to a beautiful little stream which is fed by the Colorado River and which flows through the oasis only to disappear into the ground at its end.





"Snow of the Penitents" these peaks are called in the Andes. The snow is first blown into waves by the wind, and the hollows are deepened by sunshine

### Snow Honeycombs and "Penitents" of South America

THE most bizarre of all forms assumed by snow is probably that known as *nieve penitente*. In the high Andes of tropical Argentina and Chile are found innumerable pointed or jagged blocks of snow or glacier ice, which at a distance—especially in the moonlight—bear an uncanny resemblance to throngs of white-robed human beings. This appearance has given them their Spanish name, *nieve de los penitentes*, "snow of the penitents," and the international name *nieve penitente*. These figures are from four to seven feet high, on an average, though they are sometimes twenty feet.

The origin of "penitents" has been the subject of much controversy. Probably the snow is first blown into waves by the wind, and the hollows are undoubtedly deepened by strong sunshine, but it is not easy to see why the intervening mounds remain.

One plausible suggestion is that dust lying on the snow is blown into patches by the wind, and accelerates the melting of the snow beneath it, for the same reason that any dark object laid on a bed of snow sinks more or less rapidly under sunshine, its color causing it to absorb more solar heat than does the snow. An abundance of dust is deposited in mountainous regions from meteors.


Though the most perfect examples of "penitents" are found in the Andes, more or less similar formations occur in other mountains. Some remarkable snow "honeycombs" approaching the form of *nieve penitente* are produced in hot, dry summer weather among the glacier fields of Mount Rainier. The cups or hollows are a foot or more in diameter, and no water is seen anywhere, as evaporation is rapid.

### Hatching Chickens in Glass Globes by Electricity

THERE is always a certain element of risk in hatching chickens in an incubator, for unless the incubator is watched very carefully the temperature may get too low and the eggs spoil.

Electricity may be depended upon more than any other form of heat. A new incubator has been perfected which is heated by electricity. It offers an ideal method of hatching and brooding chicks. The incubator may be attached to any electric light socket. The distribution of heat in the egg chamber is always very even and there is a welcome absence of gases and fumes.

The electric incubator is provided with a glass globe so the chicken fancier may see just what is going on inside the incubator. The heat is given by an electric light which is so regulated that it gives the required heat intermittently. A thermometer is provided.

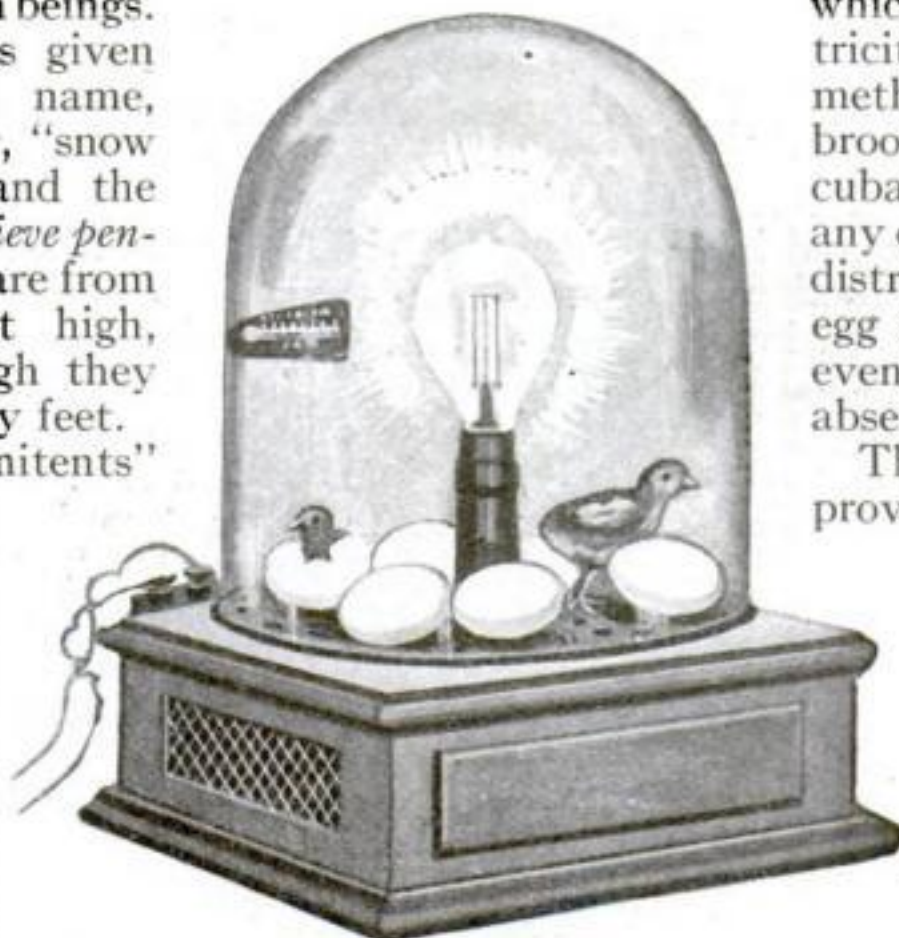


The incubator globe and stand may be connected with any electric light socket



## Artificial Respiration for Saving New Born Babies

A DEVICE that is effective in saving the life of new born infants who do not breathe properly, or fail to start breathing at all, is a special lung-motor with a capacity and an operating mechanism suited to the needs of the patients.

A mask pad fits closely over the face, while the operating mechanism is clamped to a table so as to be operated by one hand. The air goes into the lungs of the child at a very slight pressure. Fresh air enters by one passage and the expired air leaves by another so that they cannot mix. The lungmotor can be set at any one of three different capacities for different sized babies.

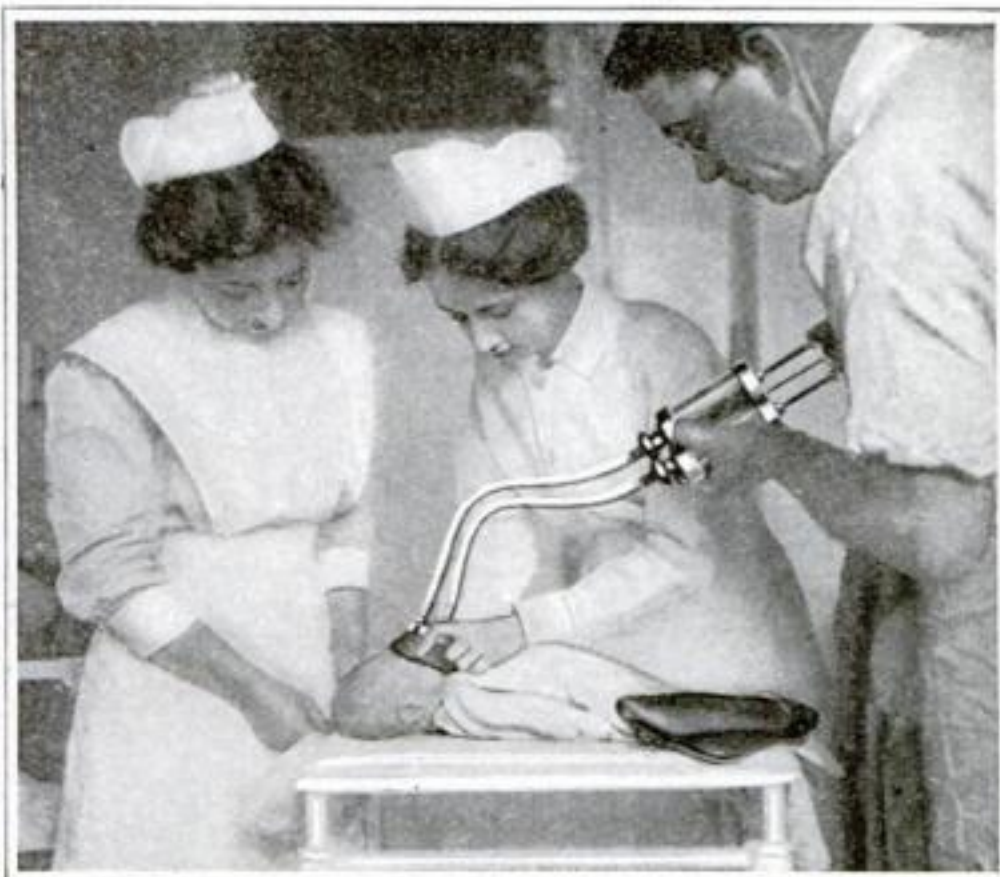

The lungmotor for the smallest human patients. Air enters by one passage and passes out through another

likely to be attracted by the little tassel that depends from your button. He takes hold of this in a friendly spirit and is much astonished to see a ribbon roll out on which are printed the words, "I belong to No. —, where are you from, Bill?"

At the same time a little bell rings merrily. If the wearer of the badge is an Elk, the bell rings eleven times. This mystifying performance astonishes the friendly stranger.

The communicative badge is a very simple device. The bell-ringing mechanism and the winding spring are merely a little set of watch pinions with a ratchet and a bell. These fit

into the space on the underside of the button. The ribbon is wound up on a tiny drum, as indicated in the illustration below.


## A Badge Which Tells the Story of Your Life

IF you are thinking of attending one of those conventions where every other man you meet is likely to be a brother Elk or Moose, get yourself one of the new explanatory badges. A California man once went to such a convention and got so tired telling others where he came from that he went home and invented the new badge, which tells the whole tale.

This badge looks like any ordinary celluloid button but it does not behave like one. When the curious stranger comes up to interrogate you, his attention is

## A Parsec—the Greatest Known Unit of Measurement

A "PARSEC" is a distance that the most zealous pedestrian would hardly care to walk before breakfast. In fact it doesn't enter into the sphere of human operations at all, but it is a handy unit in astronomy. It is equal to 20,000,000,000,000 miles and is the distance traveled by light in 3.3 years. A few of the nearest stars are from one to five parsecs distant from us, but most of the stars that dot the sky are scores or hundreds of parsecs away.

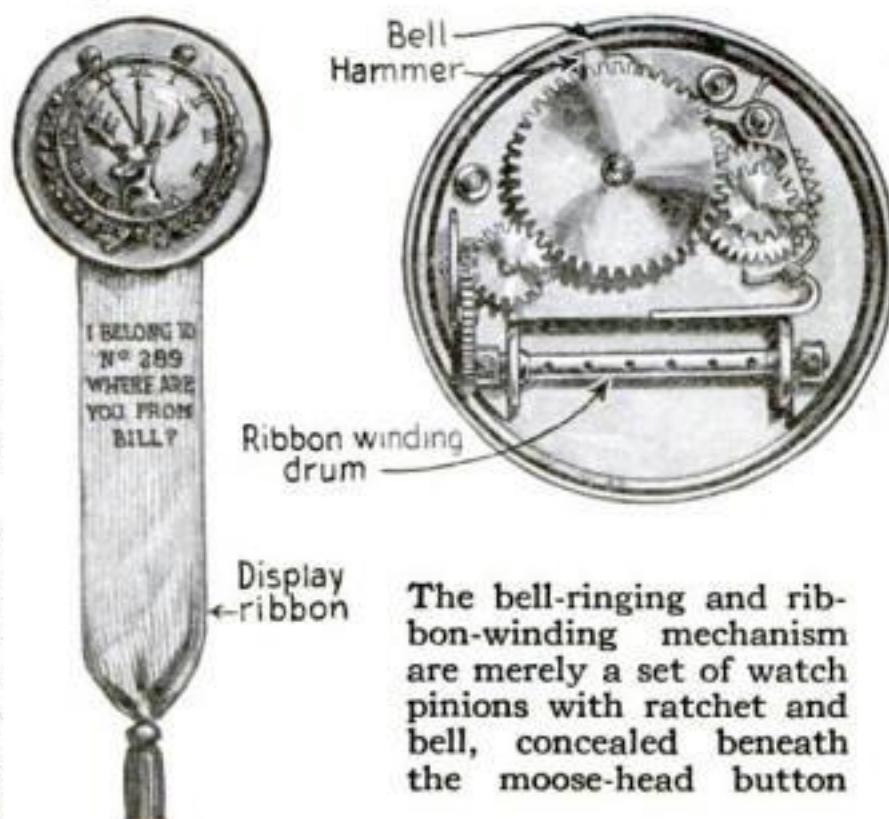

The bell-ringing and ribbon-winding mechanism are merely a set of watch pinions with ratchet and bell, concealed beneath the moose-head button




# How New York City's Health Department Makes



## Preparing the Bacteria

In the preparation of typhoid vaccine the bacteria are grown in the bottles you see on the table. The germs are killed by pouring a salt solution over them. The bottle on the shelf contains the salt solution which is being siphoned into the bottle containing the colony of typhoid fever germs.

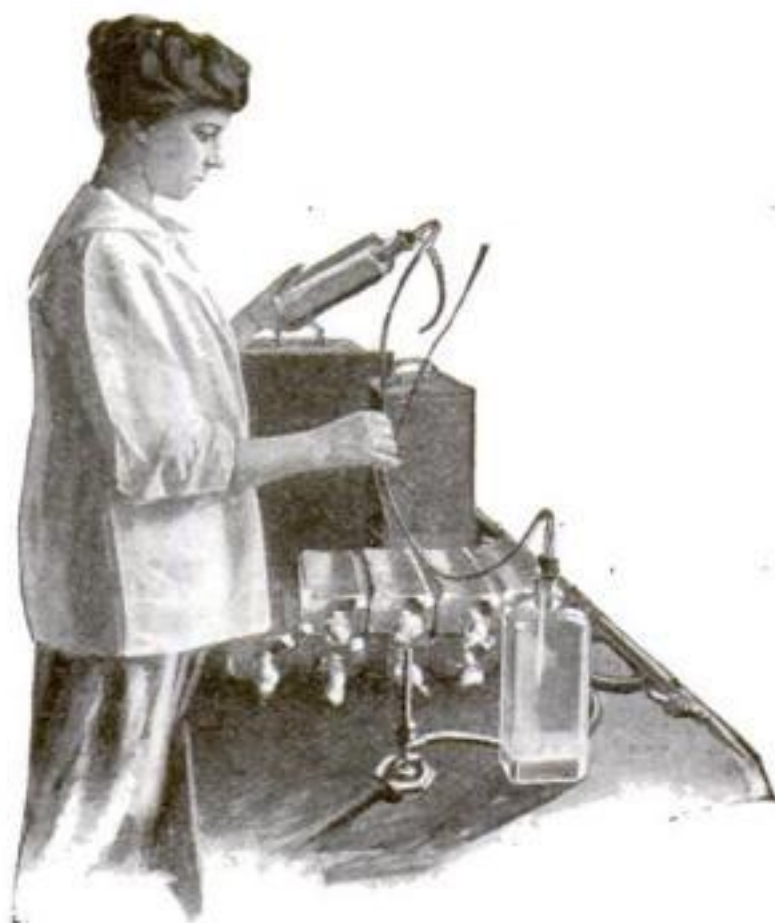

## The Final Step

The finished product containing millions of dead typhoid fever bacilli is poured by means of a siphon into large bottles. The vaccine is kept in a refrigerator until it is needed for use. Note the milky appearance of the vaccine.



## Transferring the Bacilli

Tetanus bacilli occur in dust, earth and manure. They do not grow in the presence of oxygen and are particularly dangerous if they get into deep wounds. The young lady in the photograph is drawing up tetanus bacilli from the bottom of a test tube by means of a glass tube which she holds in her mouth. Thus the germs are transferred from tube to tube.

## The Resultant Powerful Toxin

Here the large flask is being inoculated with tetanus bacilli. The small wire basket at the right contains test tubes in which are the tetanus germs. The flame which you see just to the right of the flask which is being inoculated is kept burning so that any instrument may be immediately sterilized after exposure.





# Serums and Vaccines for the United States Army



## A Glimpse into the "Shop" of the Laboratories

This photograph shows the refrigerator in the Bacteriological Laboratories of the Department of Health of the City of New York, where serums, vaccines and antitoxins are prepared for the use of the United States Army. Much of this material will be shipped to the front. In the containers and bottles which you see on the shelves is \$150,000 worth of material. There is enough diphtheria antitoxin to treat 75,000 men, enough tetanus antitoxin for 200,000 men, enough smallpox vaccine for a half million men, enough typhoid fever vaccine for 25,000 men and enough antimeningococcus serum to treat 2,500 men suffering from cerebrospinal meningitis.



## Bleeding the Horse to Obtain the Serum

After the horse has been inoculated with the disease poison in gradually increasing doses he is bled and his serum is found to be antitoxin. This is administered to human beings and renders them immune to the disease. The horses are kept in the pink of condition. At periodic intervals they are given a rest. During the rest periods they are turned out to grass. When thoroughly rested, they are inoculated again. Some horses give more antitoxin serum than others. The same horse may be used at several different times for the preparation of distinctly different antitoxins.

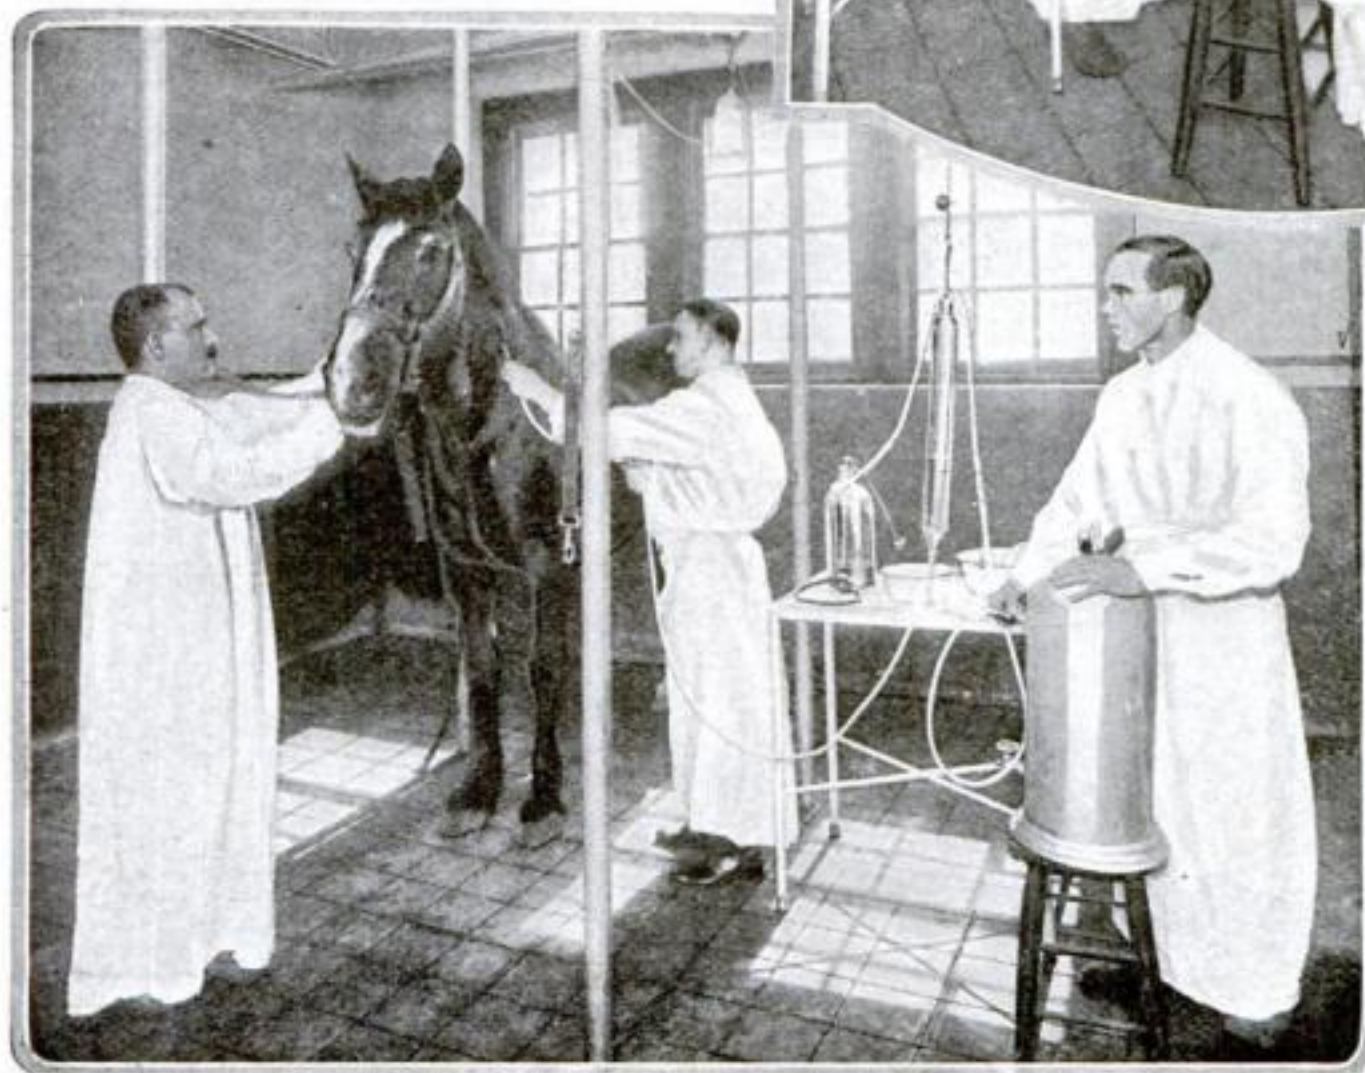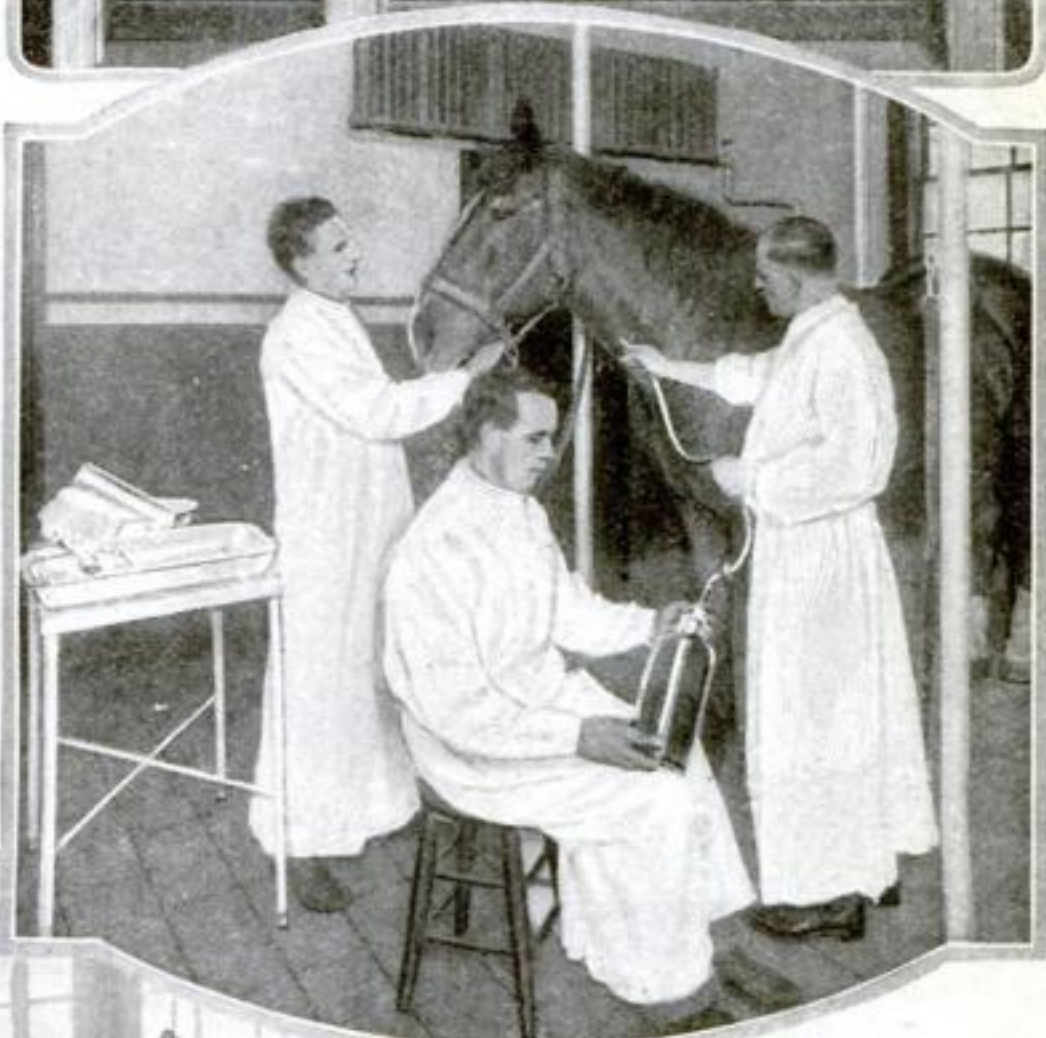

## Inoculating a Horse with Toxin

One of the 73 horses in the stables of the Department of Health of the City of New York at Otisville. This horse is being inoculated with diphtheria toxin. Small doses gradually increased render the horse immune to diphtheria. Horses are used in the preparation of diphtheria, tetanus antitoxin and antimeningococcus serum.




# You Can't Hide Anything These Days. The



This is not a spook photograph of the ghosts of carnations. Nor do the three flowers represent specimens made from extremely thin tissue paper. It is an X-ray photograph of fresh flowers. Note how clear is the tracing of the veins in the petals



If you suspect your socks take an X-ray picture of them. The tin used to weight them will show up as it did in this picture. These socks are literally tin plated. The fiber is covered with a deposit of tin

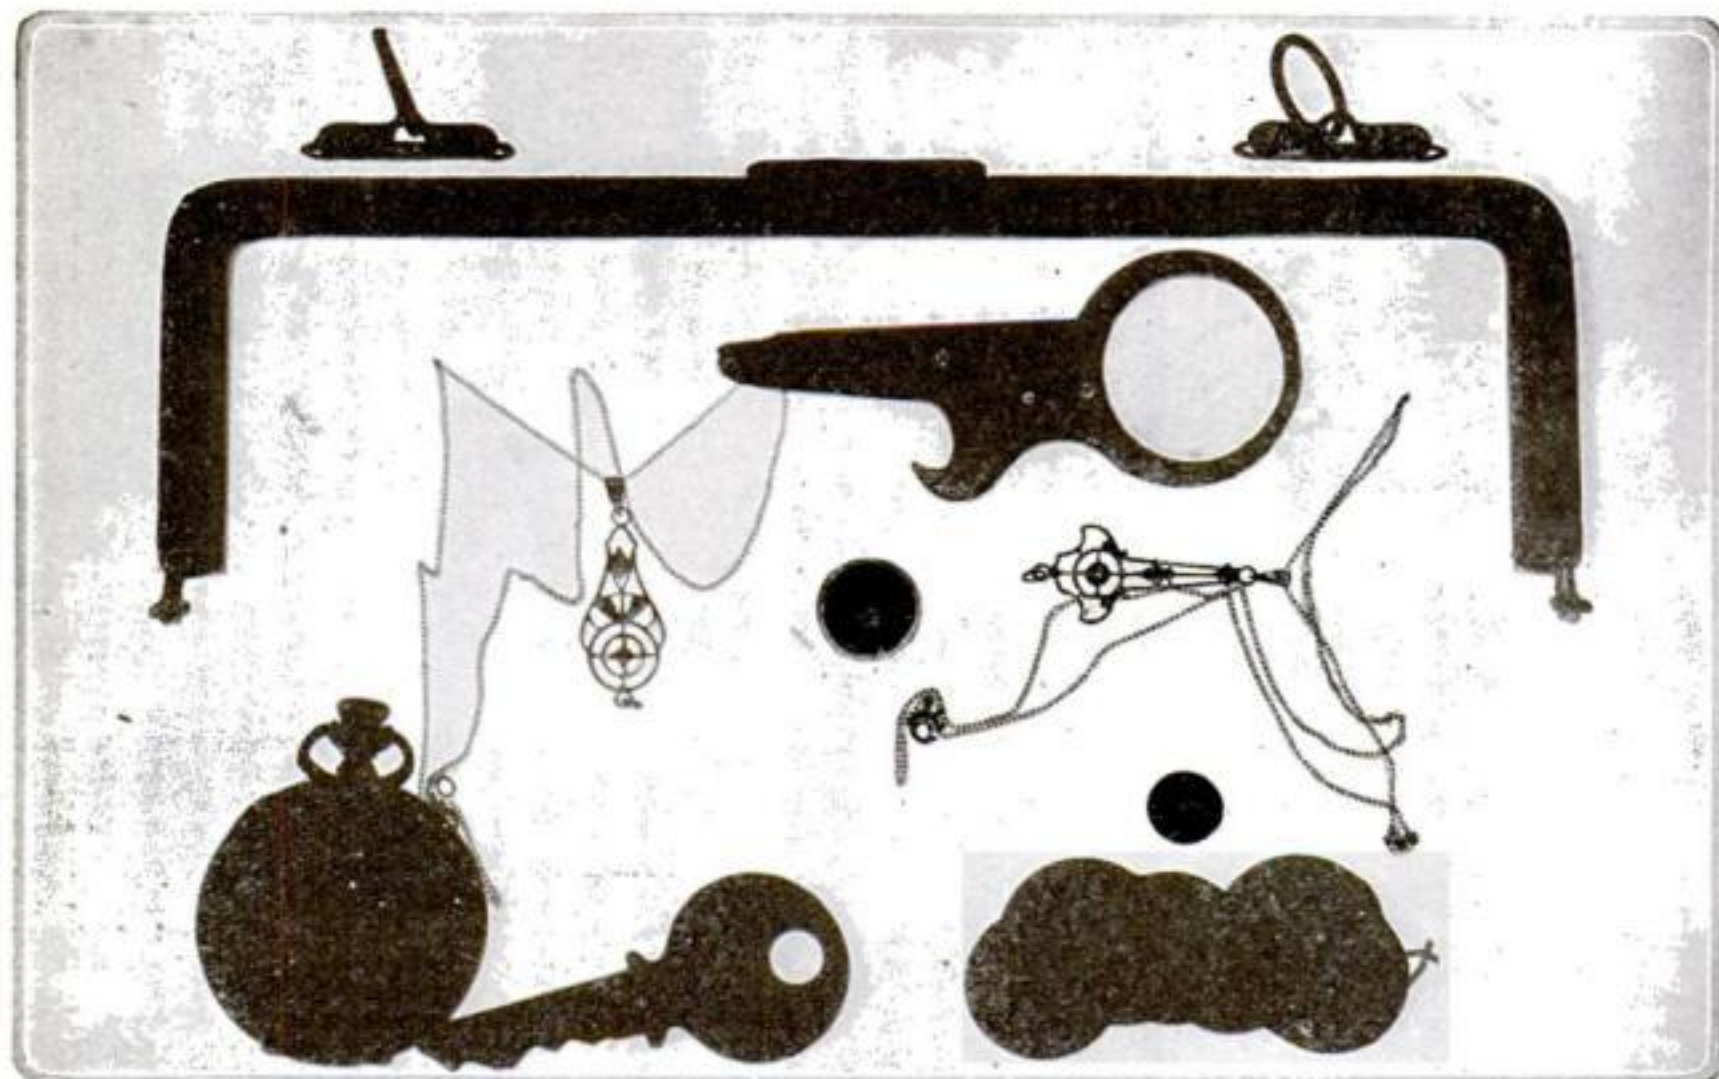


Photos by Dr. Albert Franklin Tyler


How the eye of the X-ray can see everything a lady carries in her handbag. In this bag are a watch, a change purse with a group of coins, a bottle opener, two lavaliers and a key



# X-Ray Reveals Even the Tin in Your Socks

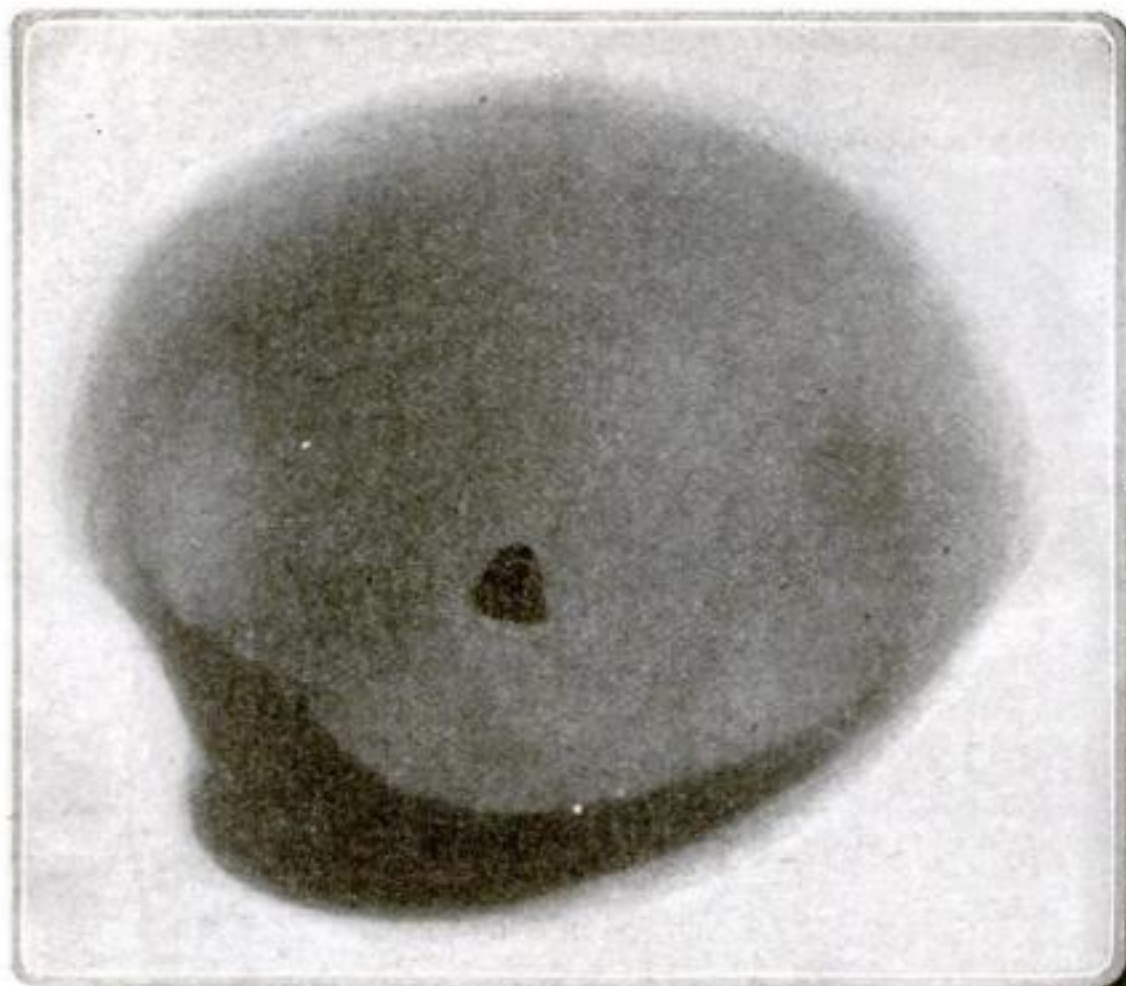


An X-ray photograph of a mollusk showing a pearl under the shell. The pearl looks black in the picture, not because it is black, but because it is opaque. The other portion of the photograph which shows up black is simply the shadowed section

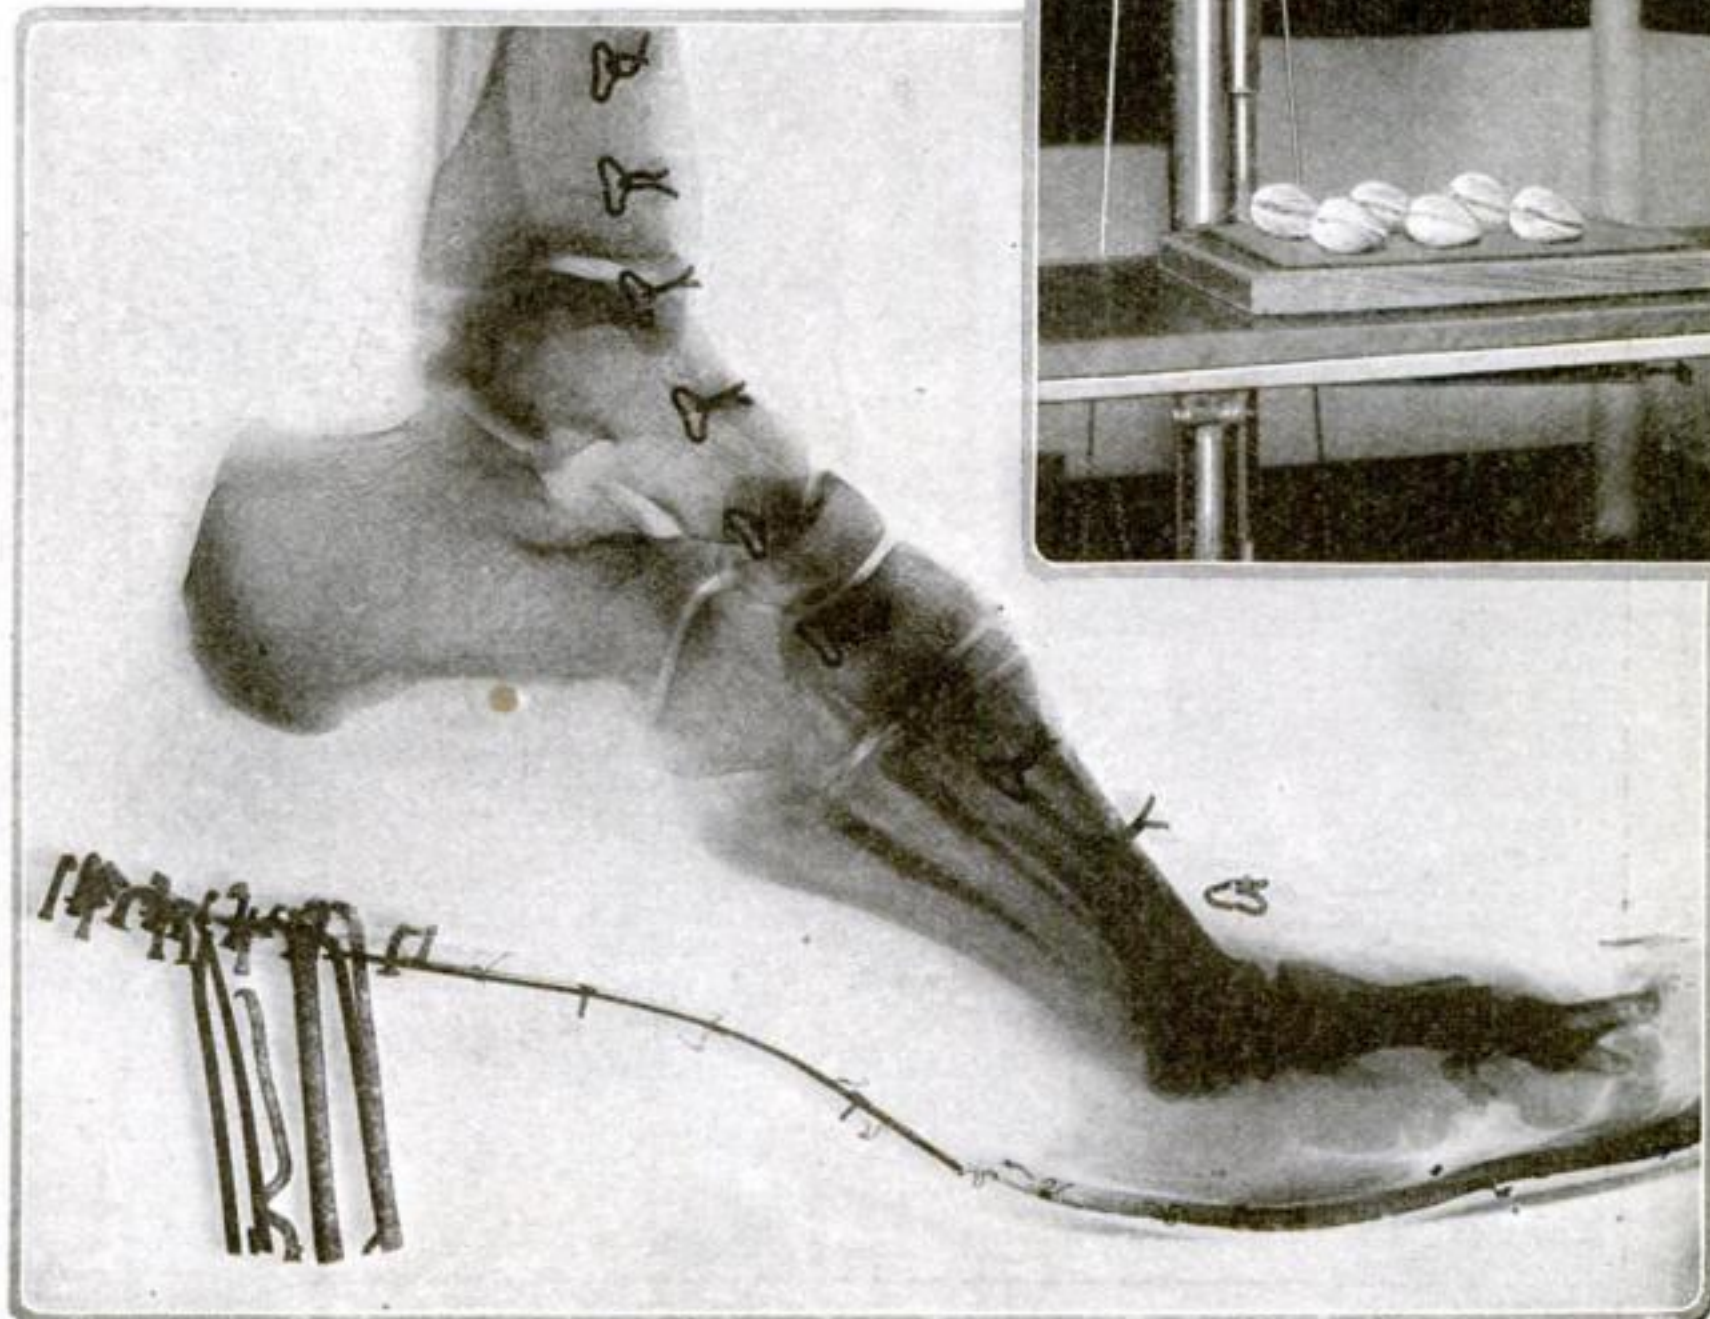

In a photograph of the shod foot the X-ray shows the bones of the foot, the metal eyelets for the laces, the nails in the heel and the wires and nails around the sole



## French Women at Work on an Observation

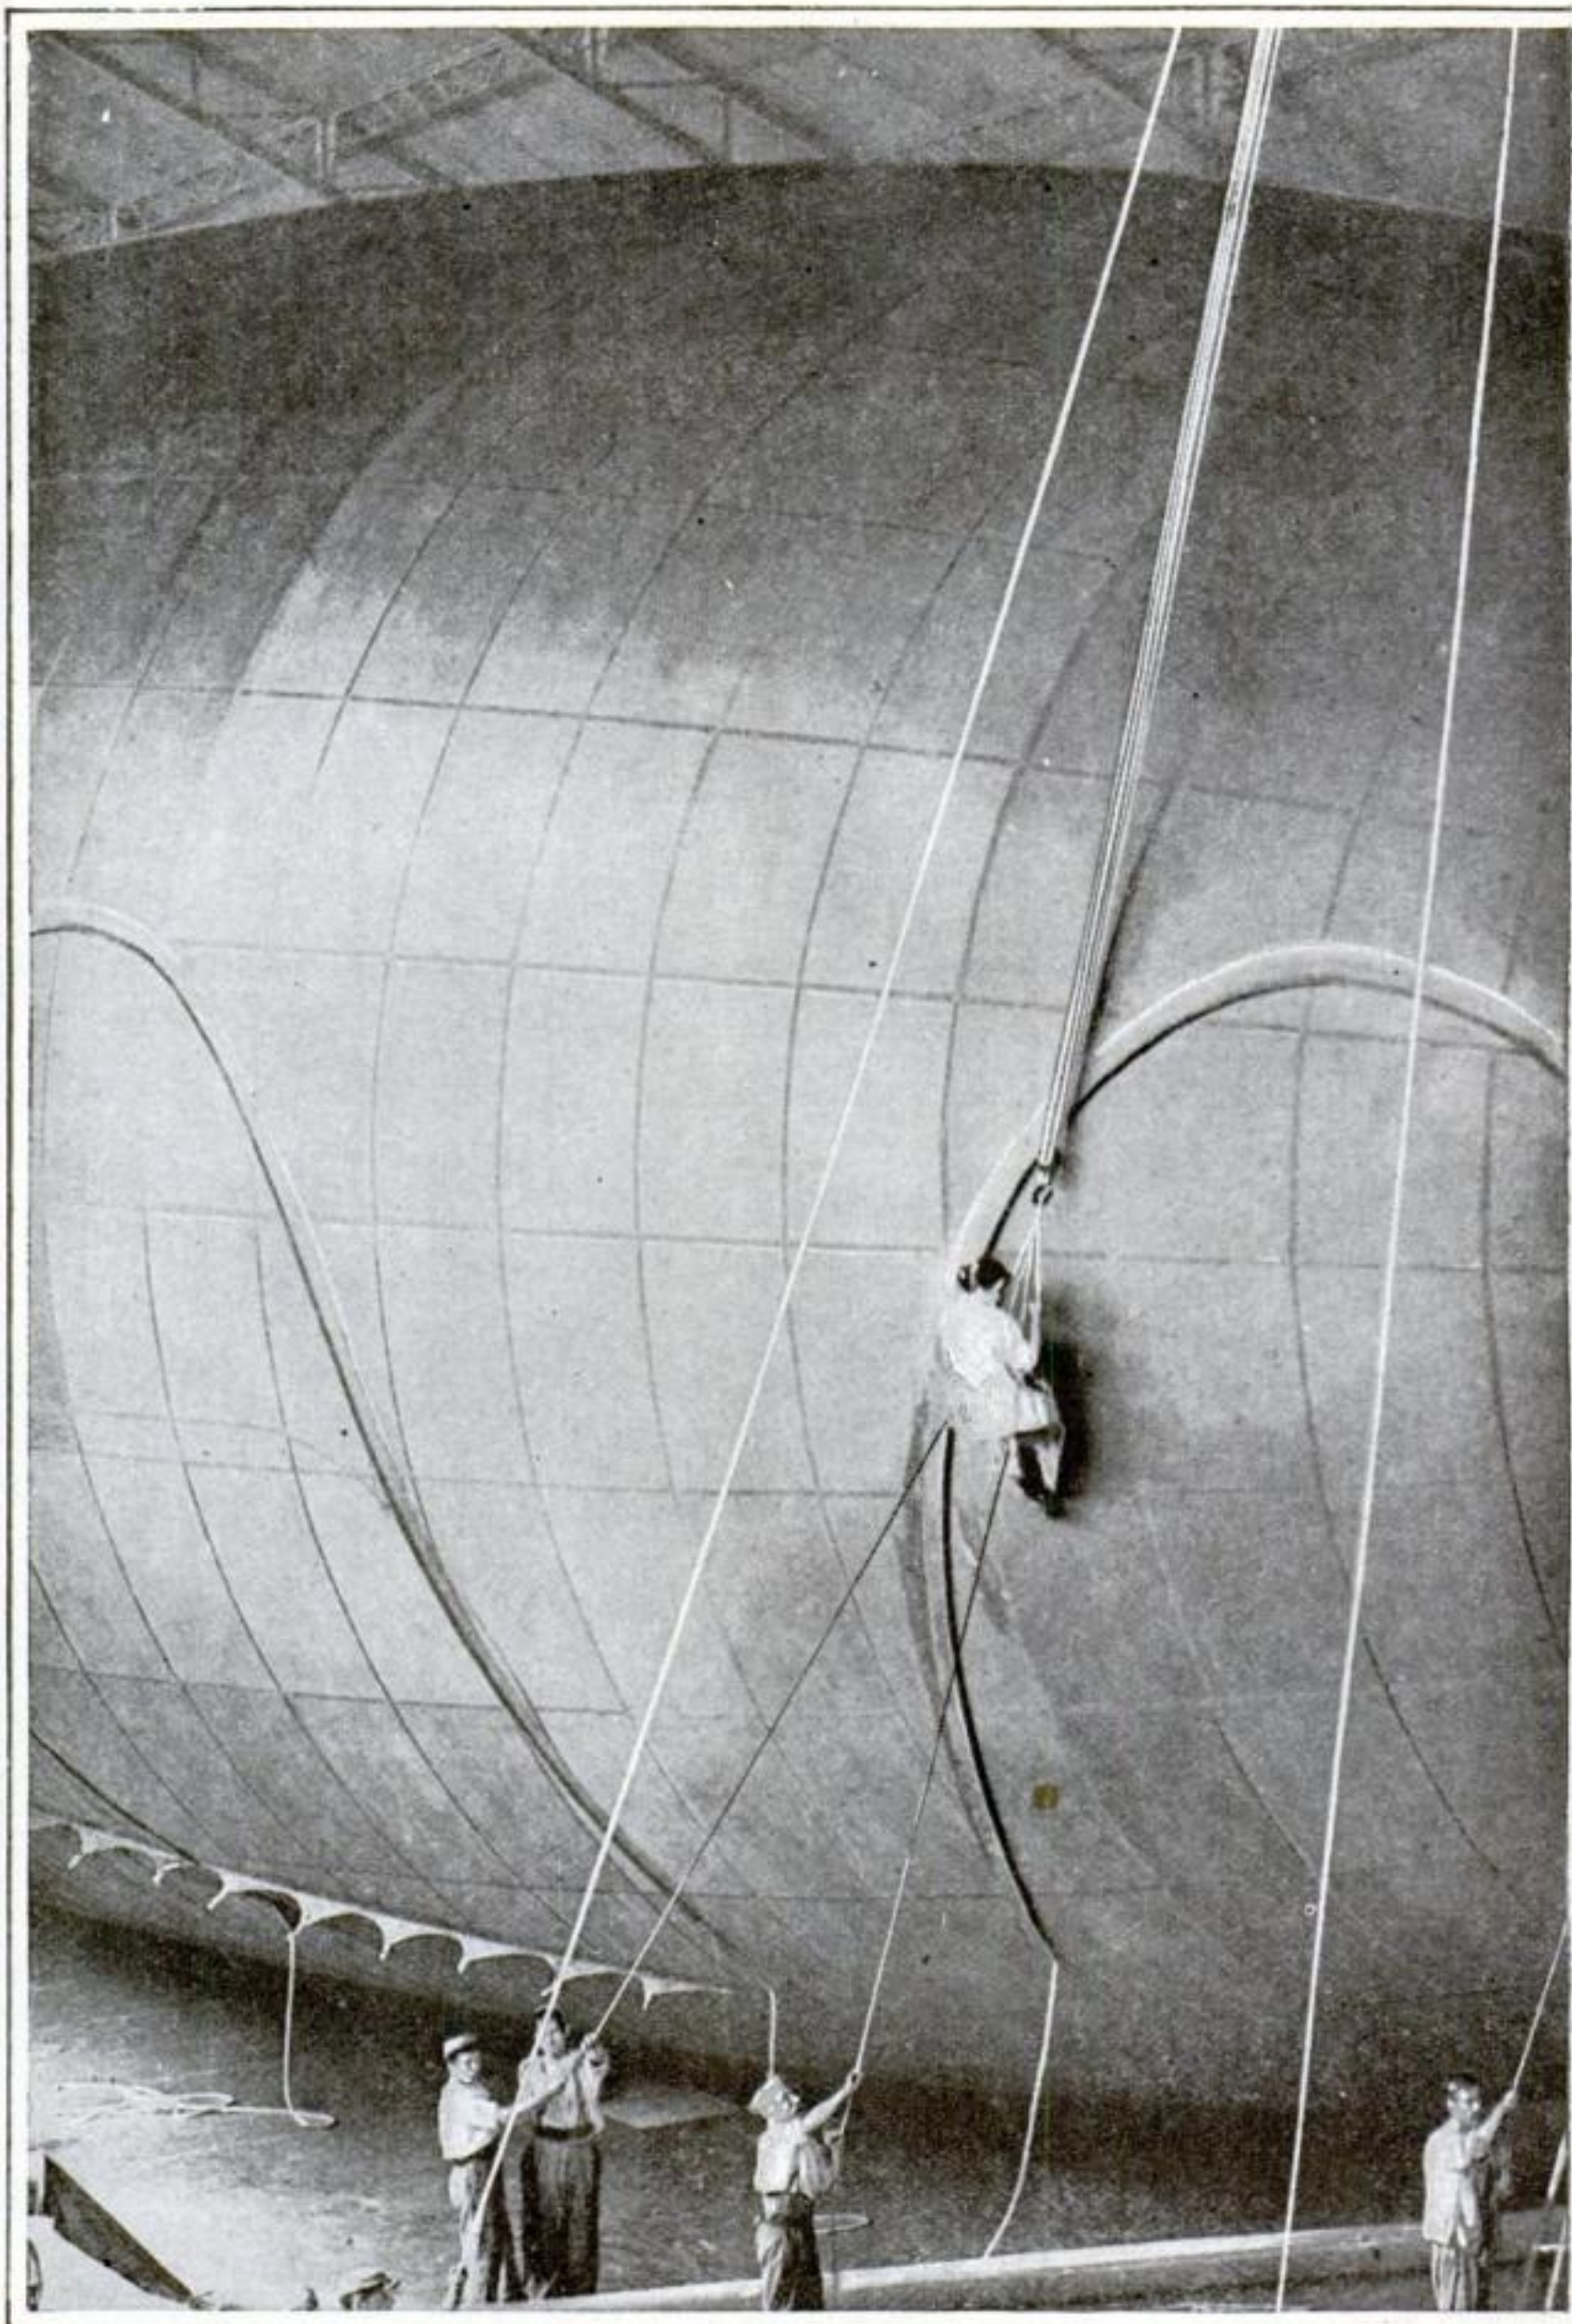


French Official Photo

Even airship factories and sheds employ women. Here are some slung in "cradles," engaged in fastening bolt-ropes on the fabric of an observation-balloon. As soon as such a



## Balloon Near the Western Battle Front

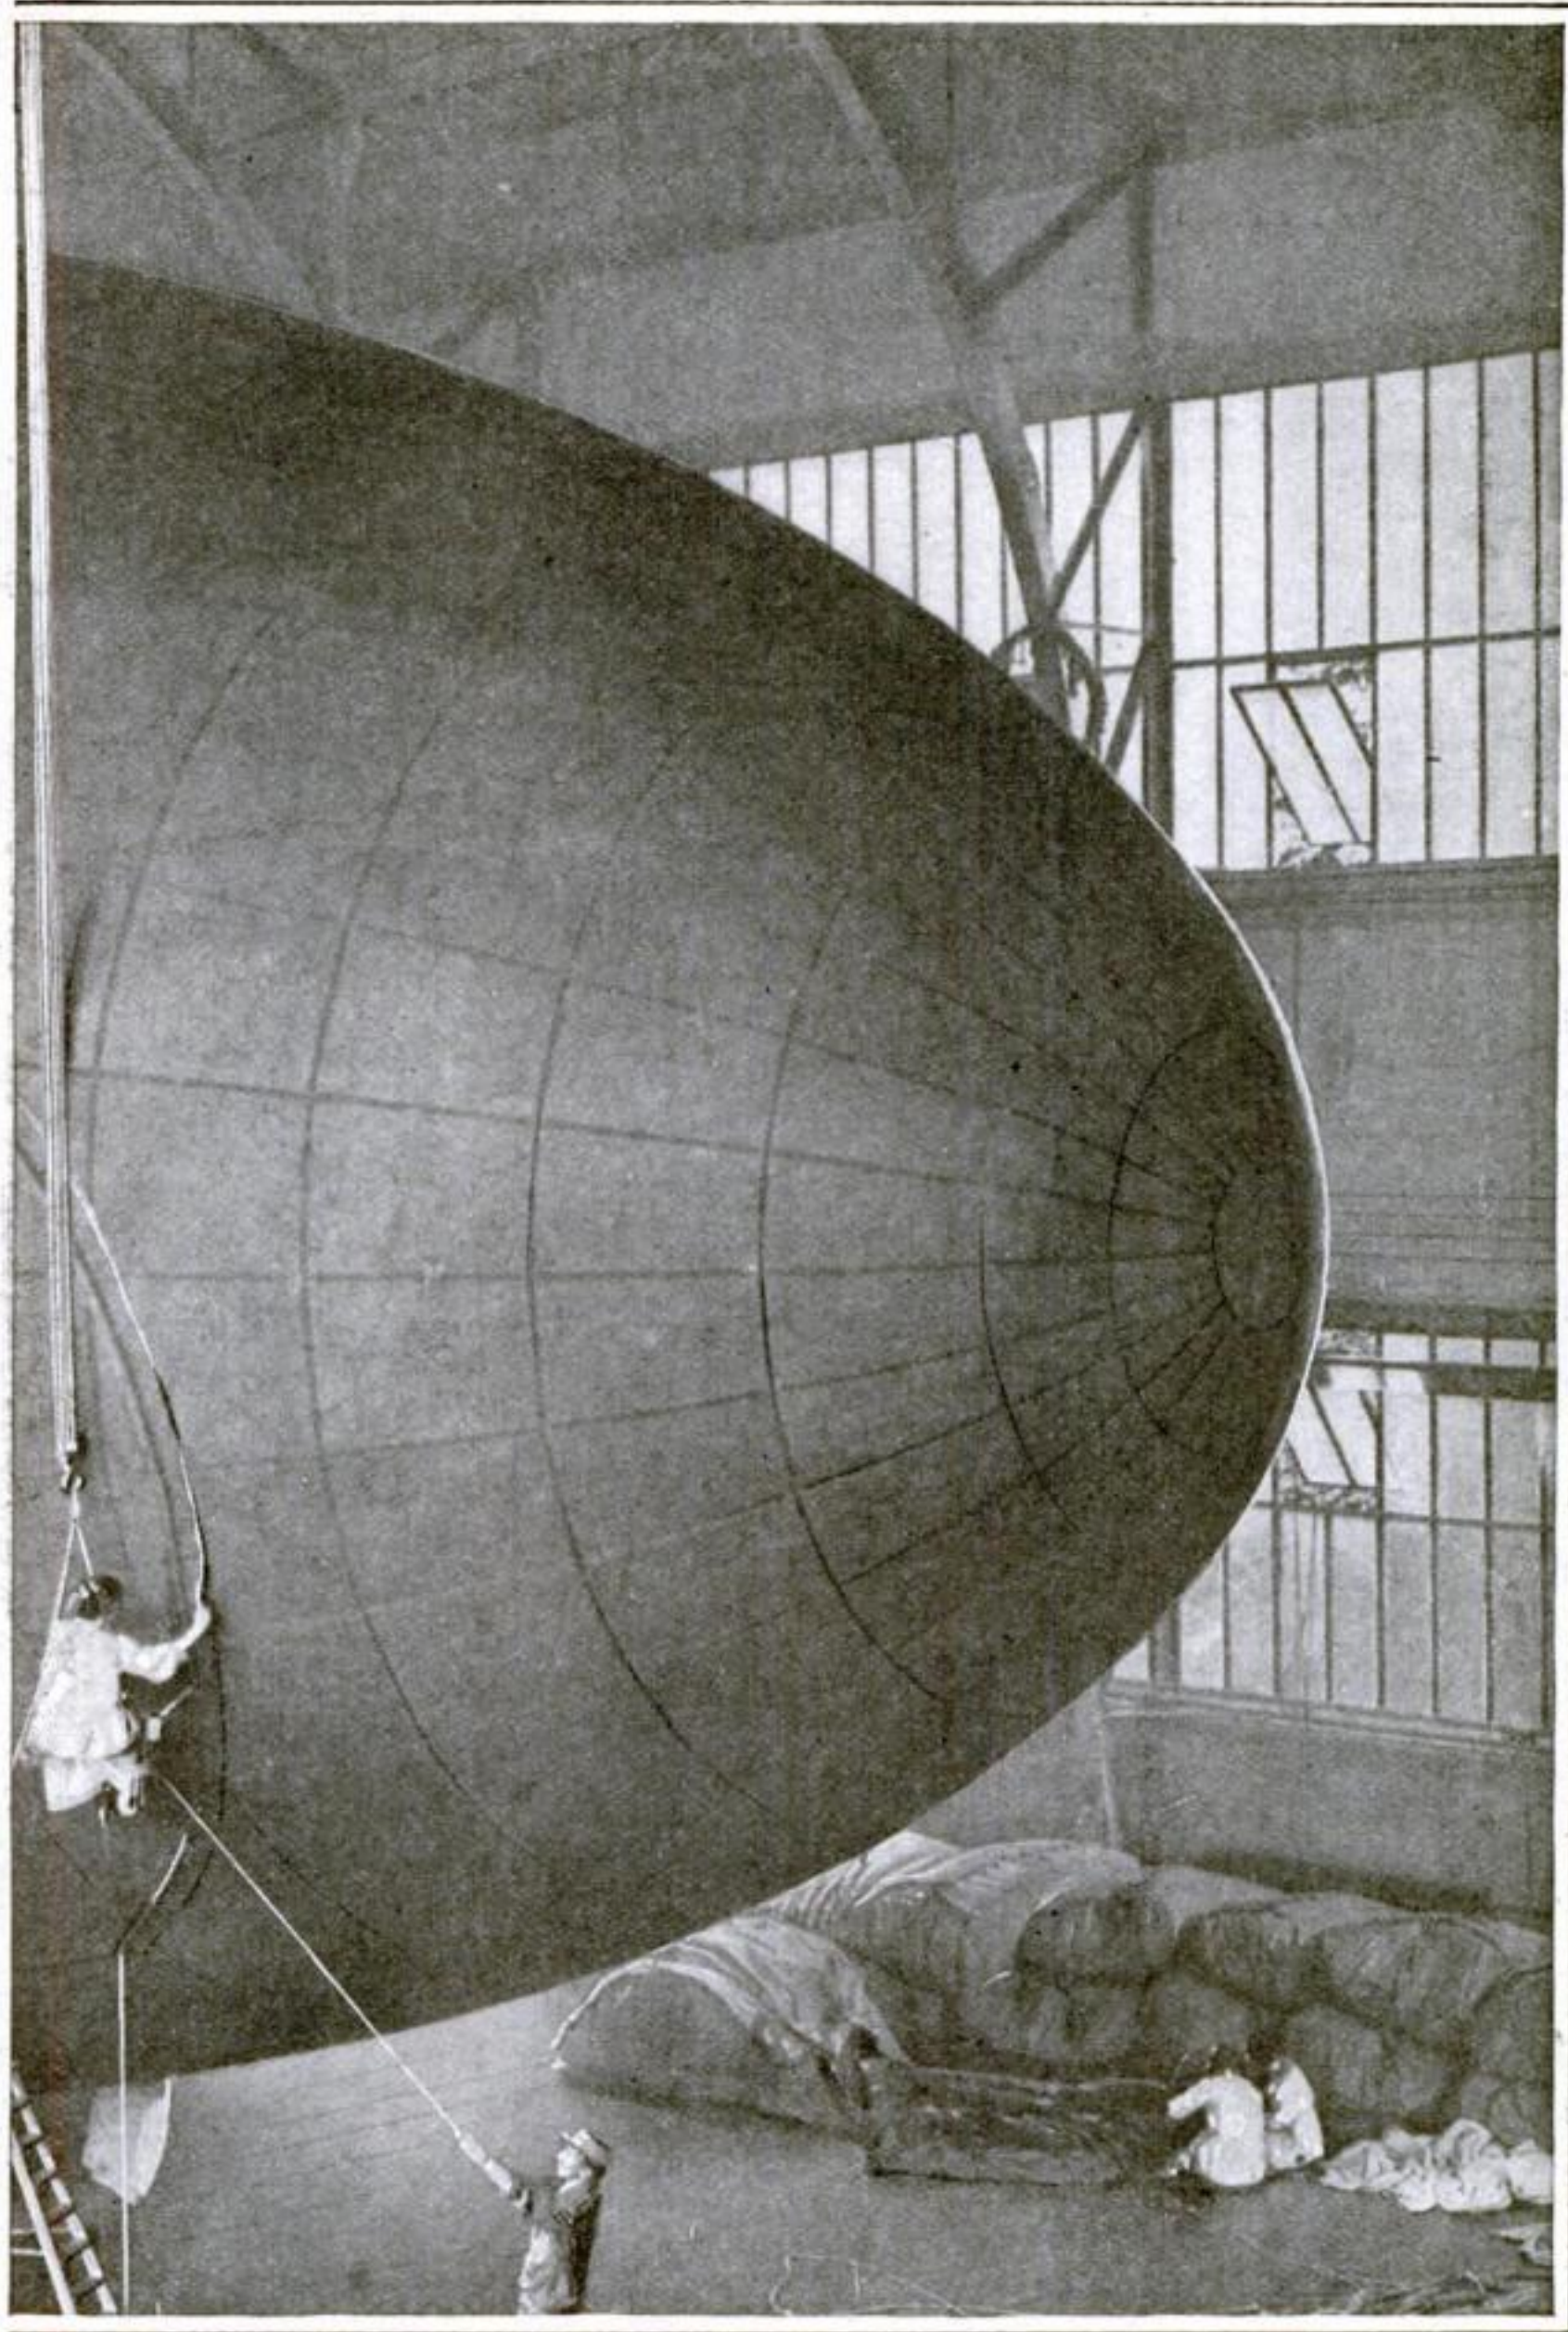

balloon appears it becomes a shining mark. It rarely stays up long undamaged. Hence these women are often called upon to make repairs within sound of the big guns



# Four-Footed Gallery Gods That Love A Curtain Call



Enter the heroine in laces and soft satins




In center picture: Getting in trim for a boxing match. He punches the bag with both his paws and his nose and even with the back of his head occasionally

Photos © Press Illus. Serv.



This little dog has lots of confidence in his master. This trick requires a very good sense of balance

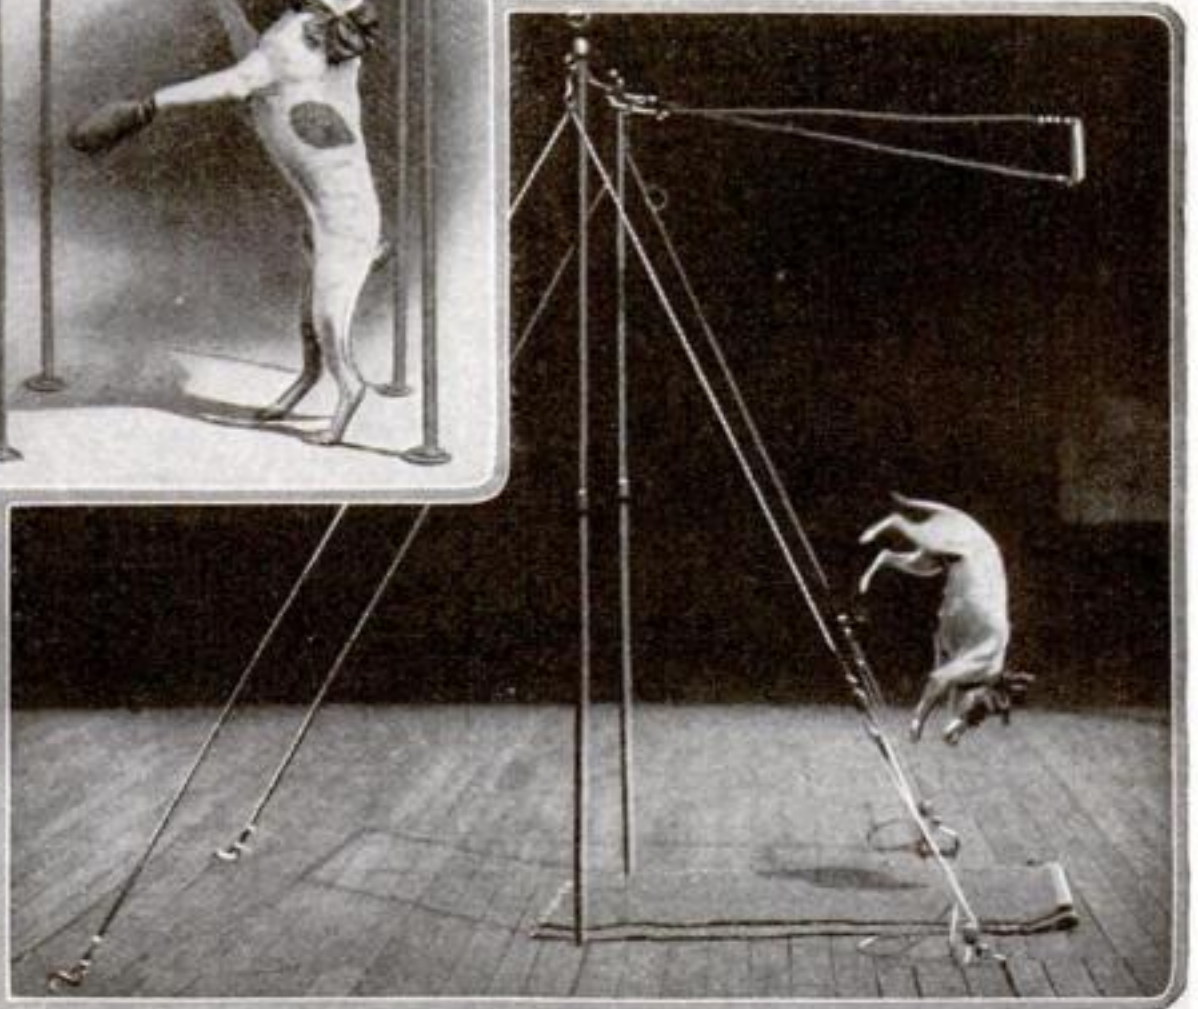

Many a human acrobat would envy the small dog shown above his ability to perform on the trapeze



Mr. and Mrs. Canine take the baby for an airing. Notice the proud expression on the faces of both papa and mama as they pose



A boxing match between two vaudeville stars. They are evenly matched as to weight and skill and handicapped as to clothes



## Making Patches for Pershing's Boys



Khaki uniforms will wear out but that does not bother the Allies or their army tailors



Broken shoes are not discarded. They are soaked, scrubbed, and mended like new




When the soldiers' kits are all repaired and ready to be returned they are carefully examined by special inspectors to see that everything is shipshape

Bicycles and machine guns are never scrapped while any part of them remains. The army smiths make them over into new ones





## Comfort for Our Soldier of Many Ingenious Minds. Kits Containing Almost Buttons and Brushes, Soap,

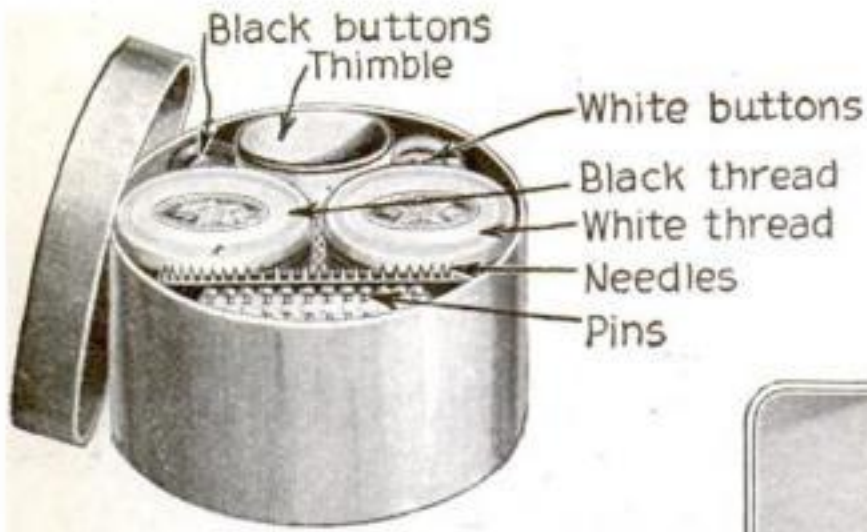

No one can take mother's place in sewing on buttons, but with this little sewing kit on hand, it is as easy to sew on a button as to depend on a thong of dried grass. Pins are also provided in the kit

Our soldier boys are sensitive about their personal appearance and pride themselves on their neatness after the rough work is done. Promotion, too, is often influenced by such things, it is said



The business of sewing up a tear is almost as strenuous as the military drill for which this soldier is grooming himself



It is part of a typical American soldier's hygiene to keep his nails cropped and cleaned, however rough his work may be



# Boys Has Been the Objective There Are Now Compact Every Necessity, Including Powder and Stationery



The fountain pen takes its place with the sword in our boys' equipment. Anything will serve for a desk—even a tin pan



A shave is a shave whether at home or in camp, provided you have a good safety razor

This case holds stationery, a steel mirror, extra buttons, and adhesive plaster and every convenience for the daily care of the teeth and nails



Talcum powder is a necessity to the infantry, whose heavy shoes and long marches are hard on the feet





Sometimes what is meant to be a smart left swing at the head of an opponent results in a badly broken forearm for the swinger



Watch your blow, boys, when you land a left swing at the body. The other fellow's elbow may drop suddenly and break your hand



You can get into lots of trouble with that ambitious left arm. A left hook at the head like this may easily mean a broken thumb

Do you want to land that hook? Take a good look at this photograph, memorize the position of Van Court's hand and go to it


If you're in the army you'll De Witt Van Court, boxing with how to do it without hurting taken for the Popular Science former boxing instructor of








A way to swing at your opponents' head with your right and regret it afterwards while you are nursing a broken forearm

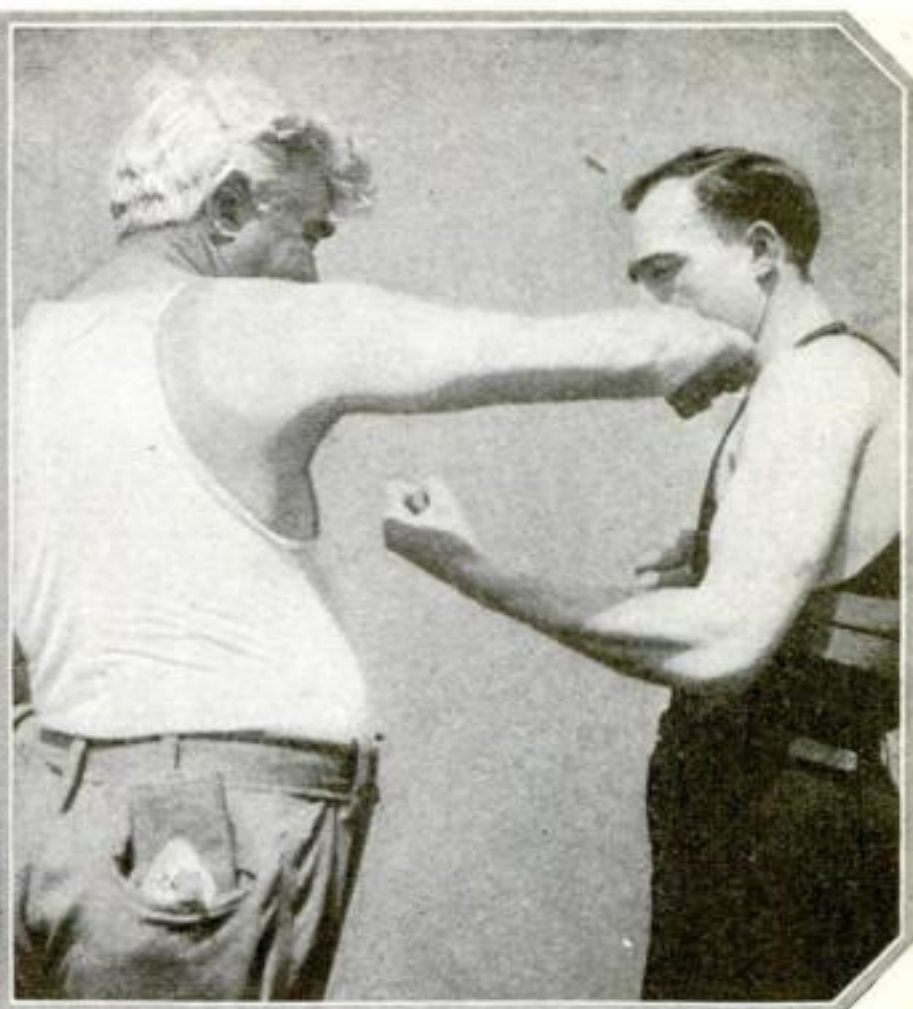

And here is just the sort of good right hand punch that might have put him out for the count and never would have hurt you

box. The famous instructor, young Vance Veith, shows you yourself. These pictures were Monthly by Carroll Van Court, the Pasadena Athletic Club

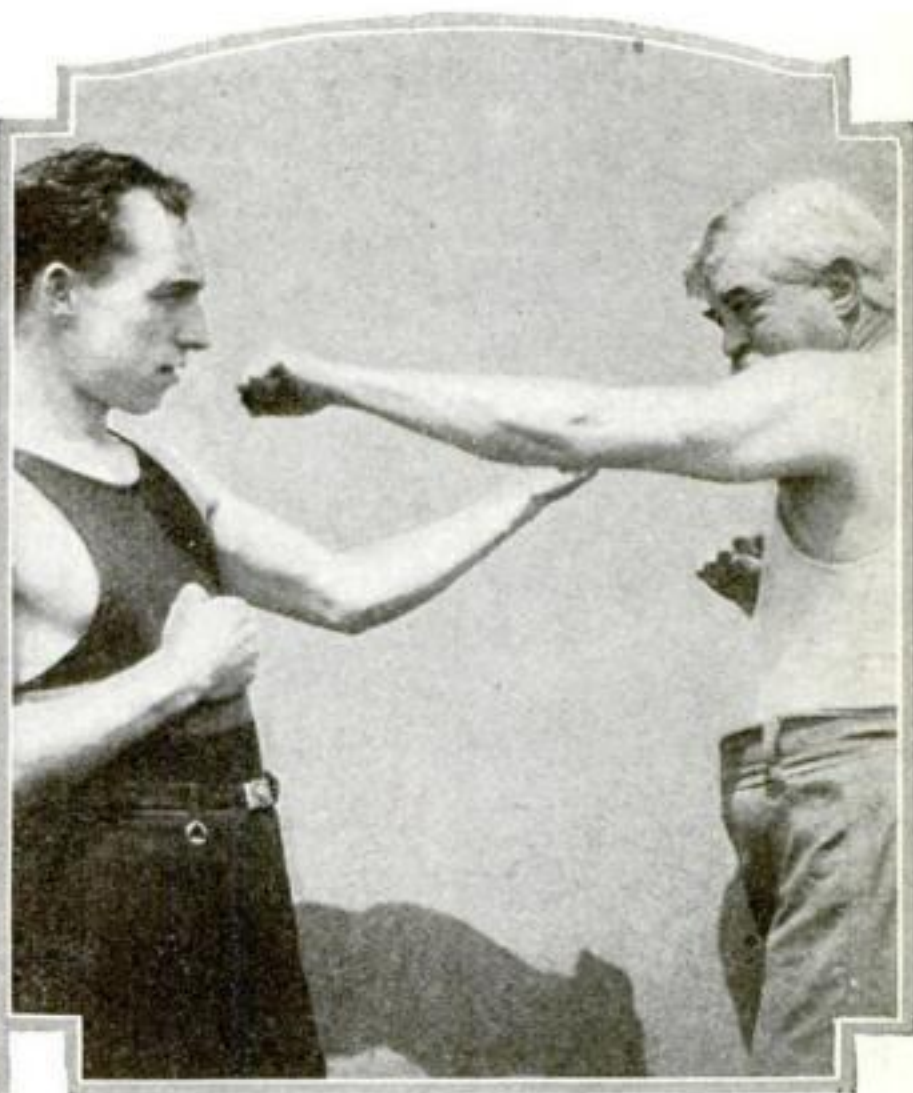

When you want to lead a straight left, look at this picture before going into action. This illustrates just what you should not do

And then examine closely this photograph on the left, for this shows the correct position for all straight lefts at the head






## How New York City Secures

In the congested districts of New York City many families live in such crowded quarters that the children never get enough fresh air. The Children's Aid

Photos © Brown & Dawson



Italian children at an open air school on the roof of a tall building. They are all children who are underweight. A term in this school soon changes them into lively, wholesome youngsters

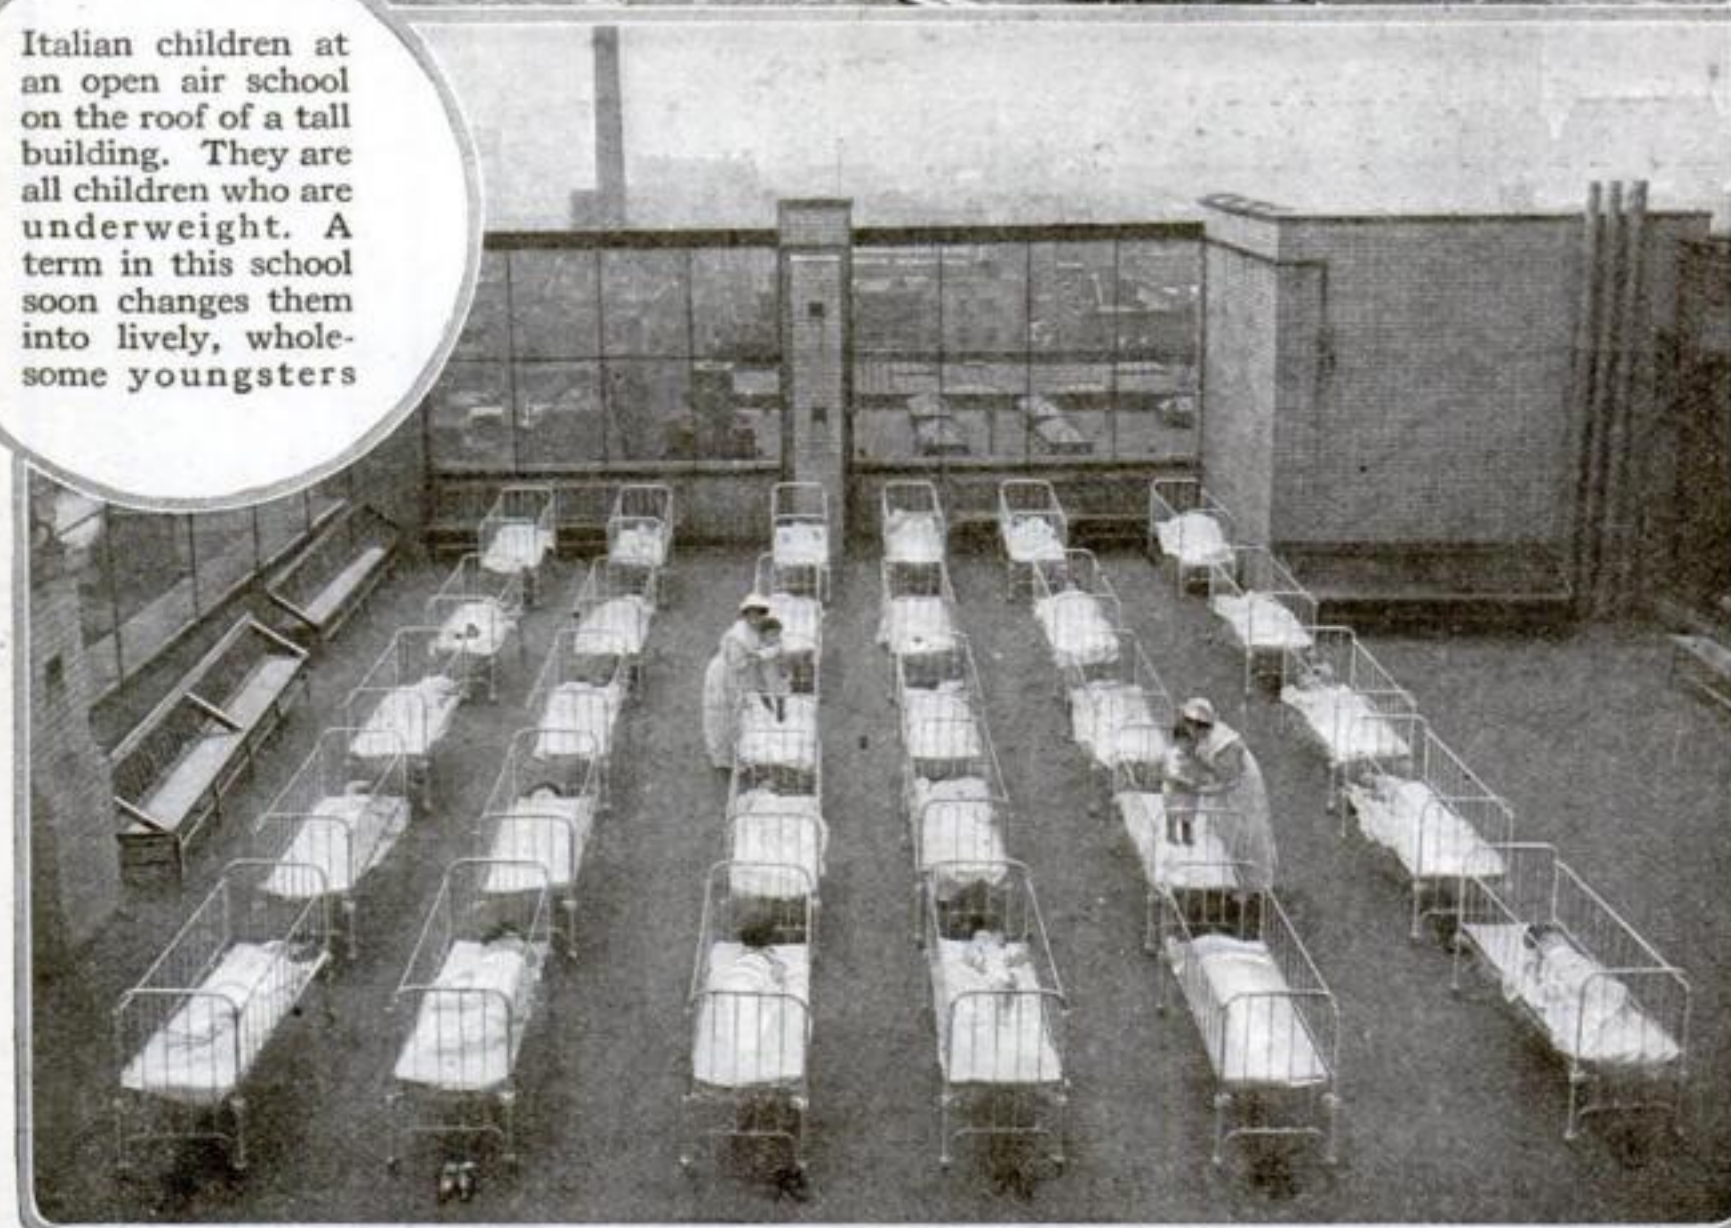

Small children sleeping in the open air on the roof of a New York day nursery where they are cared for by special attendants and trained nurses while their mothers are out working



## Red Cheeks for Its Anemic Children

Society has established an open air school and a day nursery where weak, underweight children are taught in the open air. They gain rapidly in general health and strength on the sunny roofs, are not taken away from their families and keep up with their grades in the public schools



Crippled children have a school away up above the house-tops on a sunny roof. They are taught crafts such as jewelry making and embroidery. Between classes they take a nap in the fresh air



Children of the Italian school gaining health and strength by a long rest right out in the air and sunshine. First they have classes, then a good midday meal and the outdoor nap





# Steps in the Making of Rifles and Bullets



James, here, is busily engaged in assembling the butt. He slips the wooden butt-stock into place and starts the metal parts into the shoulder butt by hand

The butt-stocks are roughly formed in the carpenter shop. Before being polished, they are cleaned on large buffing wheels like those in the top picture at right


In center picture at right: Grinding the butt-stocks so the metal parts will fit accurately. Two butt ends are inserted and ground in the machine at one time

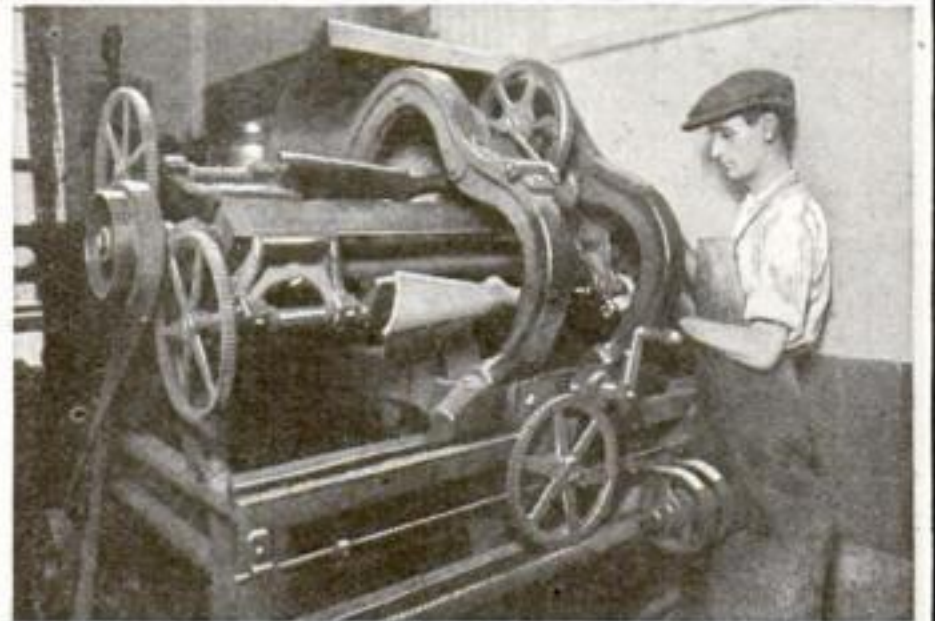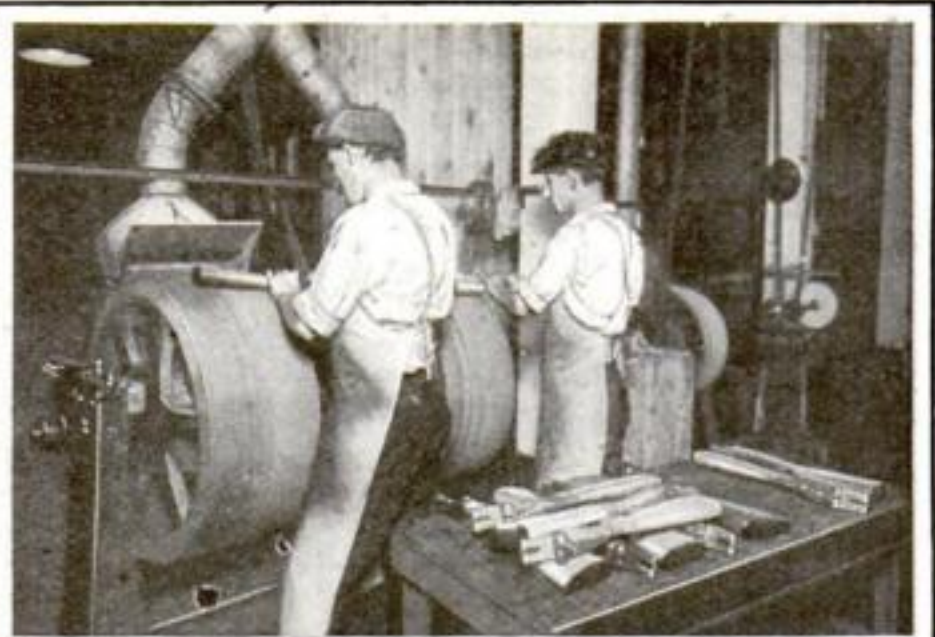

Photos © Press Illus. Serv.


Above: Stock butts being finished and polished. They are varnished, dried and rubbed down with emery cloth. This process is repeated as often as may be considered necessary to secure the final polish, which must be very high and of lasting quality

Now for the wonderful work on the magazine. Cavities and slots are cut out of solid metal by a modern milling machine with high-speed rotary cutters. The milky fluid running over the table is called the cutting liquid which prevents the tool from over heating

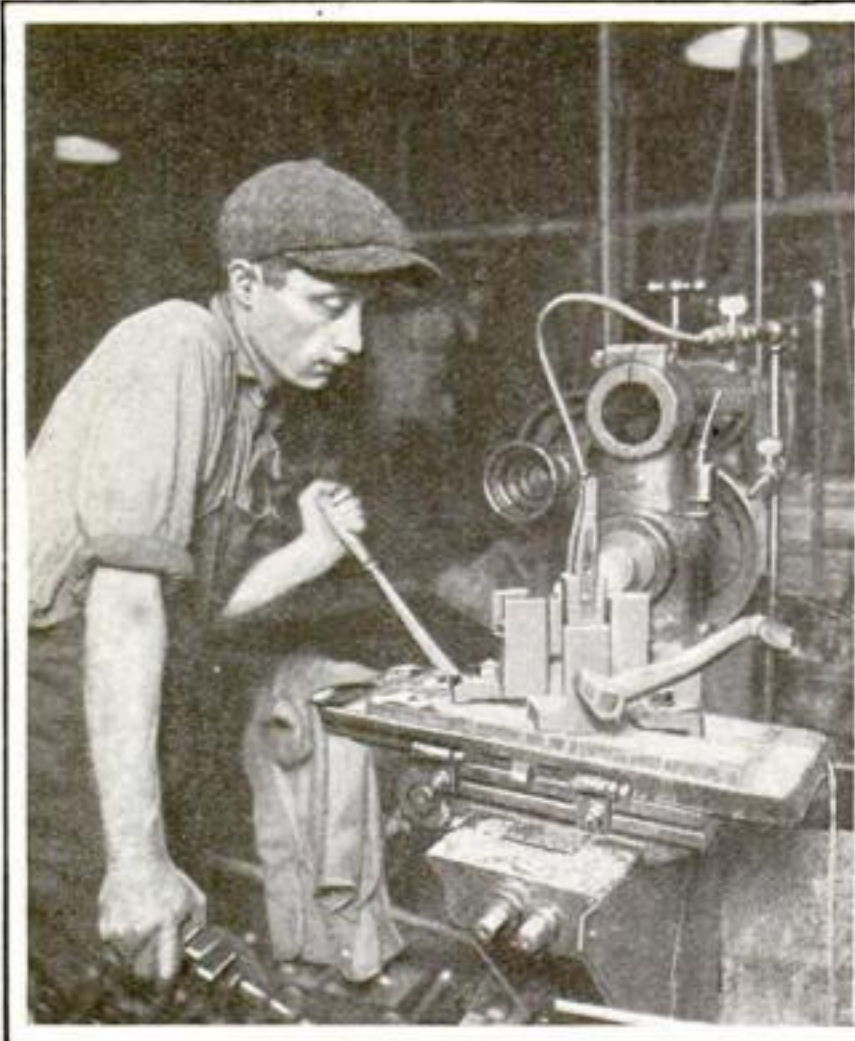



## for the Use of Uncle Sam's Boys "Over There"

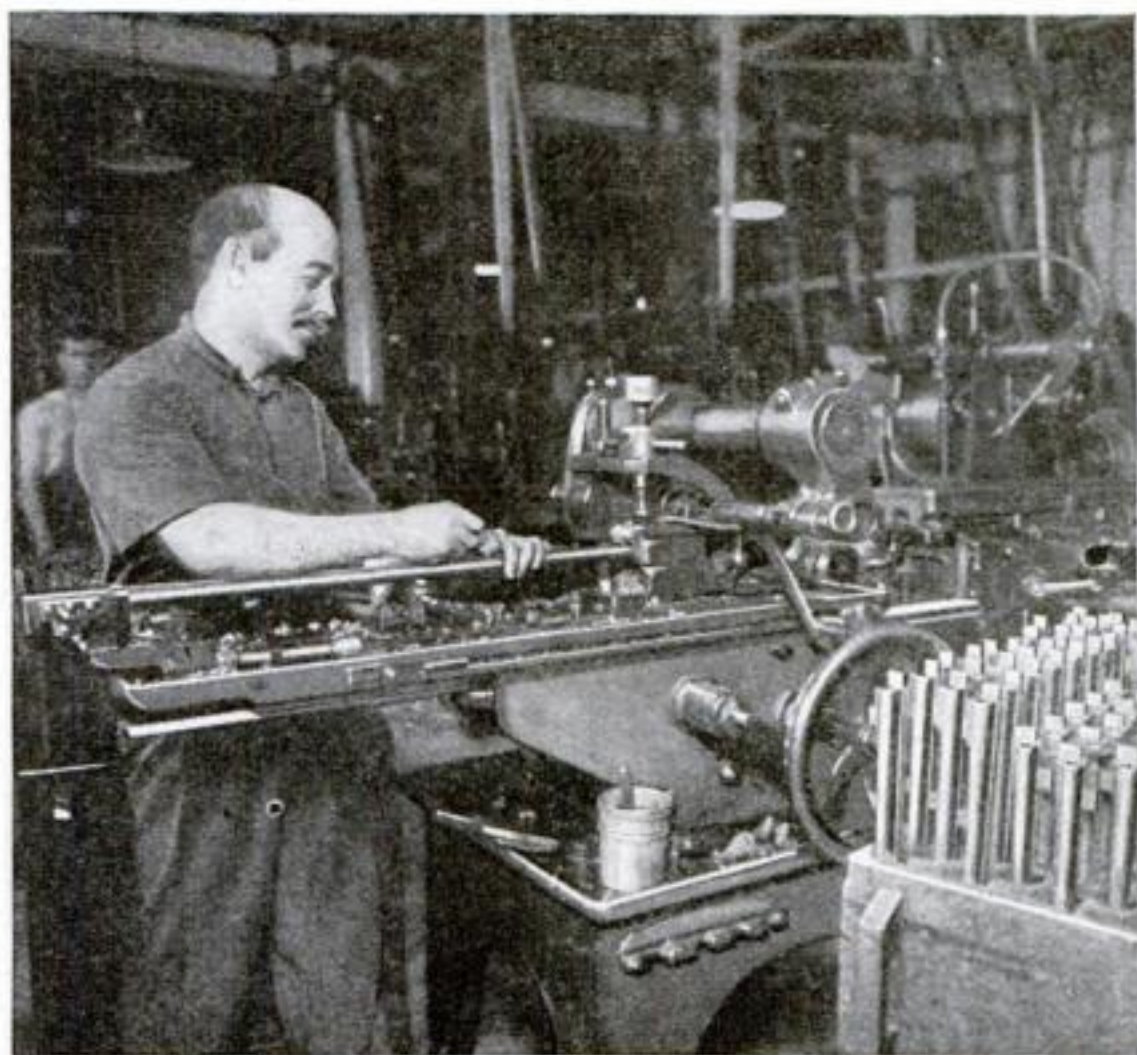

Barrels being finished on the outside. Bob is here feeding a barrel into a machine which trims it to size and finishes the outside so that it is exactly concentric to the bore

The cavities in the breech end of the barrel vary in size. The barrel is held in a fixture while Pete (below) uses the different drills on it. The piping delivers lubricating oil



Photos © Press Illus. Serv.

Adjusting the telescope sights on rifles. The rifle is first sighted on a target, then the telescope is attached to the barrel and trained on the same target



Gathering and assembling the various parts is bench work. John, shown on the left, takes great pride in his work for it calls for almost as much skill as does the assembling of a watch





In recreation hours, Fritz, the dummy, has bouts with the goat, the mascot of the camp

The instructor in bayonet practice manipulates the dummy's bayonet



### How a Fighting Dummy Teaches Men to Use the Bayonet

THIS war is not being fought entirely at long distance. Hand to hand encounters in which the bayonet is used are something every soldier must be taught to expect. Hence, straw dummies have been used for bayonet practice ever since the war began. But the best dummy thus far produced is one made by Company Sergeant-Major McKenna, of the British Army Gymnastic Staff.

His realistic dummy is mounted on wheels and is made to retaliate to bayonet charges by wielding a stick which it grasps in its hands. The instructor in bayonet practice manipulates the dummy's bayonet from behind the figure.

When the boys themselves get tired of exchanging bayonet blows with Fritz, as the dummy is called, they let their mascot have a bout with him. This mascot happens to be a goat of a belligerent nature. He takes delight in bucking the dummy.

### Keeping the Trains from Being Blown Off the Tracks

THERE is a stretch of railway along the west coast of Ireland where it was formerly not an uncommon occurrence for the trains to be blown from the rails by the winds from the ocean. These disasters are now prevented by the use of an ingenious form of anemometer which rings an alarm-bell when the velocity of the wind reaches 65 miles an hour. Each station on the line keeps on hand a stock of movable ballast, a ton of which is placed aboard every car arriving at the station after the bell sounds.

### The Largest Ball of Twine that Has Ever Been Wound

SEVENTEEN years ago, H. L. Springer, of Richmond, California, decided to make a large ball of twine. He is now the proud possessor of what he thinks is the largest ball of cotton twine in the world. Other large balls of twine have been wound by persons who had a great deal of patience, but they generally have been made of all sorts and kinds of string. Mr. Springer's ball is made of cotton twine only. Almost every yard of twine in it came from laundry bundles delivered at his laundry.

The ball has grown to such proportions that it is difficult to handle it. It weighs 80 pounds and measures about two and one-half feet in diameter. The string in it would stretch a distance of forty miles.

Needless to say, Mr. Springer is not worrying over whether or not the war will cause a shortage of twine. His ball will supply him for many weeks, if he should be forced to use it in his business.



A ball of cotton twine that weighs 80 pounds. There are 40 miles of twine in it, saved during seventeen years





## A New Way of Oiling Machinery by Electricity

**I**NSTEAD of going over machinery with an oil can in hand it is now possible to oil it automatically. George M. Rogers, of Chicago, has invented an oiling apparatus which is operated by electricity and which can be put to work at any time by setting the mechanism just as one would set an alarm clock.

The oiler has a cup with an oil-feed opening in the bottom. An oil-feed pipe is connected with the cup and a plunger rod is so arranged that it gives vertical movement in the cup. A valve fitted at the lower end of the plunger fits the opening when the plunger rod is lowered. A guide pin extends downward from the valve and a gasket adapted to bear on the bottom of the cup when the plunger is lowered is arranged under the valve. The valve and plunger are operated by electricity.

If it is desired, an electric light may be included in the circuit which operates the oiler so the attendant may be able to watch the operation.

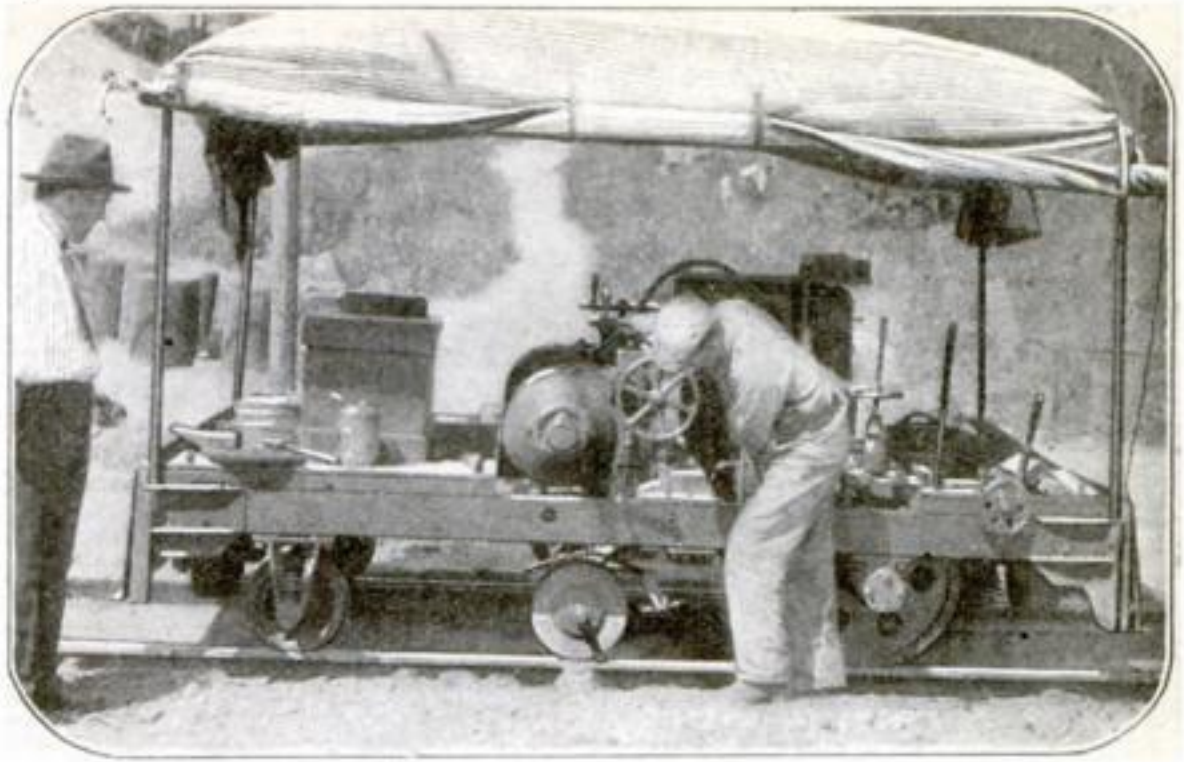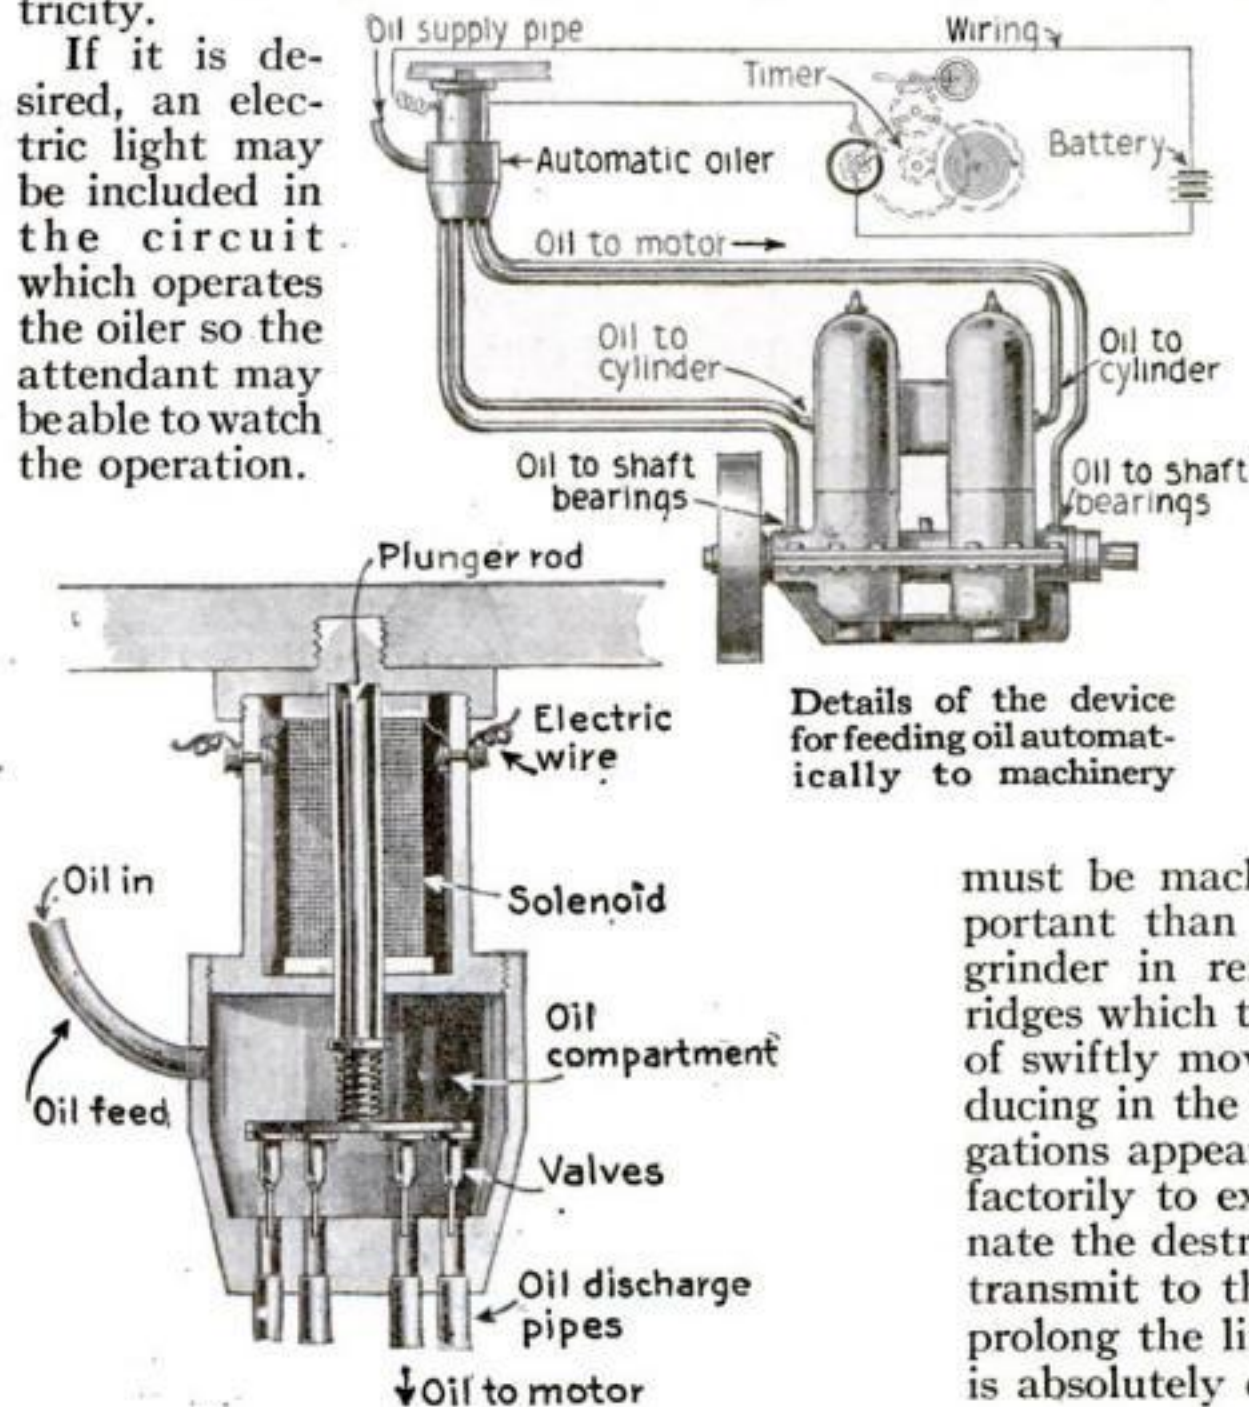

A derailing device makes it possible for a single operator to remove the grinder from the path of traffic

## A One-Man Rail Grinder Which Does Not Interfere With Traffic

**H**ERE is a one-man rail grinder recently put out for machining off the surplus metal from a solidly welded joint on a street railway line or for grinding low and pounded joints, corrugations, curves, etc.


The practice of substituting the solidly welded joint for the mechanical or bolted joint on electric railway systems is now becoming very common. It decreases the electrical resistance at the joints, saves power and prevents the leakage of current to nearby water and gas mains. Besides it eliminates the vibrations due to inequalities in the heights of adjacent rails. Whether these joints are welded by the thermit, oxyacetylene, or electric process a shoulder of surplus metal is left which must be machined away. But more important than this is the use of the rail grinder in removing the corrugations or ridges which the incessant wear and pound of swiftly moving cars are constantly producing in the rails. Just why these corrugations appear no one has been able satisfactorily to explain, but in order to eliminate the destructive vibrations which they transmit to the rolling stock as well as to prolong the life of the rail, their removal is absolutely essential.





Inserted between the front axle of an automobile and the frame of the car, the two springs are carried between narrow plates

Two vertical pins extend through concentric holes in the two center plates so that the springs cannot be jolted out of place

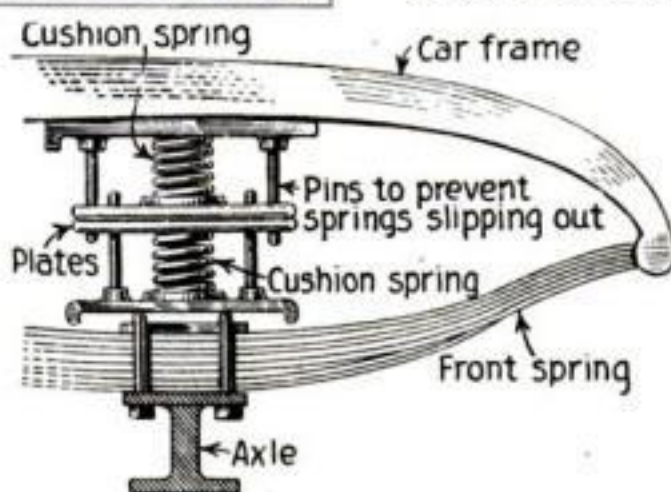

and then I will send for a new spring. It will cost me two or three dollars to be towed home. Go ahead and weld it for me." And so Scott would sadly weld the spring and charge one dollar and the driver would go away satisfied.

For all that, he did not dismiss the subject from his mind. Finally he hit upon the idea which we illustrate.

Inserted between the front axle of an automobile and the frame of the car, the two coil springs are each carried between two narrow plates. The upper plate of the top spring bears against the under side of the frame and the lower one against the top plate of the lower spring while the bottom plate of the latter bears against the top of the main car spring. Each set of plates has two vertical pins which extend through concentric holes in the two center plates as shown, so that the springs cannot jump out of place as they take up the bound and rebound of the car spring.

If you have Scott's device in your toolbox and a spring should break, you can make your own repair on the spot. You will not require the services of a blacksmith or someone to tow you home. You continue your trip just as if nothing had happened.

### A New Way of Cushioning the Front Spring Action of an Automobile


**W**ALTER F. A. SCOTT of Doylestown, Pennsylvania, is a blacksmith who has seen many a broken down automobile in his time. Often a driver would bring his car to him and point sadly to the broken leaves of a spring which he had attempted to repair temporarily with a block of wood.

Scott knew that after a spring is welded, it is not to be depended upon. He would offer to make a satisfactory job but invariably he would be met with the reply: "I only want to get home

### How Did One Egg Get Inside of the Other?

**T**WO eggs in one alongside, are not uncommon and are known as double yolked. But the eggs found by Mrs. Grace Lee Smidt of Sound Beach, Connecticut, are out of the ordinary because the interior egg has a shell.

Diminutive eggs are frequently laid by hens, especially in the "last of the litter," as the farmer would express it, and it is evident that in this double-egg production, the process of forming a larger egg continued as if the shell had not been deposited on the smaller.

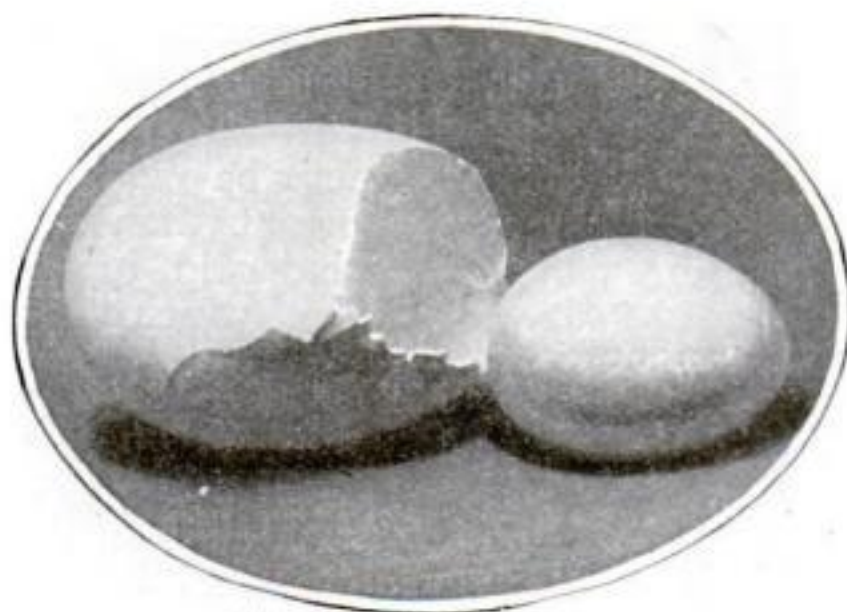


A perfect egg of good size formed inside of another perfectly shaped egg




# Steel Castings for Modern Dreadnoughts

How are they made—these giant one-piece sections weighing enough to sink a ship?

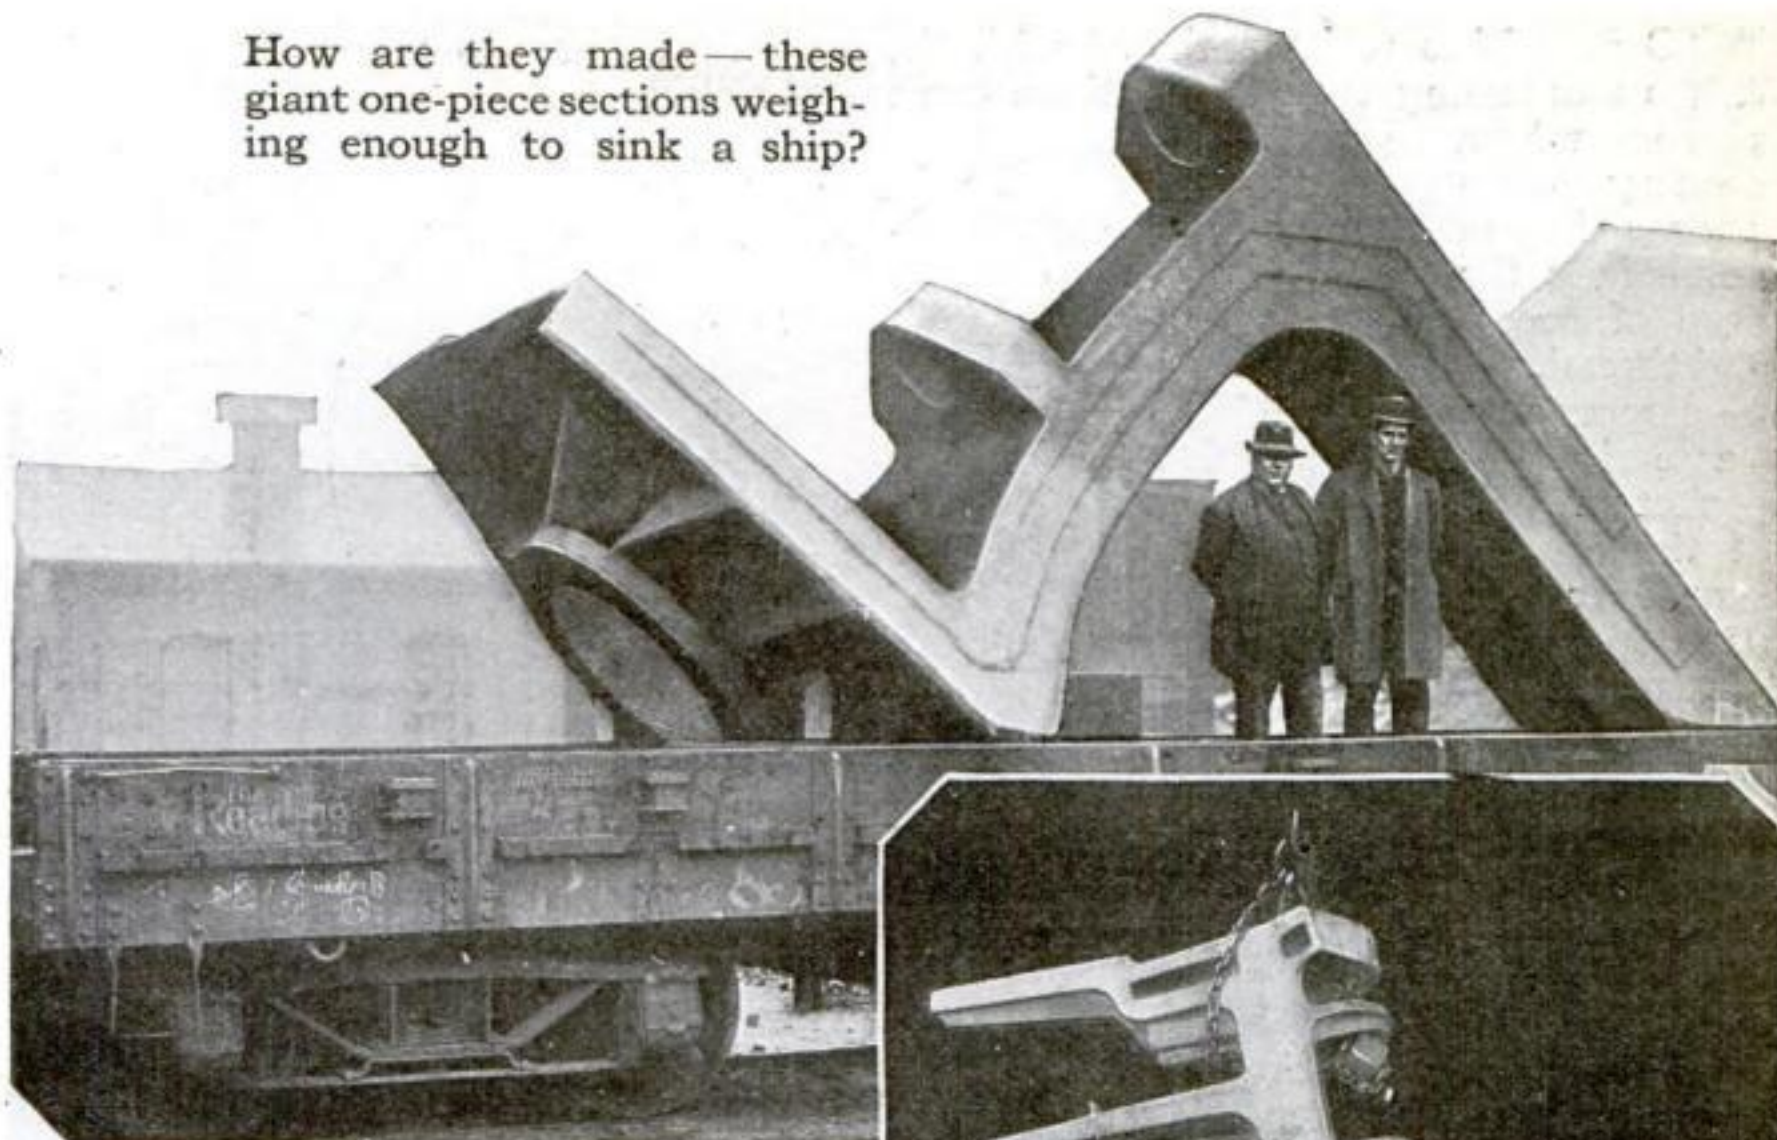

The stern post here shown was made for the new superdreadnought "Mississippi," and its weight is 44,540 pounds

The casting in which the man is standing forms a portion of the rudder of the superdreadnought "California"

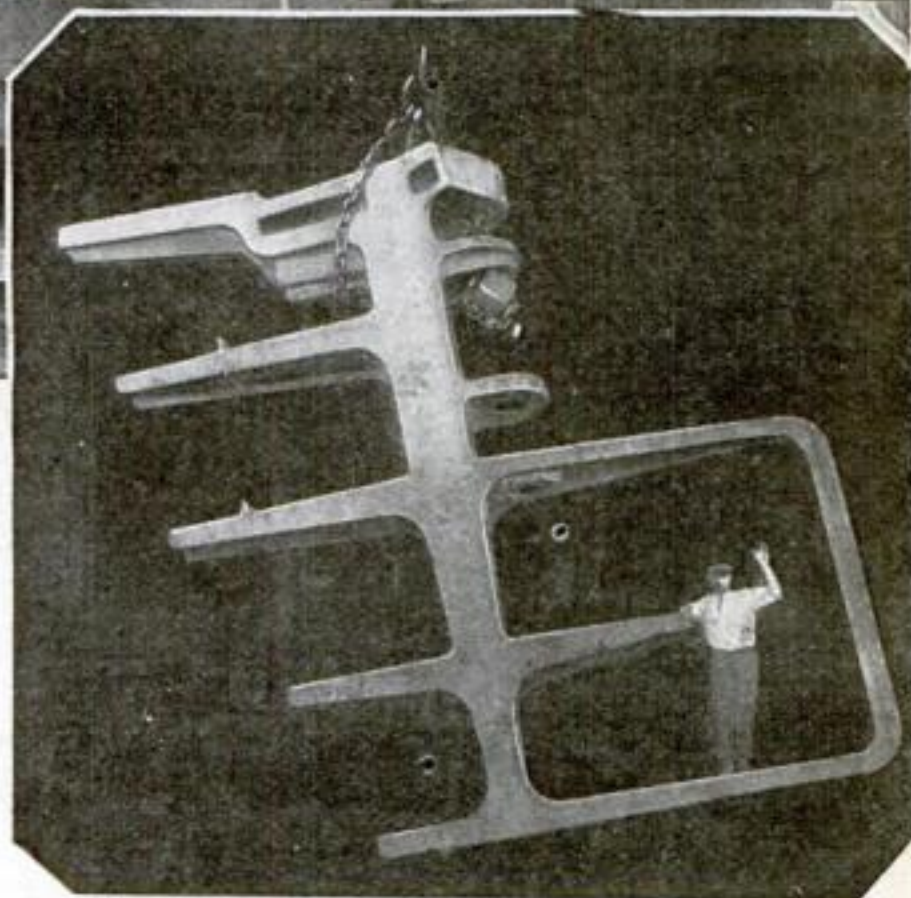

**T**HE extent to which steel enters into the construction of the modern battleship is realized by very few. Besides the tons of steel plates which form the hull or hold of the ship itself there are some very large steel castings. The two illustrations here shown are excellent examples.

In the two castings illustrated there are over 90,000 pounds of steel and both of them enter into the stern or rear part of the ship. It would seem almost as though these would cause the vessel to stand on its end or sink it.

One of these is the stern frame or stern post, and the other is the rudder frame. The rudder frame is attached to the stern frame, which of itself constitutes the backbone of the vessel's stern. The stern post here shown was made for the new super-

dreadnought "Mississippi," and its weight is 44,540 pounds. The other casting, the rudder, was made for the new superdreadnought "California," and its weight is 50,500 pounds.

The part of the casting in which the man is standing forms a portion of the rudder proper while the large lugs above fit on to the corresponding lugs shown on the stern post in the car.

How were these castings made? A large sand mold of several sections had to be made for each one, and each part was dried out completely before the molten steel was poured in. The actual amount of metal poured in each case was over sixty-seven thousand pounds for the rudder frame, and over fifty-nine thousand pounds for the construction of the stern frame.



## Storing Needles and Thread in the Handles of Scissors

**N**O man likes to be bothered with the usual sewing outfit. But there come times when every man away from home feels the need of needle and thread. If he happens to have in his pocket a pair of the scissors shown in the accompanying illustrations he is fortunate. For although the scissors are small enough to be carried in the vest pocket, they contain storage places for needles and thread ready for use.

The handles are hollow, and within them the sewing implements are kept. In one of the rods a tiny bobbin is stored, on which is wound sufficient white and black thread to serve in several emergencies. In the other handle is a compartment for needles—self-threading needles, so that it is no task to thread them on a fast-moving train or in a poor light. The hollow handle rods are closed by a small cap operated by a spring trigger.

A screw holds the two blades of the scissors together and permits of their being taken apart so that either blade may be used separately, as for ripping seams.

The scissors should be kept in a leather case so that the points may not injure the lining of the vest pocket where they are carried.


## A Three-Purpose Electric Drill for Automobile Repairs

**B**Y adding two small attachments, the electric drill illustrated below may be transformed in a few seconds to a valve-grinding tool or an emery wheel for sharpening bit tools and the like.


The drill has another distinct feature. The main spindle carrying the chuck may be thrown over at right angles to its regular

position, the squared portion of the spindle engaging the jaws on the bottom of the drill housing and thereby preventing the drill from turning, and allowing the chuck to be tightened by hand as desired. This saves much time when different-sized drills must be used alternately, particularly the time usually lost in looking for the chuck wrench or key.


The drill may be driven by current from the ordinary lighting circuit and controlled, started and reversed, by means of one switch. The drilling speed is regulated by the pressure exerted by the operator on the handles.

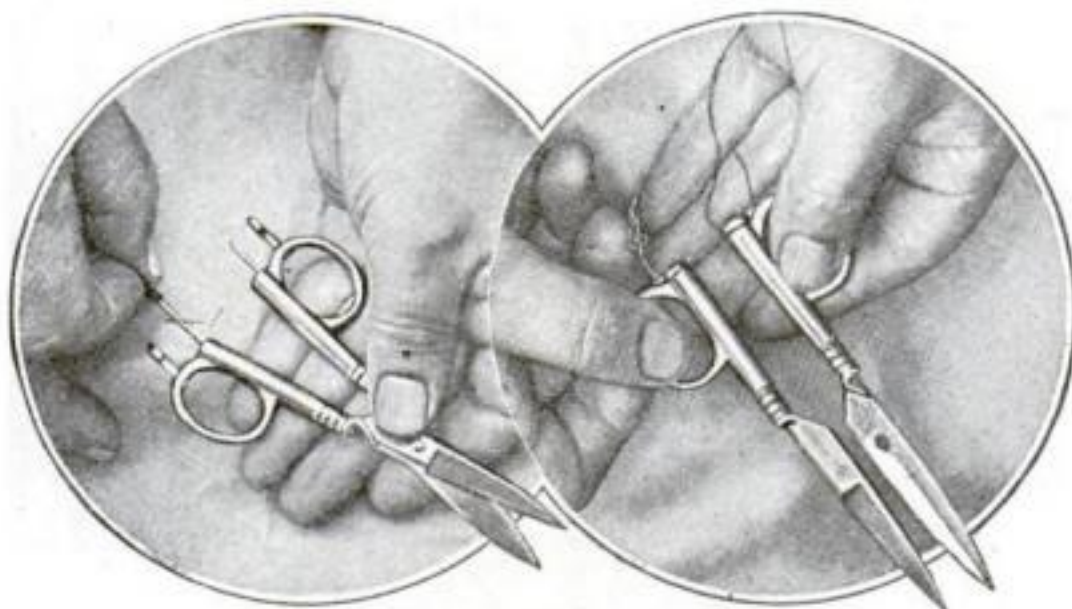

In each of the rods of the handle is a compartment for holding needles and thread

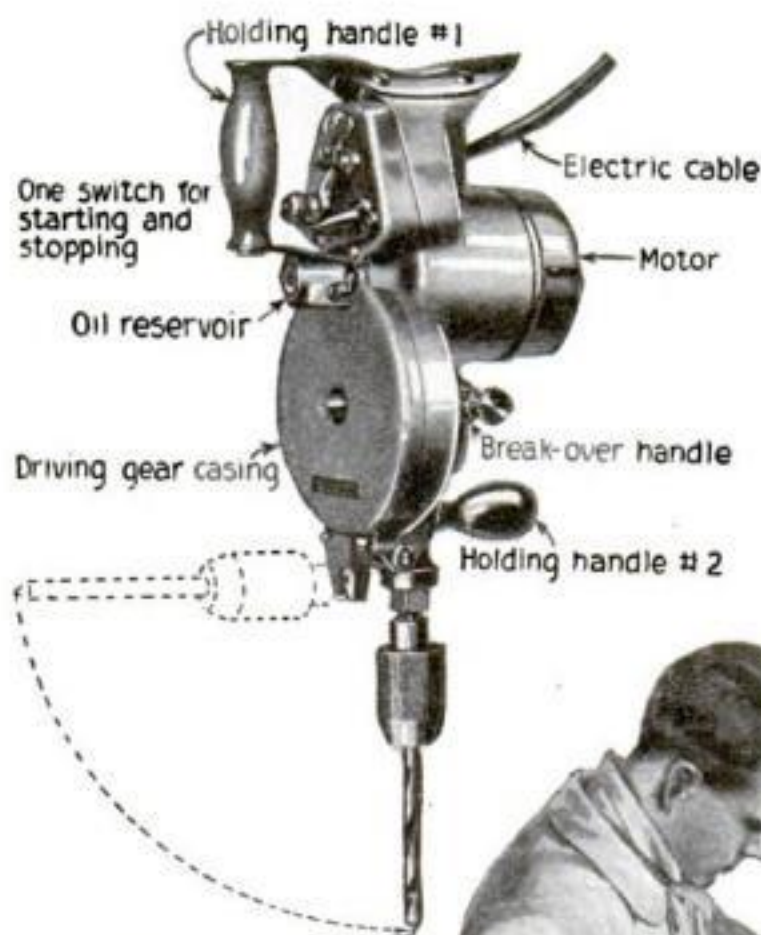

A small electric drill which serves three distinct purposes

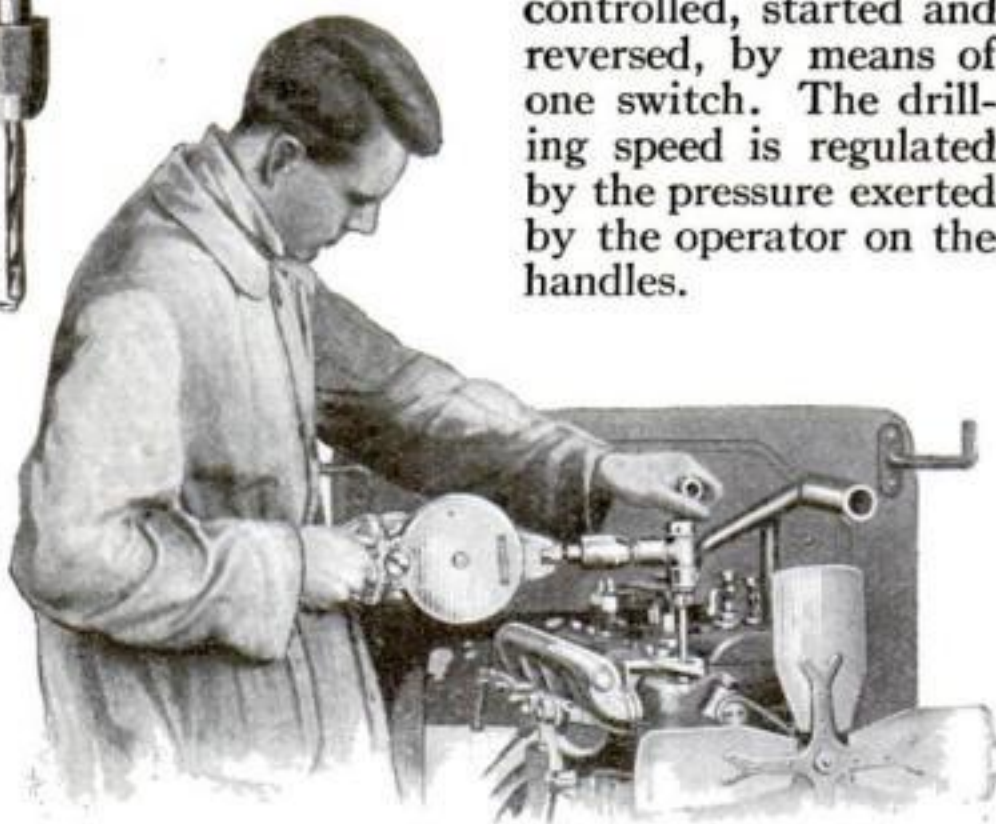

With one attachment the drill may be transformed in a few seconds to a valve-grinding tool




## Making Comfortable Quarters for the Pet Snake

ONE of the special treasures of the average country boy is likely to be a pet snake, and one of his special problems is how to house it safely. According to L. S. Crandall (*Pets*, Henry Holt & Co., New York) "no fixed dimensions need be set. Snakes are not particularly active creatures, and the cage need be only large enough to give its occupants room to move about freely. For the smaller species large glass aquaria, fitted with wire tops, make excellent homes and have the added advantage of plenty of light. If the cage is to be of wood, the front should be of glass rather than of wire, as snakes are likely to rub against the latter and injure their mouths.

"It is always wise to make the door of such a box in the top, which makes it possible to care for the captives with a minimum of disturbance. This door, or the entire top, may be of wire netting to allow ventilation. The furnishing of the cage may be varied according to the needs of the inmates. In some cases it is better left entirely plain. In others the bottom may be covered with sand, loam, dry leaves, moss or rounded pebbles. Many snakes will take advantage of a shelf placed midway between floor and top, and others will drape themselves among branches set upright in the cage.

"Water should be provided for all species, and water snakes should have a good-sized bath, in which they will often be found immersed. Cages should be cleaned frequently and all excreta removed with care. Snakes are fond of sunshine and cages should be placed so as to admit it, but care must be taken to avoid overheating. It is important that the cage be absolutely dry, for snakes of most species will not thrive in damp quarters or even in a moist atmosphere." Black snakes and garter snakes are interesting and harmless.

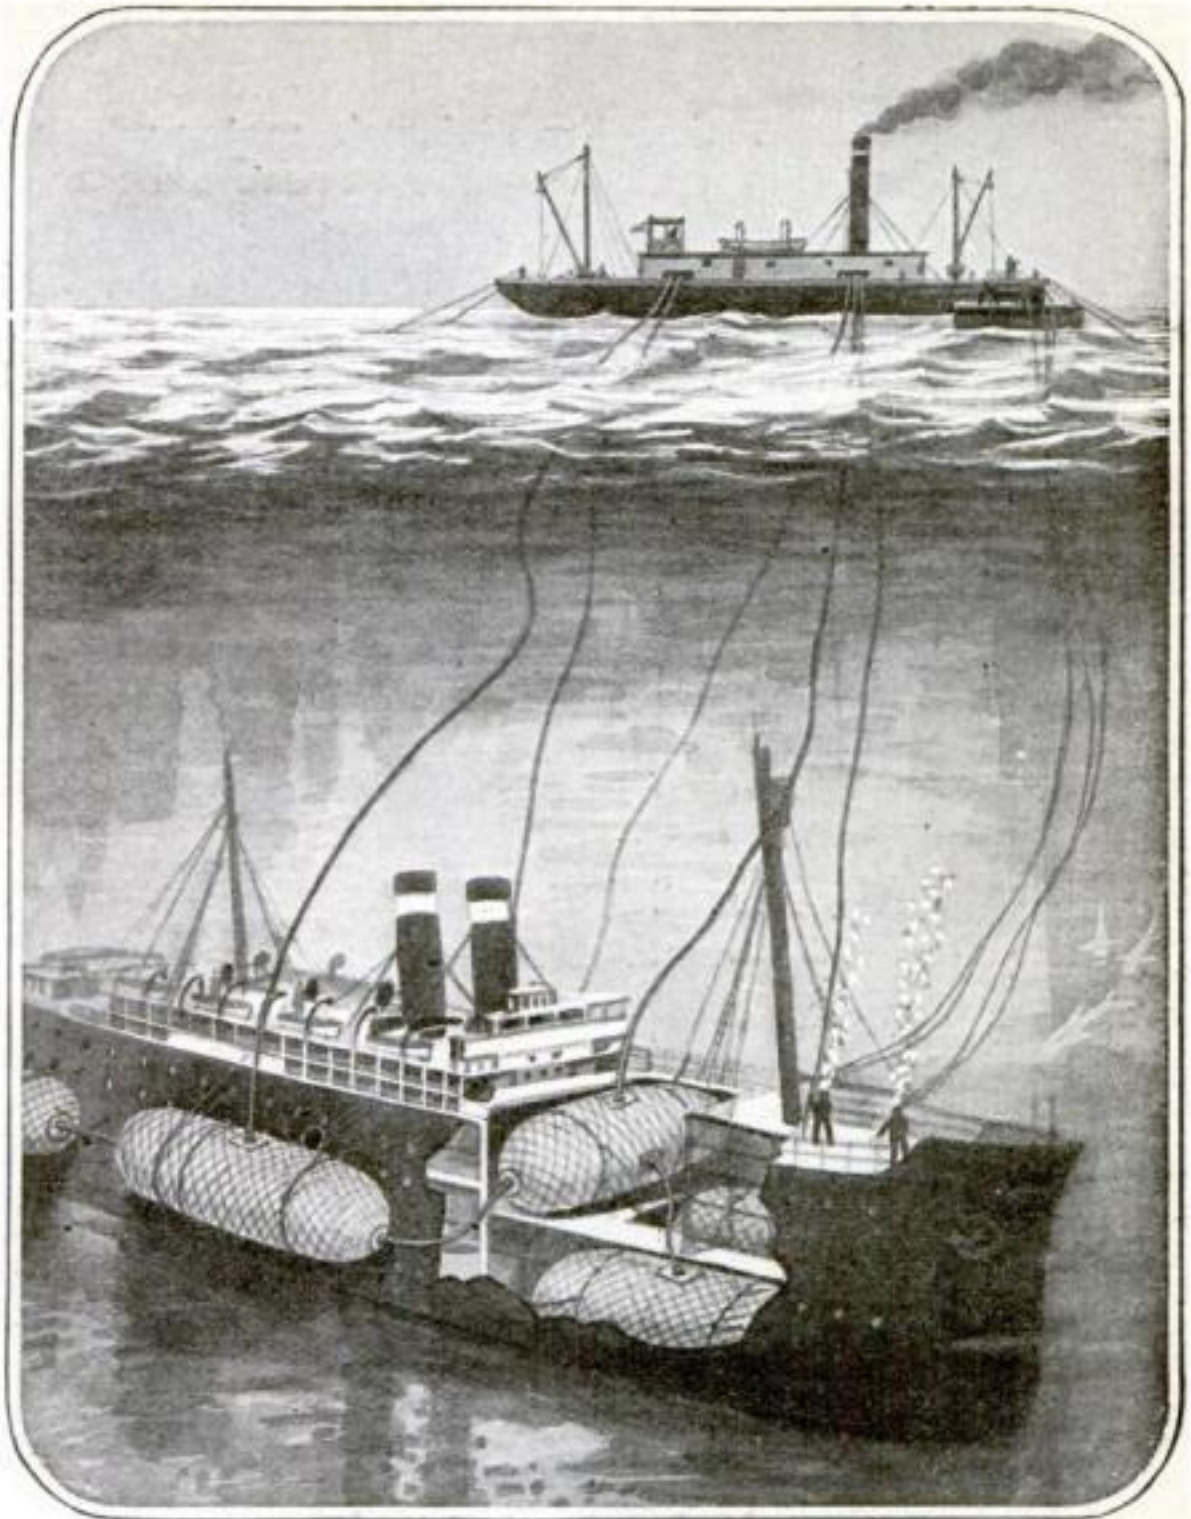

Salvaging sunken ships with collapsible floats. As the floats swell they displace the water and cause the vessel to rise

## Raising Sunken Ships with Collapsible Air Bags

A NOVEL method of salvaging sunken ships has been devised by Dr. Sylvio Pellico Portella, of Rio de Janeiro.

The invention consists of a specially built tender which carries collapsible floats made of waterproof material. The floats occupy very little space until they are put into use and inflated. They are constructed in such a manner that they will assume a number of different shapes when they are inflated.

Taken down to the wreck by divers they are attached to the vessel both inside and outside and are connected with the tender by lines of hose. When in place they are inflated by air pressure from the tender. As they swell they displace the water from within as well as from without, and their buoyancy causes the wreck to float upward to the surface.



# Solving Kitchen Problems Electrically


One little electric motor which may be set up anywhere does all the tedious jobs

THE slogan "Do it electrically!" has long since been echoed by the queens of the kitchen in the private homes of the cities as well as in the more modern farmhouses. But of all the electrical inventions to make the work of the kitchen light, perhaps none is useful in so many different ways as the one shown in the accompanying illustrations.


It is primarily a small electric motor and may be used to operate any of the hand-power kitchen utensils such as the coffee grinder, ice cream freezer, egg beater, cake mixer, bread mixer, cream whipper, and food chopper. The device is

simple, takes up little table space and consists of an electric motor mounted on a base plate together with two vertical rods carrying an arm which may be slid up and down to adjust it to the kitchen tool being used. This arm carries the driving shaft operated by the electric motor through a universal joint and is provided with both horizontal and vertical end shafts for driving utensils which are turned respectively by horizontal or vertical shafts. This permits


practically any utensil turned by a hand-crank or wheel to be successfully operated by the device. The motor is of one-sixteenth horsepower and may be driven off the

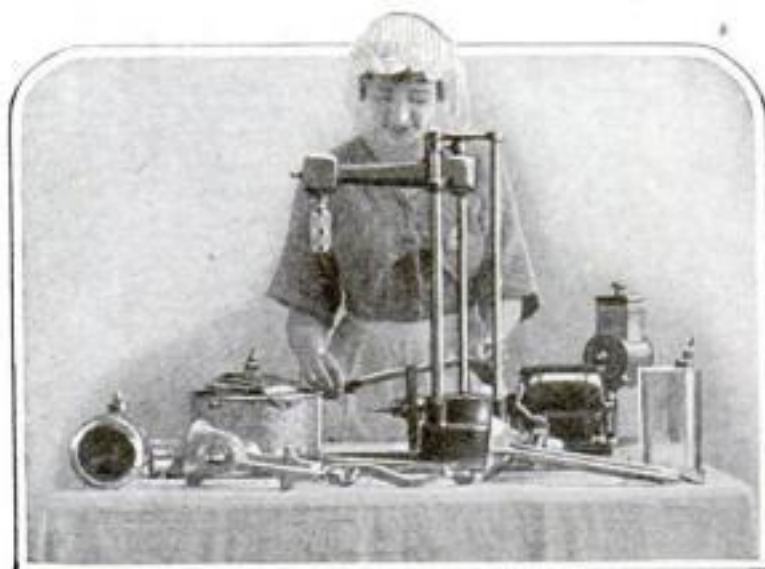


The motor with its adjustable crank-arm takes up little table space

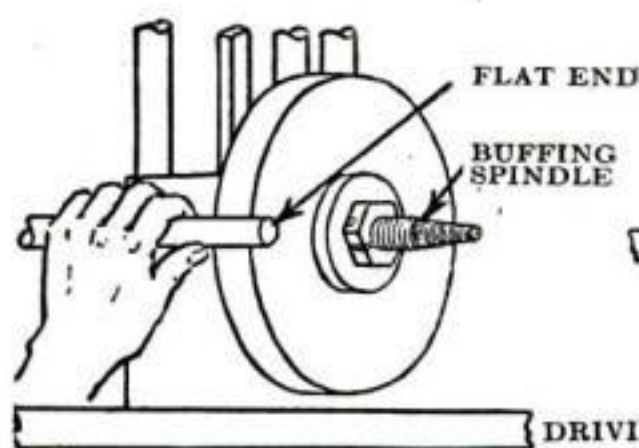


A high speed emery wheel driven off the motor armature shaft

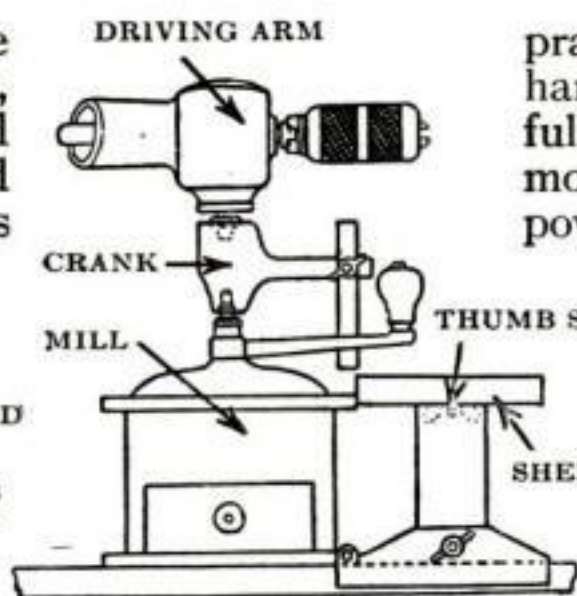


Here the coffee is being ground by the crank arm of the motor

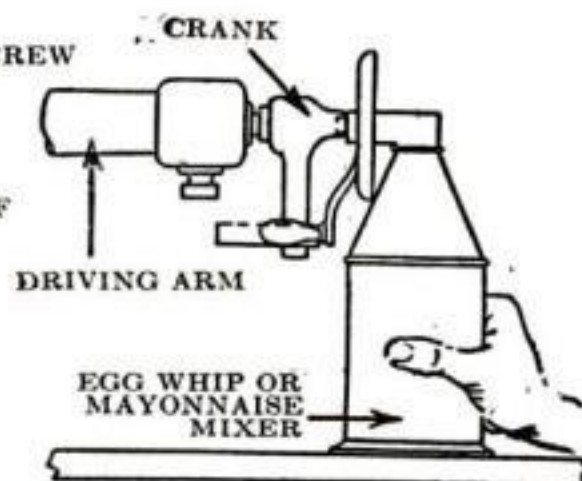

Eggs may be beaten, cream whipped and mayonnaise mixed by the device

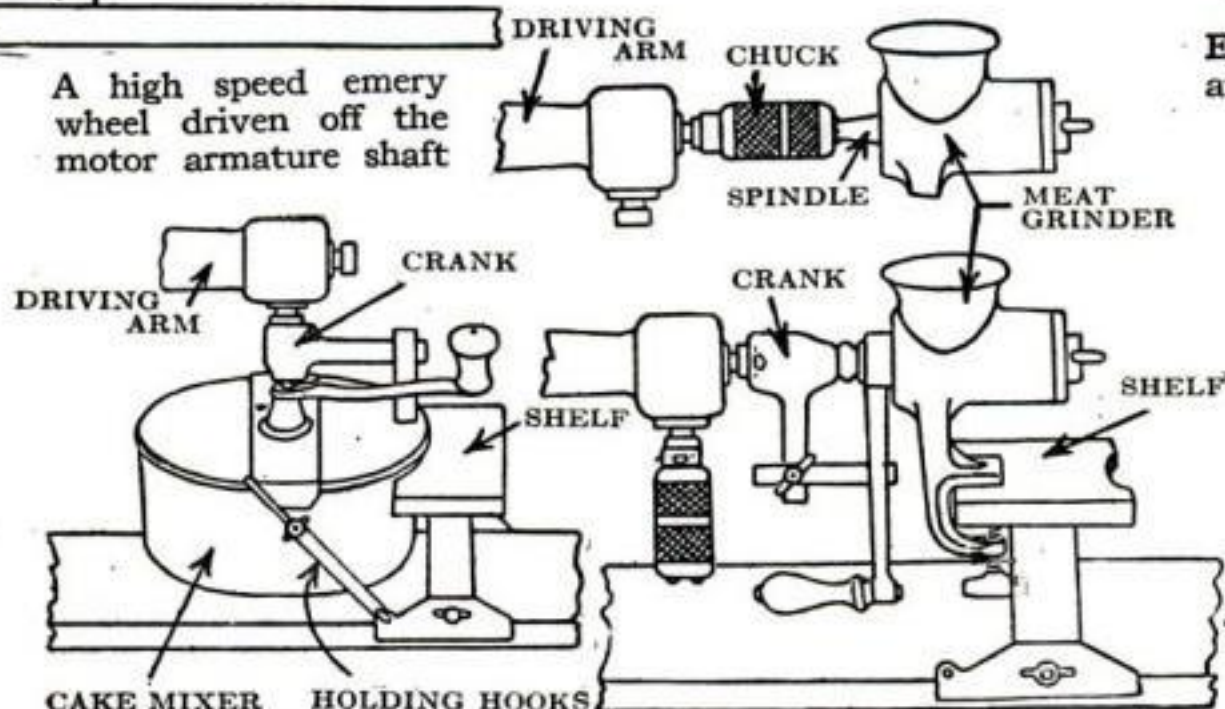


How meat choppers and food grinders of all kinds are operated by the motor

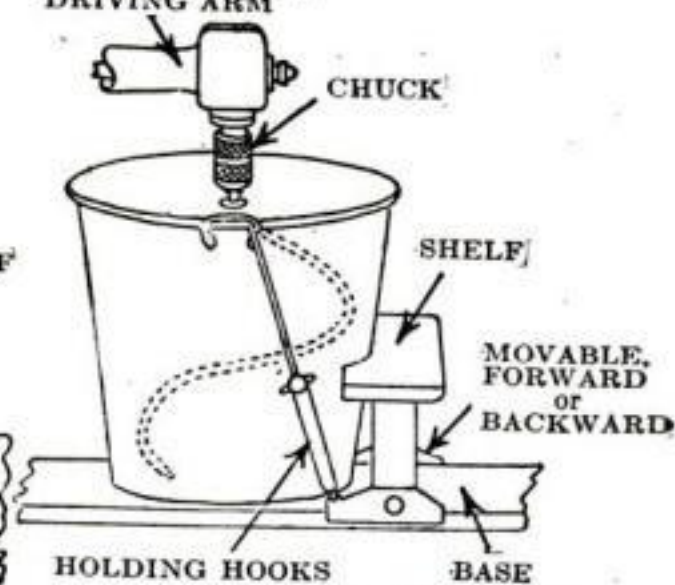

The bread will be uniformly good when mixed by the motor attachment

How the electrical motor may be connected up with the ordinary cake mixer



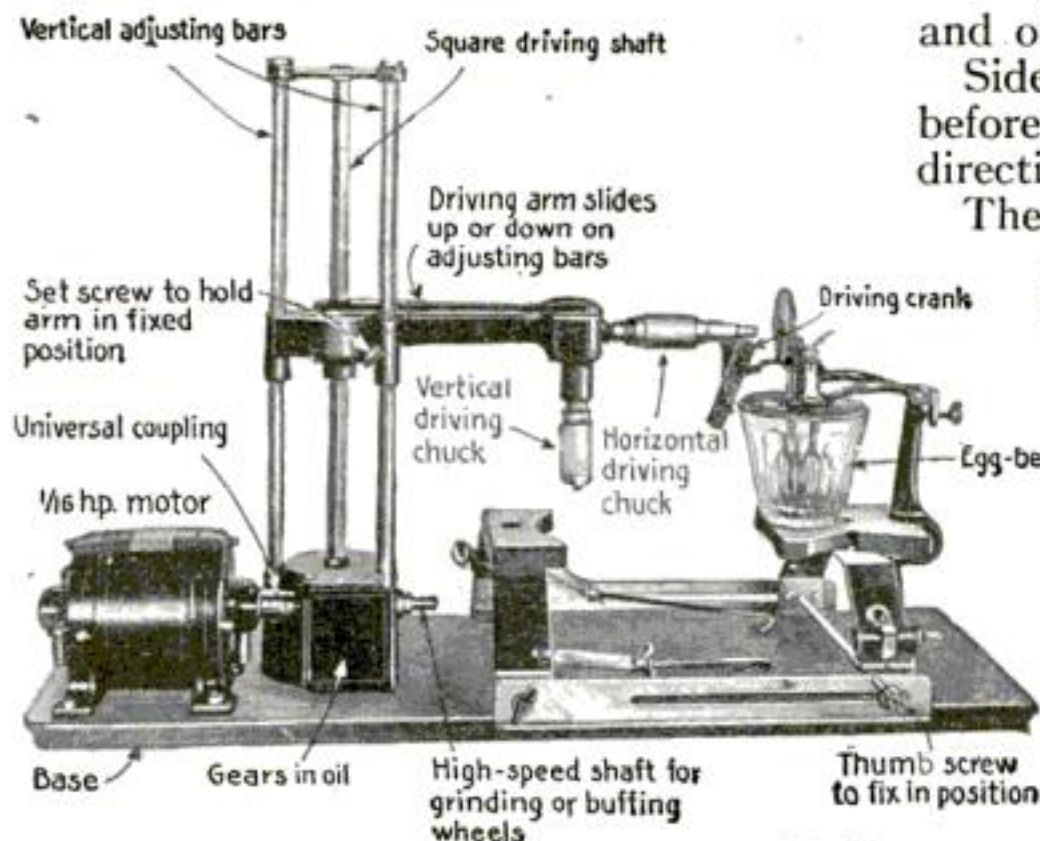


The motor is carried on a base plate. The crank arm slides up or down on the two vertical rods

ordinary lighting circuit.

The base is provided with clamps for holding utensils usually furnished with table-clamps so that practically any utensil, no matter how awkward its construction may be, may be operated by the device.

The old saying "a child can do it" is especially applicable here.

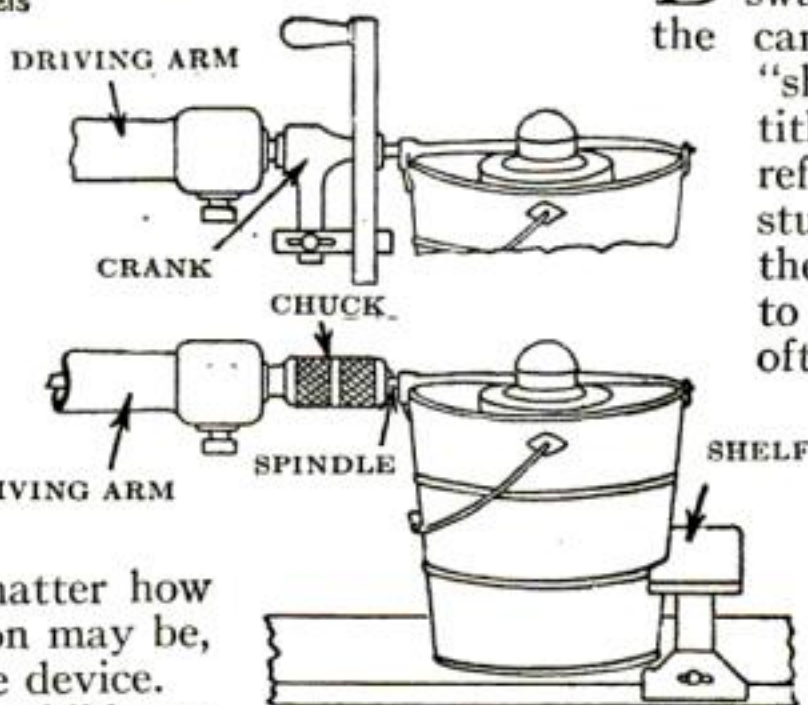

The ice cream freezer may be driven either by the chuck or the crank arm

and of the vehicle with which he collided. Side of road on which he was traveling before the accident happened and the direction he was going.

The names and addresses of bystanders who witnessed the accident should be taken.

Particulars of the manner in which the person with whom he collided was driving should also be ascertained.

## How the "Ship of the Desert" Is Anchored When the Caravan Rests

BECAUSE of its peculiar swaying motion in walking, the camel has been called the "ship of the desert." This title may also have some reference to the extreme stupidity and passivity of the animal, which submits to great loads, which it will often carry for days at a time without stopping for food or drink, with no more urging than a ship would require from the hands of its pilot.

The manner in which the drivers hobble the camels when they stop for a rest is interesting. They do not depend upon stakes driven in

the deep, yielding sand, but simply double back and tie one of the forelegs of the animal, so that it can lie down or rise up but cannot move from the spot.

## The Automobile Driver Must Know What to Do in Case of Accident

IN case of accident, a chauffeur or automobile driver should stop and note the following facts:

The speed at which he is traveling.

The exact width of the road and the condition of its surface.


What signs he gave of his approach; for instance, horn, bell, voice, etc.

If after dark, whether his lamps are burning in accordance with regulations.

The number and description of the other vehicle.

Whether the other was on the proper side of the road or not, and what light or lights were showing.

Measurements of wheel tracks from sides of road, both of his car

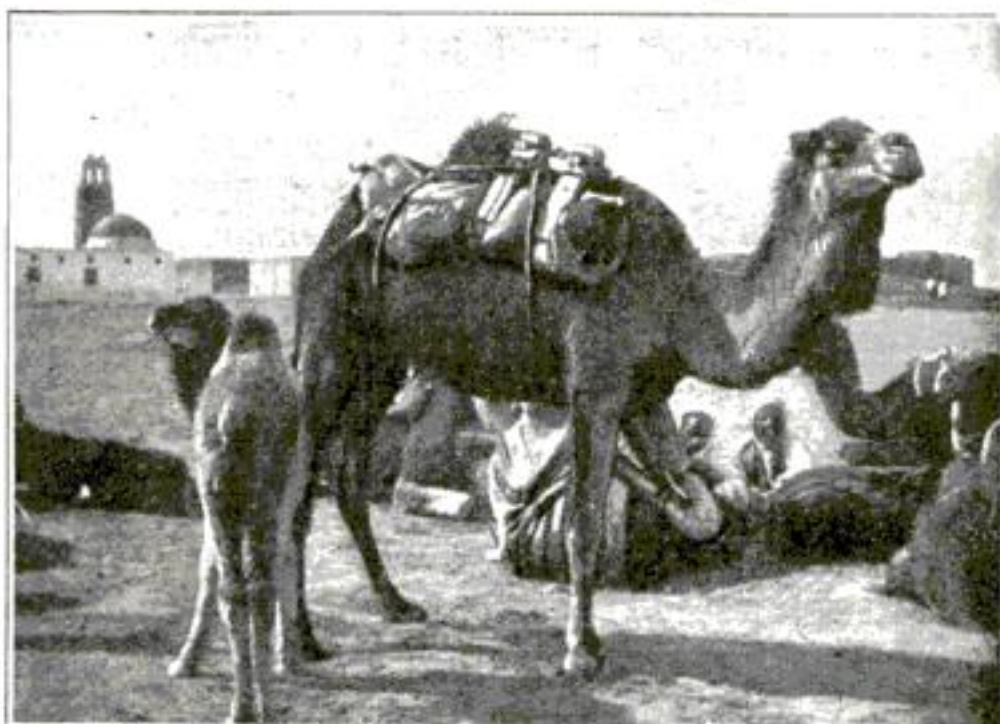

A caravan at rest. The camel's foreleg is tied back so that it can lie down or rise up but cannot move from the spot



## It Bathes, Massages, and Dries Us. Would That It Dressed Us, Too

A RECENTLY invented bathing machine not only washes the body, but also gives a massage and dries the skin without the use of a towel in less time than is required by the usual process. The machine takes up so little space and requires so little water that it may be used in a sleeping car or in other places where space or water is limited. For army use it meets every requirement of sanitation and speed when mounted on a truck so as to be moved about as needed.

The body is thoroughly cleansed by a series of brushes driven at will at either high or low speed. Each brush is eight inches in diameter with three-inch bristles. The brushes are hinged at the top on ball joints so as to open out wide for a fat man or close in for a thin one. The foot or arm can be easily thrust between any two of the brushes and thoroughly washed. An adjustable pedestal at the bottom is easily moved up or down to accommodate a tall or short person. Above are the claims which, if true, are certainly remarkable.

All the moving parts are electrically operated. The insulation and connections are so designed that the bather takes no chance of getting a shock.

## A New Siphon That Starts Itself Without Suction or Pumping

AN automatic siphon has been perfected recently which seems to have a fine disregard for the law of physics that a liquid can rise no higher than its source.

The device is exceedingly simple. It is constructed along the usual lines except that the end which is placed in the liquid has three tubes instead of one. The liquid enters through the center tube and rises

to the level of the liquid in the jar. At the same time the liquid enters the opening in the outer tubes and traps the air above it. This subjects it to hydrostatic pressure, which increases with the depth. The air in the bulb is forced upward by the pressure of the liquid until it rises over the point where the bulbs join the main tube.

The air raises the liquid standing in the main tube to the bend in the siphon and it immediately starts to flow downward.

As soon as the steady flow begins, the pressure is diminished and more water is drawn through the injector into the main tube. As the water rises higher in the bulb the air which is sandwiched between little columns of water in the delivery tube is expelled. It is

only a matter of seconds for all the air to be expelled and the apparatus then performs its work like any other siphon.



The bathing machine requires so little space and water that it can be set up even in a sleeping car


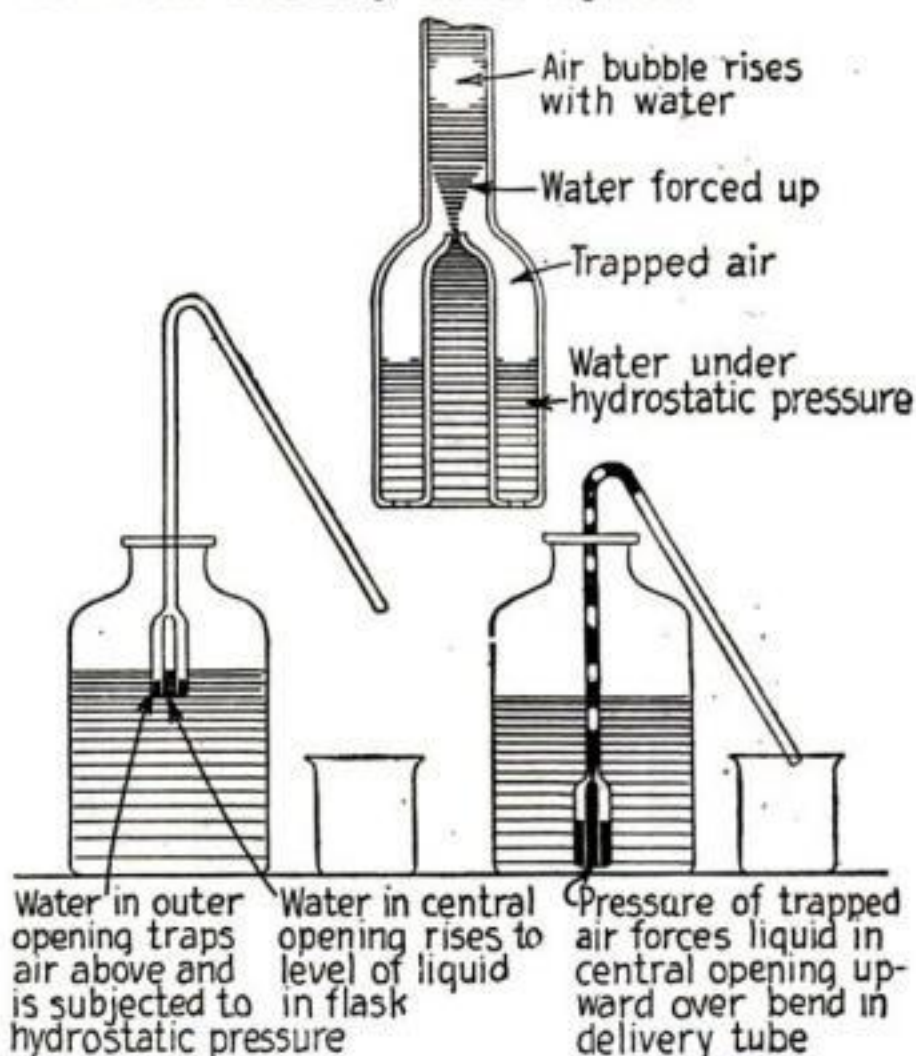


Diagram showing the siphon which requires no pumping or suction to start the flow




# Abolishing the Garbage Can

A gas-burning crematory is the latest sanitary device for disposing of refuse

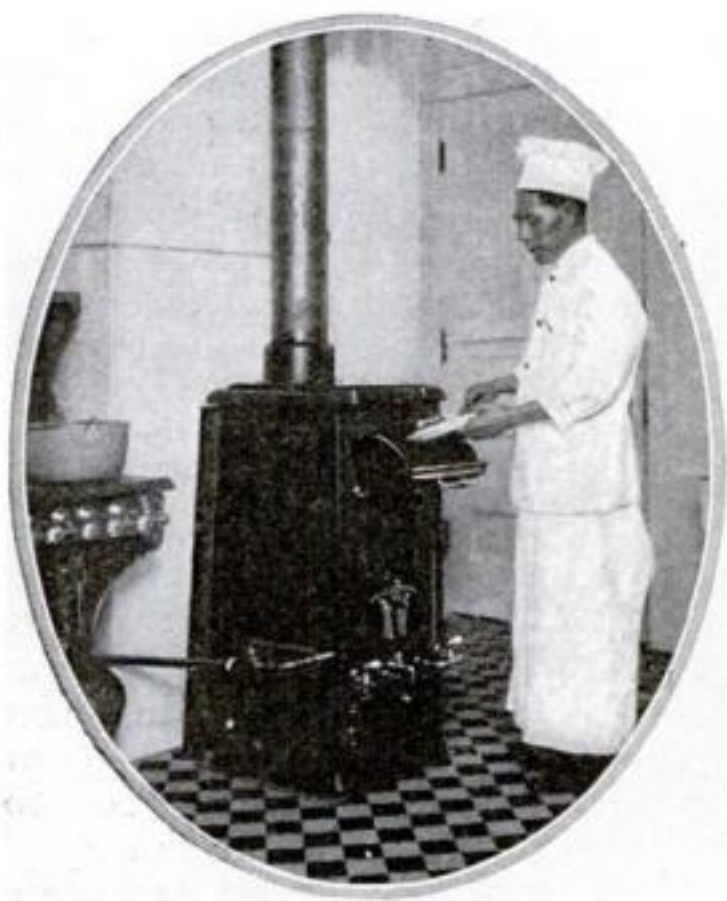

The refuse is scraped directly into the incinerator. There is a constant draft which carries all odors up the flue

The residue is only a very small quantity of sterile ash. You light the incinerator just exactly as you would your gas oven

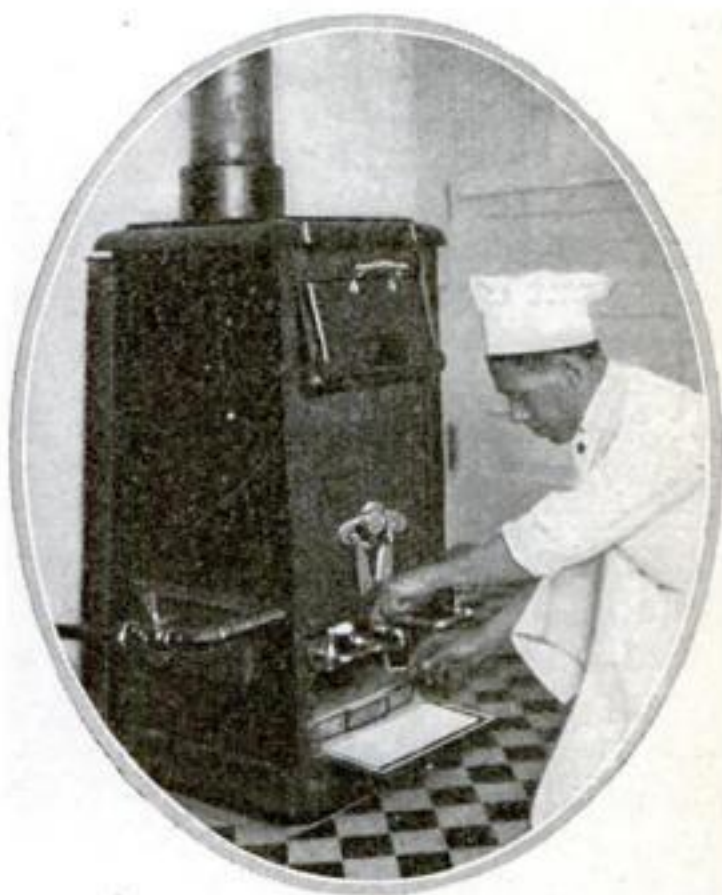

**P**ROBABLY a perfect method of collecting garbage fresh and hurrying it away in sanitary vehicles will never be found. Only by burning it on the spot will all danger and trouble from flies, odors and germs be averted.

A device which does this simply, thoroughly and economically, has recently been invented by a New York man. It is in the form of a garbage crematory, which can be conveniently installed in either new or old buildings, residences, apartments, hospitals or hotels, at the place where the waste originates. It destroys by incineration all house, kitchen or sick-room waste, wet or dry, animal or vegetable, before it has a chance to become a menace to health.

The machine generates about 1,200 degrees of heat, but is so constructed that the radiation is reduced to a minimum. It is lined with asbestos, with an air space between the outer and inner walls, to provide for constant circulation.

The cost of operation is very slight, five cents worth of gas being sufficient to destroy a bushel of garbage, which requires from three-quarters of an hour to one hour to burn, depending upon its nature. The residue is only a very small quantity of sterile ash, which may be dumped back in the hopper on top of the following day's accumulations, and burned over and over

until you are ready to dump the ashes.

In large apartment houses the incinerator means a considerable saving in janitor service, to say nothing of the annoyance of having garbage cans to handle.

The heat in a kitchen from such a machine is not any greater than that from the range, but the proper time to operate the incinerator is after all other work in the kitchen is finished, so that in the summer there need be no annoyance from its heat.

If the incinerator is installed in the kitchen or nearby where it can be connected with the flue from the kitchen range, all garbage cans and similar receptacles for refuse may be eliminated. The waste can be dumped immediately into the machine and allowed to collect there until there is opportunity to burn it. If one day's accumulation does not fill the machine, it may be left standing until three or four days' waste has collected. No odor escapes from the machine, even after the garbage has been left in it for several days, because a constant draft entering from beneath carries any odors up the flue. The operation of the incinerator is so simple, however, that it will be found just as easy to burn up the garbage of one day as it will to wait several days for an accumulation of waste. You simply apply the match to the lighter, exactly as if you were lighting your gas oven.



## Joseph's Coat of Many Colors Was Not More Gorgeous Than This

THOSE who are in a position to know, tell us that three dollars is a fair average price for an elk tooth, such as are sold to jewelers and to members of the Order of Elks. Much higher prices are paid for very good specimens. A curio dealer in Steubenville, Ohio, has a coat covered with 3300 of these teeth, which he values at \$10,000, and does not wish to sell it at that or any other price. The coat proper was made by an Indian in Manitoba, Canada, and is sinew-sewed. It weighs twenty-eight pounds. There are two rows of antelope teeth, one hundred and fifty-nine in all, down the front. The owner of the coat is a prominent member of the Order of Elks and wears the coat at all conventions. With the coat the owner wears an ornate necklace made of the largest of the elk teeth in his collection.



The coat, covered with elk teeth, weighs twenty-eight pounds. There are two rows of antelopes' teeth down the front edges


reverse gear into mesh. The pivoting action of the casing is effected by means of a bell-crank lever on the casing and a wire or rod leading from the bell-crank to the gear-shifting lever or pedal.

The sounding bell is mounted on one end of the casing. It is rung by means of a pivoted hammer oscillated by means of a small star cog-wheel mounted on the same shaft as the disk which is made to contact with the rear brake drum as the reverse gear is thrown into mesh. A ratchet wheel on the other end of the disk shaft is made to rotate by a small dog on the disk which is loosely mounted on the shaft. This loose mounting of the disk and the direction or shape of the ratchet teeth permits the bell to remain inoperative should the disk in any way be thrown into contact with the brake drum while the reverse gear is not in mesh.


The bell begins to ring as soon as the automobile begins to back up, and the warning is sounded continuously until the car comes to a standstill, thus avoiding all rear-end collision. It would be almost an impossibility for anyone but a deaf person to disregard it.

## Bell Gives Warning When Automobile Backs Up

THE simple clock-like device shown in the accompanying illustrations, the invention of Ernest P. Hoover, of Wilton Junction, Iowa, is designed to ring a warning bell automatically as soon as the reverse gear of an automobile is thrown into mesh, and thereby prevent collisions with following cars. The device consists of a cylindrical casing pivoted on a bracket attached to the rear axle and carrying a shaft with a disk which may be thrown into contact with one of the rear wheel brake drums when the entire casing is swung about its pivot by the act of throwing the car's

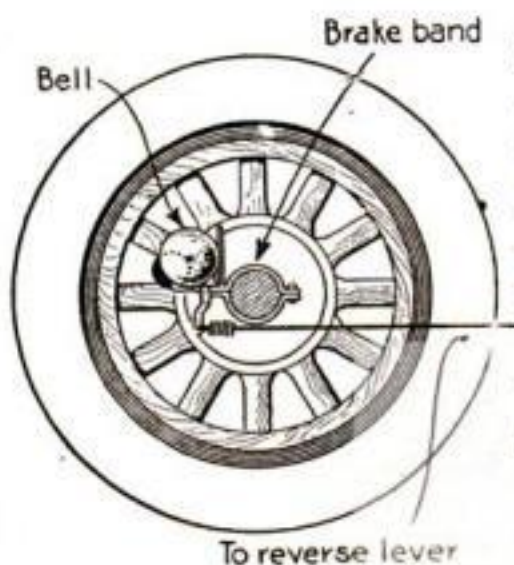

At left: The bell which rings as soon as the reverse gear is in mesh

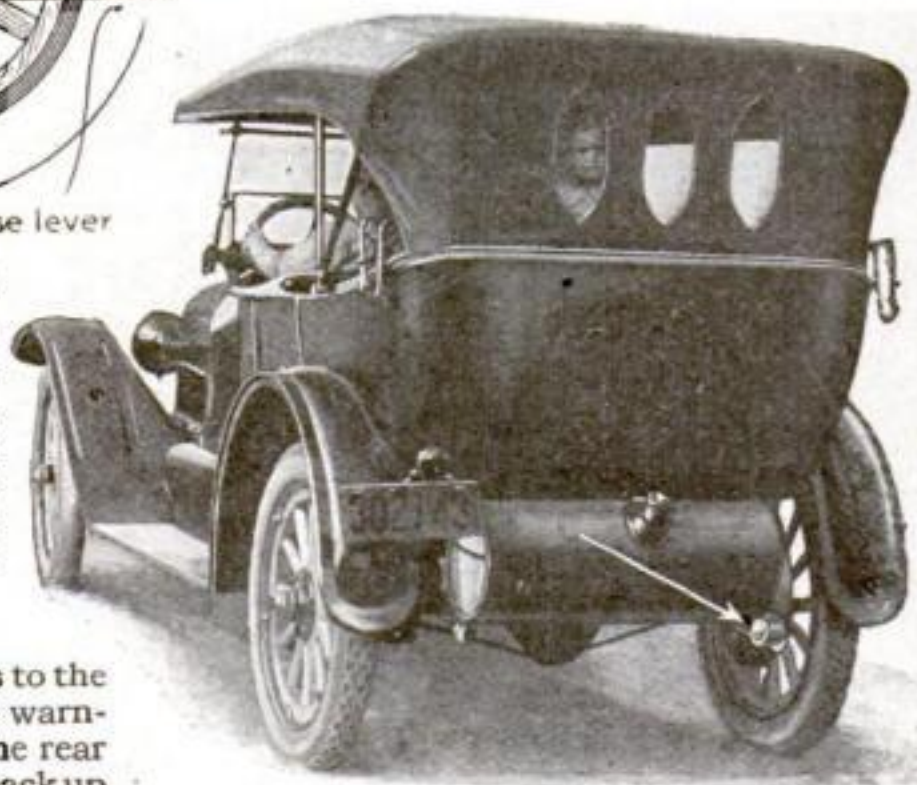

The arrow points to the bell which gives warning to those in the rear that the car will back up



# Breaking the Chain That Binds Us to Earth

We might escape if we could be shot into space at a speed of seven miles a second

By Charles Nevers Holmes

**M**AN is chained to his Earth, his planet-home. His chain is invisible, but the ball is always to be seen—the Earth itself. The chain itself is apparently without weight, while the chain's ball weighs about 7,000,000,000,000,000,000,000 tons!


This ball or Earth acts like a huge magnet, drawing us towards it, and the force of this terrestrial attraction is popularly expressed in what we call our "weight." Everyone of us is, therefore, chained to the Earth by his "weight." Although the invisible chain permits us to roam almost anywhere upon the surface of our planet-home, it ties us to this terrestrial home, and we can no more leave our Earth than we can fly through its atmosphere without artificial wings.

It is true that man, assisted by the lifting power of certain gases or machinery, may rise in a balloon or airplane thousands of feet above his Earth's surface, and reach a level where he can not breathe with comfort. His terrestrial chain can be stretched somewhat, so to speak, but there is a limit to this stretching. The chain is still there, although he may not feel it, and for a short while may forget its existence. Despite twentieth century science and invention, man has not yet broken his terrestrial fetters. He may escape several miles above the floor of his planet-home, but sooner or later he has to return to that floor, sometimes more speedily than is safe for him.

Yet man might escape wholly from his world, forever, and the time may come when he can leave the earth just when he pleases. All that


is necessary is velocity—velocity greater than that of modern war-projectiles, swift as they seem to be. Such war-projectiles possess a muzzle-velocity of from two to three thousand feet per second, and after a comparatively short flight the invisible chain pulls them down to the ground. But were these projectiles to travel at a far higher speed, say about 26,000 feet per second, they would never fall to the earth's surface, unless interfered with, but would travel forever around and around our world. That is, the terrestrial attraction would be just balanced by the velocity of the projectiles.

If this speed were further increased, if a projectile were given a velocity of 37,000 feet, or approximately seven miles a second, it would then leave the earth and never in all probability be seen again. And if a man were enclosed in this projectile he would, of course, escape from his planet-home. So that any one of us may depart our world if only an air-ship is invented that can be shot from the terrestrial surface with an initial velocity of 37,000 feet per second. Any one embarking on such an air-ship would very quickly break the chain attaching him to this earth. But although he would be able to leave this world, in all probability he would not be able to return. And a permanent exile from this planet, roving around in space, might receive a very cold reception at the surface of the Moon or a very hot one at the surface of the Sun. However firmly the wanderlust might be fixed upon him, he would doubtless find himself longing to get back home and devising means to get back again into the old environment and under the old conditions.

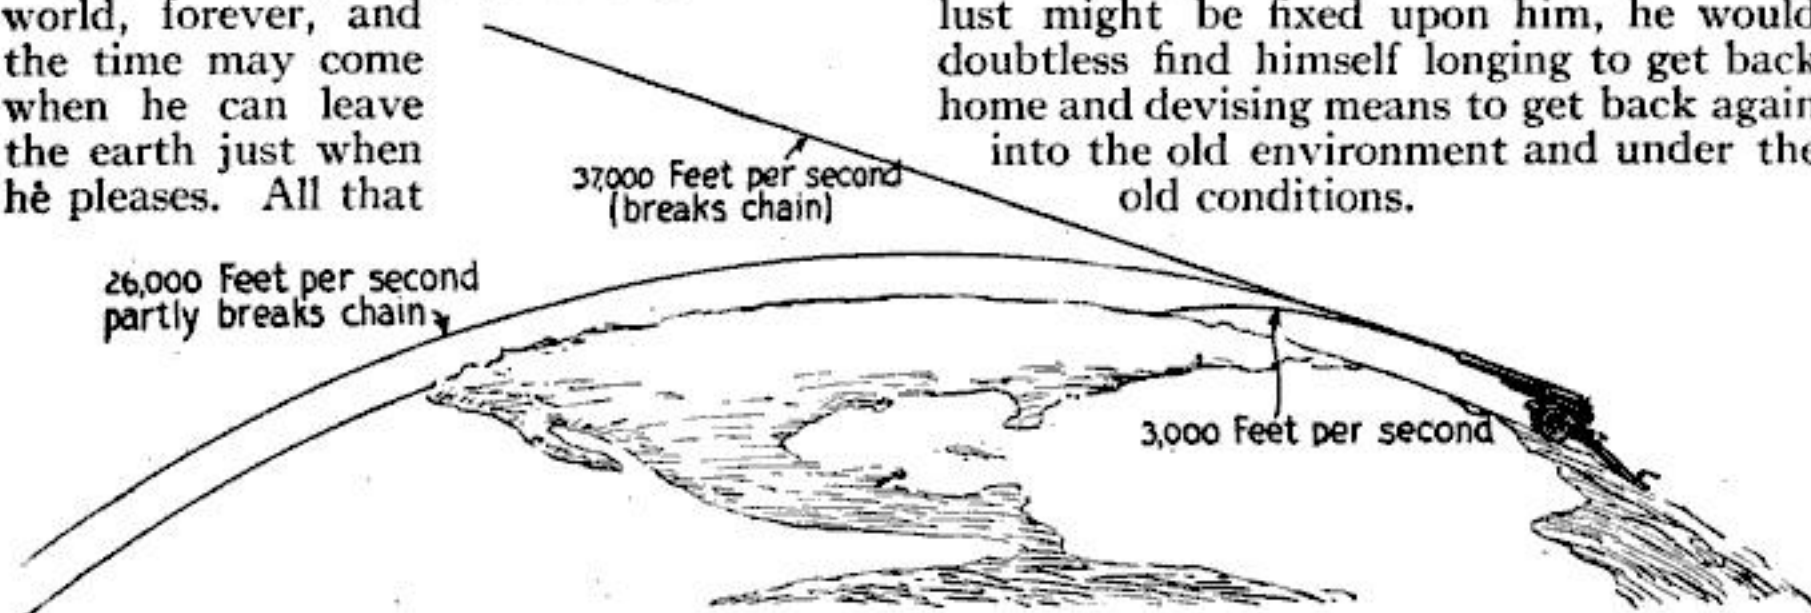

All that is necessary to enable man to escape from his planet home is velocity—velocity greater than that of war projectiles and great enough to balance the terrestrial attraction



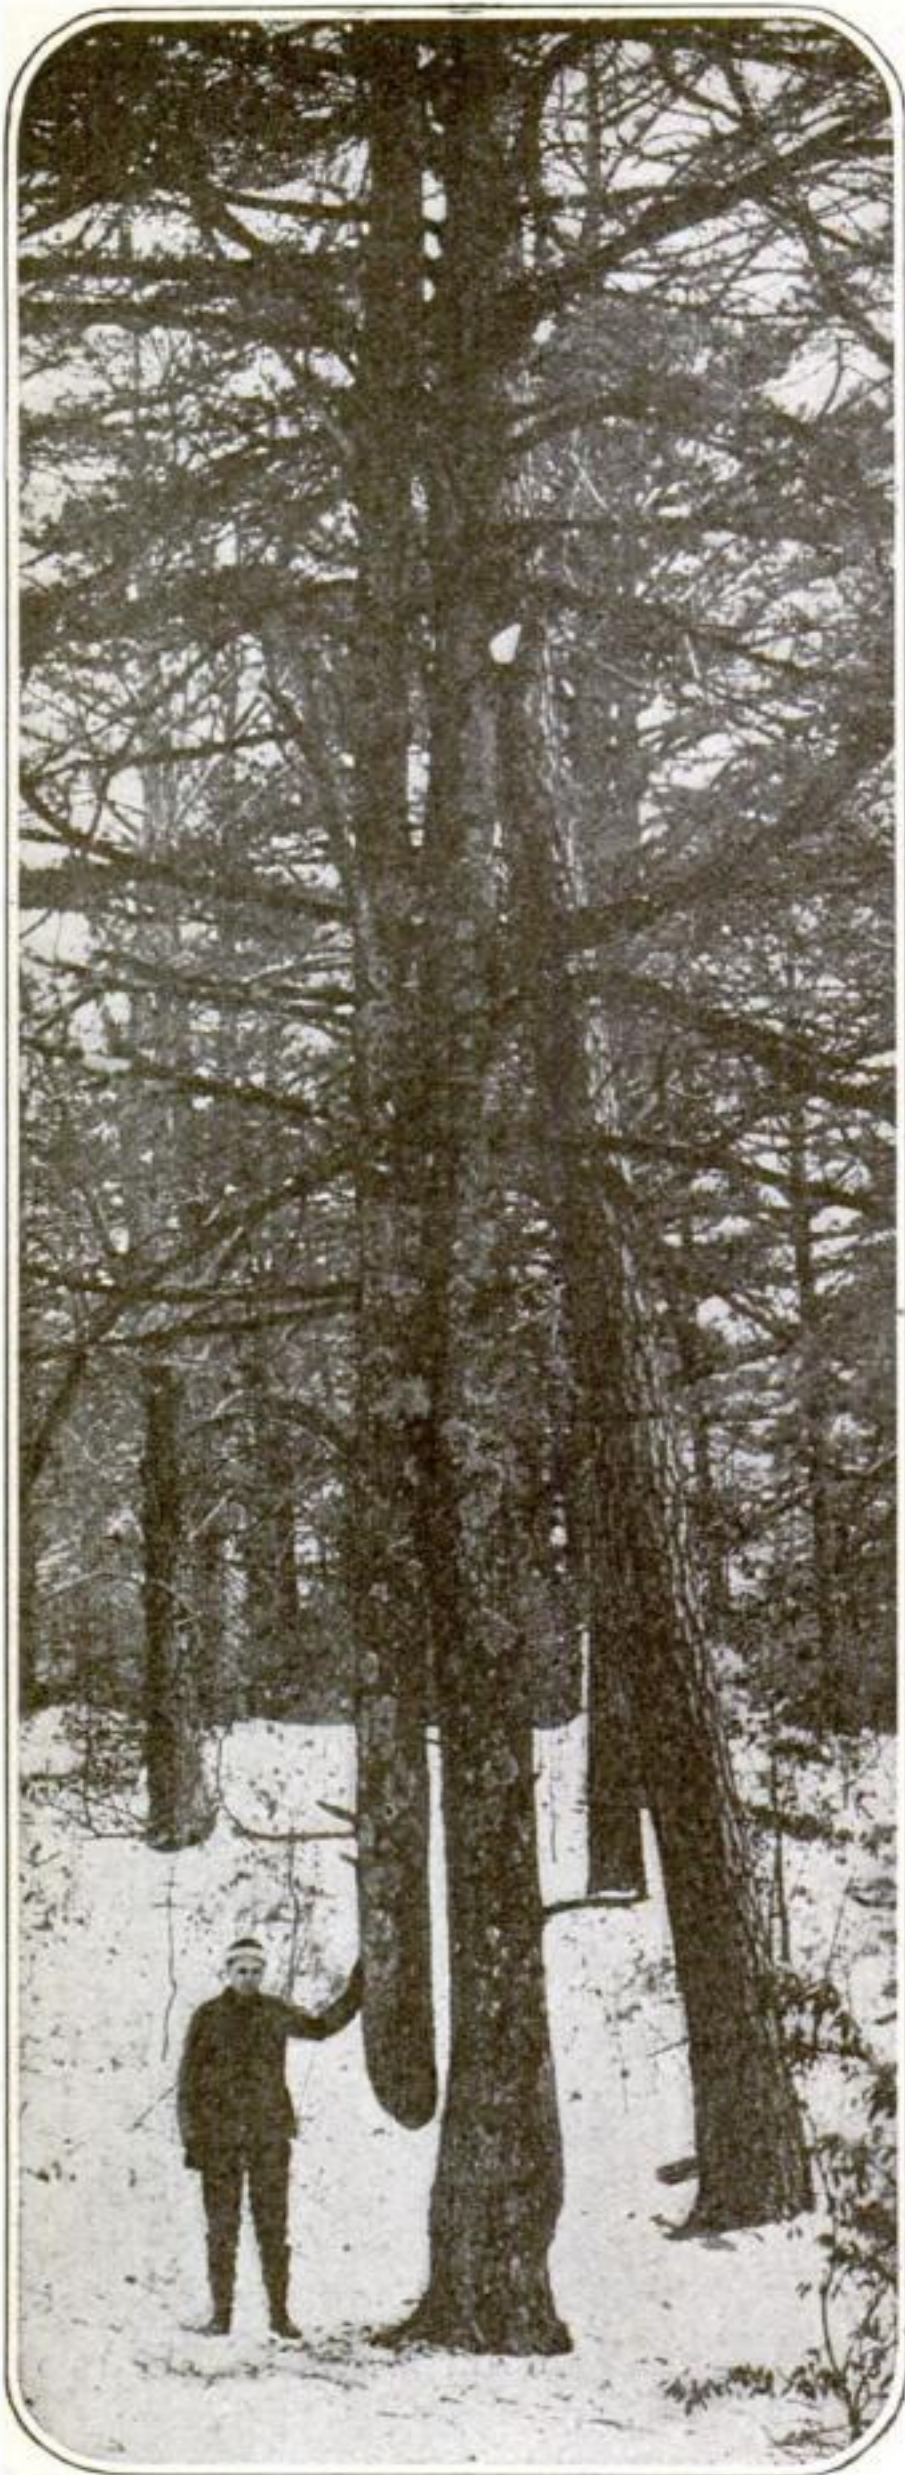

The portion of the grafted branch below the lowest graft union is still living and laying on wood rings annually. The graft has outdistanced the mother tree and most of the other trees of the locality in its growth

**The Cut Branch Did Not Die. It Grafted Itself and Lives**

IN the accompanying illustration is shown an unusual graft of two branches of a white pine tree, now completely severed from each other at the original point of union, but both still in a thriving condition because of a number of graft-unions along the twin trunks. The tree stands near Mont Alto, Pennsylvania, where a large charcoal iron furnace was formerly operated. In 1882 a laborer at the furnace was injured, and in accordance with the then prevalent belief, a companion laborer immediately set out to procure a supply of fresh white pine tree pitch with which to treat the wound. He selected the tree under discussion and cut therefrom a number of large chips at a point about three feet from the ground where the tree divided into two branches. The branch on the cut side of the tree was not completely severed at the time of the cutting, but in a few years the uncut portion rotted out and thus severed the one fork entirely from its original connection. To the astonishment of all who watched the development of this unusual tree, the severed branch continued to live. Everyone, however, predicted that this apparent condition of thrift could continue only for a short time. On the contrary, the top of the severed (dependent) branch, thirty-five years after the original cutting, is now growing more rapidly in height than the rooted branch. The following figures show the annual height growth of both branches during the past decade:

Year	Height Growth in Inches	
	Severed Branch	Rooted Branch
1916	10	5
1915	14	10
1914	10	9
1913	4	11
1912	16	7
1911	8	10
1910	6	6
1909	14	9
1908	19	12
1907	30	12
Total	131	91

The portion below the lowest graft union, which begins eight feet above the free end and extends along it for five feet four inches, is still living and laying on a ring of wood each year down to the point where the man's hand rests.





Photo by Bureau of Education, Washington

Ready to start a reindeer race at Igloo, Alaska. Two hundred Eskimos, all of them engaged in the reindeer industry, fourteen wild deer and numerous collie dogs took part in the sport

### How the Eskimos of Alaska Held an Exciting Reindeer Fair

**T**HE first reindeer fair held in Alaska took place recently at Igloo. It was attended by about two hundred Eskimos, all engaged in the reindeer industry on Seward Peninsula. The fair was a great success; for it gave the Eskimos a chance to exchange views on such problems as the best way to raise and drive reindeer and the best types of sleds and harness.

A herd of eight hundred deer was exhibited. They were not confined in a corral, but were kept in place by the crowd of eager sightseers, ever alert to prevent an escape. Intelligent, trained collie dogs hovered around the outskirts of the crowd to round up a deer that might break through.

Interesting features of the fair were the lassoing contests and the races. Thirty minutes each day for three days were devoted to lassoing. Only bulls without horns were lassoed. The winner of the contest had eleven deer to his credit. The bulls are difficult to lasso because of their wariness.

The driving race was held over a course a mile long. There were fourteen wild deer in it.

### The Old Indian Priests Had No Easy Time of It

**T**HE Indians are faith curists. But in South America certain tribes, more highly developed than others, had priests instead of medicine men in their religious ceremonies. These tribes were very particular about their priests. They argued that in order to be a successful intermediary the priest must be thoroughly cleansed of all impurities himself.

To make perfectly sure that the priest was worthy, a "swallow stick," such as the one shown in the illustration, was thrust down his throat. This, of course, acted as an emetic, and satisfied the audience that the priest was purged of his iniquities and could proceed with the ceremony.

The "swallow stick" in the photograph is one of four specimens brought from the Virgin Islands to the United States by Captain Theodore De Booy, explorer for the Museum of the American Indian, of New York City. It is estimated to be over four hundred years old, and is made of the rib of a sea cow. Three inlays of mother-of-pearl form the teeth. The eyes are shells set into hollows.



Photo by Museum of American Indian

A "swallow stick" — a 400-year-old relic from the Virgin Islands



## A Biplane Which Crashed Through a Tile Roof, Injuring Only Its Wings



© Int. Film Serv.

It was a lucky chance that the machine struck a comparatively fragile roof, in tearing through which it could expend its energy. The broad wings cut through a corresponding expanse of roofing

ONE of the pioneers of modern flight was Otto Lilienthal. He used to run down a hill with a glider (two outstretched wings connected by a handle-bar which he grasped), lift up his legs when he had gained sufficient momentum, and float down for several hundred feet. To maintain his balance, he would throw his weight around. Sometimes he was not quick enough and he would come crashing down to the ground. He used to say that his crude, motorless monoplane was not dangerous because if he could only manage to slide down edgewise, the wing would act as a buffer. To be sure, the wing's ribs would be broken; but then his own would be saved. He wrote of one instance in particular when he lost control because he was too tired to throw his weight to the front. A tail-slide and a dive resulted. His life was saved by an elastic-curved bar of willow wood which he had added in front of the wings.

The American apprentice who flew the machine, the tail of which is seen in the photograph above, will probably endorse Lilienthal's observations. At an altitude of five hundred feet the American lost control and plowed through the roof of a barrack building as if

his machine were a battering-ram. That he escaped without a scratch once more illustrates the old mechanical truth that when two bodies collide the weaker collapses and acts as a buffer for the stronger. The accident also demonstrates the protection afforded by a modern tractor biplane, provided, as it is, with a deep cock-pit in a very substantial body and constructed so that the weight of the machinery is all in front of the aviator.



Bringing the toes into their proper position by means of a toe spring

## A Toe Spring for Enlarged Joints and Bunions

ONE effective method of dealing with crooked toes, enlarged joints and bunions is to bring the toes into the proper position with a toe spring. This removes the cause of the enlarged joints and bunions, which will naturally disappear as a result. The toe spring is worn at night, and if necessary may be worn also during the day with a special shoe; it is attached to the foot in such a manner as to cause no discomfort or inconvenience.

In cases of severe soreness or inflammation, an ointment applied to the sore part prevents irritation from the spring.



## Reaching the Wounded Soldiers, Far Up in the Mountains

THE recent invention of a Massachusetts militiaman, Paul P. Alex, will be appreciated by the fighters in the mountain regions. It is an apparatus for carrying a wounded man comfortably on the back of an animal, and consists of two frameworks mounted upon the sides of a special saddle. One framework is stationary. The other, however, can be unclamped and be set upon the ground when a soldier needing attention is found. In opening out this framework, a toggle link is extended above the horse. With this link as a supporting member, the wounded soldier can be hoisted up on to his stretcher. Close up the framework once more, clamp it back in place upon the saddle, and the wounded man can be transported in comparative comfort.

On the journey over the trail to the dressing station, the soldier will be carried flat just as he would be were he in the ordinary ambulance. Even the most severely wounded can be moved with no more inconvenience than would be felt in an ambulance.



A tiny model of the folding staircase supporting a champion heavyweight to show its strength


## A Folding Staircase for the Fire-Escape—It Makes Descent Easy

THE ordinary fire-escape has no attraction for the timid man or the fat woman, principally on account of the lower part, which is nothing more than an iron ladder. Such persons will be glad to hear about the folding staircase illustrated in miniature on the left. It opens and closes on much the same principle as an accordion. In place of the accordion's ridges, however, are the steps and backs of the staircase which are horizontal and vertical respectively.

The counterweight and tackle of the staircase make it an easy matter to bring it into position in case of a fire. First a push, then a few pounds pull on the counterweight ropes, and the staircase drops from the balcony under its own weight. What was formerly a huddled mass of flat steel bars becomes a real staircase, by means of which it is easy to escape. When not in use the staircase is kept folded up on the first balcony out of sight and out of the reach of burglars.

## Administering the Chloroform to Some Old Sayings

THE Arctic explorer Stefánsson—who ought to know—has knocked the foundation out from under several old sayings which had come to be regarded as solid facts. Among other things he says authoritatively that frost-bites cannot be remedied by rubbing snow on them; that there is no harm in eating snow when you are thirsty; that Eskimo houses are well ventilated and are not generally ill-smelling; and that in his whole experience north of the Arctic Circle he has never encountered anything so bad, so sudden or so disconcerting as a typical North Dakota blizzard.

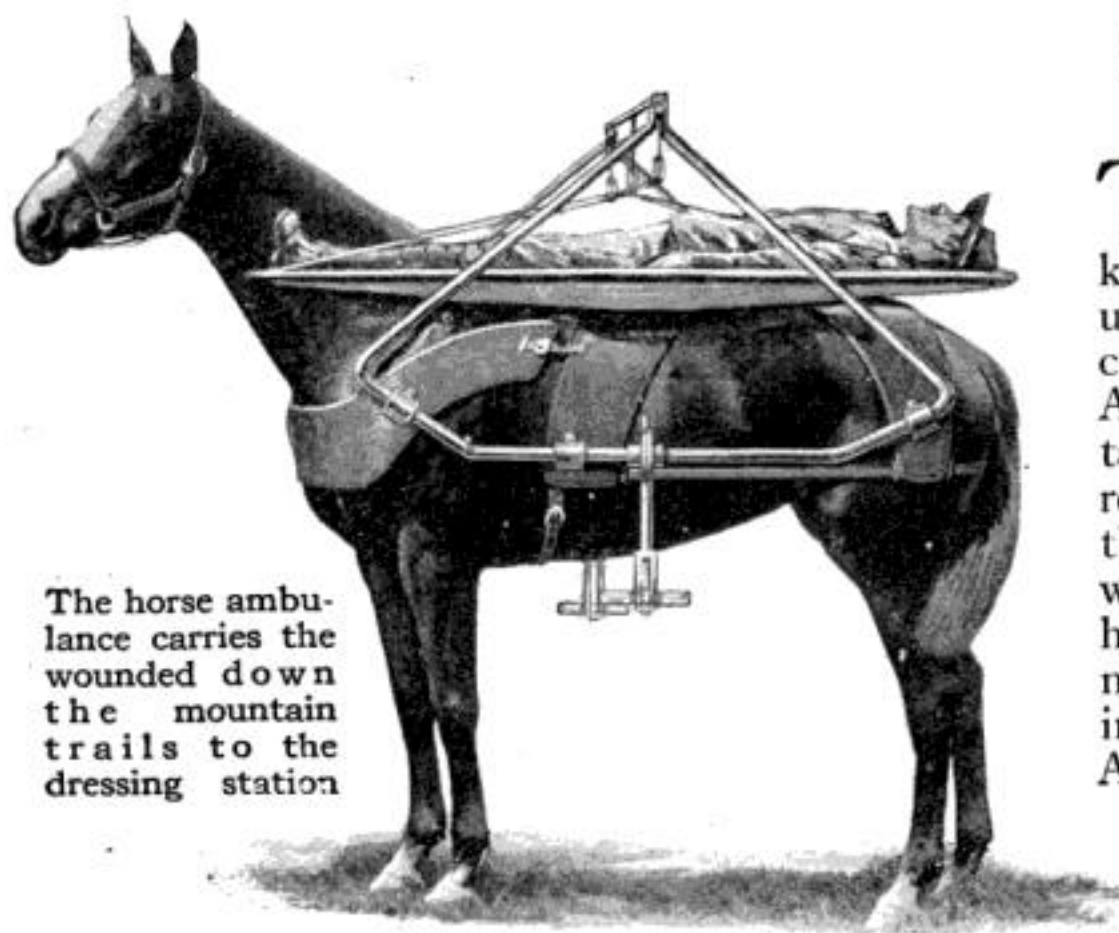

The horse ambulance carries the wounded down the mountain trails to the dressing station



# The Unsinkable Submarine

When struck, it simply discards the injured section and proceeds on its way

THE submarine may strike you as a very deadly thing. But the most formidable U-boat in the German Navy is as nothing compared with the submarine as Alphonse Fernandez of Spain would have it. Mr. Fernandez has patented some improvements on the submarine which render these terrors of the sea far more deadly than they are at present.

His invention provides the submarine with a detachable upper section. This section contains all the armament except the torpedo tubes. When a submarine is attacked and injured it capsizes because of the weight of the water which enters the injured part. If the Fernandez submarine is attacked by gun fire, is hit by a bomb dropped by an aviator or strikes a mine, the injured section may be cast off. The crew enters the remaining section and the enemy is deprived of victory.

The two sections are fastened together by screws which have bevel gears on their lower ends. In the main body there will be a longitudinal shaft having bevel gears which mesh with the gears on the ends of the screws and will release all of the screws


when the shaft is turned. This construction makes it only the work of a moment to separate the main body of the vessel from the upper section.

Another invention of Mr. Fernandez provides a deep-sea boat which carries a small vessel just as a kangaroo carries its young in its pouch.


Suppose, for example, that the large submarine reaches the mouth of a river up which it cannot pass because the water is too shallow. The enemy has a number of ships resting at anchor on that river. The mother ship submerges and opens the

doors of the compartment in which the small vessel is carried. This is done very easily as the miniature submarine has a hatchway by means of which it may be entered from the compartment. The torpedoes which it requires on its journey of destruction are loaded on it from the mother ship. When the crew which is to man it enter and all is in readiness the small vessel is set free by opening the doors of the compartment and releasing the miniature ship from its coupling.

Its mission accomplished, the baby returns to the mother submarine.

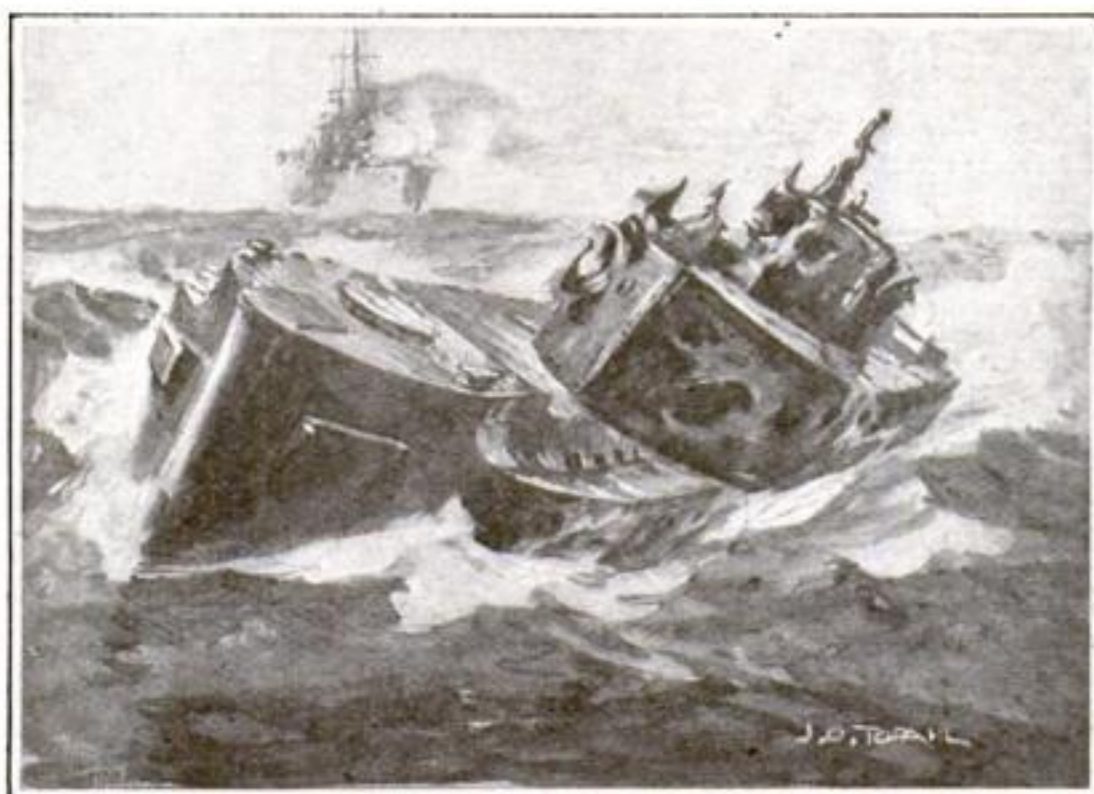


If the upper part of the submarine is struck, it may be detached and discarded without affecting the boat's safety

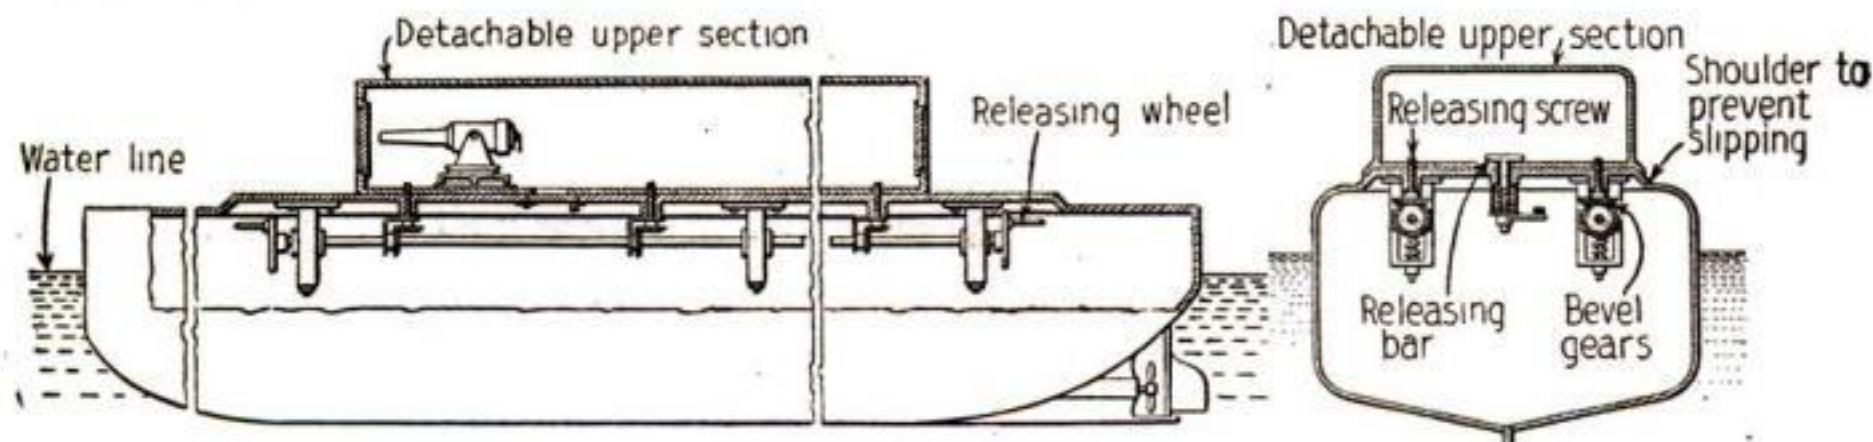

The two sections of the submarine will be fastened together by screws which have bevel gears on their lower ends meshing with a longitudinal shaft in the body of the vessel which releases them



## The Mother-Submarine and Its Baby

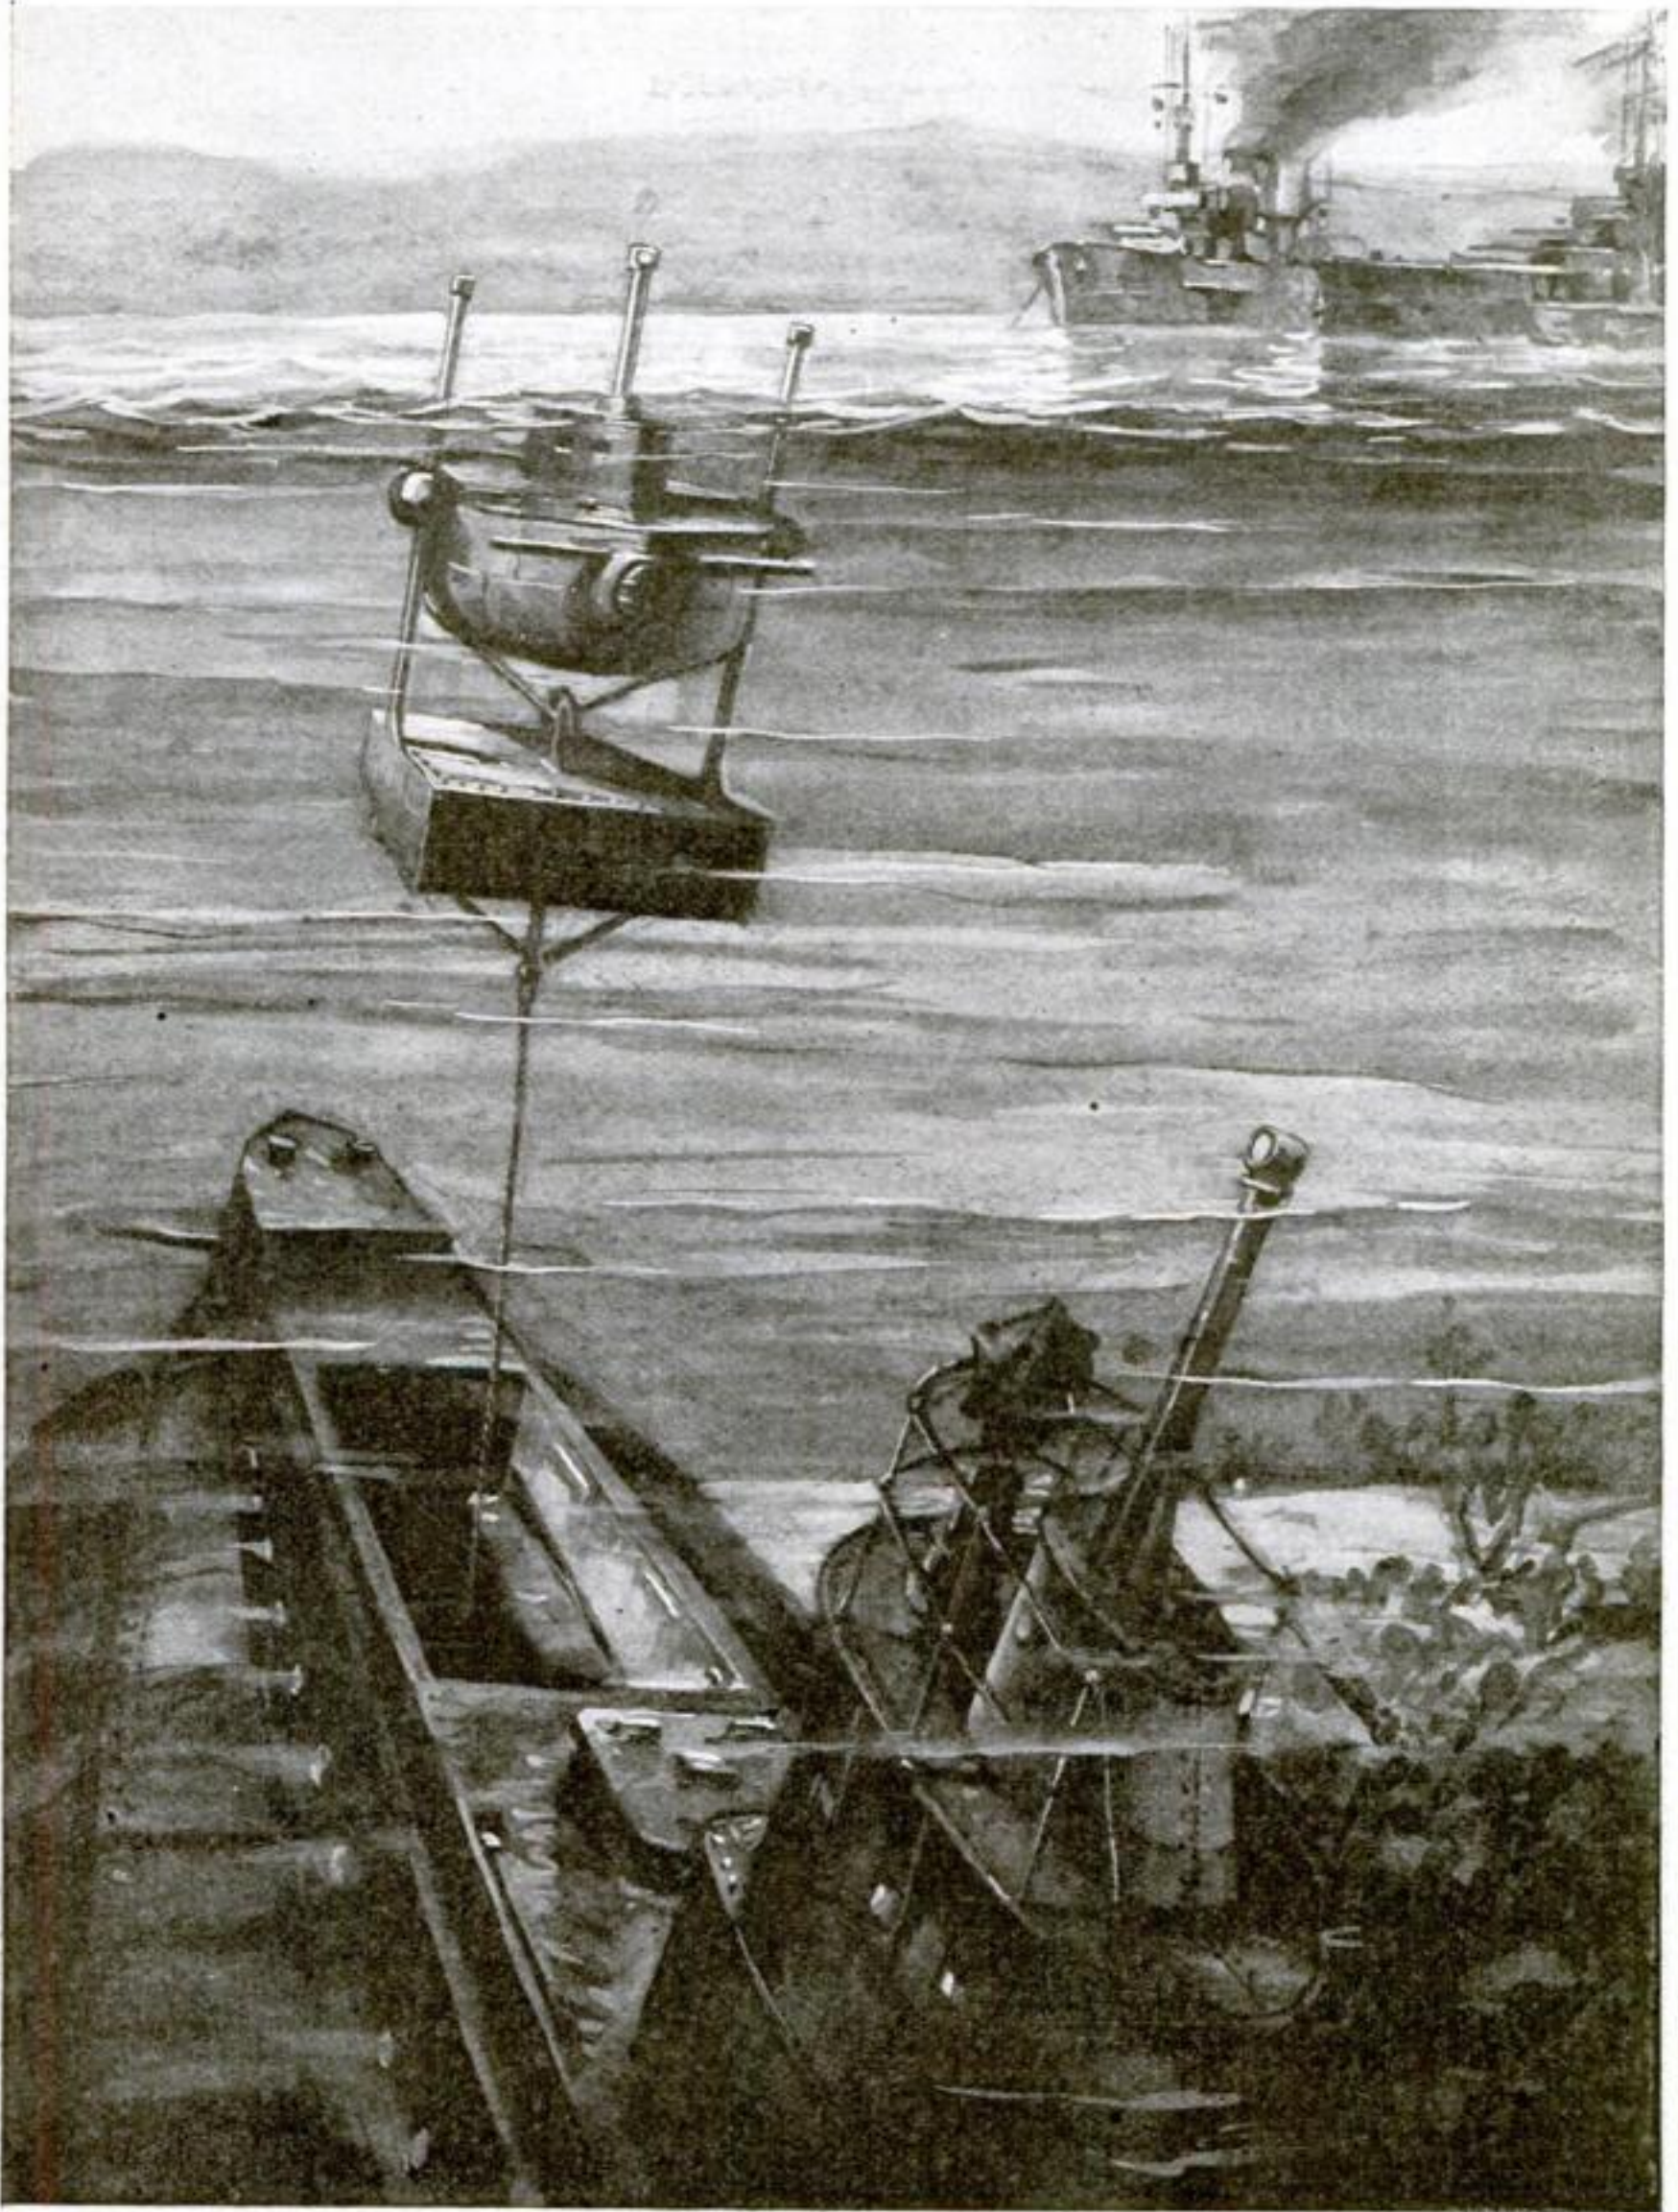

The miniature vessel is carried in a kind of pocket in the large submarine in much the same way that a baby kangaroo is carried in its mother's pouch. When the mother submarine encounters a piece of work in shallow water, or which is for any reason difficult for it to accomplish on account of its size, it releases the baby vessel, which is armed and manned for the task. Its work accomplished, the baby returns to its mother





The cradle complete. The framework is hinged together so that it is easily collapsed and stored away


Pressure on the treadle bar causes the cradle to tilt forward. The weight of the child brings it back

### Rocking the Baby Fore and Aft

WHEN William F. Walsh, of St. Paul, Minn., finished reading all the literature he could find on the subject of the harmfulness of rocking babies to sleep in cradles, he was convinced of only one thing—that the harm lay in the direction of the motion, not in the rocking itself.

Therefore he gave his attention to constructing a cradle for William, Jr., which would have a gentle motion forward and back to equilibrium, rather than from side to side. The result of his effort is shown in the illustrations above. One of these shows a detail drawing and the other the perfected cradle in miniature. Being a plumber by trade, Mr. Walsh used gas pipe for the frame of the first model, but later resorted to band iron in order to make the cradle collapsible.

The basket of the completed cradle shown in the illustration is suspended between two side standards braced by the base framework. A chain extending from an arm of the pivot pin at one side of the basket is connected with a treadle.

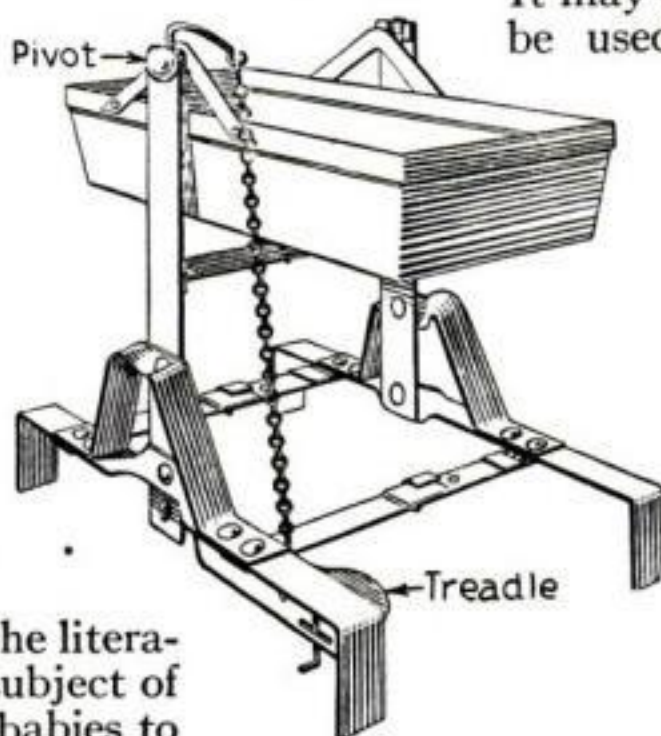

In operation, a light pressure on the treadle bar will cause the basket to tilt forward slightly. When the foot is raised from the treadle the weight of the child in the basket restores the cradle to equilibrium.

A gentle motion is secured which is neither a swing nor a roll and which the inventor believes will not affect the nerves of the most susceptible infant. The parts of the framework are hinged together so that they may be easily disconnected to be stored away when the cradle is no longer needed. There is room for indulgence of personal taste in the choice of the material and design of the bed portion of the device.

It may easily be a basket which may be used for other purposes later.

Or the shape shown in the detail of the design may be used, made up in metal or wood. Rods may be attached to the framework for curtain supports.

### The Pull-Motor: It Takes All the Work Out of Skating

HAVING motorized about every other sport, the engineers have turned to skating, and by making a motor-wheel pull instead of push, they have taken all the physical effort out of the sport. With the motor-wheel all you need do is to steer with the handlebar and hold on, paying your respects to your friends as you scoot by them.

To make the wheel useful for ice work, strips of steel are fitted to the wheel to form a handle. A wooden crossbar, about fifteen inches long, fitted across the top, serves as the steering apparatus. The control wires are attached to the wooden handle. Murray Fahnestock, of Pittsburgh, Pa., is the man who conceived the idea of putting the wheel to work on the ice. According to Mr. Fahnestock, the sight of a big collie dog pulling a girl over the ice gave him his inspiration for the motor-wheel.



Steel strips and a handlebar on an ordinary motor-wheel make a pull-motor to whizz you over the ice




## Magnetizing Steel Without Using a Lodestone

DR. S. J. BARNETT, of Ohio State University, has recently discovered an entirely new method of producing magnetism—the first since the finding of the lodestone or natural magnet in ancient times, by means of which a magnetic field was produced in which the body to be magnetized was placed. Dr. Barnett, however, has been able to produce magnetism without the influence of any outside agency, by simply rotating a piece of steel at a speed of about forty-five revolutions per second. Perhaps this fact may help in the final solution of the great problem of the earth's magnetism which has puzzled scientists for ages.

If a bar of steel can be magnetized by rotating it, why can't the earth produce its magnetism in the same way, as it rotates upon its axis?

In the first place he has found that a bar of steel behaves just as if its molecules were little spinning tops, or rather minute gyroscopes. These gyroscopic molecules line up with their axes parallel to the axis of rotation of the bar, and because each molecule acts as a magnet the whole bar then becomes magnetized.

The reason why the molecules act as they do has been very carefully worked out and the result seems to substantiate the now common electrical theory of matter. This theory assumes that each atom of matter consists of a positive center about which a little negatively charged particle is rotating at very high speed. From this it is deduced that each atom is a minute gyroscope and that the negative particle rotating about its axis acts just exactly like an electric current and magnetizes the atom.

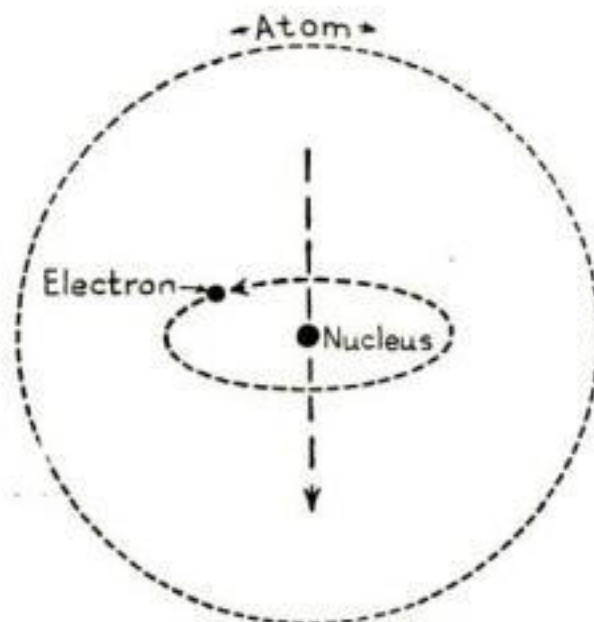

in the electrical theory of matter, each atom is a negatively charged particle revolving about a positive center




The barrel of the seven-shooter watch-revolver is the hollowed out watch stem. The trigger slides along this stem

## "Hand Over Your Watch!" Why Certainly, Mr. Burglar

WITH a revolver disguised as a harmless watch, Leonard Woods, of St. Louis, Missouri, hopes to get the "drop" on a burglar who has the drop on him. When he has been asked to hand over his watch he will willingly pretend to do so, but he will deliver a volley of hot lead instead.

The device is really a seven-shooter with a repeating mechanism small enough to fit in the limited space of an ordinary watch-case. The encompassing of all the mechanism in such a space is a real achievement. It took Woods several years to do it. The manner in which he finally accomplished it is shown by the accompanying illustration.

The barrel of the revolver is the watch stem hollowed out. The trigger, which slides along on this stem, is placed in such a position that your forefinger naturally encircles it when you are compelled to take the watch from your pocket. As you pretend to be looking at the time, you are actually aiming at the hard heart in front of you. If the thief insists upon having the use of your watch, you can give it to him by simply pressing the trigger. When that is pressed in, the cartridge cylinder will be turned around and the hammer will be brought back until a cartridge is in line with the barrel and the hammer is automatically released.

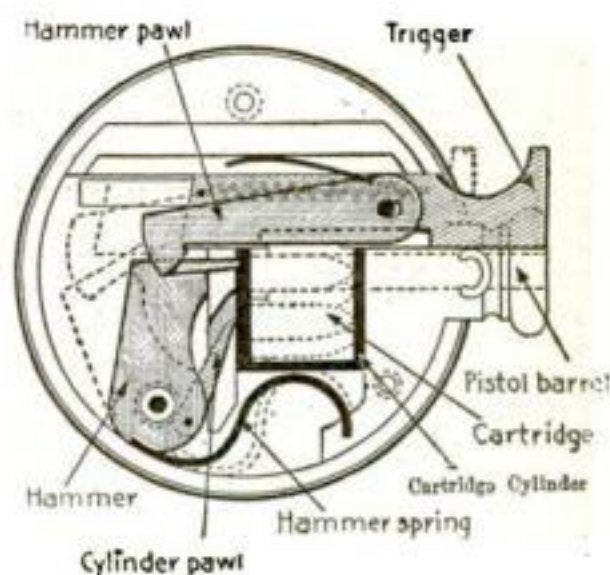



# Shooting Shells of a Hundred Tons

It will destroy half a city at one shot  
and an entire city with three shells

By Charles Beecher Bunnell

**T**HE English are said to be using 21-inch guns which fire 4,000-pound projectiles

capable of burying themselves in the ground a depth of thirty-five feet at a distance of ten miles.

But they are mere pop-guns compared with the gun that I have designed. My gun will fire a shot one hundred miles.

One of these weapons placed at Portland, Maine, would protect her entire coast from Mt. Desert to the Massachusetts line. Another such gun at Newport, Rhode Island, would protect the entire Massachusetts, Rhode Island and Connecticut coasts as far as Bridgeport. A third gun at Lakewood,

New Jersey, would reach from Bridgeport, Connecticut, to Cape May, covering as well the entire State of New Jersey.

And if we go farther and plant these big guns as thick as lighthouses, all the vulnerable points on the Atlantic seaboard would be placed under instant gun fire. That's quicker than sending out ships or troops, although this gun will not do away with either. For instance, thirty seconds after Boston was attacked, the guns at Newport would be shelling the enemy's fleet, who could not locate the attack or reply to it. From Lakewood, New Jersey, the harbor of New York would be under absolute control; so would Philadelphia, Cape May, and the Delaware River. The whole State of New Jersey would be in its protective range. The moral effect of such a powerful and deadly weapon should not be underestimated. The artillery of few, if any,



Elevation of the big gun is controlled by a left-hand wheel operating three dials—a degree dial, a second dial and a minute dial—while point of compass is controlled by a right-hand wheel with three other dials geared similarly

ships can match it, for two reasons: the cost of a ship to carry such a gun would be impoverishing, and there is no way of locating satisfactorily an unseen object one hundred miles away.

The explosion of the shell sixty feet from an ordinary ship would swamp it and thereby prevent firing of the ship's guns. The concussion alone would destroy the crew and leave the men dead without mutilation.

I have shown the accompanying picture to ordinance officers. "Anyone who laughs at that design is foolish, in view of what's happening every day," said one man who is

on Major General Wood's staff. Other Staff Officers said: "I'm very much interested in that gun."—"That gun will shoot a hundred miles."—"Do you realize what that range means to us?"—"That's what we want, big guns and lots of them."—"Go ahead and God bless you."

The rifle is 375 feet long and weighs 39,277 tons without mountings. It has a bore of 60 inches. It throws a shell 26.5 feet long weighing 100 tons a distance of 70 miles at 20 degrees elevation or 100 miles at 45 degrees.

The weight of the shell fired by this gun is always uniform no matter what form of explosive is employed. Its nose is ellipsoidal for the reason that a round shot goes to the left and down, while the conical shot goes to the right and up of any gun's axis. The nose of my shell is the mean between these two extremes.



Ten tons of powder in 20-inch prisms propel the shot, which encounters an atmospheric resistance at the muzzle of 10.45 tons which fades off to zero at the first point of impact. Ignition is reversed; the powder commences to burn at the shell's base and works back to the breech-plug so that the air is not filled with burning powder grains, as is usually the case. Fired point-blank the shell travels twenty-one miles parallel with the earth's curvature, which would permit the shot to perforate two German fleets side by side. At a 70-mile range the gun's possible destructive area is 15,386 square miles; at the 100-mile range, 31,400 square miles.

If this gun were using its 70-mile range and it were located at Somerville, New Jersey, it would command New York City, Philadelphia, West Point, Mauch Chunk, Wilmington, Delaware and all the intervening country. One gun on the Panama Canal would command both entrances with deadly accuracy.

The power required to operate the gun is furnished by its own recoil. The rifle automatically assumes the position for firing.


The first part of the recoil is absorbed by compressed air cylinders connected with a series of glycerine cylinders. At the end of the recoil the gun is locked in a horizontal position through compensating gear and is ready for automatic cleaning and loading, after which it automatically elevates itself and fires.

The gun is started and stopped by a foot press. The elevation is recorded by a left-hand wheel operating three dials—a degree dial, a second dial and a minute dial, while the point of compass is controlled by a right-hand wheel with three other dials geared for degrees, minutes and seconds. Since harbors can be ruled off into imaginary numbered squares, it is merely necessary to telegraph the office in charge of the gun that the hostile fleet is in square 22 or 64. The operator places a pantographic pointer on a metallic map at the position designated and the gun does the rest. The area of each square is coincident with the shell's own destructive area, while the whole metallic map is coincident with the gun's destructive area.


The carriage weighs 98,492.5 tons without the gun. It is practically an automobile car resting on 250 soft iron wheels, each of which is 2 feet wide and 2 feet in diameter with 12 grooves in the rims for the rope tires.

Each wheel's bearings are a fork, like an inverted "U," the handle being a plunger terminating in a compressed-air cylinder.

All cylinders are connected and subject to the same pneumatic balance. Each wheel may be turned in any direction by a gear which connects all wheels. Power is transmitted to a certain number through double cranks in a double

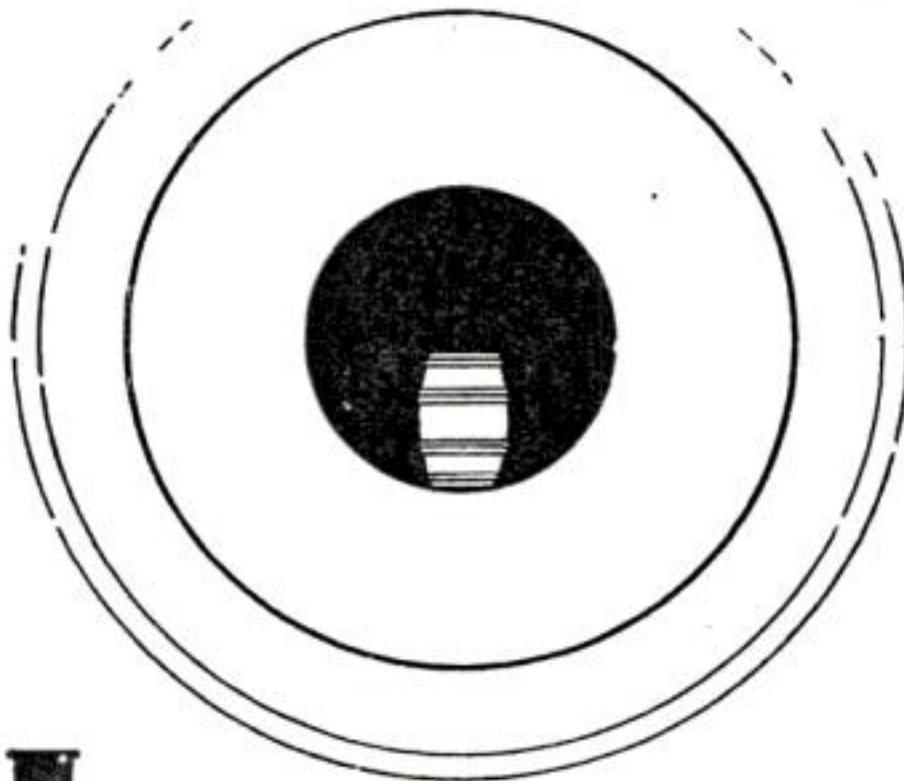

If the largest cask you ever saw were placed in the mouth of the gun it would probably look as tiny as the one shown here at the left

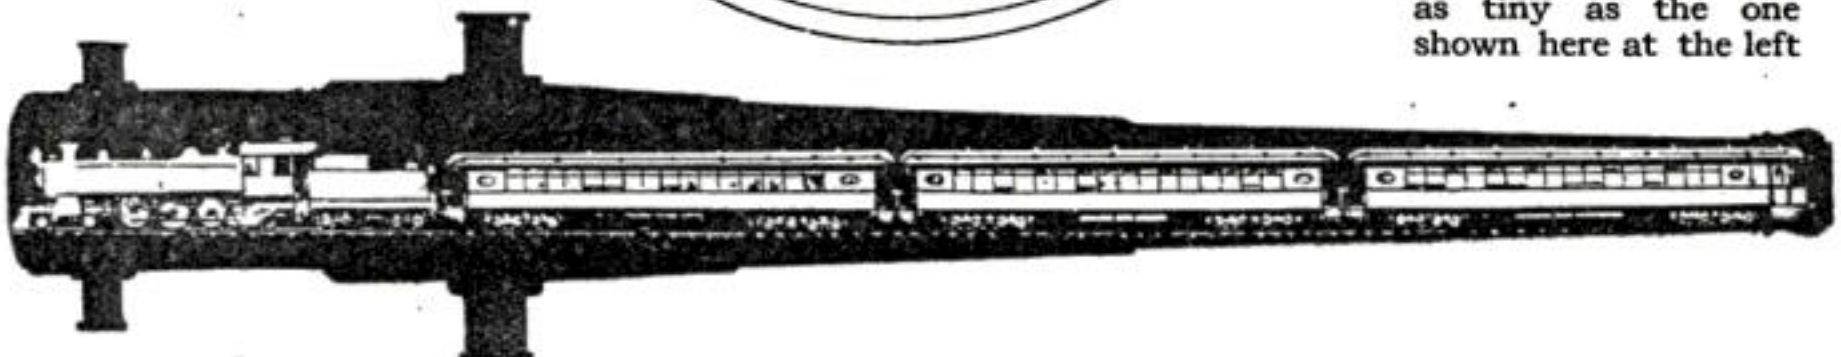

In the drawing above you get a fair idea of the length of the bore of the new gun. It could accommodate an engine and a train of three usual-size cars



An idea of the size of the shell used is given at left. An ordinary eight-cylinder automobile could be carried in it and there would be plenty of room to spare



twisted joint sleeve without regard to the position of the upper cranks or the lower wheels.


At rest a series of screws with flat heads descend and level the platform automatically.

The inner tube of any big gun is no stronger than any flaw which it may contain. To make a tube in one piece is like putting all your eggs in one basket. The inner tube of my rifle is designed to take care of the stress developed parallel with the major axis only. It consists of 16 strips of steel, each 375 feet long, 2 feet thick,  $22\frac{1}{2}$  degrees wide, each locked with the next, making a tube 375 feet long, 9 feet in diameter, with a 5-foot bore. To take care

of the stress at right angles with the gun's major axis, I shrink upon this segmented tube 750 steel rings each 6 inches thick, 12 feet in diameter with a 9-foot hole. These rings are of compressed steel made when in a semi-fluid state and subjected to the greatest pressure that can be developed. Upon these rings a series of steel sleeves are locked and shrunk. Lastly, the trunnion and breech band are placed in position. As a result of this construction the gun is proportionately 40% stronger parallel with its major axis and at right angles to it than a 16-inch gun of the same size would be.

One shell from this gigantic weapon would annihilate Essen and make the Krupp works look like so many heaps of emery powder. Another would make the whole district a Valley of Death for thirty days after it fell.


One form of shell used is exploded by

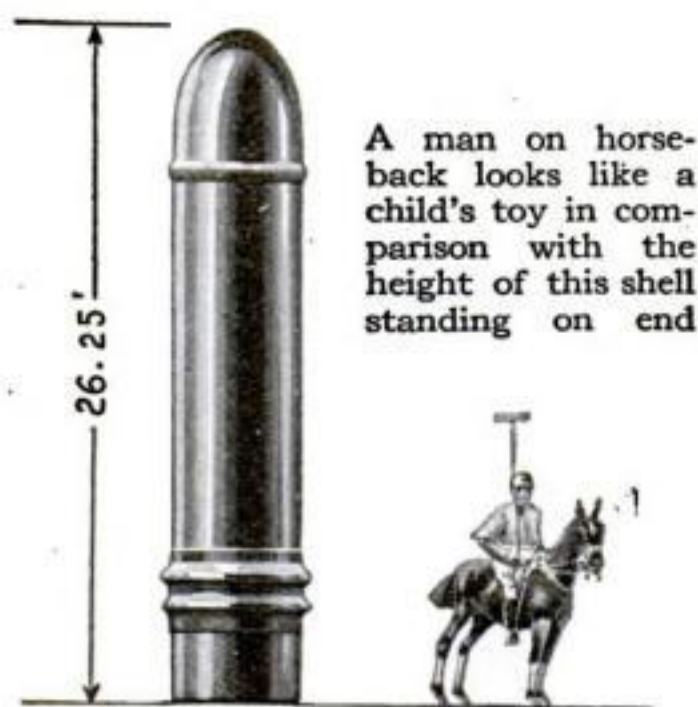

THE SHELL



The rifle has a bore of sixty inches, throwing its huge projectile 100 miles

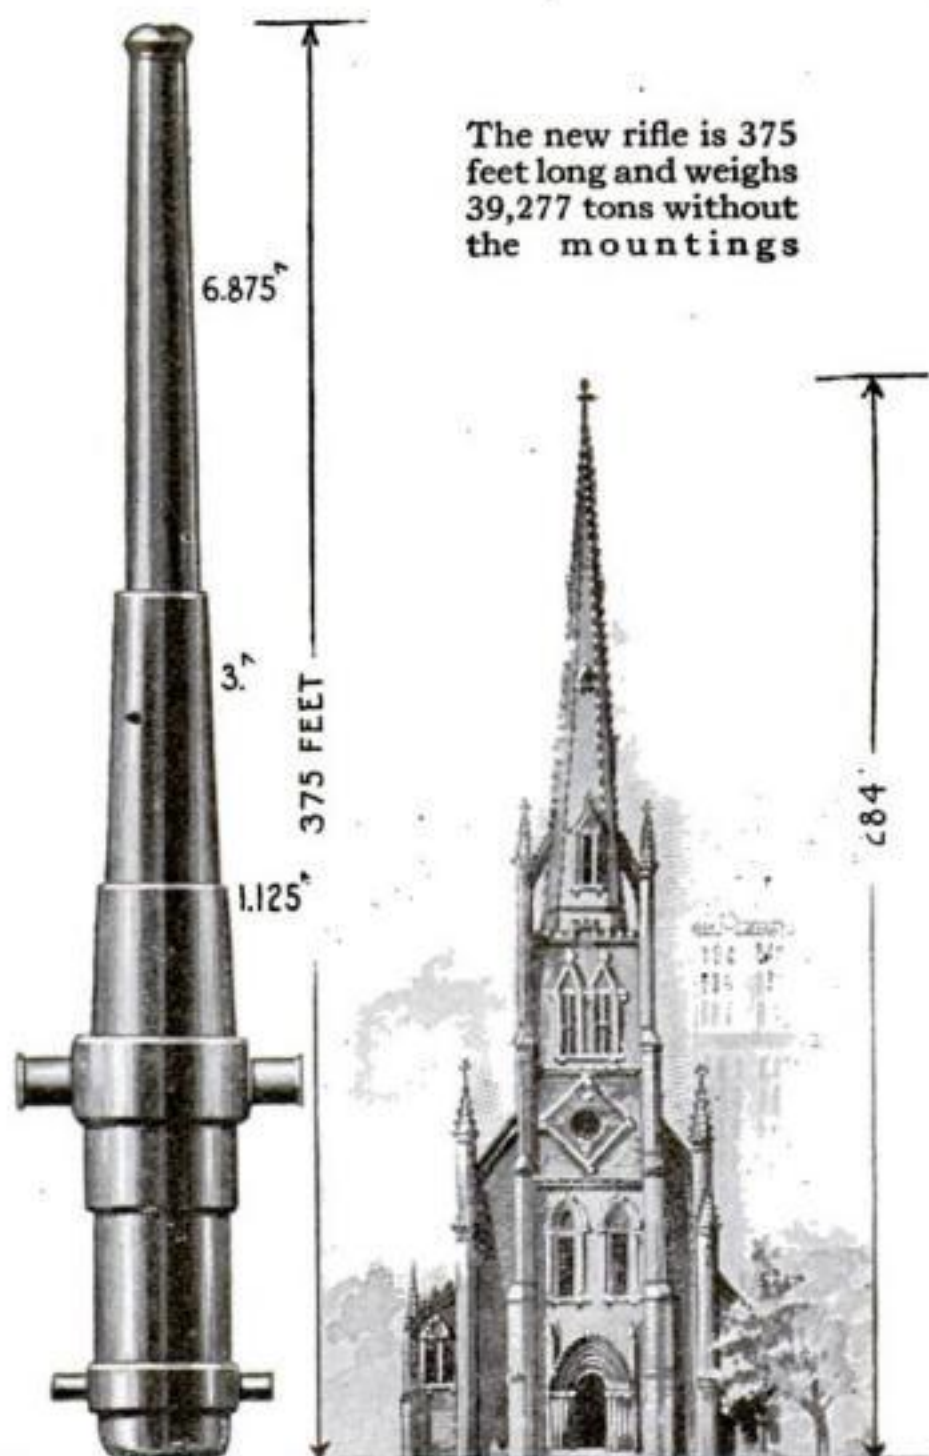


THE BUNNELL GUN

TRINITY, N.Y.

A comparison of the length of the gun with the height of Trinity Church and steeple, New York



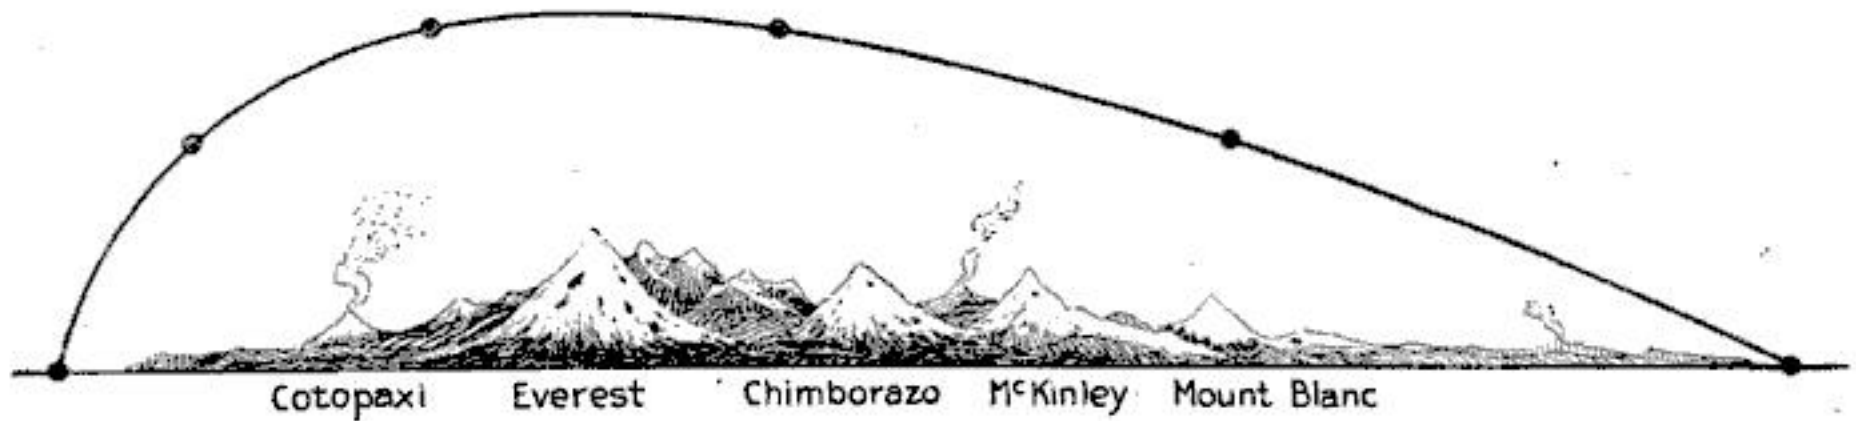

At a 70-mile range the gun's possible destructive area is 15,386 square miles; at 100-mile range, 31,400 square miles. We can imagine its projectile bounding over our highest mountains with ease

chloride of nitrogen. The second shell would be aimed at the same place and fired as quickly as possible to get the same atmospheric advantages, whereupon it would begin after landing to vomit innumerable small shells containing osmium and hydrocyanic acid, cyanogen, etc.

The silent death produced by osmium would make an ordinary graveyard tame and commonplace; for the osmium that

can be piled on a ten cent silver piece will kill 1,000 persons. I have devised a shell which would contain enough of that poisonous metal to kill 300,000 people and 700,000 persons, respectively, allowing the usual 10% for failures, etc. The gas would travel in waves from a central point. The crest of each wave would be a terrible compression, and the bottom of each wave a fearful vacuum.

## What's Wrong with the Big Gun

**M**R. BUNNELL, the author of the foregoing article, is one of the few laymen who has definitely attacked the problem of the big gun. He is an artist with an imagination, as his pictures and his article prove. We gave him space in the *POPULAR SCIENCE MONTHLY* to set forth his ideas. And now the Editor shall proceed to give his view of them.

The size of a gun cannot be increased without paying the price. The weight of a heavy gun, the projectile and the powder charge vary almost directly with the cube of the diameter of the bore. Hence a small increase in diameter means a very large increase in power. For example, a twelve-inch gun fires a shell which is about seventy-five per cent. heavier than that fired from a ten-inch gun; a fourteen-inch gun fires a shell about sixty per cent. heavier than that fired from a twelve-inch gun; and a sixteen-inch gun fires a shell half again as heavy as that fired by a fourteen-inch gun. A sixty-inch gun would be at least two hundred and fifty feet long; its shell would weigh about sixty tons; and the charge would be about twenty tons of powder. The weight of the gun itself would approximate that of the old battleship *Oregon*; the carriage would weigh twice as much.

Now it must be admitted that such a gun could be built. But are the existing facilities adequate for handling such an enormous mass in a single unit? We doubt it.

Consider the mere matter of machining the casting. The lathe to bore and rifle the gun would be not less than five hundred feet long—twenty times the length of any lathe ordinarily seen in a machine shop, except lathes built for very special purposes.

How would the completed gun be transported? Transportation by rail would be impossible in many places.

No doubt bigger guns than those we have now can be built. But the ordnance expert and the

military strategist asks himself: Is it worth while spending the necessary time, energy and money? To justify its existence a huge gun such as that which Mr. Bunnell proposes would have to accomplish amazing results. In judging these results such factors as probable life, range, accuracy, rapidity of fire, character of the target and destructive effect of the projectile would have to be considered.

As the destructive effect of the projectile is approximately proportional to the weight, this is usually not a determining consideration, provided the projectile can destroy its probable target, which for heavy guns is usually considered as the most powerful battleship afloat or contemplated.

The range does not increase greatly with the caliber. At the usual maximum elevation the range of a sixteen-inch gun is only about a mile more than that of a similar ten-inch gun. A sixty-inch gun would have an appreciably greater range than a sixteen-inch gun, but not great enough to be a determining factor. The accuracy of fire would also not be appreciably greater. As a projectile not much heavier than the heaviest now in use could destroy anything now known or contemplated, the factors which would determine whether or not a sixty-inch gun should be built would be probable life, rapidity of fire and difficulty of construction.

The life of a gun decreases rapidly with the caliber; probably a dozen rounds fired from the Bunnell gun would mark the duration of its accuracy life—not enough to insure the destruction of a single target. With the best gunners the hits made are limited by accurate observation of fire, by the natural dispersion of shots, and in the case of ships, by unexpected changes of course.

The increase in size of guns has been a slow evolution. It is not likely that we shall suddenly leap to a titanic weapon.—EDITOR *Popular Science Monthly*.



### You Can Hold a Dozen of These Perfect Coconuts in One Hand

THE coconut family is a large one, and there are many babies in it. The babies are a species all by themselves, though closely related to the giant seventy-pound specimens called *coco-de-mer*. As shown in the photograph they are full grown, although only as large as a good-sized hickory nut. Although they taste exactly like the ordinary coconut, they are too small to be of any value commercially and they rot on the ground by the ton, in the tropics. The same is true of the giant species which are too large for commercial purposes. Only the medium size is sold.



The baby coconuts are exactly like the larger-sized nuts in taste and texture

### The French "Horizon Blue" Is the Best Color for Uniforms

OUR khaki suits are good. But "horizon blue," the color which the French use for their uniforms, is said to be better still. Against certain backgrounds it is altogether invisible from a distance. The reason for this is that it is the color of distance. An artist painting a landscape puts his objects "back" by washing them over with a mixture of white and blue, the horizon blue. This makes it appear as if there were air between the objects and our eyes, so that the objects themselves appear indistinct.


The uniforms of horizon blue make the wearers appear, if not actually a part of the landscape, at least considerably farther away than they are. And since a man is recognized by his shape rather than by his color, the blending of his clothes with the color of the horizon helps his "camouflage considerably."

### Making Money Out of a Nuisance. The Industrial Rise of Acetylene Ash

INDUSTRIAL chemists are constantly finding new and useful ways of disposing of by-products. One of the latest troublesome wastes to rise to the dignity of a valuable commercial product is acetylene ash. This stuff, which could not be disposed of profitably a short time ago, is now worth fifty dollars a ton.

An employe of a Los Angeles plant, Frank L. Thompson, discovered that it could be used to make plaster, whitewash and a substitute for marble dust that is used in the surfacing of asphalt highways.

Dissolved acetylene gas is made from calcium carbide, which is a combination of plain lime and carbon. The product that remains after the gas has been extracted is slaked lime of a decided commercial value.

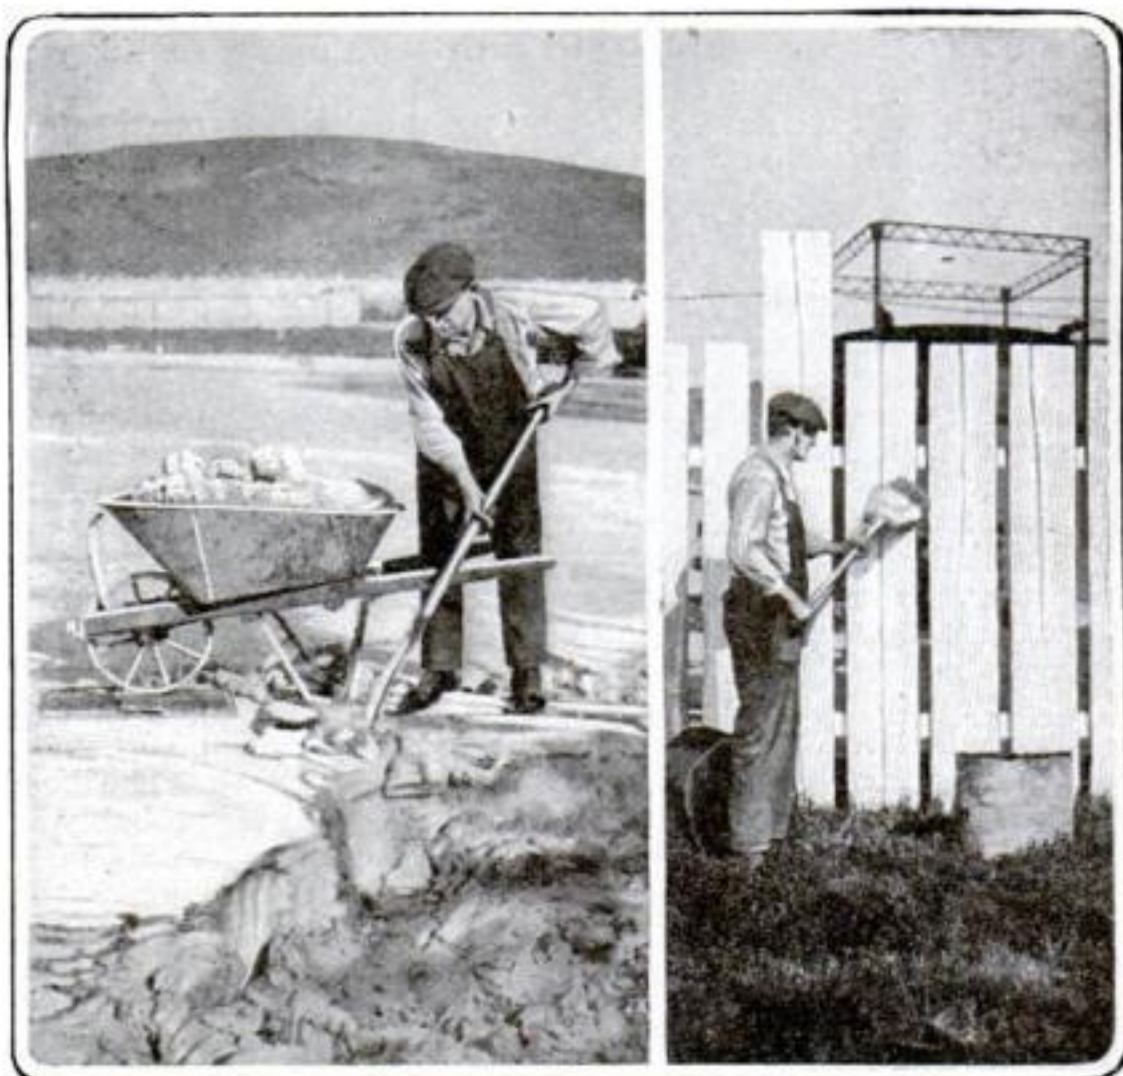

Digging acetylene ash from a sludge pit filled with lime from a Los Angeles acetylene plant and whitewashing a fence with whitewash made from acetylene sludge






The five flusher-nozzles at the front of the truck swing on a vertical pivot

### Exit the Old Horse Water-Wagon. Enter the Powerful Motor Sprinkler and Flusher

**T**HE new type of motor sprinkler and flusher shown in the illustrations above carries twice as much water as a horse-drawn outfit, travels twice as fast, sprinkles or flushes twice the area in any given time and at three-quarters the cost. In a word it combines the work and efficiency of two vehicles. The motor-flushed or sprinkled street is better cleaned because the speed is uniform and because the water pressure is constantly maintained at the proper point by means of the truck mechanism.

The motor unit illustrated carries a twelve-hundred-gallon tank of water which flows to a two-stage centrifugal water pump inserted into the truck drive-shaft behind the speed-controlling gearset. Thus the pressure of the water is controlled in conformity with the vehicle's speed, so that too much is not furnished now and too little later, which happens with the horse water-wagon. The pressure is varied to suit particular conditions of the street pavement by manipulation of the nozzle openings controlled by a lever from the driver's seat.

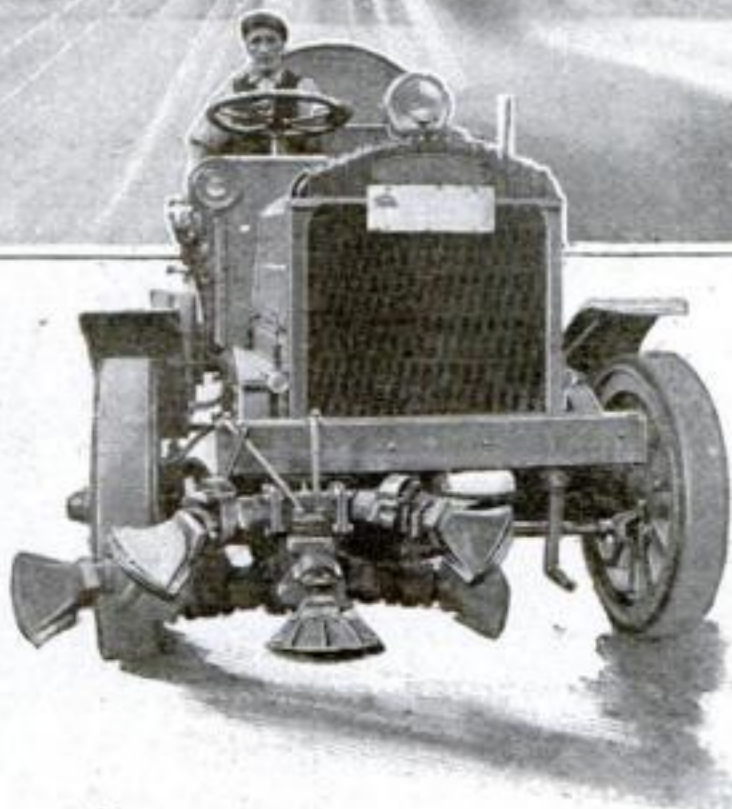

It is possible to flush either a small portion or an entire sixty-foot street

The five flusher-nozzles shown at the front of the truck may be swung to flush a portion or the entire width of a sixty-foot street in one operation.

### Of What Use Is the Best Gun with Defective Ammunition?

**S**UPPOSE that a machine-gun is supplied with ammunition which is one per cent defective. That does not seem very serious. One per cent is such a small factor. But consider the question a bit more closely. A machine-gun fires 1000 shots a minute. Defective ammunition will cause the gun to jam. It takes at least ten seconds to straighten out each jam. One per cent of 1000 is 10. Ten jams, each taking ten seconds to straighten out, would require 100 seconds of work. Instead of delivering 1000 shots a minute the machine-gun with the one per cent defective ammunition would be consuming almost two minutes in getting rid of the jams. It is evident that in two minutes' time, it would be possible for the side having poor ammunition to lose a position of great strategic value.



# An Entire Air Fleet versus One Destroyer

There were sixteen German aircraft, but the little destroyer held its own against them

THE airplane has met a worthy foe in the modern torpedo boat destroyer. In a recent thrilling battle, a whole fleet of German planes, sixteen in all, engaged a single Russian torpedo boat destroyer. Instead of blowing the little destroyer up with the first bomb dropped, they suffered considerable punishment themselves and failed to do anything more than give the little wasp of the sea an exciting time.

One-sided as the contest seems, it was not so in reality. The aircraft were at a constant disadvantage. In order to hurl their bombs with any degree of accuracy or with any hope of affecting the slender-hulled destroyer, they had to put themselves within excellent target range of the heavy-caliber, quick-firing, anti-aircraft guns which the destroyer carried. On the other hand, the destroyer, protected by its gun-shields from the damage that might have been done by the machine-gun bullets from the airplanes, darted in and out and round about with such lightning-quick maneuvers, that the bombs had not a chance to do any damage.

This battle incidentally demonstrated an essential improvement which has been made in airplane tactics, and throws light upon recent maneuvers of German bombing expeditions. The improvement concerns a system of inter-communication which has been established, by means of which an "admiral" of an air fleet can keep his battleplane fleet as well in hand as does the commander of the naval force. Without such intercommunication the sixteen planes would merely have "shuffled" around one another, doing more damage to their fleet, perhaps, by collisions than their bombs and machine guns could have done to the destroyer. The battleplanes are now able to receive as well as send wireless messages notwithstanding the roar



Notwithstanding the mobility and speed of the aircraft, the maneuvers of the destroyer were still swifter. The bombs did little damage and the machine-gun bullets rained harmlessly upon the destroyer's gun-shields

of the motors. The attack in question undoubtedly required some definite formation by means of which the greatest number of bombs could be concentrated on the smallest space in the least time, and yet not offer a massed flock of airplanes to the destroyer's guns. This would necessitate very rapid shifting, in which the whole fleet would move as one in accordance with a general plan, yet each one acting independently to meet unforeseen conditions. This would require uninterrupted wireless communication.

---

Libraries and other subscribers wishing to obtain indexes for Volume 91 of Popular Science Monthly should notify us at once stating how many indexes are needed. These will be sent free of charge.



### This New Motor-Truck Kitchen Serves Meals to 2,000 Daily

A NEW type of United States Army steam field kitchen has just been designed to furnish a battalion of 2,000 men three hot meals a day. The new outfit is mounted on a four-ton motor truck to enable it to accompany the troops on marches and even move ahead of them so that their meals will be ready when they halt for the noon lunch period or at night.

The great capacity of the equipment is its principal feature. This is directly attributable to the use of a ten-horsepower vertical boiler which furnishes live steam at fifty pounds pressure to two fifty-gallon coffee urns and two ninety-gallon stew, soup or pot-roast kettles. The boiler is arranged to burn coal, wood or oil, and the kettles and urns are of the steam-jacketed type which can raise water from 62 degrees Fahrenheit to 212 degrees in six minutes.


The kitchen can be run by two cooks and the motor truck driver. The outfit and these three men replace twenty of the ordinary army field kitchens which require eighty men and forty horses or mules for their operation, and are slow-moving as well as lacking in facilities for serving quick meals in large quantities.

The new outfit is the invention of J. C. LaVin, manager of the Hotel Taft, New Haven, Conn., and is known as the Taft army kitchen.

### Some of the Eccentricities of a Sleeping Horse

HORSES seldom lie down to sleep. Throughout their entire lives most of them sleep while standing on their feet. The reason for this is believed to be that the horses are afraid that an insect might crawl into their nostrils. This is a very likely explanation when we consider that a horse's nostrils are the most sensitive part of his body. If the insect could not be removed, it could easily irritate a horse to death. Many horses will not lie down because they have once been "foundered," that is, unable to get up unassisted.

Another curious fact about a sleeping horse is that he seems always to keep his faculties working. His ears, for instance, keep constantly twitching and he seems to hear the slightest noise. Because of this, it would probably be impossible for a man to enter a stable quietly enough to prevent his waking up every horse in it. Horses act peculiarly also in time of fire. They will burn to death rather than rush out from the stalls.

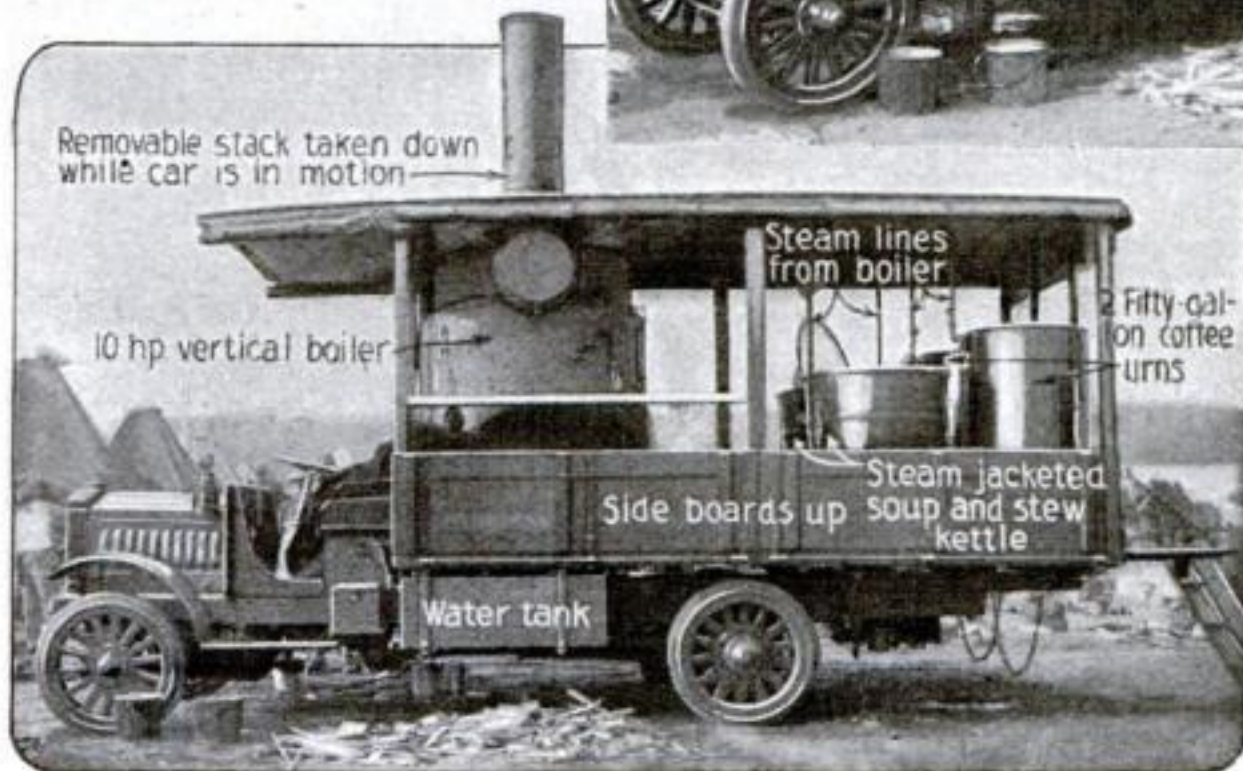


The boiler of the motor field kitchen is arranged to be run by coal, wood or oil. Three men operate the entire apparatus

The great ten-horsepower vertical boiler furnishes live steam to two fifty-gallon coffee pots and two ninety-gallon soup kettles





# What's New in Automobile Accessories?

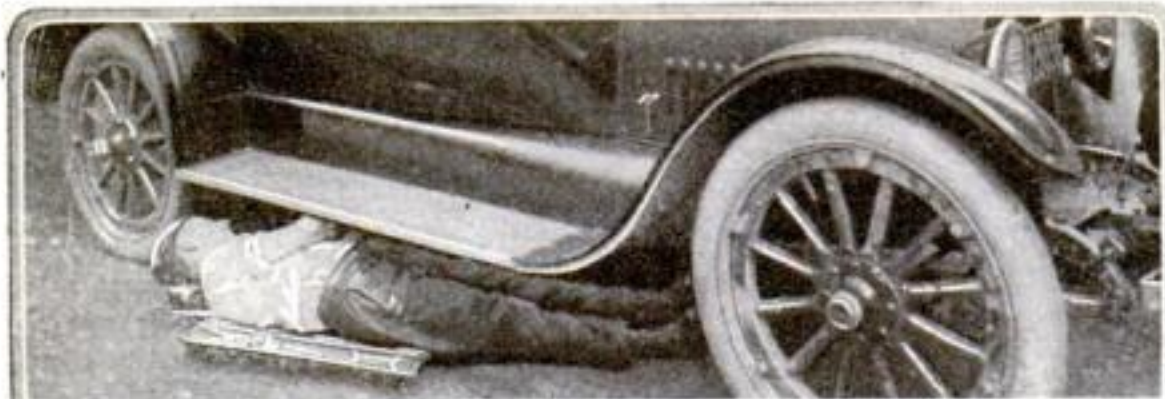

A creeper having a light frame with upholstered head rest and mounted on ball bearing wheels so that it is easily run beneath an automobile or truck




Electric mudguard side lamps of original design shown at the left. When they are placed far out on the mudguards the width of the automobile overall is shown

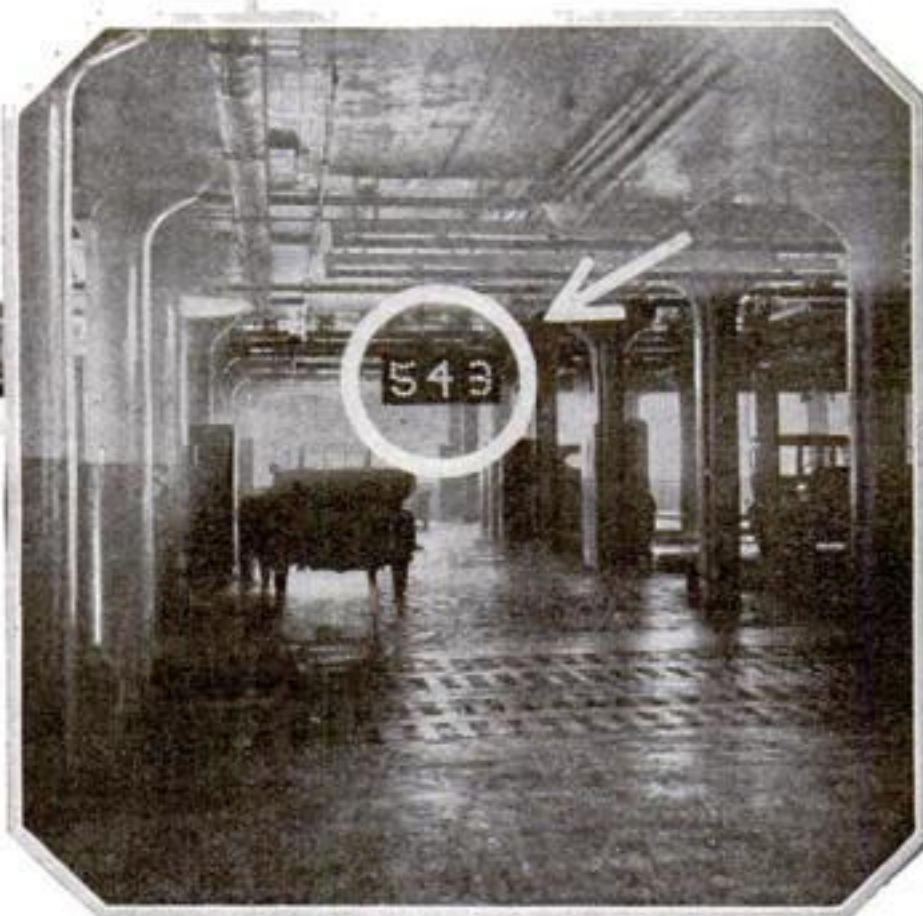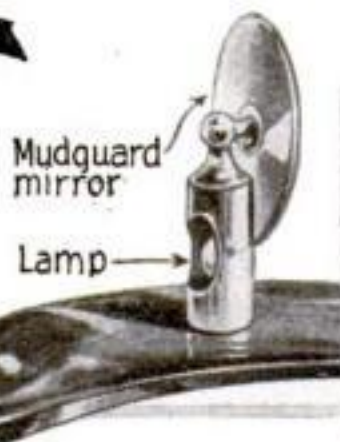

Unbreakable goggles having two layers of optical glass separated by one of celluloid


Electric-lighted numbers operated from the garage office to call chauffeurs to the telephone

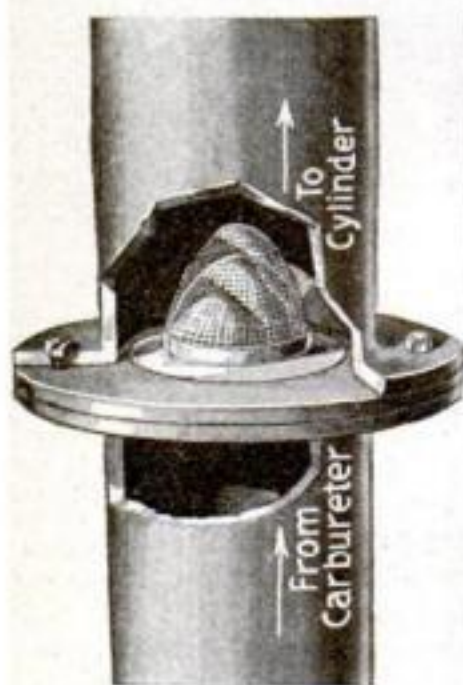

Fly-trap gauze gasket to break up the gasoline properly



Extension on the pedals, useful to the short-legged driver

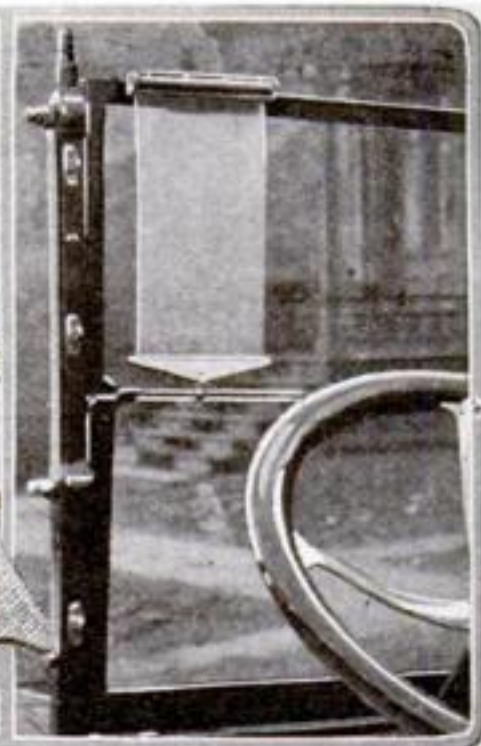

A roller shade made of colored celluloid to stop glare




# What's New in Automobile Accessories?

A new muffler that contracts and expands in order to exhaust gases from the automobile engine. It passes them through a series of bell-shaped stampings at the exhaust end to reduce the noise



At left: A staggered door arrangement. The driver enters on the left side. The door for the passengers is set in the center of the right side. This keeps the driver from passing in front of the passengers to get to his seat

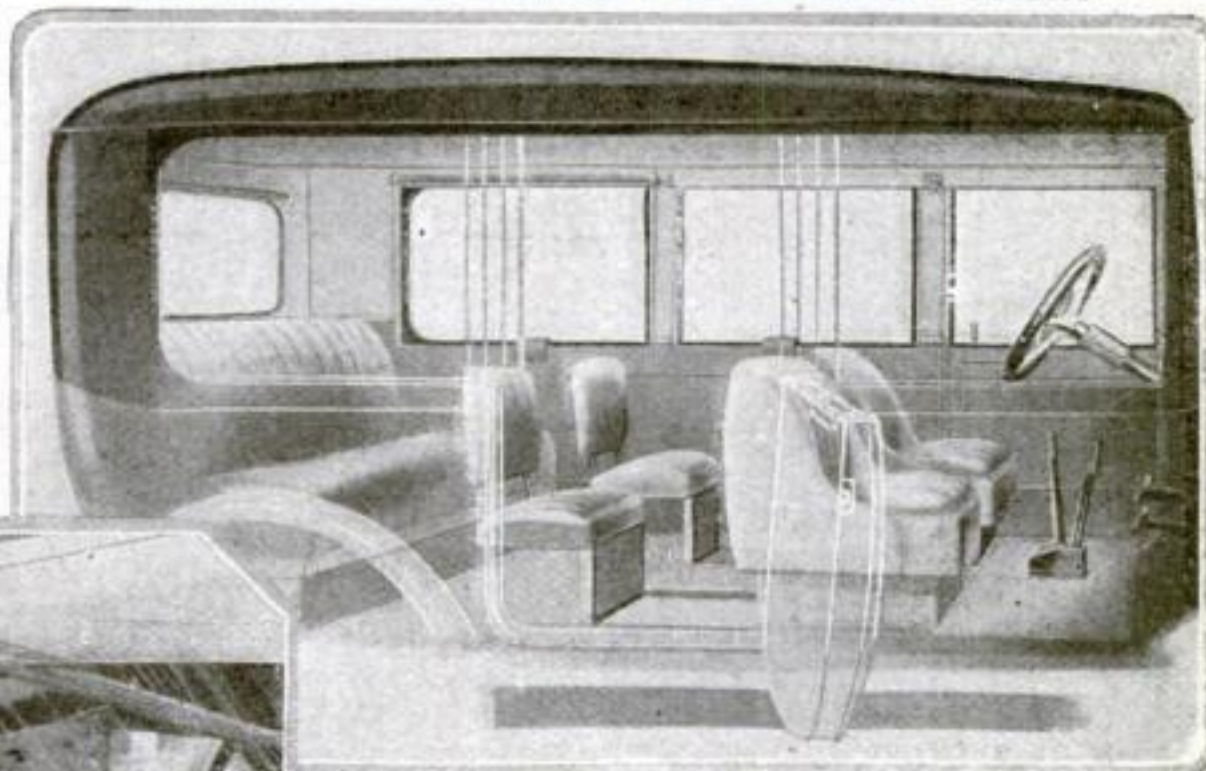

A chemically prepared cloth with which to rub a wind shield to prevent rain from dimming the glass



The needle of this compass has luminous ends so that it may be used by automobilists at night




This auxiliary lens applied to any automobile lamp will make a flood of light without any glare



This steering post holster is for use on the police detective's car



A rain cape for emergency use. It can be carried in the tool box and may be used to protect passengers as well as upholstery

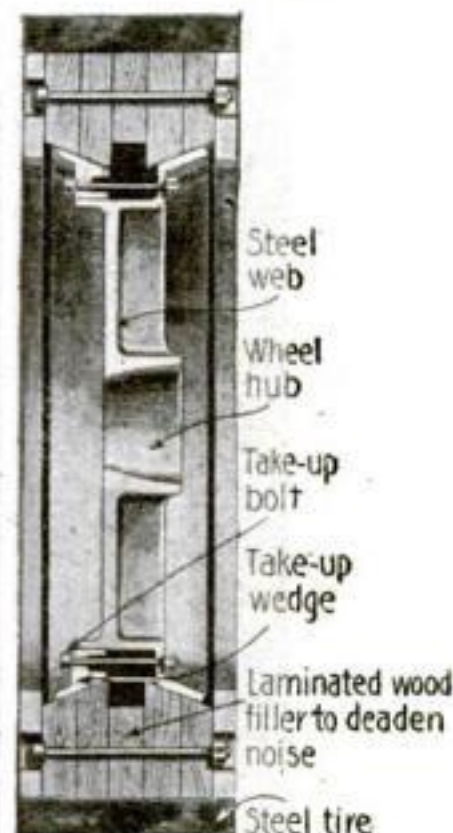

A laminated wood wheel with a steel tire for steam wagons



## How Merchant Ships Hide Themselves from Submarines

WHEN the sinister little periscope of a submarine is sighted aboard a merchant ship an order is given to throw out the smoke boxes. These boxes contain material which, when burning, gives off dense clouds of black smoke, completely screening the vessel from the attacking submarine.

The smoke boxes are about two feet square and are filled with oakum, waste, or other inflammable stuff soaked with hydrocarbon material that will give off heavy black smoke when ignited. The exact nature of the material used is a secret.

One box which has been used very successfully has a top slightly smaller than the opening it is to cover. It is supported by means of lugs fastened on the inside of the box. The intervening space between the top and the edge of the box is covered with a piece of adhesive tape which contains a part of the igniting mixture. The match or fuse which sets fire to the contents of the box is placed at one corner and projects slightly through the slit.

When the order comes to hurl the smoke boxes overboard the sailor grasps the tape and throws the box into the sea. The friction of the adhesive tape across the fuse ignites it in much the same way as you light a safety match by striking it on the box. The fuse carries the flame to the interior of the box and sets the inflammable material afire. The slit around the top causes the smoke to spread out freely.

Several of these boxes are lighted and thrown overboard at the same time. They create such a dense cloud of smoke that the vessel can make her escape before the submarine can launch her torpedo.

## Plenty of Rice for Food and Face Powder!

AMERICAN women may powder their faces in comfort without fearing that they are robbing the Allies of food. For some unknown reason people generally prefer to use the white, polished rice, rather than the more wholesome brown rice.

When rice is polished it is first hulled, then scoured to remove the bran and cuticle. Every barrel of rice loses about six pounds in this process. The "polish" as the hull and bran are called, is sold for cattle food at three-fourths of a cent a pound. Some of it is pulverized and sold as cosmetic powder.



The smoke screen rising from the ignited waste in the smoke-boxes hides the ship

## A Disappearing Crutch. It Telescope to Scabbard Length


A NEW crutch has made its appearance in London which may be worn on a belt. The legs are made of telescopic tubular steel and may be adjusted to any height or locked into the first section, when the wearer is seated.




© Int. Film Serv.

A new crutch for British soldiers. The legs are made of tubular telescopic steel fitted to a belt



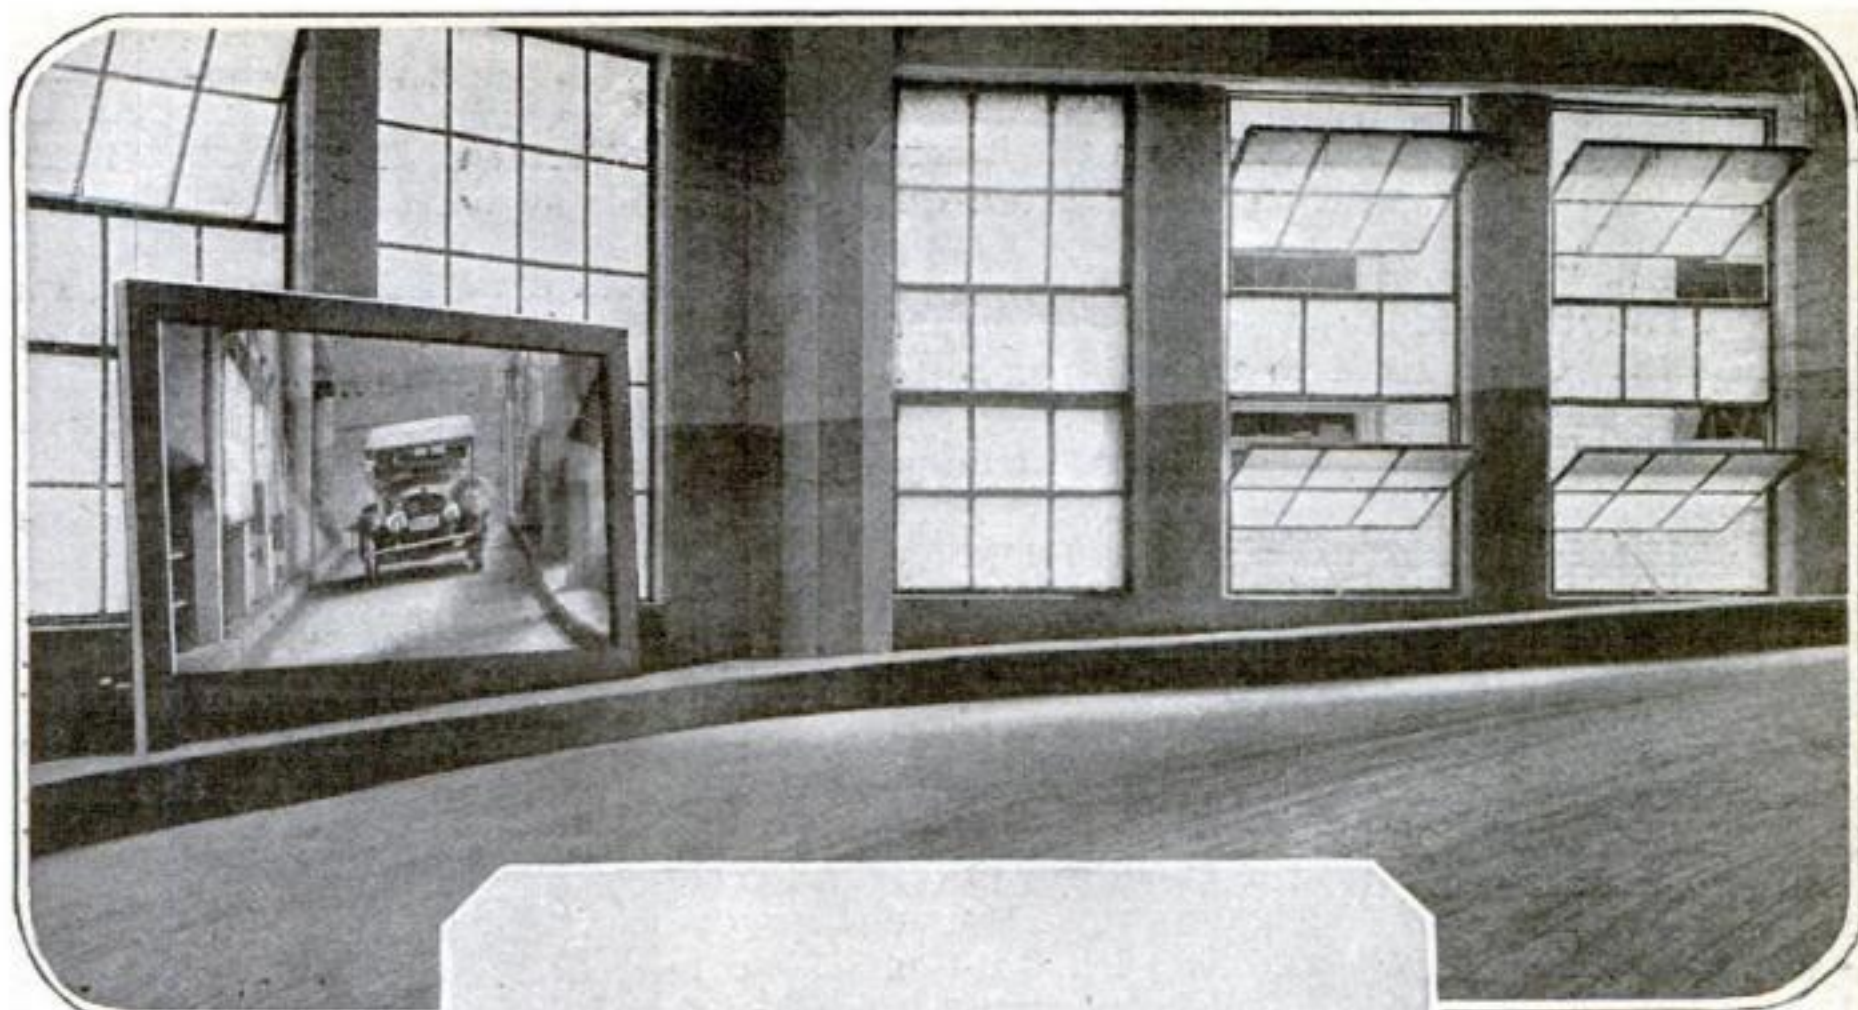

This mirror placed on the outside edge of a garage ramp enables a car driver to see round the corner or behind him. He can note the approach of another car from either direction.

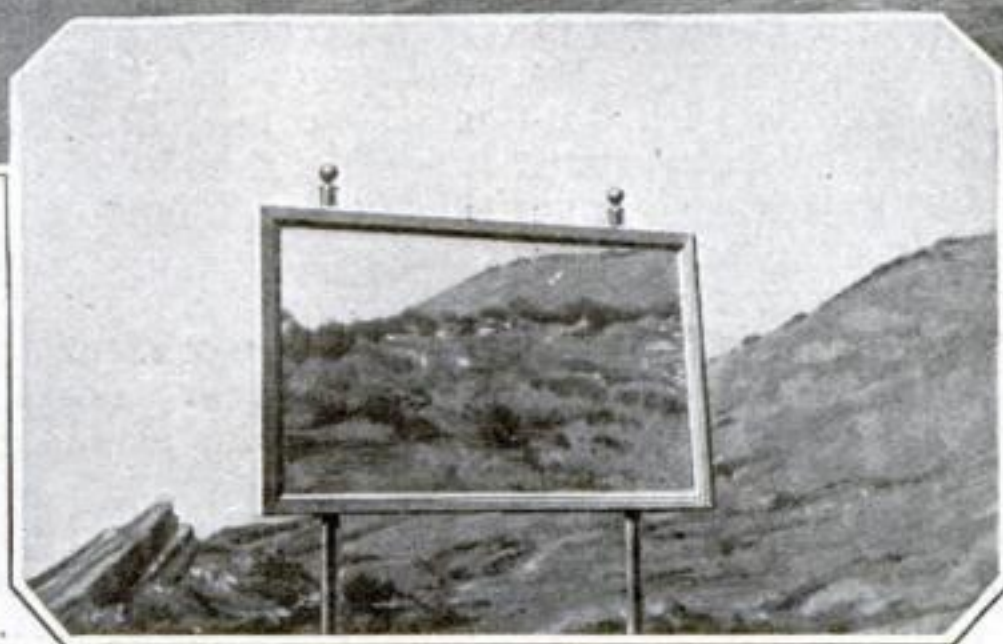

A framed mirror set at the edge of a road running through Denver's Mountain Park. It enables automobilists to see any one coming around a very dangerous curve in the roadway.

### Is the Coast Clear for Your Car? Look in the Mirror and See

EVERYONE who has ever driven an automobile knows how often danger lurks just round the corner. A man who had often longed for the ability to see at the same time round the corners ahead of him and what was coming behind him devised a method of arranging a mirror so this could be accomplished.

By placing a large framed mirror on the outside edge of a curved road or a curved ramp the driver of an automobile approaching the mirror in either direction is enabled to see whether there is danger ahead or behind.

The mirror must be large enough to serve the purpose and must be held in a stout frame. If the frame is strong enough, ordinary shocks will not injure the glass. Such mirrors placed at dangerous curves on highways would greatly reduce the number of accidents which are always the toll exacted by sharp curves.

### Two Billion Paving Bricks a Year From Furnace Slag

AT a meeting of the American Ceramic Society, Mr. J. B. Shaw of Alfred, N. Y., told of some very successful tests he had made in producing paving brick from blast furnace slag. These bricks are worth about \$35 per thousand. They may be successfully made of almost any blast furnace slag at a cost of five to seven dollars per thousand. He figures that there is at present available about 16,000,000 tons of slag annually in the United States after leaving 2,000,000 tons for cement manufacture. This would provide about two billion bricks for permanent good roads every year—say for laying 1,000 miles annually of fifty-foot road.

The oft-repeated attempts to solve this problem seem to have met success now. The slag must be treated hot as it comes from the furnace and the brick must be heated out of contact with air or steam lest it become brittle.—ELLWOOD HENDRICK.



# Showing Mars the Moving Pictures

Reflections on the invention of a giant screen  
which can be seen a quarter of a mile away

EDITOR: "Good morning, have you invented anything today?"

READER: "Can't seem to think of anything."

EDITOR: "Perhaps you need a little encouragement. First of all examine casually some great invention. If you find you are unable, offhand, to change or improve its function, just change its size. Make it enormous, gigantic, awe-inspiring. Why? Don't ask questions. Apply for a patent at once. When the patent bearing your name and the names of the humble witnesses is issued, keep calm even though manufacturers and promoters do not claw at one another and fill the air with desperate wailings in their efforts to buy, rent, promote or steal your patent. Console yourself with the fact that the world has not as yet been educated up to your method.

This imaginary conversation is inspired by the contemplation of a recently issued patent which discloses nothing more than a moving picture screen so large that it will require four or five projection machines to fill it up. We daresay the glittering path of success will shortly dazzle the inventor.

The advantages so great a picture possesses are not divulged. We have a suspicion that the inventor has a scheme which will make it possible to assemble an audience on Mars who will shoot the customary price of admission into the exhibitor's cash register.

The method for displaying this huge picture is simple. Procure a screen about four times larger than any at present employed. Raising the roofs of picture theaters to accommodate the screen is a matter hardly worth mentioning. Next induce photoplay producers to employ four photographers to take the scenes. Each photographer will take one-quarter section of the picture; one man to photograph the upper right section, another the upper left, etc. The sections must be taken in such a manner that when they are displayed simultaneously on the screen by four projection machines, they will all meet properly.

You have often done this very thing as a child when you pieced together a rhinoceros or zebra with four spelling blocks.

A little care should be exercised, however, in the taking of these films. The four men should be instructed to grind in time and at the same speed.

In displaying the picture, only four operators and assistants are required who will be instructed to keep an even pace for their individual sections. It would not do for the operator who is showing the head and body of the beautiful heroine to run his machine slowly, while the operator who has charge of the feet projection runs his machine fast. No, indeed. Her elbows may just then be on the dinner table while her feet walk off to the ballroom scene.

A good operator can also be trained to understand the necessity of keeping the head section of the picture in the upper part of the screen. The feet should do their accompanying shuffling underneath.

A very ingenious method for camouflaging the lines on the screen where the four sectional pictures meet, has also been devised by the inventor. These edges form a cross directly in the center of the picture field. Permanently painting a tree, window or telegraph pole over these lines will effectually eliminate the meeting edges of the four picture sections and will in no way detract from the enacted scene. Only a carping critic would object to viewing a play through the branches of a tree. What if the tree does appear in the kitchen scene? The effect is not necessarily spoiled because you are unaccustomed to seeing it there.

Anyone intending to embark in this gigantic motion-picture enterprise should not forget that the nearest seat to the screen from which a fairly good view can be had, will be about one hundred feet distant. This slight loss in seating capacity is more than compensated for by the fact that the screen can be viewed at a distance of about one-quarter of a mile. This will permit the extension of the theater seats out on to the sidewalk, and across the street.

---

Those of us interested in science, engineering, invention form a kind of guild. We should help one another. All the specialized knowledge and information of the editorial staff of the Popular Science Monthly is at your disposal. Write to the editor if you think he can help you. He is willing to answer questions.





Two British airplanes in Mesopotamia. They are covered with matting woven by the natives to protect them from the rays of the sun. The matting also acts as camouflage

### The Sun Is an Enemy of Airplanes in Mesopotamia

**A**IRPLANES are being used in Mesopotamia just as they are in other theaters of war. The British find that the eyes of the army are as much needed to see over the sun-baked desert where they are fighting the Turks as they are in France. The natural conditions in Mesopotamia are very hard on the military airplane.

There is no moisture in that country. The air is very dry. This would be an ideal condition for airplanes if it were not for the intense heat of the sun. Long rainy spells make great trouble for aviators in Europe because the moisture causes the wood used in the machines to warp. In Mesopotamia this difficulty does not exist; but the large expanse of horizontal surface offered by the planes absorbs the sun's heat as a sponge absorbs water. The planes become so hot that you could literally cook an egg on them. This naturally has a bad effect on both the wood and the canvas used in the planes.

While the planes are in flight the coolness of the upper air and the gale that sweeps across the desert keep them comparatively cool. It is when they are at rest on the ground where the temperature is so very

high that the damage is done by the sun. The natives of Mesopotamia weave a pliable, fine matting. The British use this matting as a covering for their military airplanes. It not only acts as an ideal protection from the rays of the sun but makes the planes invisible to the enemy.

### A Perfect Shoe-Blackening Kit—It's All in the Brush

**T**HE Army and Navy boys are not the only ones who will appreciate this novel shoe-blackening kit.

It contains a tube of paste which is securely capped and held on top of the brush in a sliding groove. You slide the brush forward, take off the cap, twist a key to deposit a small amount of the paste directly on the shoe, then put the cap back on the tube and slide the tube back in place. Then you turn the brush over and polish the shoe with the bristles until the paste is well spread. At the end opposite the bristles there is a piece of lamb's wool for polishing. A light rub with this produces a mirror-like polish. After the operation you slip the whole thing into a little bag, pull the drawstring and put it away anywhere you choose to keep it until the next time. It will not soil anything with which it comes in contact.



Turn the key and just the right amount of polish drops out of the tube. Then slide the tube back in its groove and polish with bristles and lamb's wool



## Blinding the Enemy with Searchlights



While the searchlights, concentrated on the Austrian position, streamed above, the Italian engineers worked below in pitch dark, bridging the chasm between the opposing forces. They had to drop their pontoons down a forty-foot wall on wooden skids, join them, and plank them over a wildly rushing stream. The Austrians, flooded in noon-day light, could see nothing in the darkness beyond. They suspected a ruse and kept their guns booming but this only covered the noise of bridge building



**"Let There Be Light—Enough to Blind the Enemy," Said Cadorna**

**Turning Valves on Their Seats Automatically**

**T**HERE have been thrilling happenings galore in this war of wonders, but nothing more dramatic has been reported than the manner in which the Italians under Cadorna, by a piece of engineering daredevilry, crossed a great gorge in the Alps and brought their troops, guns and entire equipment right up under the Austrians' noses without losing a man.

The feat was accomplished by sheer audacity—made possible by blinding the enemy with floods of light from searchlights strung along the Italian side of the gorge and concentrated on the Austrians all during the momentous night, so that they were unable to see what the Italians were doing. When the morning dawned, the sun revealed a number of bridges which the daring Italians had erected over the terrible chasm during the night.

Naturally the Austrians suspected that something was going on while the powerful searchlights were making noonday glare all around them and leaving the Italians and the surrounding country wrapped in midnight blackness. They fired their guns ceaselessly, but the booming only served to conceal the noise of the bridge-building.


The engineers had to drop their pontoon boats down a forty-foot wall on wooden skids, then join them across as treacherous a stream of running water as was ever encountered anywhere, plank them over so that the troops could cross, and provide ladders to enable the troops to scale the precipice on the Austrian side. Time and again the current swept the boats away before they were properly joined. But in the morning the Austrians fell back in consternation before the entire Italian unit, not a hundred yards away.

**A** SIMPLE device has just been designed and patented for the purpose of automatically rotating the valves of gas engines on their seats while the motors are running, thereby bringing a different portion of the

valve head and stem into the path of the flame on each up and down stroke. This rotative action is positive and reduces the pitting on the valve seat or valve head, this in turn requiring less valve grinding and making for less fuel and oil wasted, since it is impossible for either to work its way past the valve seat.

As shown in the disassembled unit pictured and the cross-sectional view, the valve rotator

consists of four main parts, a threaded boss slipped over the valve stem near the bottom; a hollow sleeve rigidly attached to the cylinder water-jacket and internally threaded to fit the thread of the

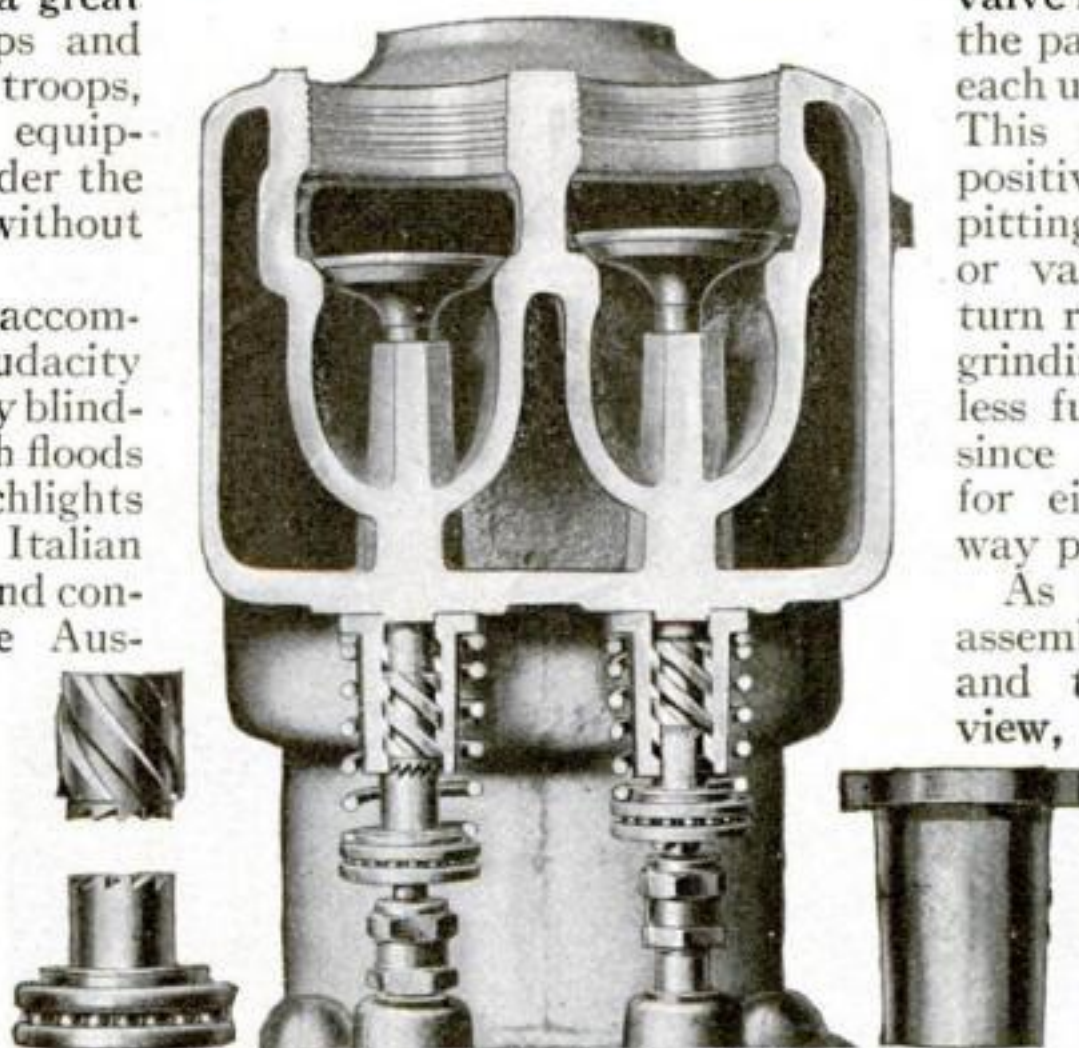

**The Details of the Valve-Turning Device**

The valve-rotator consists of four main parts: a threaded boss slipped over the valve stem near the bottom; a hollow sleeve rigidly attached to the cylinder water-jacket and internally threaded to fit the thread of the boss; a ball-bearing joint the bottom half of which is attached to the valve push-rod and the upper half of which has a small projection with saw teeth to contact similar teeth on the bottom of the boss around the valve stem; and a coil-spring between the hollow sleeve and the ball-bearing joint

boss; a ball-bearing joint the bottom half of which is attached to the valve push-rod and the upper half of which has a small projection with saw teeth to contact with similar teeth on the bottom of the boss around the valve stem; and a coil-spring between the hollow sleeve and the ball-bearing joint.

In operation, the upward movement of the valve push-rod causes the teeth in the ball-bearing joint member to mesh with those on the bottom of the boss, the angularity of the teeth tending to cause the valve stem to move round against the resistance of the coil-spring. As the valve stem drops, the spring brings the ball-bearing joint back to its original position as the teeth are withdrawn from mesh. The next upward movement forces the valve round on its seat a little more until by a succeeding upward stroke it has made a complete revolution on its seat.



# Learning the Violin Without an Instrument

Knobbed sticks are used to teach the fingering



A class of violin teachers at New York University learning the Mitchell method of violin instruction. The fingerboard chart on the blackboard shows the exact position of the sounds on a regular violin fingerboard



The substitute violin and bow used in the Mitchell method of violin instruction, and on which the students learn to play without going to the expense of purchasing an instrument for practise work



Showing how the bow should be held. The fingers are rounded and unstiffened. The axis of the wrist joint (an imaginary line running across the wrist) should be parallel with the bow

**F**ROM the day when Nero fiddled to a burning

In circle: The fingerboard on the substitute violin. The little knobs teach

the pupil just where to place his fingers in order to produce the different notes

for the violin is a straight piece of wood with little

Rome up to the present time the only way any one learned to play the violin was by getting one and employing the services of an instructor. Now all that is changed. Dr.

Albert G. Mitchell, of New York University, has devised a method whereby an entire class learns to play the violin at once. And the strangest part of the Mitchell method is that in the beginning, the class does not use a violin at all.

The pupils are taught the correct position for the bow and the fingering on the violin by means of an imitation violin and an imitation bow. The substitute

knobs at the top to indicate the places where the fingers should rest in order to produce the various notes. The pupil learns to use the bow in the proper place because

there are two small pieces of wood fastened to the imitation violin between which the bow must pass. If it is not handled correctly it will break.

A large fingerboard chart is drawn on a blackboard so all the pupils can see it. Dr. Mitchell's class at the university is conducted for teachers of the violin. They learn the method and are then able to instruct large classes of children.



Learning how to use the violin bow. The two short pieces of wood nailed on the substitute violin act as guides for the bow. It is impossible to use the bow in the wrong manner when this method is employed



## How Airplane Engines Are Tested at the Factory

**P**ROBABLY nothing that is made in our factories to-day is tested more carefully than an airplane. An airplane has not the solidity of an automobile or of a power boat. It is very light and elastic. Yet it calls for a high power engine. To put a hundred horsepower engine in an airplane without first testing it would be to invite disaster. An engine that gives an ideal performance when on a bedplate securely bolted to the factory floor might be trusted in the

solid chassis of an automobile or the substantial hull of a launch but never in the flimsy, vibrating fuselage of an airplane.


Where airplane motors are made in large numbers it is not practicable to test them in actual fuselages because the fuselages would deteriorate too rapidly. Therefore a good imitation fuselage has been designed to meet the needs of the engine makers. This is made of angle iron and rests on real airplane wheels. The motor is controlled from a regular pilot's seat. The water jackets are connected with water mains by flexible hose resting on a separate wooden frame.

It is not at all difficult to test an airplane motor because the propeller is its flywheel and it is only necessary to ascertain whether or not it keeps up a standard amount of pull and works steadily. This is measured by a simple spring balance. The engine must be tested also, to determine how it is affected by inclining it up or down as it

must be inclined when flying. This test is accomplished by hooking the spring balance lower or higher to a massive post behind the testing fuselage. While the pilot controls the motor a mechanic

stands by to watch the performance of the engine. A safety attachment holds the fuselage in place in case the spring should break.

In this way it is possible to test the airplane engine very thoroughly before it is put into service in the air, without endangering the lives of the workmen.

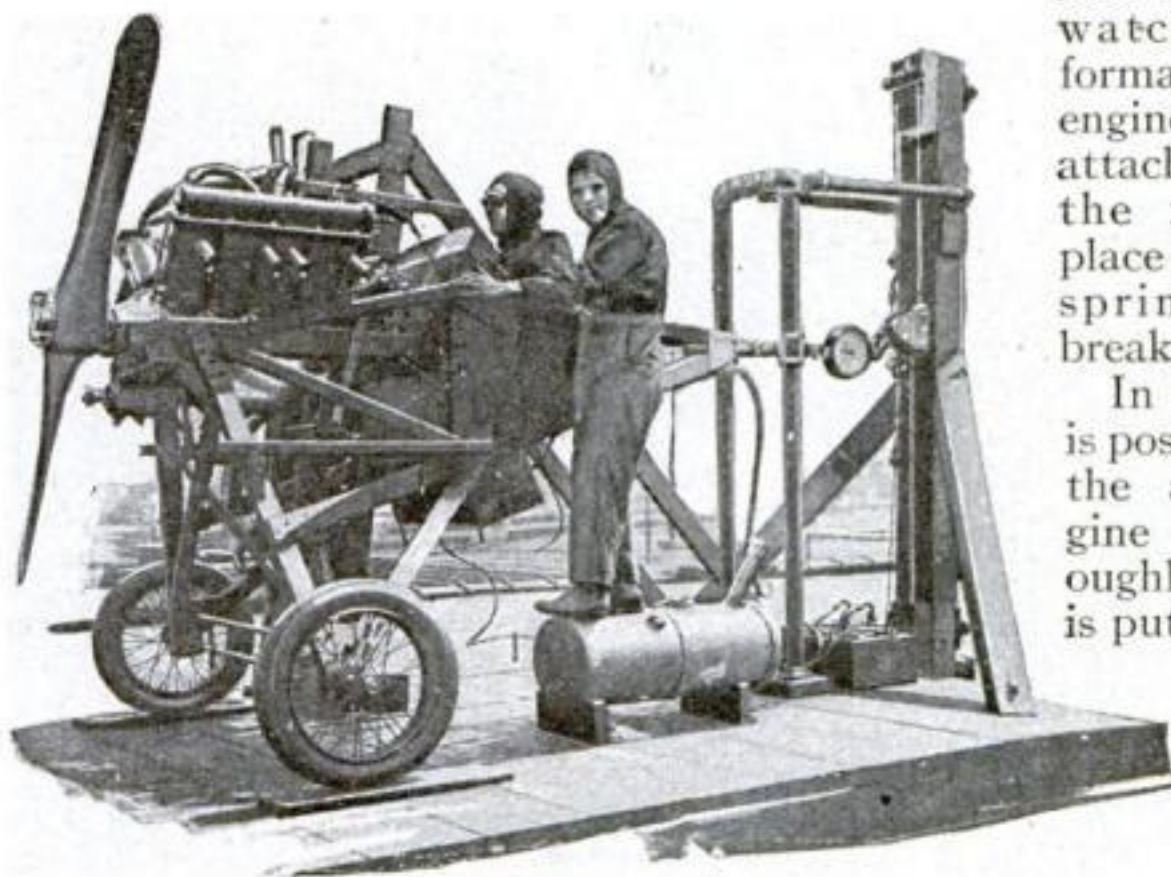


Testing an airplane engine by means of an imitation stationary fuselage made of angle iron mounted on airplane wheels

## Protecting Your Shoes from Mud—in War Gardens or Trenches

**T**HE patriotic citizens who planted and tended war gardens in response to the urgent advice of the Government during the past year, found that weeding is best accomplished after a rain, when the ground is soft and yielding. The housewives had to learn something too in the line of patience, which was needed when so much cleaning up had to be done on account of the gardeners coming indoors with their muddy feet.

I. E. Harris, an employee in the Census Office, in Washington, D. C., found a way to protect his shoes from the mud so that

when he came in out of the garden there would be no tracks for the housewife to complain about. He designed a garden shoe with canvas upper and wooden sole and around the sole he shaped a piece of zinc, tacking it to the sole. He has offered his idea to the Government.

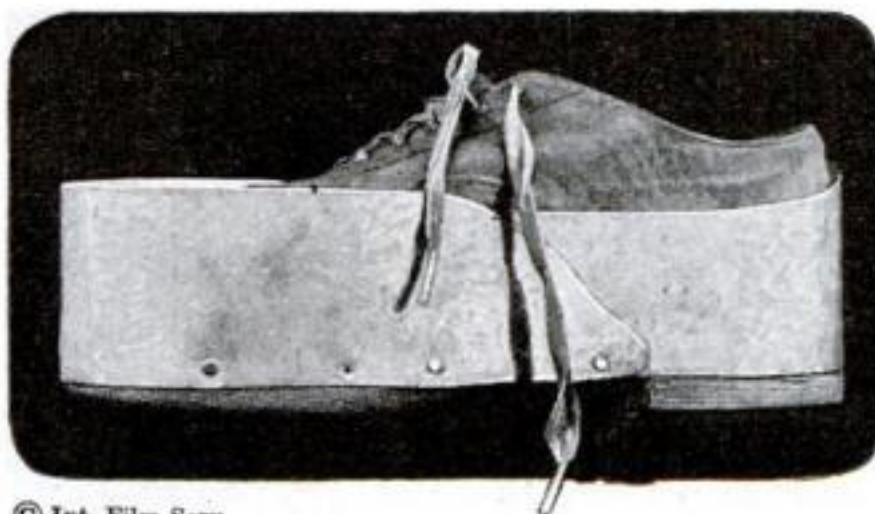

© Int. Film Serv.

This wooden-soled, zinc protected gardening shoe may serve our trench-fighters



# The Latest Playthings from



This bunny leaps six inches in the air every time the wheels go 'round. This is because the hind wheels are so high




Trench warfare is possible all the year with this outfit, at the seashore or in the back yard



Every time you shoot this pneumatic cannon you see a puff of talcum powder smoke



A small tablet of soap in the end makes bubbles within bubbles

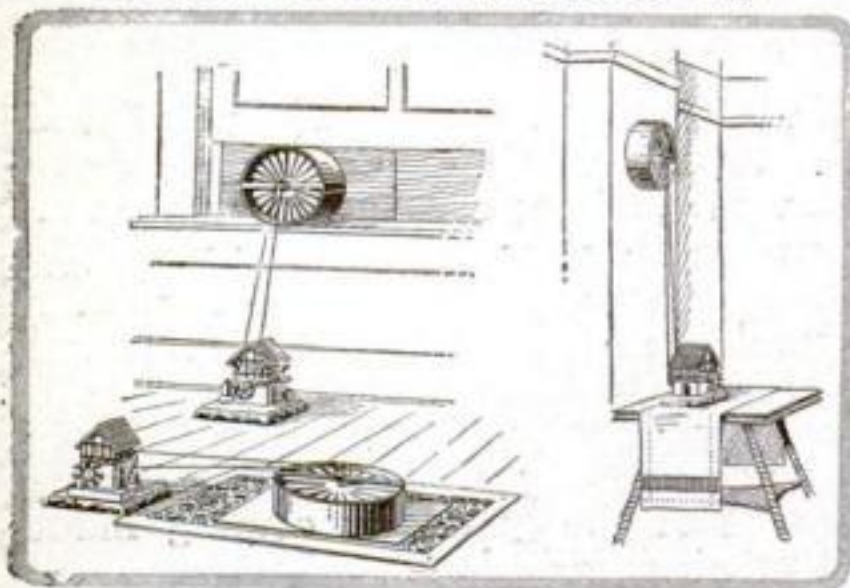


Connect this turbine with a toy and let the wind turn it



Folding sides turn this wagon into a coaster whenever you wish




No real, live clown in a circus can do better tricks than this little tumbler

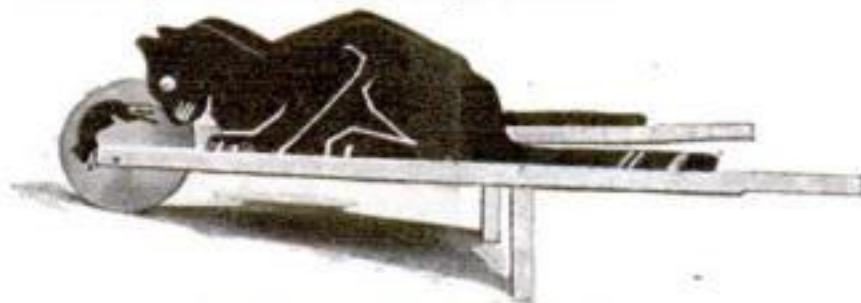

Not a real cat toying with a mouse. Just a decorated wheelbarrow




# Santa Claus's Mechanical Toyshop

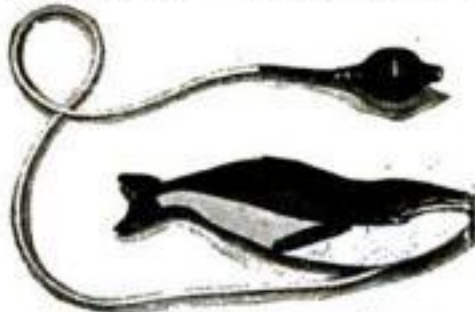

With this spouting whale the baby can amuse himself during his bath. Pressure on the bulb causes the water to spout from the head of the whale



This imitation automobile has rockers instead of wheels so that it is really merely an improvement on the old rocking horse

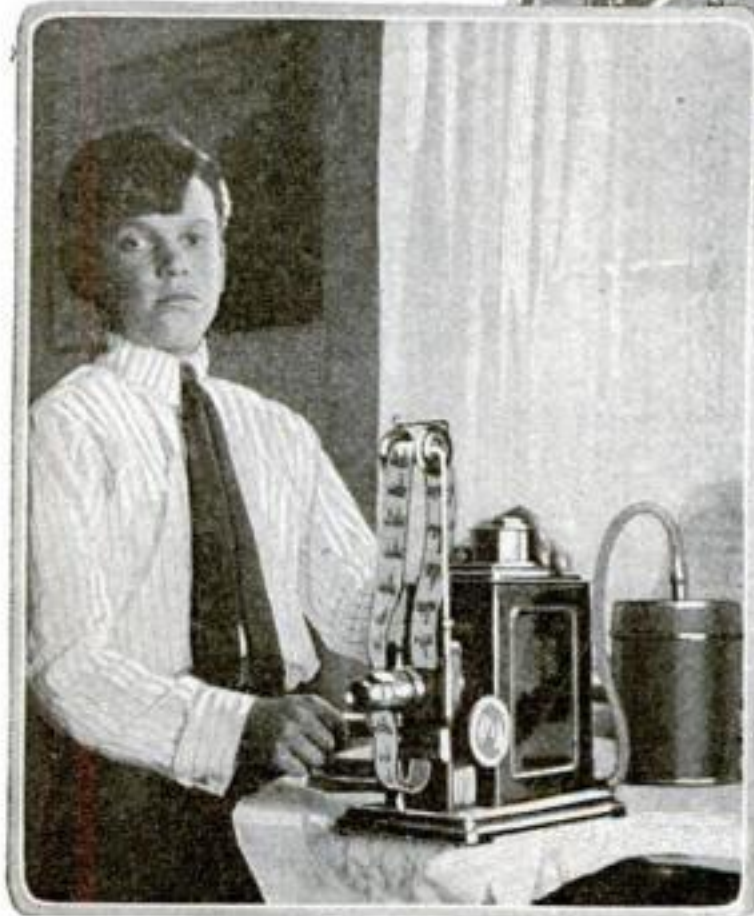

Any boy can be a motion picture director if he has this machine. It generates its own gas and uses standard film




Hold this monoplane as far up as you can reach and then let it go. It will fly and volplane


Children can have a beautiful time safely attached to the center post of this new rocker



The dry cell below furnishes power that swings the bird

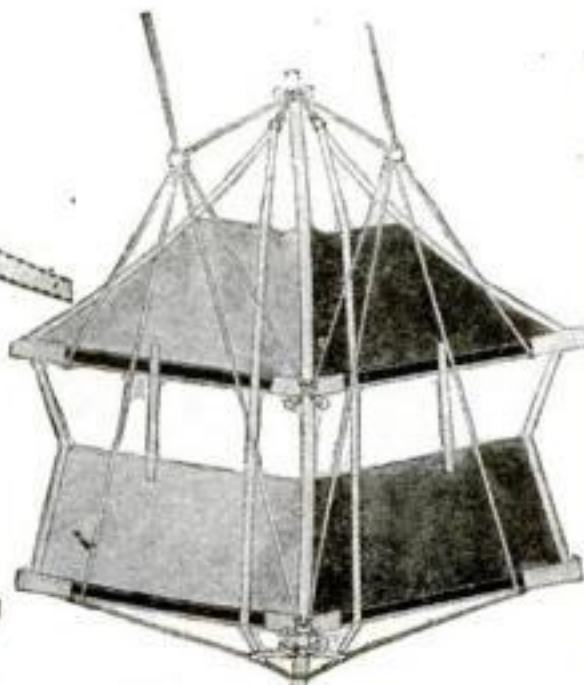

This airplane loops the loop and performs other feats

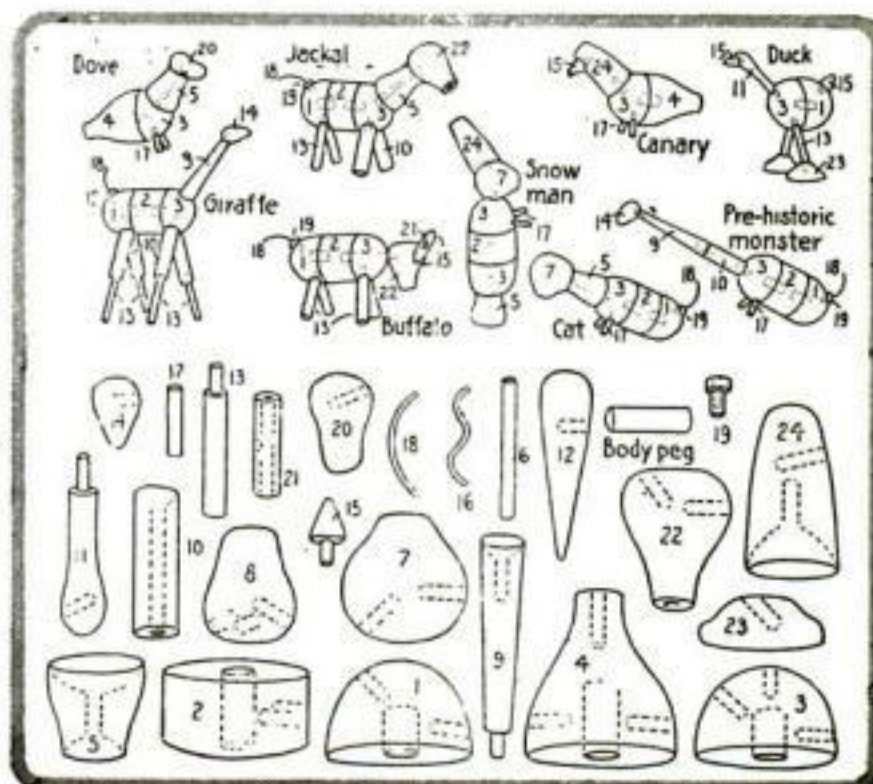

The numbered parts of these blocks fit together to make queer-looking animals. They are instructive in several ways




# Burning Distillate in Your Automobile Engine

Something the East can learn from the West

By Edward C. Crossman



Electric heated carburetor for heavy fuel oils to start engine when cold

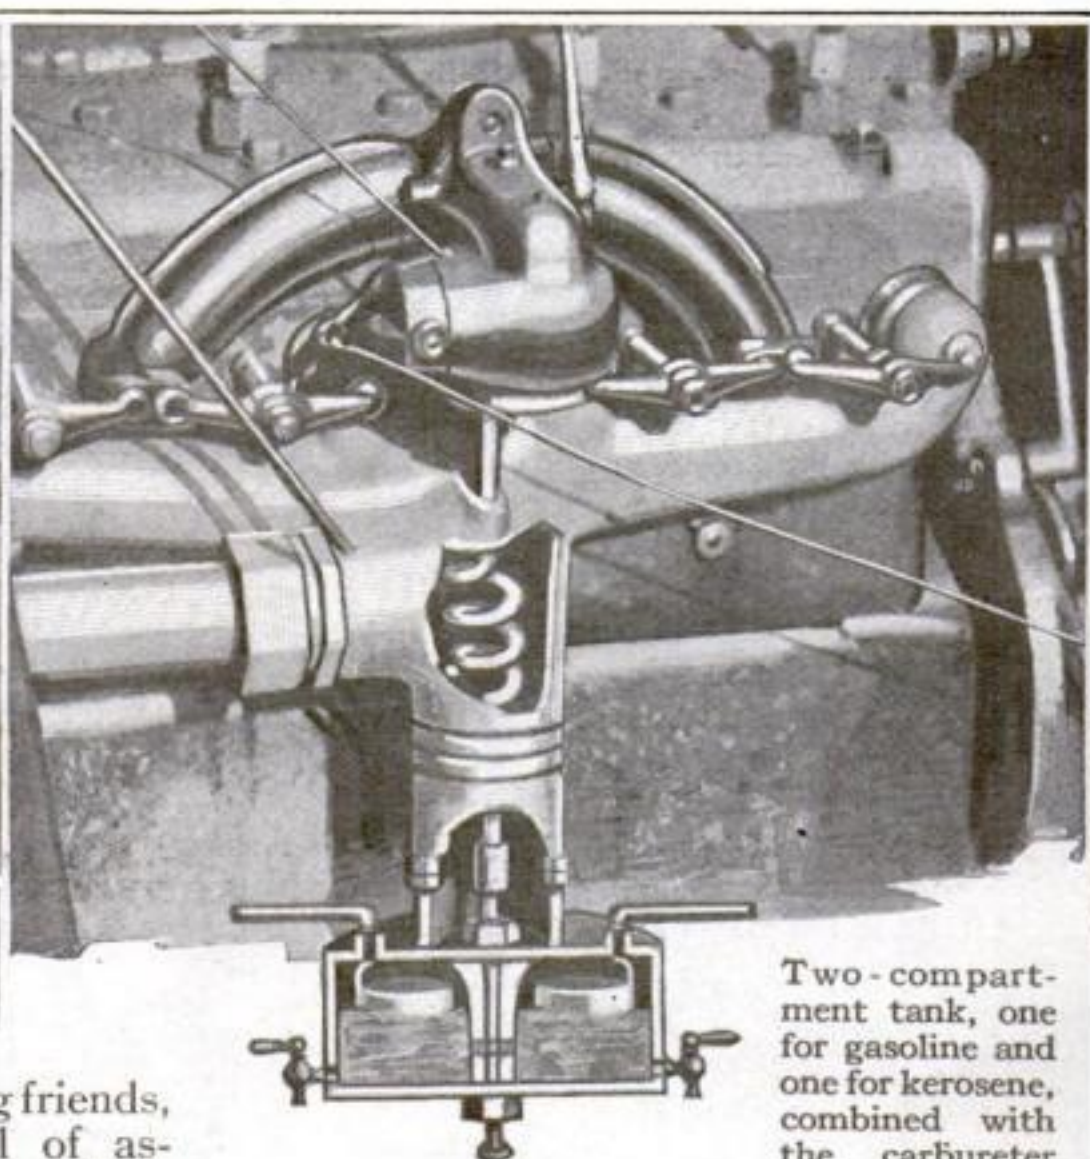

Two-compartment tank, one for gasoline and one for kerosene, combined with the carburetor

**A**CCORDING to my oil refining friends, when you distill crude oil of asphaltum base, you get first a high test gasoline, then a lower grade gasoline, and so on down until between kerosene and gasoline, you get what is known as "distillate." It looks, acts and smells much like gasoline, but costs much less.

Distillate is being used by too many business firms with fleets of delivery and salesman cars to be condemned as merely a passing fad.


Its fatal weakness is that it will not start a cold engine, and inasmuch as gas engines until they have started, are cold, the distillate is useless until some other method is used of turning over the engine and getting enough heat into the walls to make distillate vapor stop condensing on the way up the intake manifold. So owners burning distillate either in

regular carburetors or in the many patent devices for utilizing the fuel, have to start on gasoline.

On the Pacific Coast, car drivers overcome by various means the reluctance of distillate to vaporize and to give power in a cold engine. The first means is a powerful starting and high compression motor, the combination developing heat through mere compression alone like a Diesel engine,

until the distillate begins to fire. The second is by water-jacketing the intake manifold with the heated water from the cylinder cooling system and heating it again by paralleling it to the exhaust manifold.

It is a common scheme in California to burn half distillate and half gasoline, making a mixture

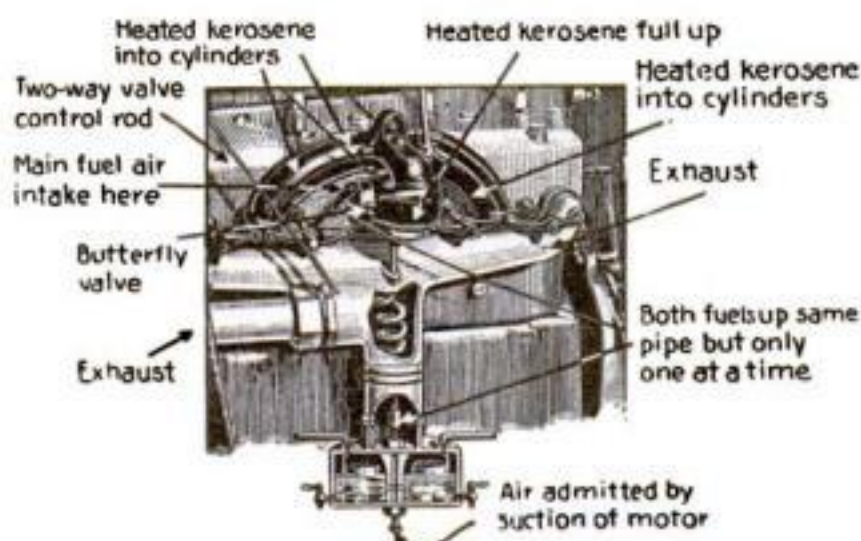

Details of the double tank carburetor and heating arrangement using kerosene for fuel



costing fifteen cents per gallon, which is said to start easily and to develop even more power than the straight gas. Distillate works fairly well in pure form in the ordinary gas engine equipment, and very well in the higher grade, which costs twelve cents per gallon.

Distillate vapor will not ignite from the electric spark in a cold engine, unless it is of a high grade, approaching gasoline, like the twelve-cent grade. The mixture is too heavy and oily, and will not take fire from the tiny spark, but if you draw it into a hot cylinder it breaks down into an explosive mixture the instant it strikes the hot walls. Then the spark starts something.

So, roughly speaking, the patented distillate burning devices for the gas engine—chiefly for Fords—consist first of some form of stove or coil heated by the exhaust manifold, and so heating either the vapor taken into the carbureter or else the vapor after it comes out; and second of an auxiliary gasoline tank over the engine or on the dash to hold a little gasoline by which to start the engine in the chill of the morning. A valve is turned, admitting gasoline to the intake manifold or to the carbureter; the engine is started; then the valve is closed again, letting the distillate take up its labors for the day.

One weak point of this device is that the carbureter is full of distillate, and, if the gas is taken into the carbureter, it must first be rid of its distillate. A large Los Angeles market company uses straight distillate with an auxiliary tank for gas. When the cars are sent from the store to the garage at night, they are run the last mile or so on gasoline from the auxiliary tank. This leaves gasoline in the carbureter and gas vapor in the cylinders so that the car starts on gas and runs on it long enough to warm up the engine for the distillate vapor.

A new experimental device for burning either distillate or kerosene consists of a double-compartment steel tank of small size located about the place usually occupied by the old carbureter, one compartment containing gasoline, the other distillate or kerosene. One is piped to the main tank holding distillate or kerosene, the other to a smaller tank under the seat for the gas. Two rods lead to the dash, and control the outlet valves of the two compartments. A coil of copper pipe runs from the main outlet pipe going to both valves into the exhaust manifold and then up into the main carbureter.

The fuel, whether gas, kerosene or distillate, stands up in this coil, which becomes very hot from the exhaust gases. The driver turns one lever on the dash, admitting fuel from the gas side of the two-compartment tank into the coil, and starting the engine on the gas. Then he closes that lever and opens the other, allowing the distillate or kerosene to rise into the heating coil. The practically vaporized fuel is then sucked into the carbureter and sent very hot, to the engine.


### "To the Victors Belong the Spoils"— If They Dare Take Them




The bomb-loaded German piano taken as booty. Fortunately the bomb was discovered in time

**M**R. A. K. YAPP, secretary in charge of the Y. M. C. A. work on the Western front, in a recent interview said: "The spirit of the men is marvelous. We feel we are able to do a great deal to help them during their leisure by providing little luxuries that mean much to the men." One of these luxuries in one of the camps was a piano taken from the Germans. Concealed in the piano was a bomb with the fuse attached to one of the piano strings so that when a certain note was struck, explosion of the bomb would follow.



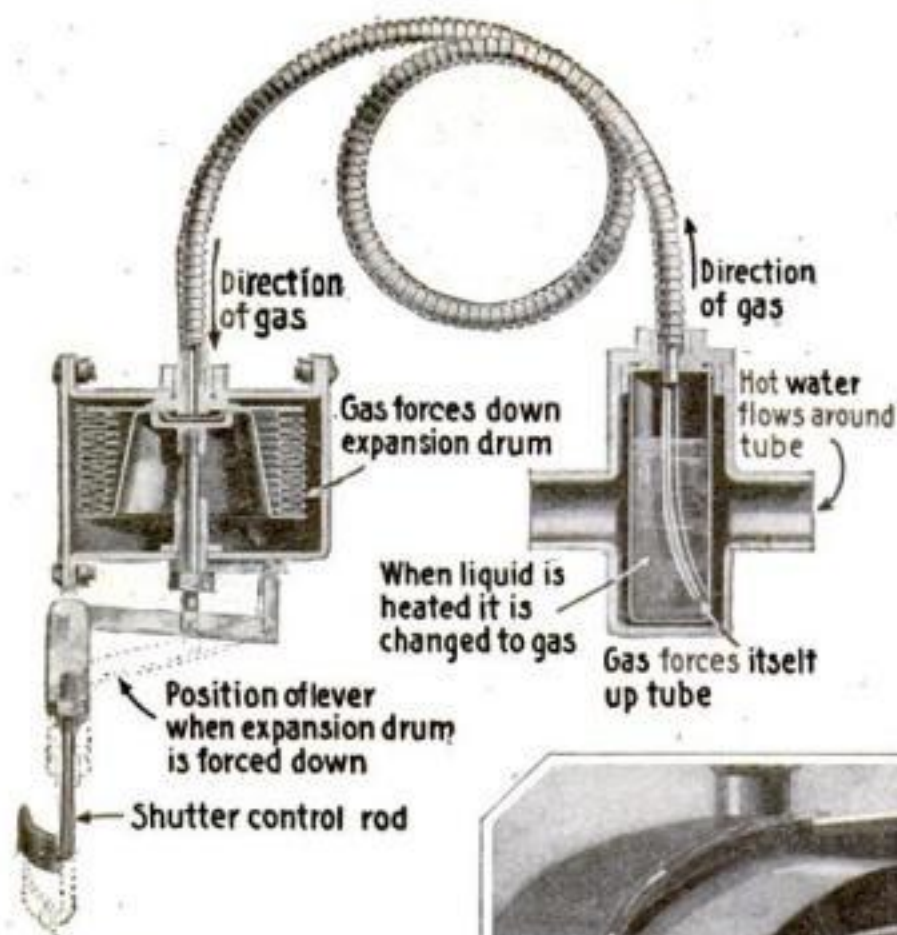

The device is in two parts—an expansion drum which moves a shaft and bell-crank lever to operate the shutters, and a syphon thermostat in the return water line to the radiator tank

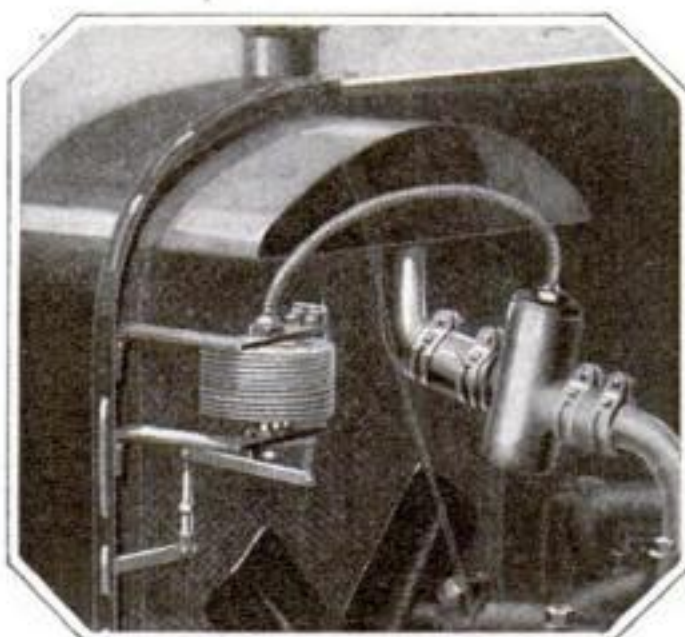

### Keeping the Engine Temperature at the Right Point Automatically

**A**N AUTOMOBILE manufacturer is offering a model with automatically-controlled radiator shutters. His device combines two well-known automobile devices, the radiator shutter and the thermostatic control for the temperature of the engine water.


The combination of the two devices has made it necessary to make the apparatus in two parts—an expansion drum which moves a shaft and a bell-crank lever to operate the shutters, and a syphon thermostat in the return water line to the radiator top tank. The two parts are joined by means of a short flexible hose which ends in a small metal tube at the end of a pot in the return water line. This tube is filled with a sensitive liquid which changes into a gas when the temperature of the cooling water passing around the tube in the iron pot in the water line reaches 140

degrees Fahrenheit. The expansion of the gas creates a pressure in the tube and the flexible pipe connecting it with the expansion chamber, so that the latter is moved downward. This motion, by means of the system of rods and levers shown, opens the shutters slightly and admits air to the motor. This opening action has a maximum temperature point of 180 degrees with a full opening of the shutters. Should the temperature of the cooling water change, the shutters are opened or closed, as the case may be, to maintain an even engine temperature.

### How the French Prepare Dummy Airplane Fleets for Target Practice

**W**E take off our hats to the Frenchman who conceived the idea illustrated below. For simplicity of construction and the efficiency with which it performs its duties, it is in a class all by itself. It is nothing more or less than a fleet of dummy airplanes suspended from a crossbeam attached to a tree to afford target practice for the French air men.

The dummy planes are suspended just as any boy might suspend toy planes, except that strong wire rope is used. The rope is long enough to give plenty of opportunity for the wind to whirl and toss the planes.

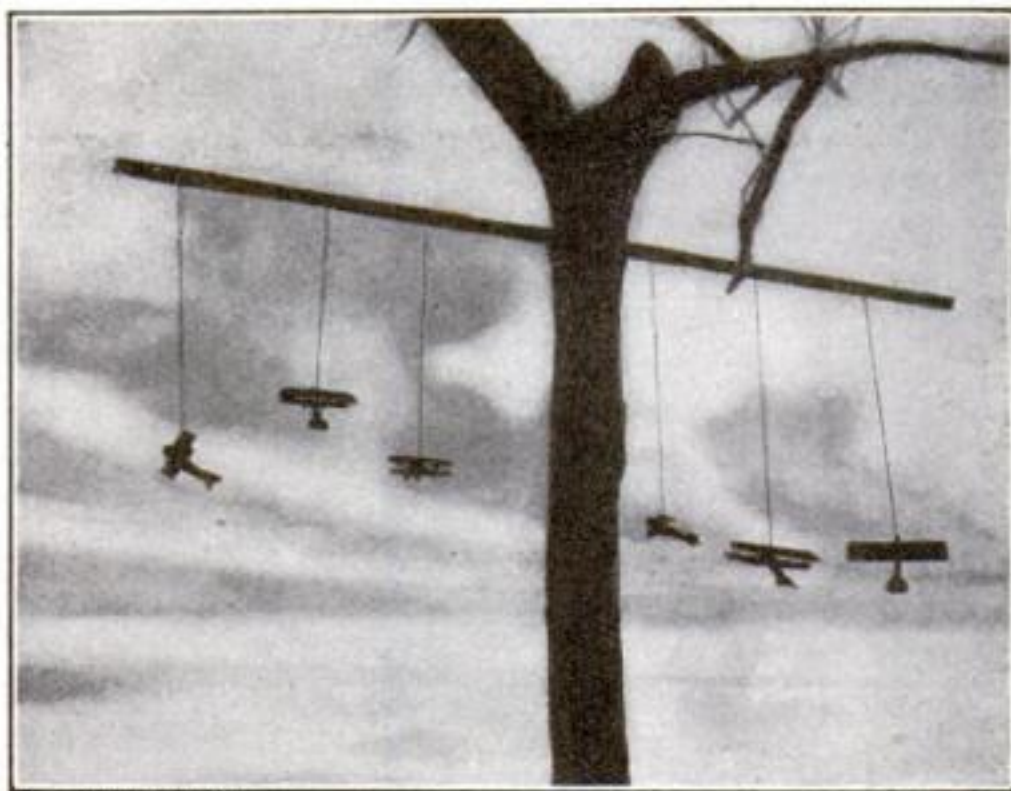

French Official Photo

The airplane targets suspended from a crossbeam attached to a tree sway and dart about in the wind

Maybe you have special needs. Write to the editor about anything within the scope of the magazine. He will be glad to help you.




## Curing Soldiers' Wounds with Granulated Sugar

**D**ESPITE the terrific fighting in the present war there will not be so many one-armed and one-legged men as there have been in past wars. The reason rests with the surgeons and the methods of treatment given the wounded. Dr. Alexis Carrel has been doing some remarkable work in France. He has made an effective antiseptic from sodium hypochlorite and boric acid. But for real ingenuity credit has to be given to Dr. Erich Meyer, of Germany. He has cured wounds with sugar.


After washing out the wounds he has dressed them with ordinary granulated sugar covered with a compress, renewing the sugar every second or third day. This simple treatment, according to Dr. Meyer, has been notably successful. In a number of instances amputations have been prevented because the wound was sugar-cured.

## This New Furnace Burns Soft Coal and Cleans Its Own Radiator

**I**N view of the coal shortage and the necessity of burning more soft coal than ever before for heating apartments and private houses, a new furnace that has a self-cleaning radiator which does not become clogged with soot is timely. By means of a diving flue the soot is deposited in the fire chamber before it has a chance to enter and stop up the flues. The radiator may also be used for burning hard coal, coke, or wood. The furnace is so constructed that it may be used for either a single register or pipeless furnace, or with the radiating pipes. It has the up-to-date appliances for humidifying the air and securing cleanliness and ventilation.

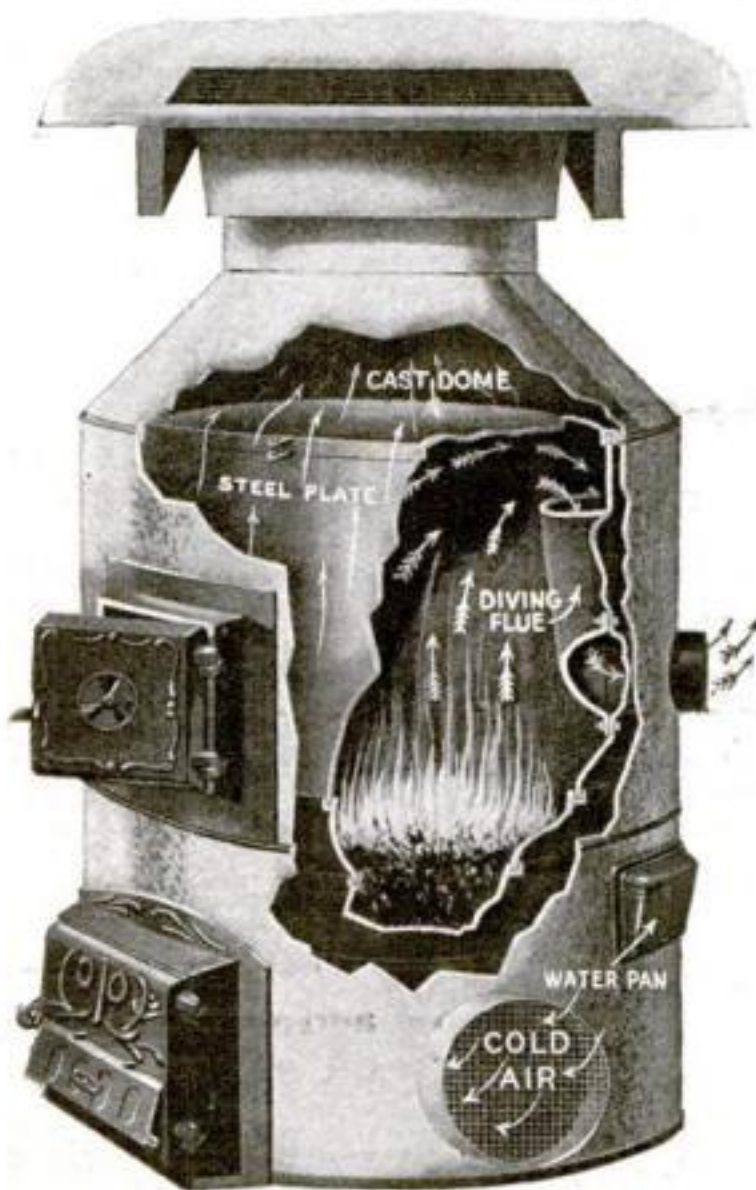

Construction of the new self-cleaning furnace. It may be used with single-register or radiating pipes

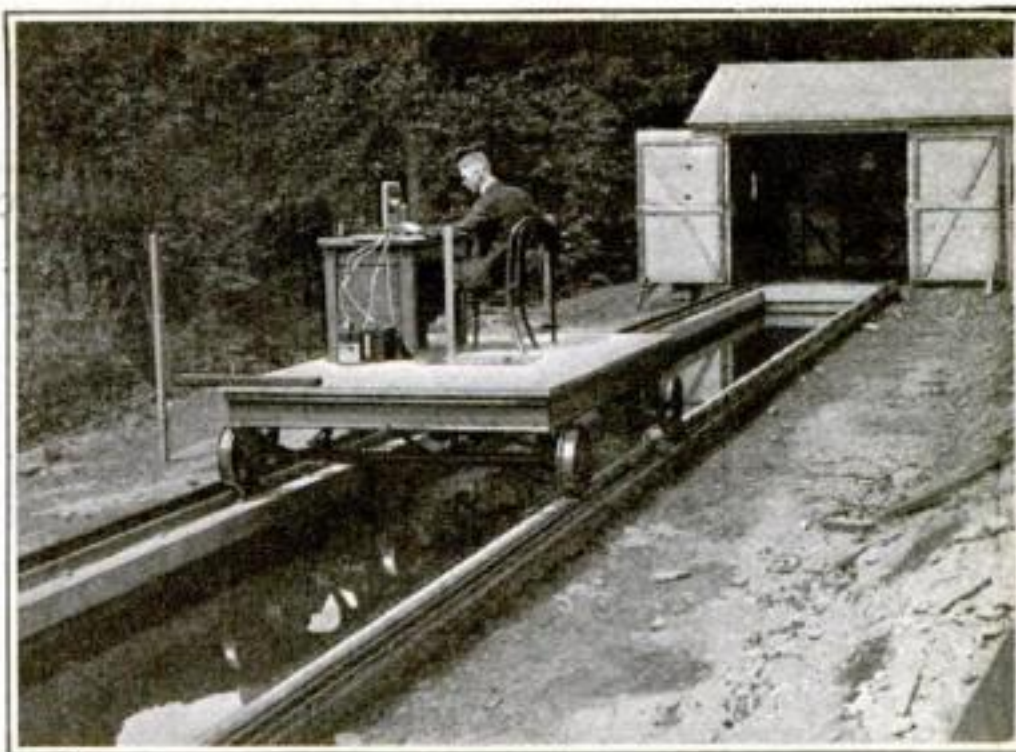

A type of car used for calibrating water current meters for measuring the velocity of running streams

## Calibrating Water Current Meters Which Measure the Flow of Rivers


**T**HE little railroad shown in the photograph above is not for the purpose of joy-rides for school-boys, as a youngster might think at first glance. It is a conveyor for an instrument of large name and important purpose, which is used to calibrate water current meters, instruments used by civil and hydraulic engineers for measuring the velocity of the water flowing in rivers and open channels. These velocity measurements, in connection with the cross-sectional area of the stream at the point where the velocity measurements are taken, are used for computing the quantity of water being discharged by the stream in a given time. Such statistics are necessary in many engineering projects, such as water power development, irrigation and flood prevention.

Hundreds of such calibrations are made annually by the United States Geological Survey, the United States Reclamation Service and other branches of the Government.




# The Largest Direct-Current Power Plant

Each generator is in four parts and each of the four parts required an entire freight car in transportation

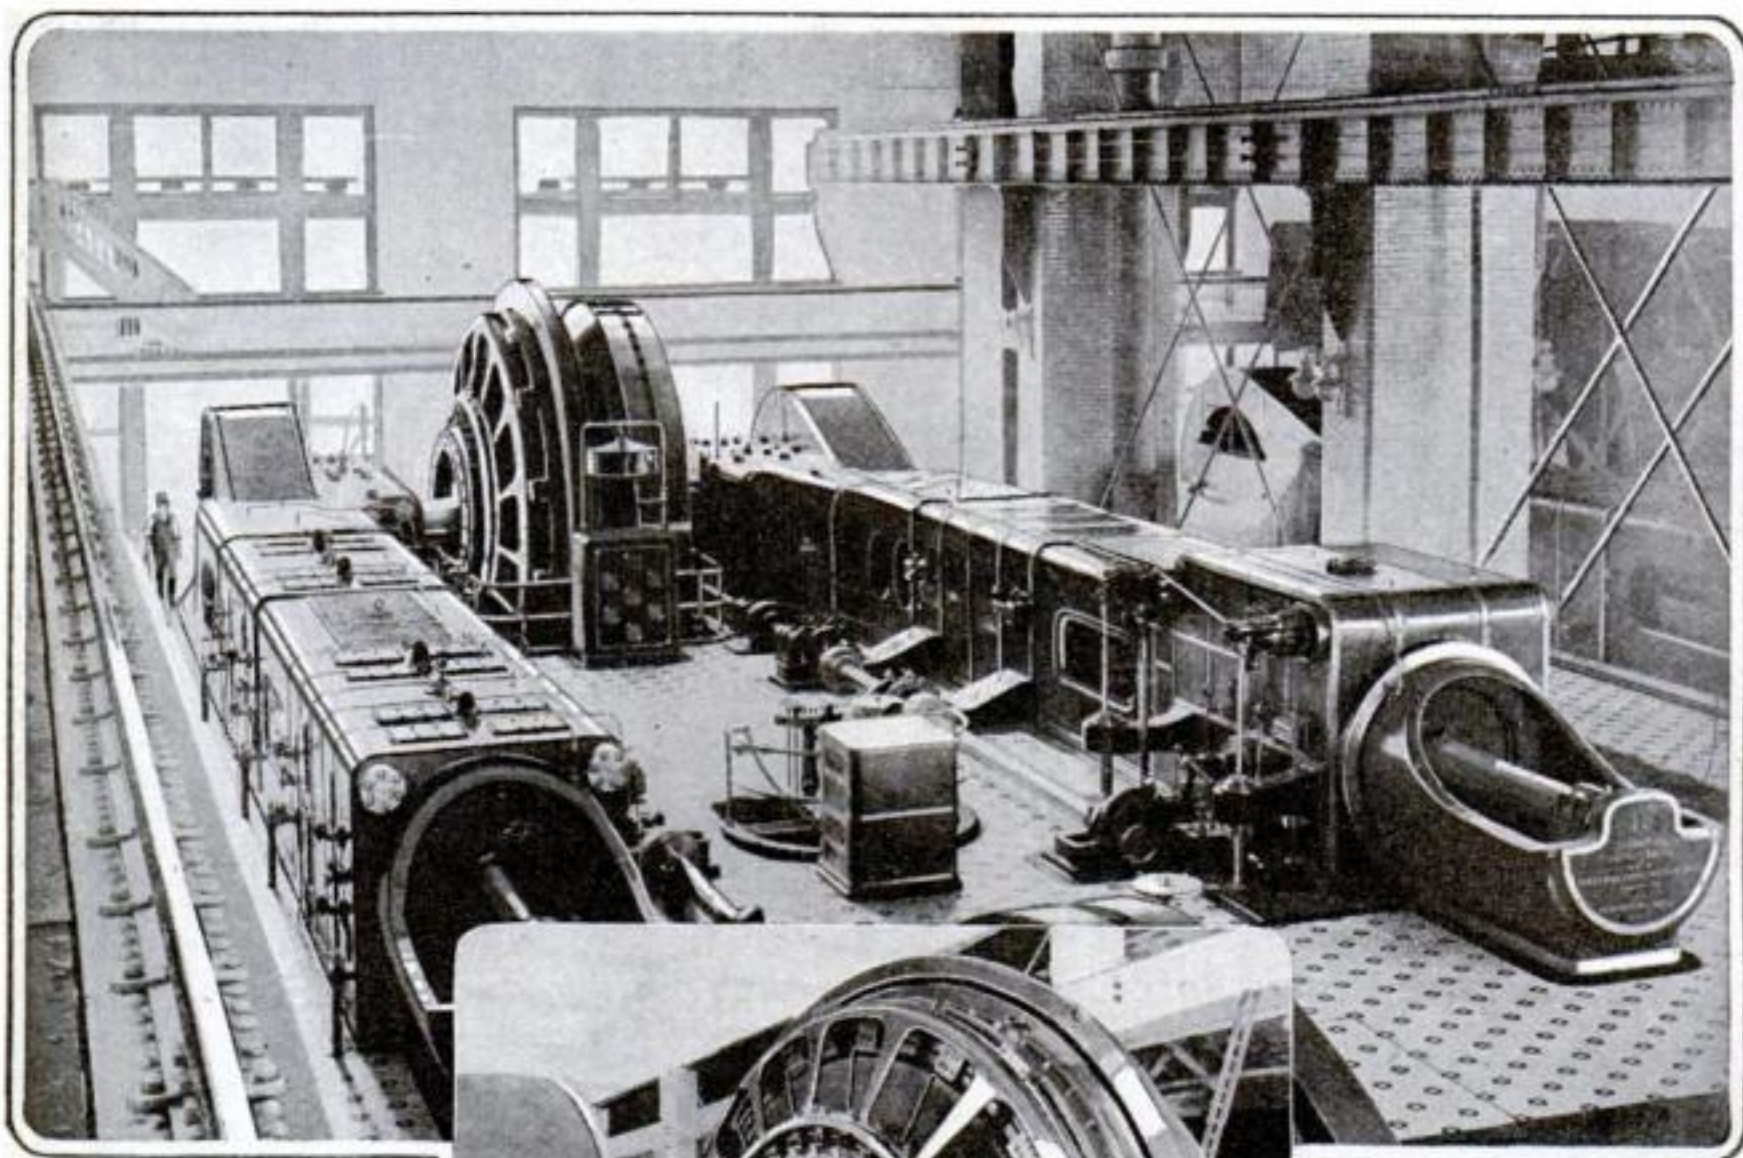

The generators are driven by fourteen 6000-horsepower and one 4000-horsepower reciprocating engines of the gas-steam type and one 1500-horsepower straight steam engine

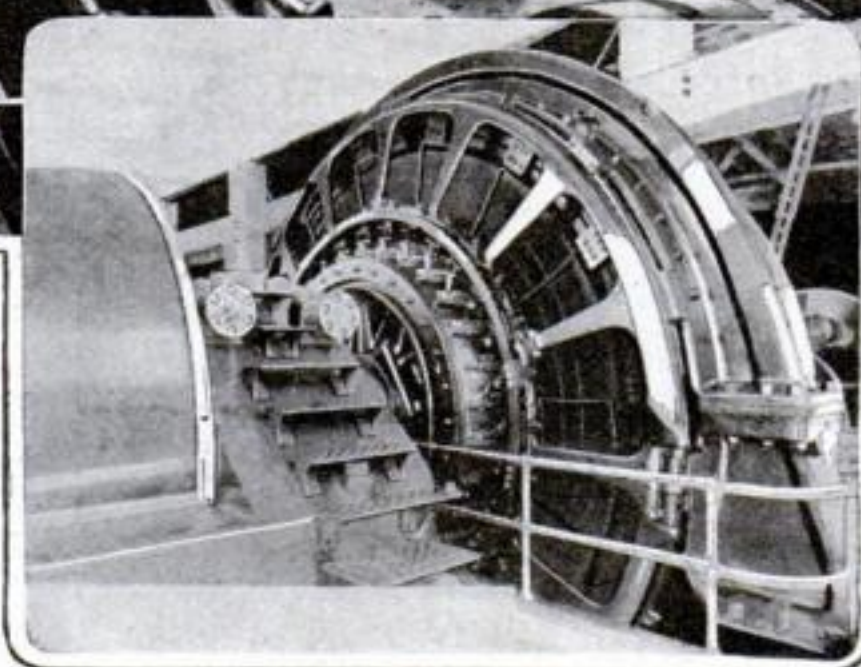

At left: A closer view of the generator. Each generator develops enough electrical energy to light 7500 arc lamps or run three hundred street cars. It is equivalent to 5000 horsepower

**T**HE installation of the largest direct-current generators ever built in this or any other country is now rapidly nearing completion at the Detroit works of the Ford Motor Company. This power plant has a maximum rating of 65,000 kilowatts or approximately 87,000 horsepower and is the largest strictly direct-current system in existence.

This immense amount of power is used to run the motors which operate the more than eight thousand machines distributed over the forty-seven and one-half acres of floor space in the Ford factory. In addition, these generators supply current for the motors of the ventilating system and the lighting circuits of the plant.

The switchboard which controls this electrical system is 424 feet long and consists of 222 dark Tennessee marble panels. It was built at a cost of \$400,000 or nearly \$1,000 per running foot. The amount of copper used in its construction for bus-bars, switches, etc., was approximately 165 tons and at current prices would be worth nearly \$100,000 in the raw state.

In order to give unity to the whole system and insure continuous service at all times, an elaborate signaling system has been installed. This consists of a 200-pair telephone switchboard which connects with engine-operating stands, boiler rooms and every distribution center throughout the factory. In the office, in connection with,



this switchboard, is a panel carrying 300 signal lamps and a duplicate set of telephone terminals. When a feeder is in operation a green lamp shows. This is replaced by a red lamp when the feeder is not in operation. This makes the location of any trouble in the system an easy matter.

The field frame of these gigantic generators is twenty-one feet high and twenty-six feet across the supporting legs. The weight of each complete generator is 105 tons. Five tons of copper are used in its construction. Owing to their immense size, it was necessary to construct these generators in parts, for the height of the arma-


ture alone is greater than the clearance on most railroads at bridges and tunnels. To transport the parts of each generator from Ampere, N. J., to Detroit, Mich., required four freight cars.

Each generator develops 3,750 kilowatts at an electrical pressure of 250 volts and 80 revolutions per minute. This quantity of electrical energy would light 150,000 25-watt lamps, or 7,500 arc lamps. It is equivalent to 5,000 horsepower and the output of a single generator would be sufficient to run 300 street cars. Each generator supplies continuously 15,000 amperes of current. The whole plant supplies 260,000 amperes. The total output is one-eightieth of the potential capacity of Niagara.

These generators are driven by fourteen 6000-horsepower and one 4000-horsepower reciprocating engines of the gas-steam type and one 1500 horsepower straight steam engine, all of which are direct-connected to the shafts of the generators. The water used

in cooling cylinders, pistons, valve boxes and bearings of the gas unit leaves the engine at a temperature of 175 degrees Fahrenheit and is utilized for boiler feed and hot water factory supply. The exhaust

gases, at a temperature of 1100 degrees Fahrenheit are employed to maintain the temperature of the steam between the high and low pressure cylinders of the steam engines, after which it preheats the boiler feed water. The steam engines are of the double expansion Corliss type. The boilers contain 1800 tubes having an approximate heating surface of 26,000 square feet.

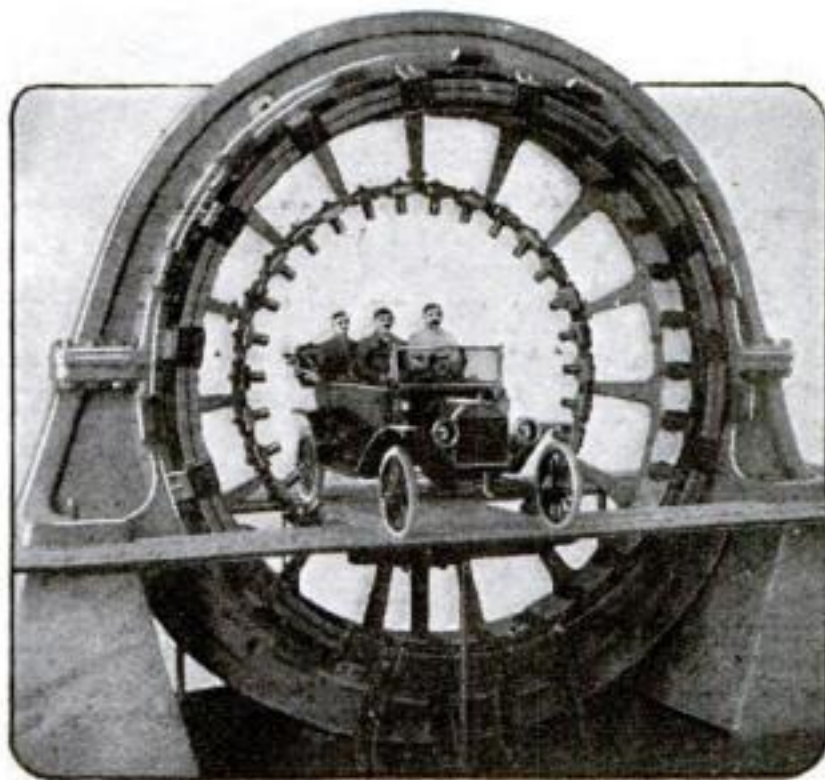

Here you get an idea of the size of the generator by a simple comparison of the field casting with a four-passenger Ford car

### One of the Ways the Retreating German Army Tried to Prevent Pursuit

WHEN the Germans made what has become known as the strategic retreat of the Hindenburg Line they very naturally wanted to prevent the Allies from following them too closely. Various obstacles were

put in the path of the pursuers. Those which they counted on to make the most trouble for their enemies were huge spiked boards, shown in the accompanying illustration.


These wicked-looking boards were placed all along the roads and in the trenches. They are constructed of heavy planks thickly studded with spikes. These were covered over with brush, leaves, branches of trees or any other available "camouflaging" device which might be depended upon to conceal the obstruction from the rapidly advancing troops.



Germany's spike-studded boards which were left all along the roads when the Hindenburg Line retreated. They were intended to cripple the pursuing Allies but they were discovered in time




# Efficiency Hints and Little Helps for Your Office, Sir

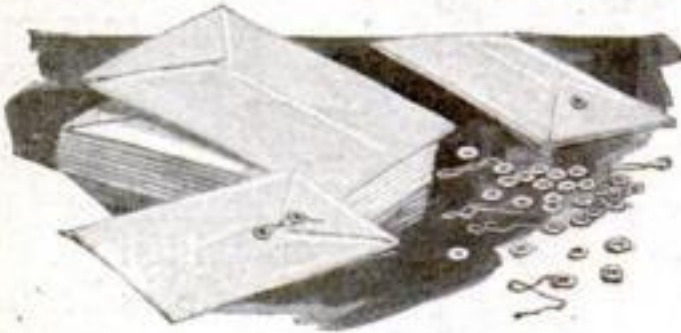

Above: A standard with separable trays for sorting and filing mail


Gummed washers as tie fasteners to be attached to an envelope or package containing other than first class mail matter

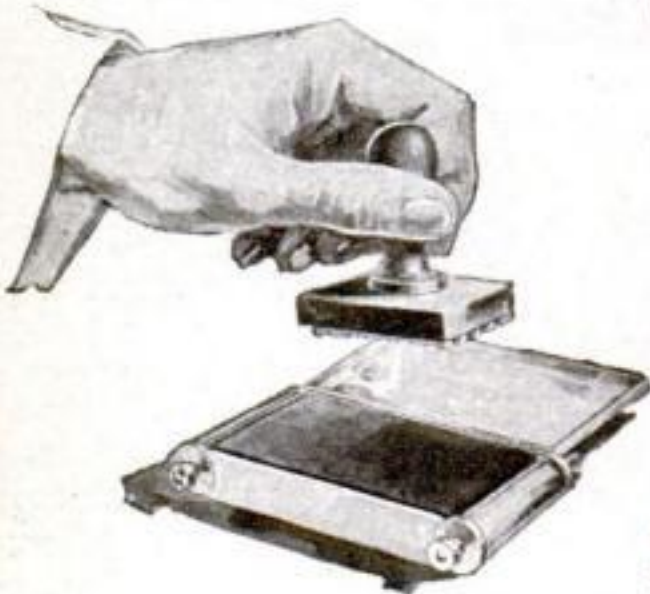

A stamp pad with an inking ribbon roll similar to a typewriter ribbon




With this container mucilage may be applied and spread without getting the fingers sticky

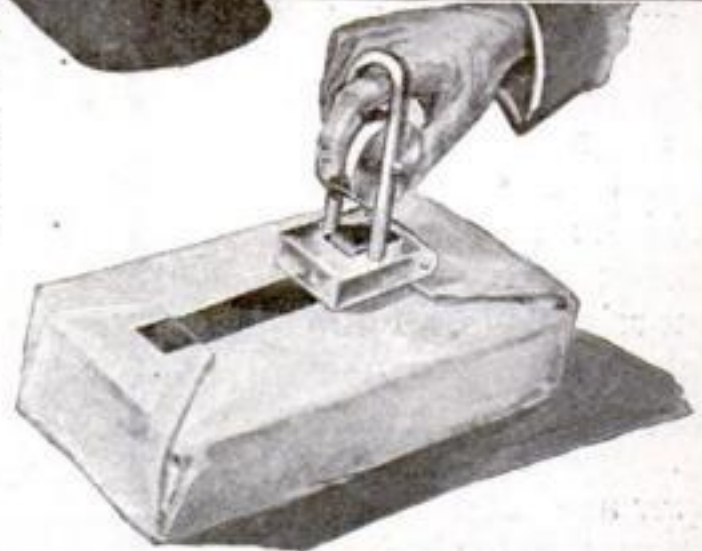


Adhesive tape container with moistener for binding packages

Below: A pin tumbler lock for loose leaf binders

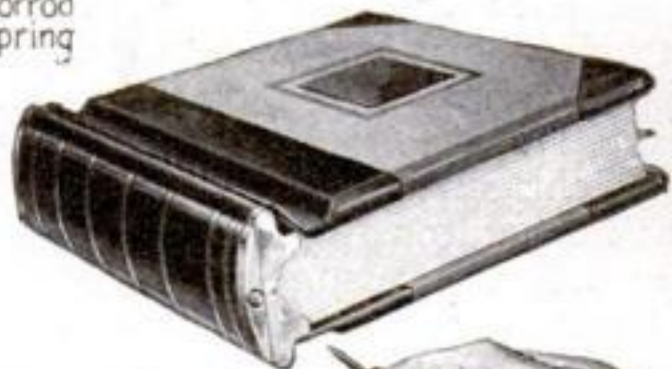

A card-index holder having the names and addresses of customers in plain sight and the notation covered over by the overlapping index sheet

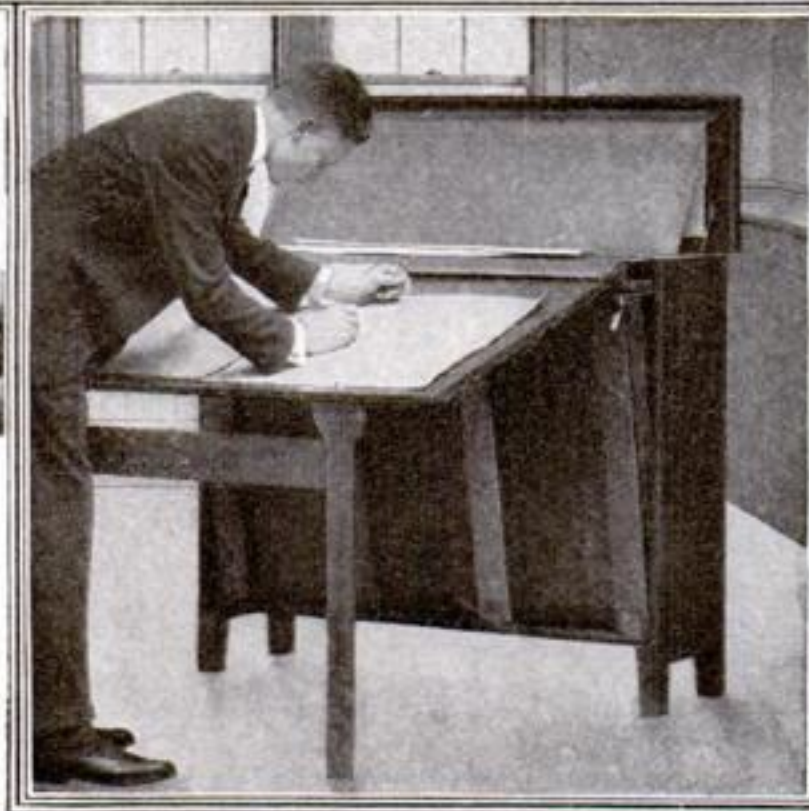

Blue print file and desk with drawing-board attachment for copying notes and measurements conveniently




A printing attachment for paper roll holders. It prints advertisement on each strip of the paper torn off to wrap a package




# Do It With Tools and Machinery



Testing cartridge plug-gage heads to close limits, by the use of a fluid gage

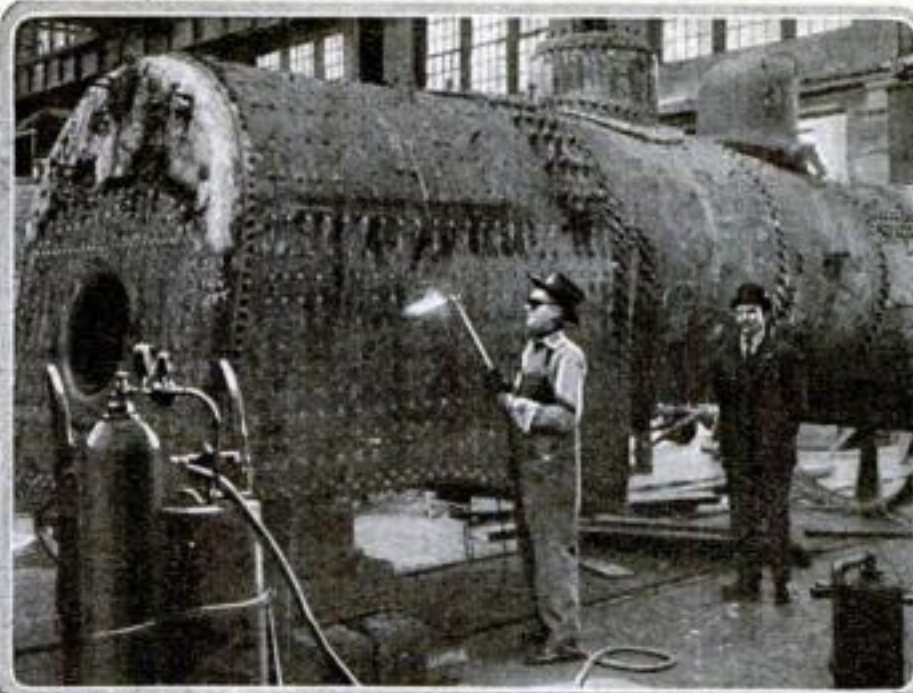

With an oxy-acetylene blow-pipe five hundred stay bolts were cut in fifty-eight minutes, a record time for such work

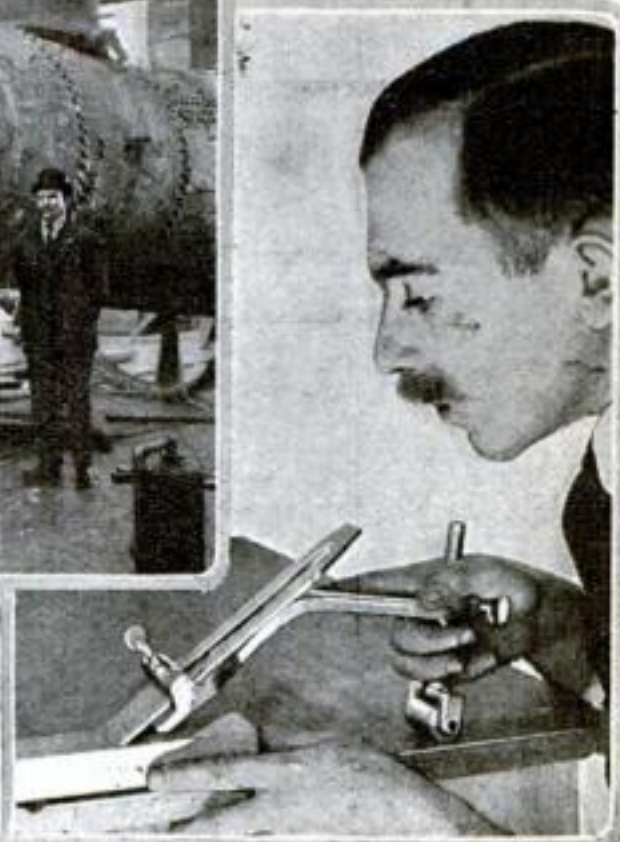

This holder for chisels and plane irons keeps the edge at the proper angle




A holder to be attached to a screw-driver so that a screw may be held and turned




A paint gun for applying liquid coatings. It works on the principle of an air brush




A tap or spout for puncturing a can cover. When attached to the can by a thumb nut, it delivers the contents in driblets

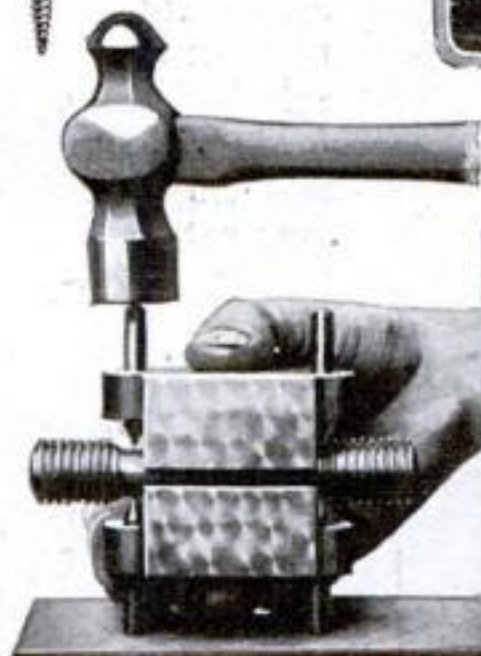

An instrument that shows the elasticity of a bar. Method of placing it on the bar

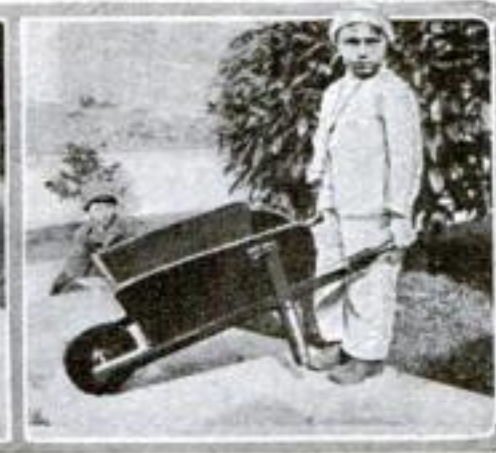


Wheelbarrow that folds completely up so that it occupies little storage space

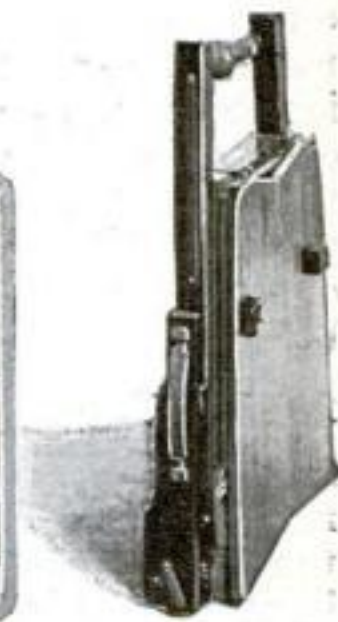



# An Engine-Carrying Fin for the Power-Boat

A device for conserving floor space on the boat and for enabling the boat to turn in its own length

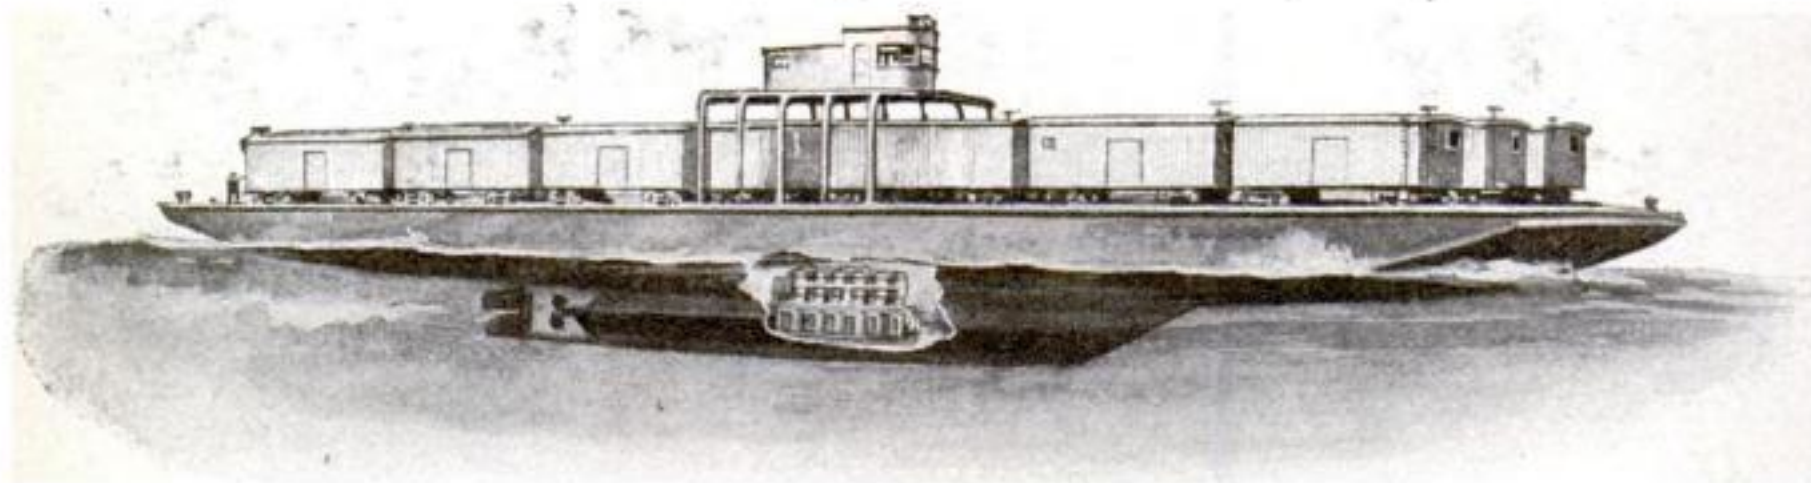

The engine-containing fin principle applied to car floats. These large, clumsy floats can be handled as easily as a light motor-boat, and the need of a tug is thus done away with

**A**LL the captains who sail the briny deep are not satisfied with their ships. Captain Samuel Golden was not so pleased with ships as he found them that he did not think they could be improved. Therefore, he thought out methods of improving power-boats. So far the captain has built three boats, all designed along the same lines.

The last one, known as the "Shib II" is a forty-foot houseboat equipped with a four-cylinder 28-hp. engine which operates at about 500 revolutions a minute. The peculiarity of the construction lies in the fact that the boat is equipped with a fin which is about twenty feet in length, twenty-seven inches in width at its widest part and twenty-six inches deep. The engine is built in this fin. The propeller is an ordinary three-bladed side propeller, twenty-two by thirty-inch pitch. The rudder is smaller than those used in other boats of her size.


The entire fin

is submerged. The water flows around the extreme lines of the fin without any suction. Therefore, the full surface propeller blades are available for pulling as well as thrusting. The thrust from the propeller cannot rise into the air. No air can reach the wheel.

The short narrow fin and the position of the rudder and propeller make it possible to steer the boat with great accuracy. One advantage in this construction lies in the fact that this type of boat may be used for many purposes, such as for tugs, lighters, pleasure boats, speed boats, ferry boats and


power life-saving boats. In crowded harbors it is very necessary to be able to handle ships without mishap. The invention of Captain Golden makes it possible to turn any vessel in its own length and makes steering far more accurate than it is with ordinary boats.

The size of the fin is in proportion to the size of the boat. In the case of a float for railroad cars the fin is large enough to be a good-sized engine room. A

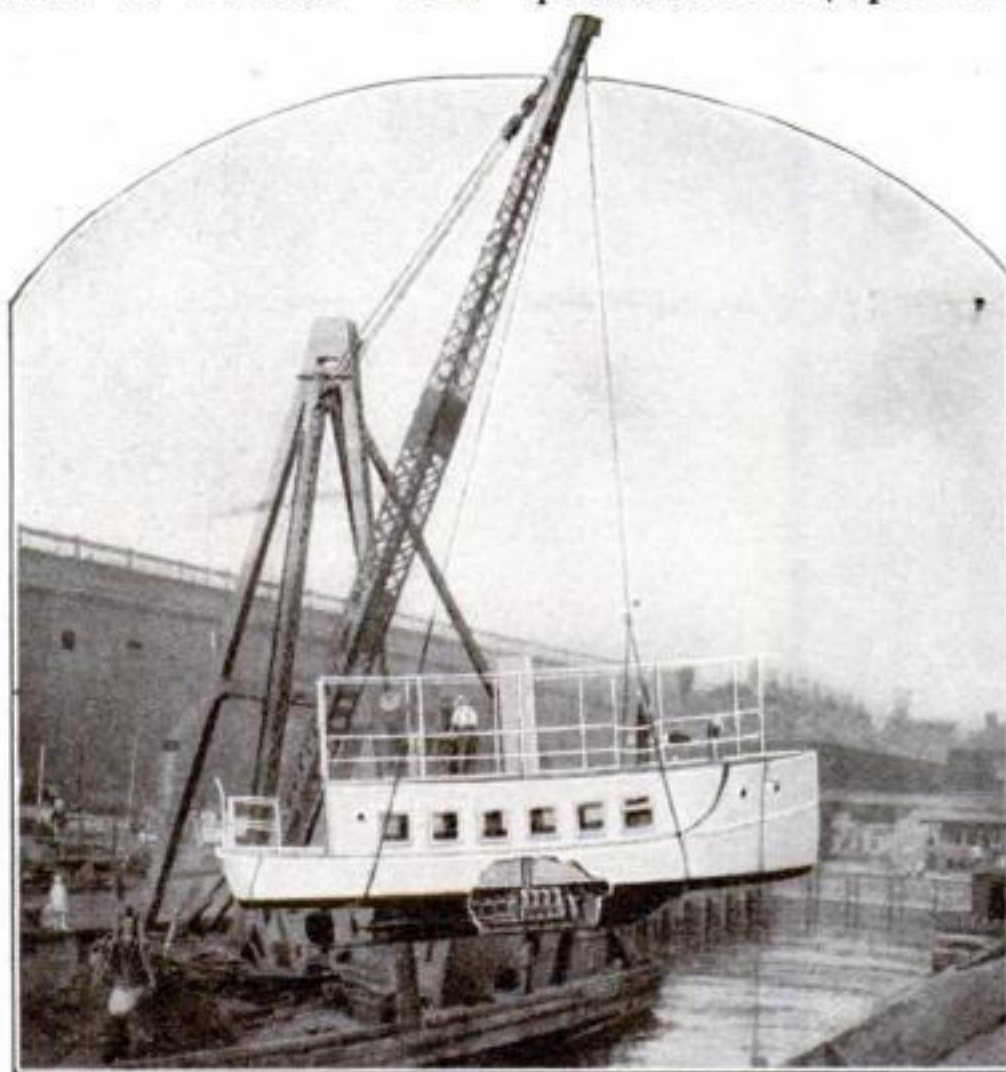

A new type of boat which has a short narrow fin that contains the engine. The propeller is always under water. This boat may be steered with great precision



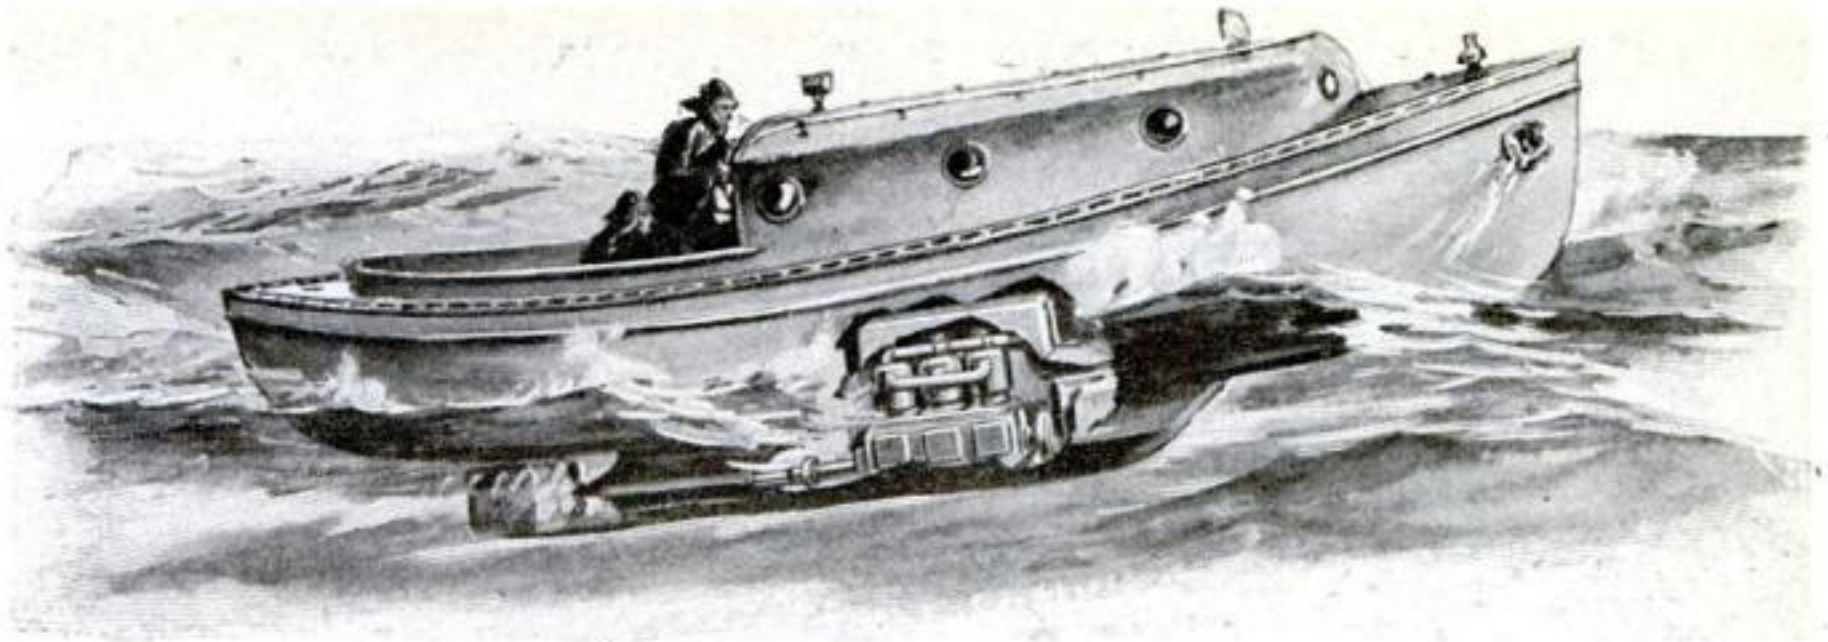

A power-boat equipped with a short fin. The position and construction of the fin make it possible to turn this boat around in its own length. This is an important feature in a crowded harbor

two-hundred-and-fifty-foot float would have a fin twelve feet in width. The engine would take up four feet, which would leave four feet on each side for passageway. On such a large boat a great part of the engine would be above the fin and there would be plenty of room to get at any part of the mechanism.

Small boats, like motor-boats, have a narrow fin and a correspondingly small engine. All that is necessary in such boats, is arm space around the engine. A man can reach any part of the engine from the floor above it.

### Zip! Zip! The Electric Fish Scaler Is Cleaning the Fish

A NEW device which has recently been patented by Louis Weinberg, of Chicago, will enable anybody to scale a fish in the shortest possible time and with very little effort. This invention looks like an old-fashioned music-box cylinder, except that the teeth are mounted on a tapered body. The scraper blades or teeth are larger and farther apart on the thick part of the body and finer and nearer together where it tapers. The coarse blades are to be used on large fishes having heavy scales.



Turn on the current and scale your fish electrically. A flexible shaft runs from an electric motor to the tapering scraper

### Can a Fish Frozen in the Ice Be Restored to Life?


OCCASIONALLY a "fish" story gets into circulation which has such a scientific flavor that it challenges the credulity of even the very well informed. To this class belongs the story of the resurrection of a fish called the "Chindagaks," which, it is reported, will come to life again after having lain frozen solid in the ice for months.

According to the authorities connected with the United States Fish Commission, the Chindagaks is a newcomer not only into the field of fish literature but also into the lists of known species. None of the experts on the Commission has heard of it before.

They declare that when a fish is entirely frozen, life is extinct; though it is possible for a fish to appear to be frozen when its flesh is only stiffened from the cold.

The blood is still uncongealed, therefore the fish is still alive and will, of course, revive gradually when placed in water of the proper temperature.

Even this will happen only to a fish which has been caught through a hole in the ice and left lying exposed on the ice surface until it has become stiffened from the cold.

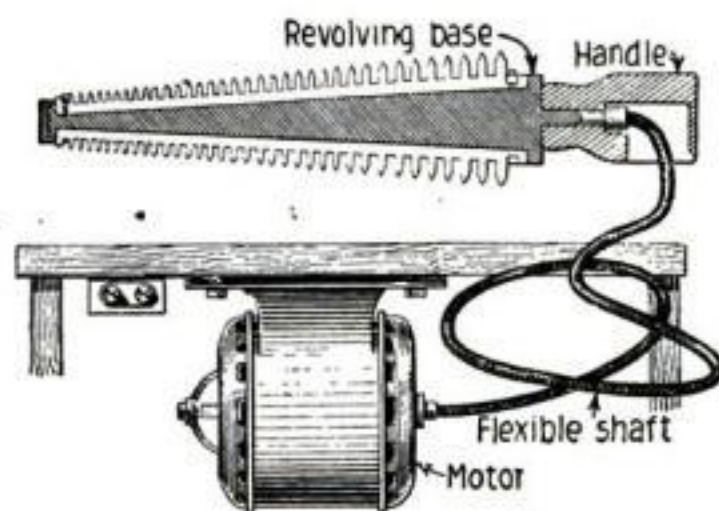





© Int. Film Serv.

This building was constructed entirely of corn. The color effects were obtained by using white, purple, yellow and red corn, many thousands of bushels being consumed in the making

### Residents of This Western Town Are Not Worrying Over Corn Shortage

**J**UBILANT over the bumper crops which have surpassed all previous records, the residents of Mitchell, South Dakota, have given vent to their enthusiasm by building an enormous palace in which all the intricate designs in the ornamentation, as well as the entire framework, are worked out either in grains of corn, cobs or stalks. The points of stars in the American flag designs are ingeniously formed from quarter-sections of sharp-pointed ears of corn.

Thousands of bushels of corn were consumed in making the palace. We are wondering if the enthusiastic corn-growers have heard the food conservation appeal recently made to the nation.

### A New Christmas-Tree Stand That Prevents the Tree from Tipping

**A** NEW type of Christmas-tree stand is like a giant bottle with a broad base, into the neck of which the tree fits snugly. The bottle, or shell of the stand, is made of sheet metal or galvanized iron, and is to be filled with sand before the tree is inserted in the neck. This gives considerable weight to the stand and holds the tree steady.

When the tree is taken down, it is only necessary to turn the stand upside down in order to empty it of the sand. Water may be used instead of sand, if desired.

The use of water will make the stand equally weighty and will serve to keep the tree fresh and green much longer. It is so simple that a child can adjust it.




This bottle-shaped Christmas-tree stand may be weighted with either sand or water



## House Numbers in Concrete—You Can See Them from Your Car

THE latest style in house numbers in Pasadena, California, utilizes concrete blocks in which the numbers are molded. These are set out on the edge of the curb so that he who runs (in an automobile) may read without getting out of his car and walking up to the house to find out whether it is the place he is looking for or not.

The blocks are only four by seven inches, face surface, with triangular sides, that slope back from the street. The ruler shown in the picture is placed so as to give an idea of the size of the lettering.

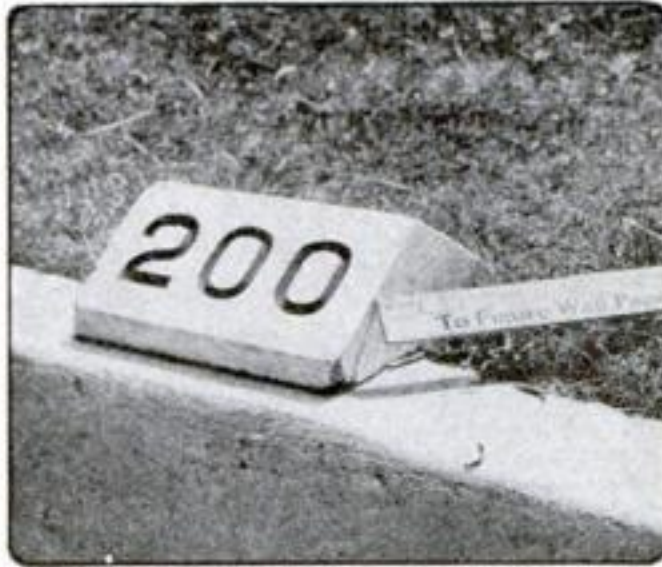

Concrete blocks bearing the house numbers are set on the curb in front of the residences

from place to place. This one may be carried by the physician to the patient.

When the machine is unpacked the case acts as a rest for the body of the patient. Two arms support the legs. These arms are so arranged that the injured member may be set so it will be exactly the same length as the uninjured leg. The measure of the uninjured leg is taken and the injured leg is drawn out to correspond to it.

Movable supports are provided for the limbs. Hence there is no strain on the fractured leg. The supports are made of wood fiber so that X-ray pictures may be taken of the leg while it is resting on the supports. A plaster cast may be put


on the fractured leg while the patient is on the machine.

When the machine is packed up it fits compactly in the case. This apparatus should be very useful for army purposes because it is so easy to move it about.

The case is the size of an ordinary suitcase, and is made of black walnut, with a dust-proof cover. The large amount of aluminum and fiber which enters into the construction of the apparatus explains its extreme lightness.

## Setting Broken Bones by a Portable Machine

A NEW machine for setting fractures of the legs has been designed and patented by John H. Wilting of Buffalo, N. Y. One of the most interesting features of the apparatus is its light weight, thirty-five pounds. The average fracture-setting apparatus is too heavy to be moved about

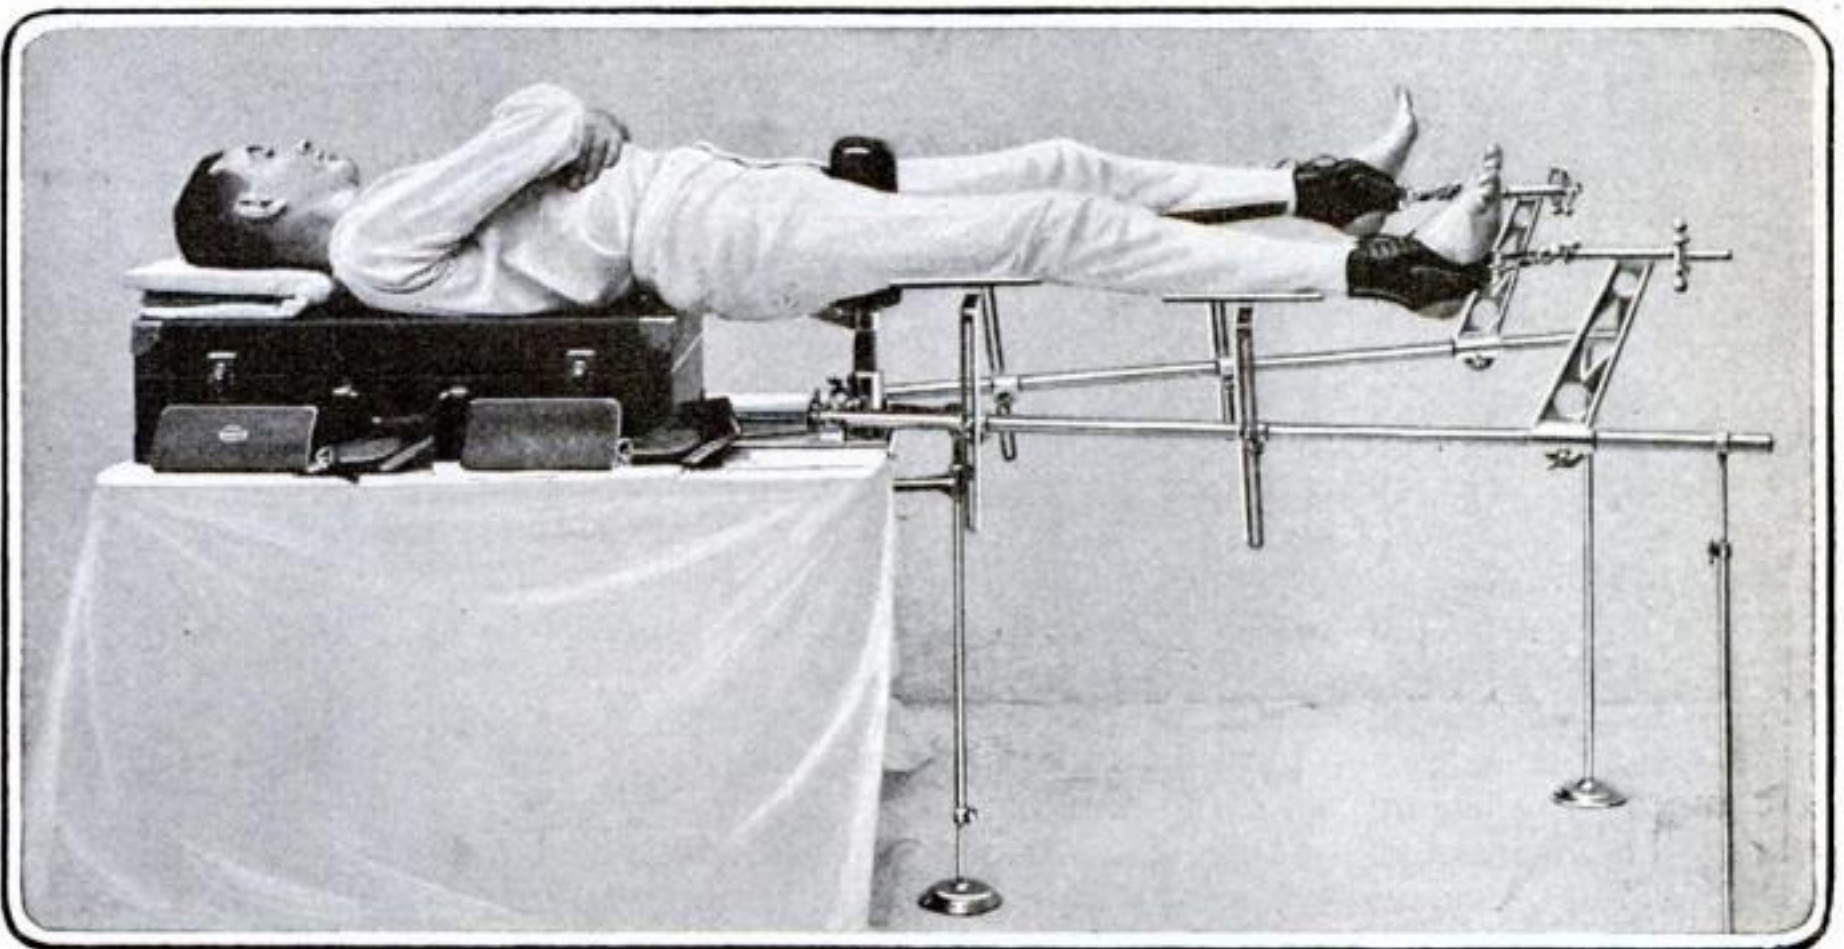


A fracture-setting device which may be operated anywhere. The entire apparatus may be packed up in the case on which the patient's shoulders are resting, and it weighs only thirty-five pounds



# A New Sea Camouflage Foils the Submarine

A painted curtain is used to conceal the guns and make the vessel appear unarmed

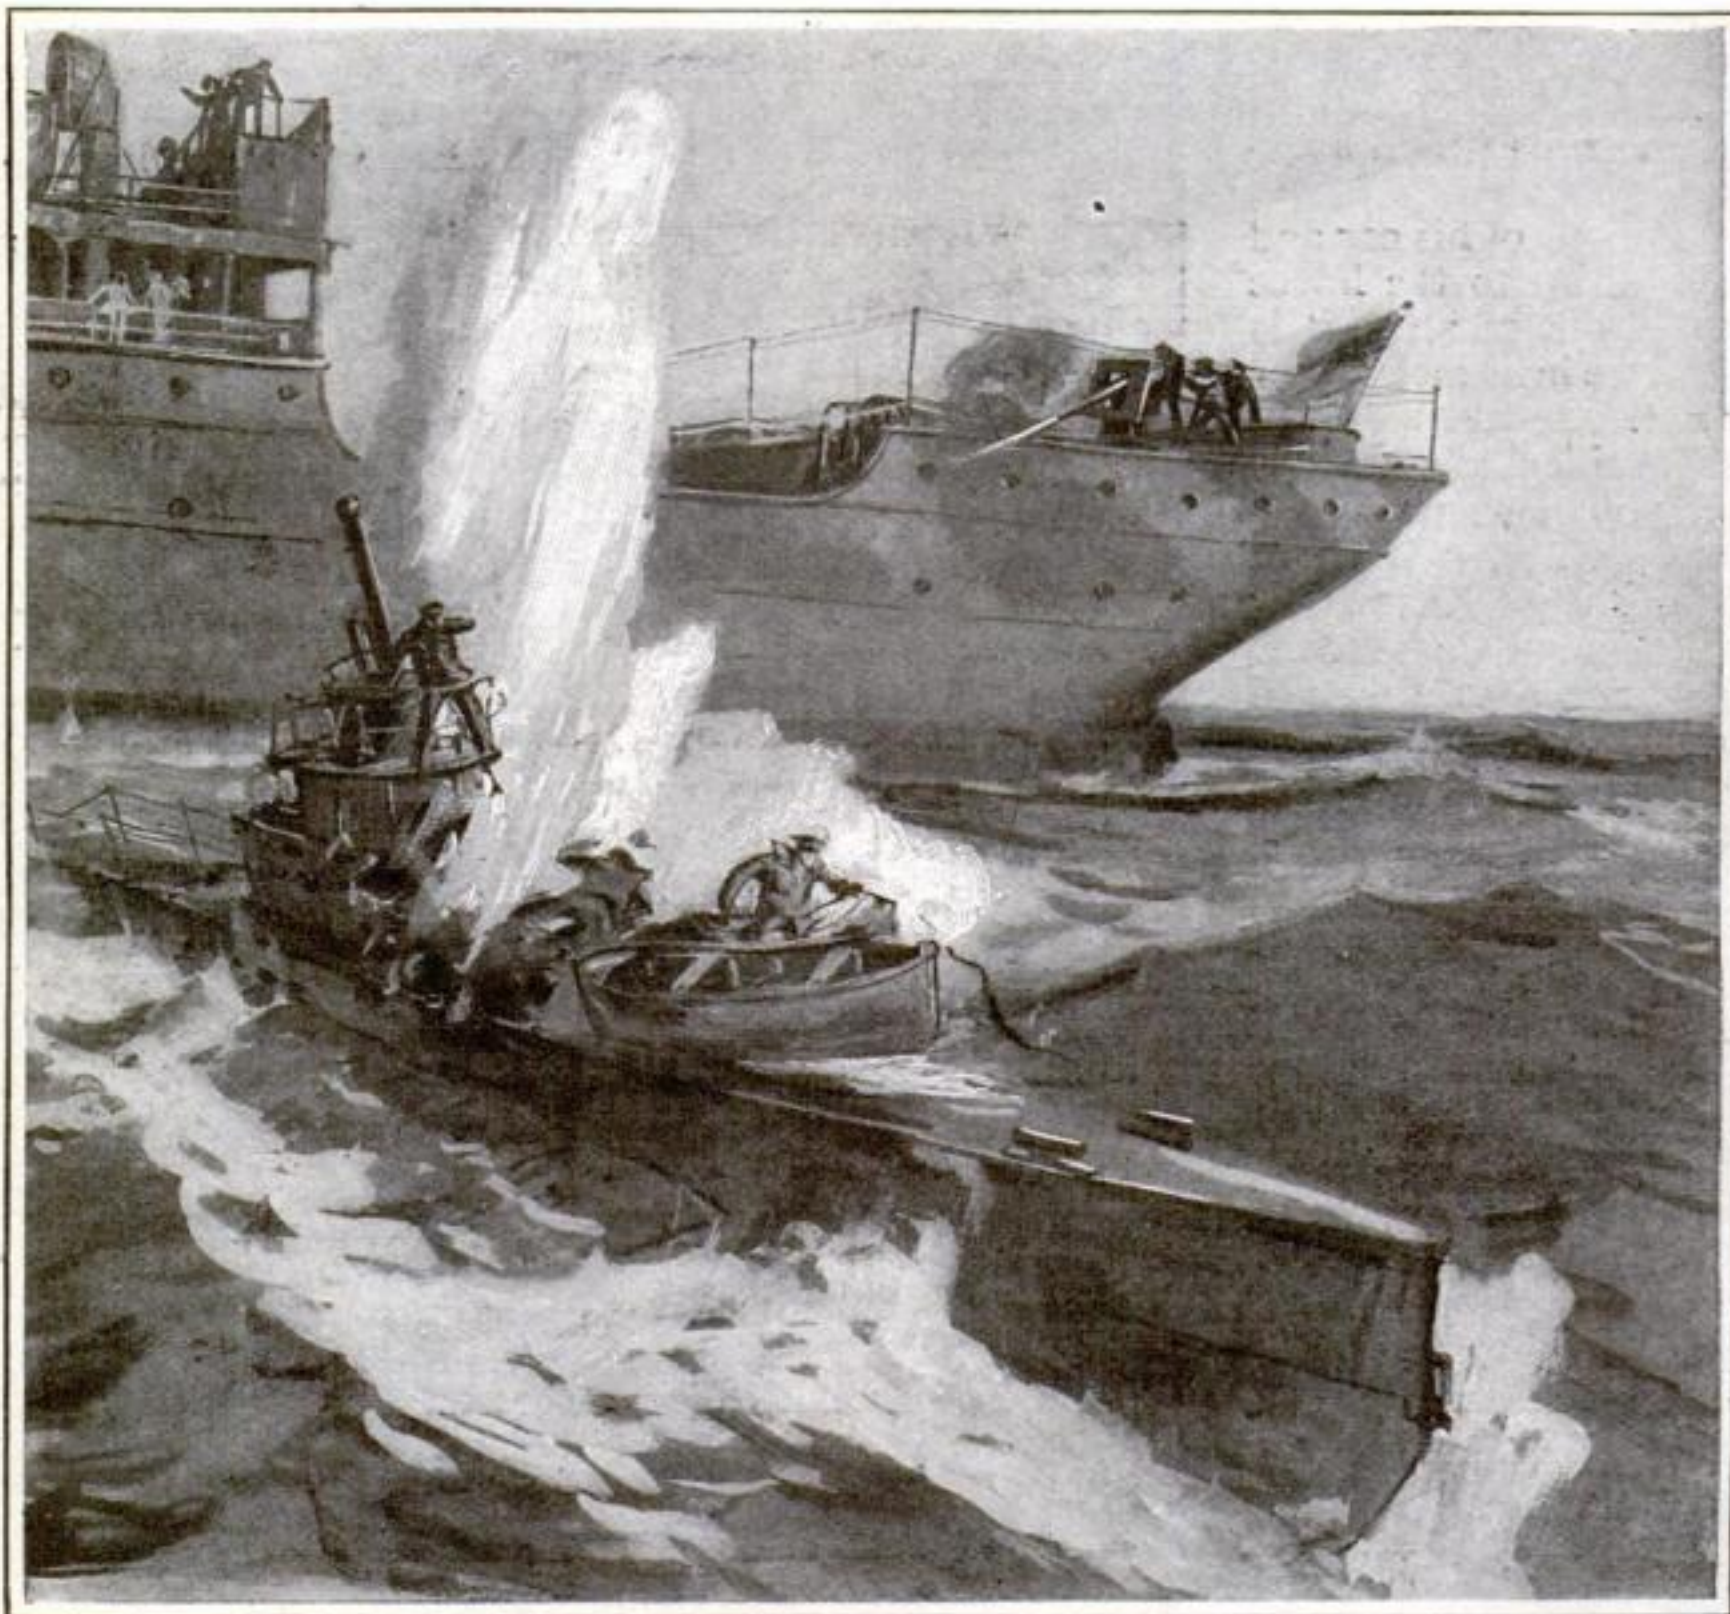

The U-boat approached to within twenty yards of her intended victim believing her to be unarmed. Then the false curtain was dropped from the after-poop deck, revealing the big stern gun. The submarine was destroyed by the gun's first shot, the whole crew perishing

**A**T least one German submarine has already been sunk by the latest adaptation of camouflage to sea warfare in the form of a painted curtain to hide the stern gun of a merchantman. The purpose of this new adaptation of the camouflage idea which is now so commonly employed in connection with armored cars and tanks is to get the submarine to approach the vessel under the impression that she is unarmed and then to put the gun into play so quickly that the U-boat cannot submerge in time to escape being hit.

While this kind of deception has been

practiced in different forms, such as the dummy funnels and fake topsides of the German raiders *Emden* and *Moewe* and in the many grotesque futurist daubs of paint with which some of our own vessels are now blessed, this is the first time the ruse has been employed for the benefit of the submarine.

According to the officer of the British vessel which had the encounter referred to, the German submarine was first seen some distance away with her periscope showing. The ship's big gun was hidden behind a collapsible curtain screen which covered the



entire stern and which had been painted to resemble lifeboats.


The curtain was in sections, each with rings slipped over extensions of the rail uprights. It was lowered instantaneously as a unit by means of ropes running over small pulleys at the top of each upright and tied to a cleat on the deck. The submarine approached to within twenty yards of the vessel. Several men clambered up out of the forward hatch with a collapsible life-boat. The ship's curtain was suddenly dropped; the guns were brought to bear, and fired. The first shot struck the U-boat at the base of the periscope and she sank in four minutes carrying her crew with her.

## Butter? No; Pass the Oleomargarine, If You Please

IN some parts of Germany, according to the Bulletin of the Chicago Section of the American Chemical Society, oleomargarine is quoted at higher prices than butter. "Now how do you account for that?" asked a man as he read it. We have no direct information so we claim the privilege of several guesses. The statement does not record just what kind of butter it is that is cheaper than oleomargarine. Some of us can hark back to student days in Germany and recall little platters of virile, puissant and mighty butter that were placed before the guests at the table (but not the landlady),

and the memory of it, through the long and arduous years, carries the sense of economy. Butter like that seems bound to be cheap; by rights it should be cheap; cheaper. an anything else one can think of.

But there is another reason which may explain why even good butter may be worth less than oleomargarine. There is a fat famine in the land, and oleomargarine produces a greater number of calories than butter. We are told by those who have traveled in Germany since the war has been raging that the craving for fats, after being on short rations for a while, becomes so intense that the mere sight of butter induces a disposition to throw all propriety to the winds and devour the fat like a beast. Oleomargarine may "go further" than butter in satisfying this intense craving.—  
ELLWOOD HENDRICK.

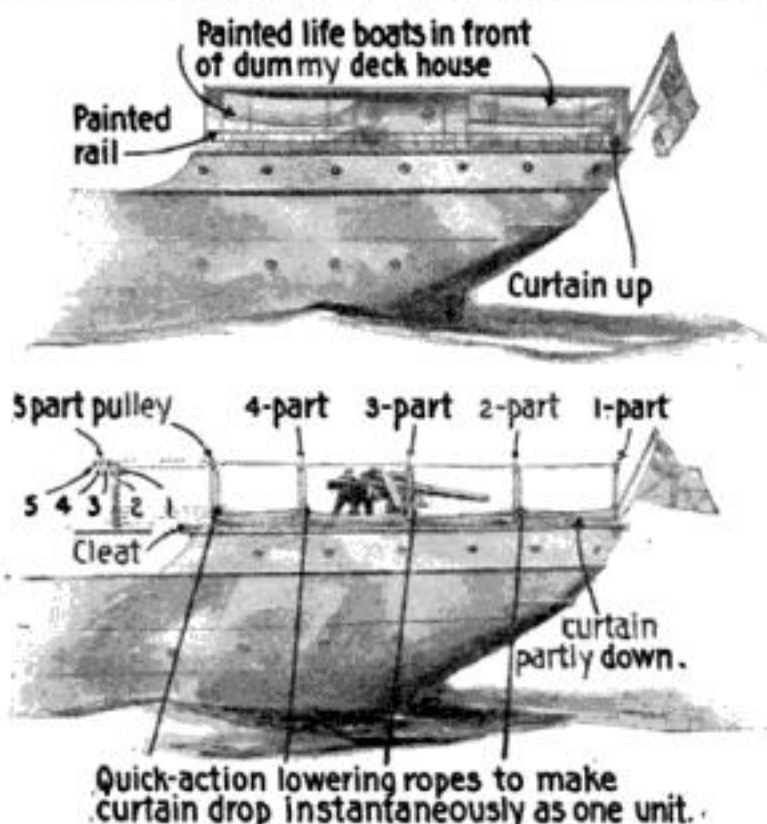

The top picture shows the camouflage curtain in position, its painted lifeboats plainly visible from a distance. The lower picture shows the curtain lowered and the gun deck cleared for action

## The Up-to-Date Baby Has a Wheeled Dressing Table

A CERTAIN Philadelphia (Pa.) manufacturer is putting out on the market a baby-dresser on wheels, which is nothing more nor less than a stout piece of fabric stretched on a frame and supported on wheels, so that it can be moved from one room to another. It is large enough to hold the baby's toilet articles as well as the baby himself.


The frame is made of steel with rubber-tired wheels. It is rigidly locked when in use, but easily folded up and put out of the way when not in use. It occupies a very small space when stored. It is perfectly balanced and cannot be tilted over, nor will it close up before it is locked.

When not in use for baby, it can be used as a tea-serving table.



This is much better than the nurse's lap after his bath, thinks the baby



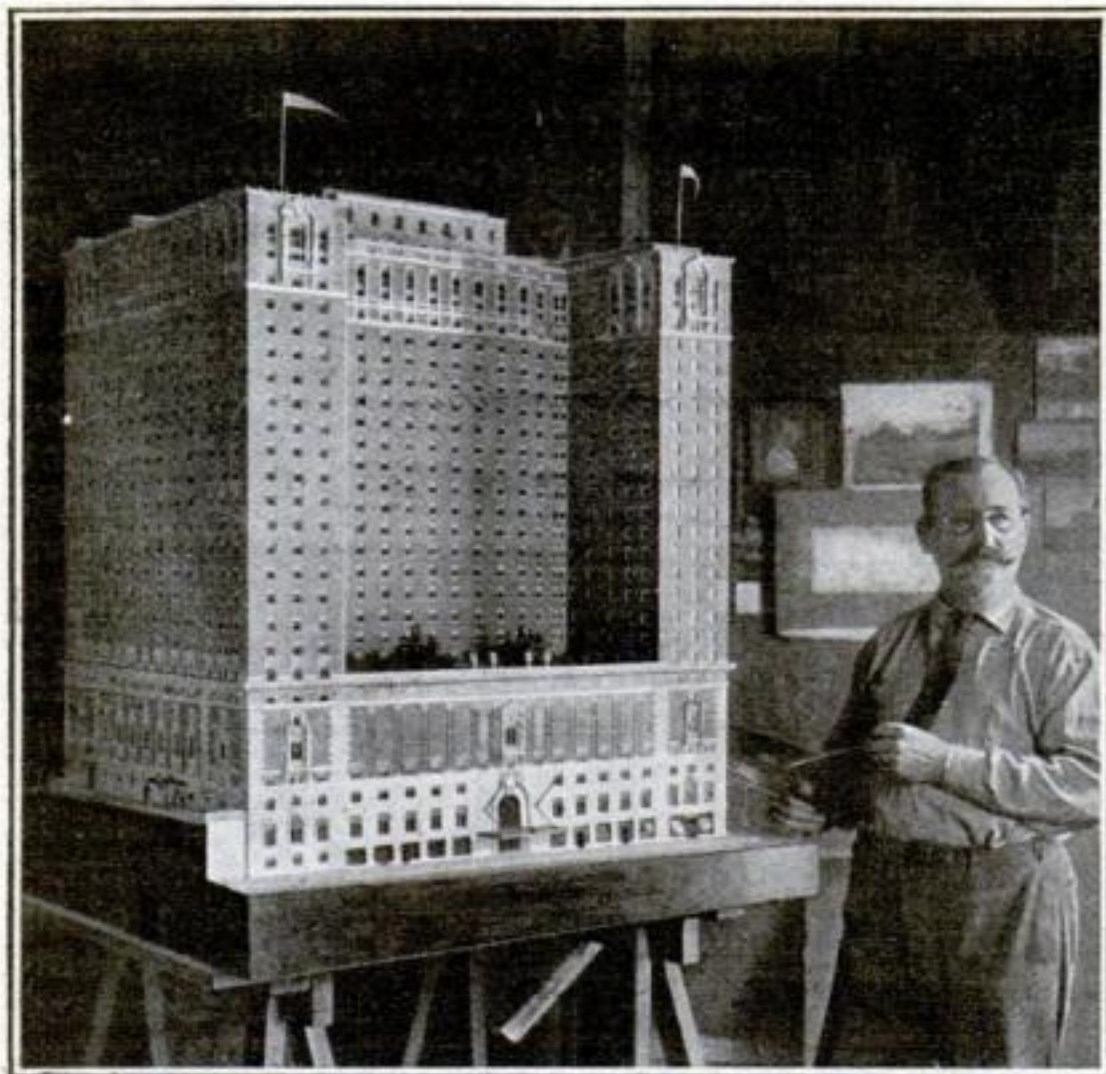

An exact reproduction, in miniature, of a large hotel now being built in New York. The windows are of real glass

### A Miniature Hotel With Two Thousand Rooms

THE picture above shows a remarkable model of a gigantic hotel which is planned for New York City. The model is a faithful representation of the building as it will appear. Every little detail of ornamentation, coloring, lighting effects and general construction has been faithfully portrayed. The result is a little palace that might accommodate a whole community of Peter Pans. The model was constructed from the plans of the architect who designed the great hotel that is to be. The material used was wood pulp stained to imitate perfectly the stone which will be used for the new building. The windows of the miniature are of glass.

The real hotel when finished will be enormous. It will have a ballroom which will accommodate three thousand dancers. There will be two thousand guest rooms in the building and preparations are being made to serve more than a million people during the first year it is open.

### A Motion Picture Camera That Stands on One Leg

ARTHUR SELDEN of Rochester, N. Y., intends to employ a single swinging support in place of the stationary tripod of a motion picture camera to facilitate the following of moving objects and a crank attached to the operator's belt to minimize vibration by indirect driving. No provision is made for focusing.

In motion picture work, lenses of universal focus are not employed. An object moving to or from the lens within certain distances will necessitate re-focusing. At the same time the crank must be kept in motion without the slightest variation in speed. The photographer using a camera with a single swinging support would find both his hands well employed. Focusing of the lens when the necessity arose would be impossible. It is doubtful, too, whether a smooth, even turn could be made with a crank attached to the flexible body of a man.

Although in this case the inventor has given most of his attention to a more accurate centering of an object in motion, it should be remembered that this feature, with rare exception, is not desirable in motion picture work. An object in motion which is continually photographed in or near the center of the film in spite of its movements will, when projected on the screen, dazzle the eyes of spectators, because the background, which is greater in area, will assume in an opposite direction the identical motion which has been arrested in the object. At best, the majority of such pictures are somewhat confusing and consequently seldom used.



The photographer using a camera with a single swinging support, such as the one shown, would find both his hands well employed



## Commuting by Airplane from the Suburbs to New York


**I**N April, 1916, the New York Flying Yacht Club, the only club of its kind in the country today, was organized for the purpose of establishing on the Hudson River a station where aviators and owners of hydroplanes could "house" their machines after making flying trips to Manhattan Island. The

day is coming when "commuting" by aircraft will be a common thing. It has been done already by a few wealthy men whose homes are on the water front several miles from New York city. These air travelers will find it necessary to have "garages" for their machines while they sojourn in the city. The hangars will be erected near the club house which will soon be erected at One hundred and Twenty-ninth Street and Riverside Drive on the Hudson.

The club building will be two stories in height, with a spacious roof garden. A catering room and a banquet hall will be found on the lower floor. The trophy and club rooms will occupy the second floor. A balcony will surround each floor and the structure will have verandas on all sides where members and visitors can sit and watch the machines in their flight over the land and river.

A gangway will lead from the south side of the structure to the river, and this walk will be used by all persons leaving and board-

ing their machines. On the roof of the structure will be two observation cupolas which will be used chiefly by officials for timing the races. The roof will also have a powerful searchlight that will be a guide to the aviators who fly in the night. The searchlight will cast a bright perpendicular beam heavenward continually every night and this will be a beacon to the men coming home to roost.

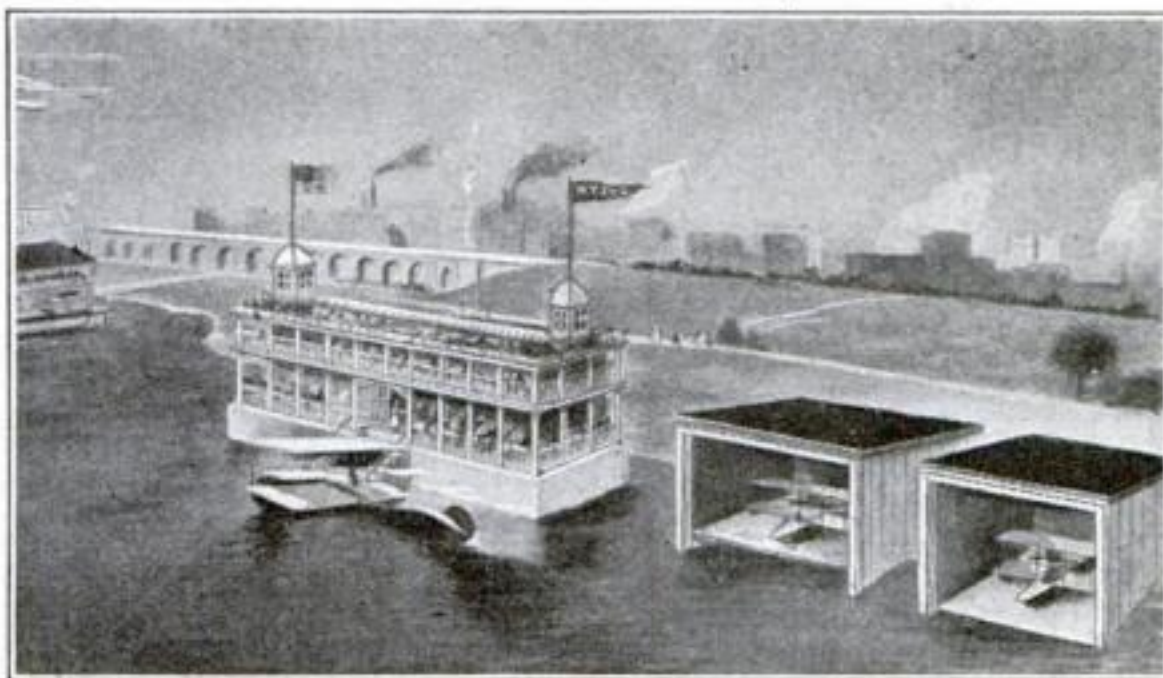

The proposed club house of the New York Flying Yacht Club and its string of hangars in which the hydroplanes will rest


A string of hangars will be built on the water's

edge close to the club house. These will be so constructed that an aviator can pull in or take out his flying machine with the greatest ease. The hangars will be big enough to hold the very largest types of hydroplanes.

## Using the Heat from the Hot-Air Furnace for Cooking Purposes

**I**F you have a hot-air furnace you can do your baking by its heat. Here is how it may be done. A sheet-iron oven can be built into the hot-air conduit, as shown in the illustration, and the

heated air can be made to flow around the sides and the back of the oven. By this heat the contents of the oven will be thoroughly baked and none of the disagreeable gases in the hot air will be allowed to touch them. Apparently, here is a practical device which can save many a dollar on your coal and gas bills. That at least is what Albert Caro, of Illinois, who is the originator of the idea and inventor of the oven, believes.

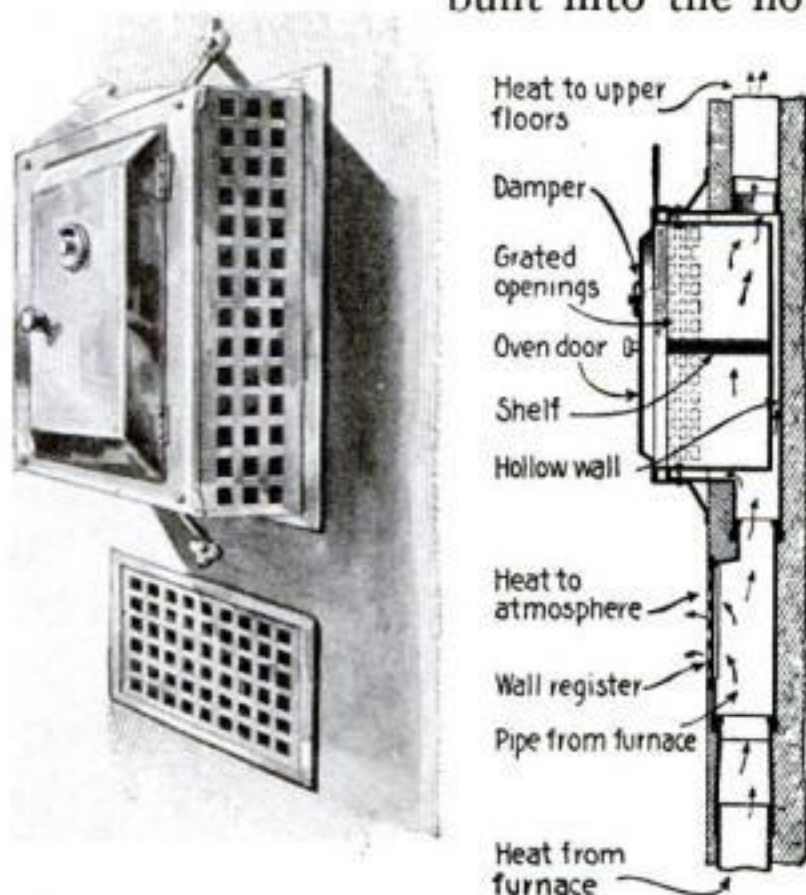

The hot air rising from the furnace heats the oven and circulates around the contents



# An Imported Jungle in a School Yard

A method de luxe by means of which one set of children could dispense with school books

**T**HE children in the family of Mr. George Getz, of Chicago, Ill., are not inclined to neglect their school work.

In fact, there is little difference between the school hours and the recreation periods; for according to the system of education which Mr. Getz has established for them, school work is recreation.

On the Getz estate at Lakewood, Michigan, where the children pass the greater part of the year, there is a veritable jungle, full of animals, wild and tame, from which the lessons in zoology may be illustrated at first hand. There are camels on which the youngsters may ride while they learn all there is to know from the Arabian caretakers about the habits of the camels and listen to tales of mystery about the great African desert and

Arabian lore more interesting by far than fairy stories. The children know all about the honey bear, the various types of mon-

keys and other small animals, including guinea pigs and rabbits. All are to be found in their private zoo.


When the lesson is on birds, there are still finer facilities for study. In the aviary there is almost every kind of bird known to man. These are kept in congenial groups under the care of experienced fanciers. Of course there are all kinds of flowers to supply not only beauty of landscape and material for botany lessons, but also nectar for the bees.

There are vegetables and farm animals of every description, some native to

the United States and others from different parts of the globe. Geography and History are taught at the same time and in connection with the Nature study.



The schoolhouse, built for three children, answers the purpose of a church on Sundays

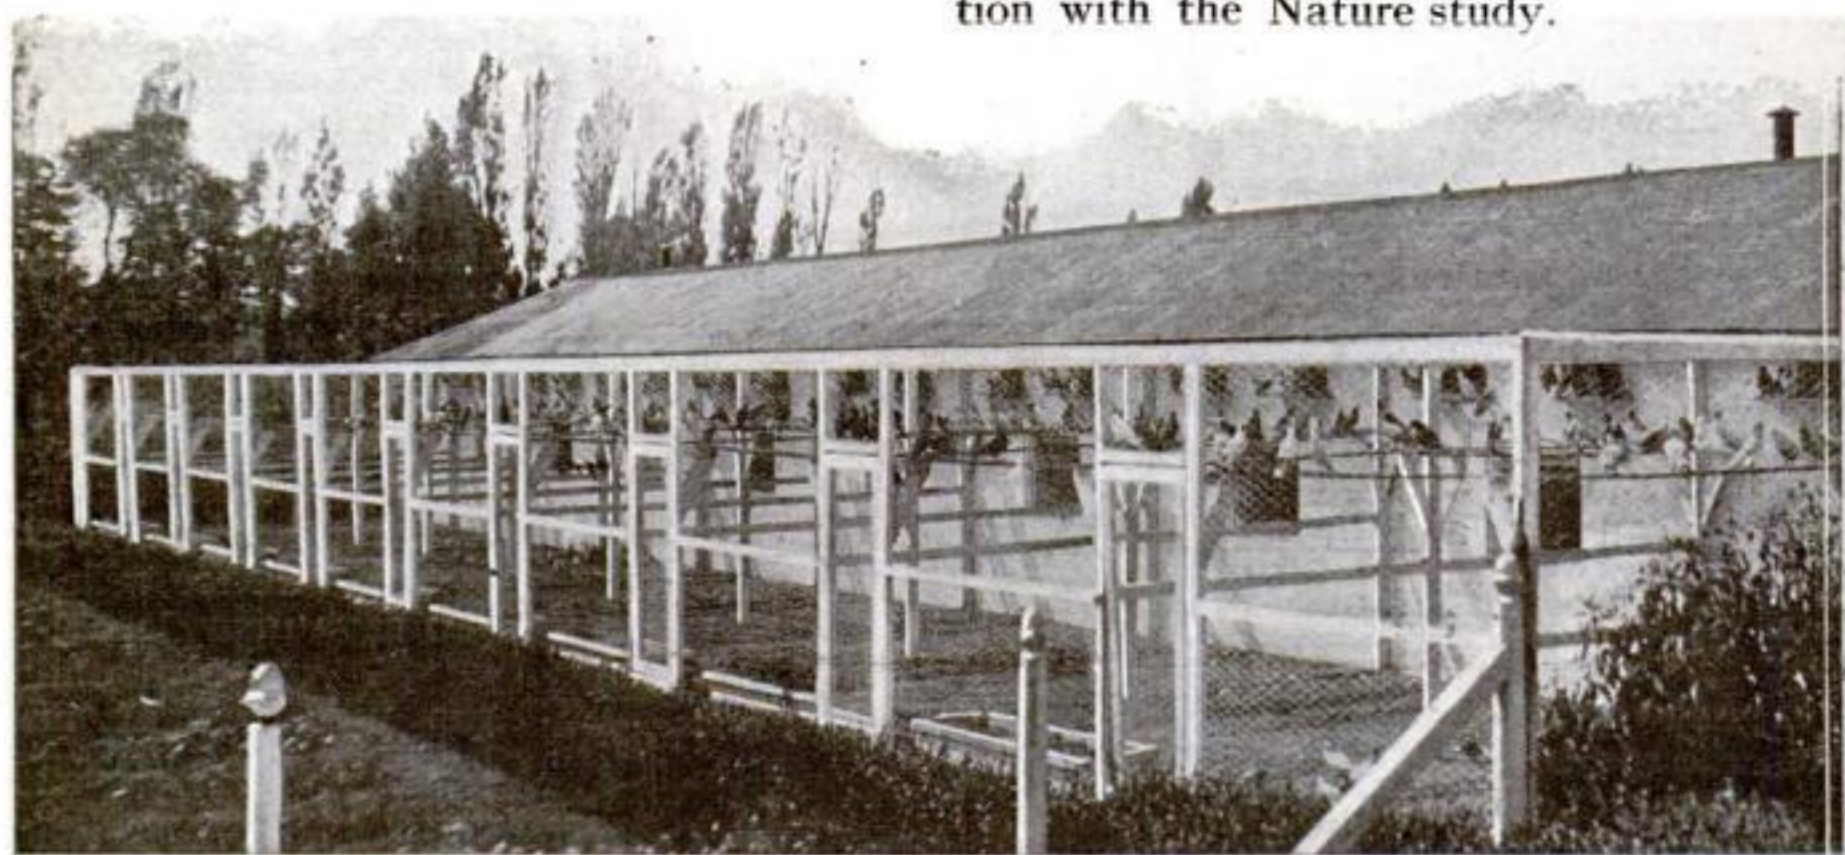

In the aviary almost every kind of bird known to man is kept. History and Geography are taught in story form in connection with the bird and animal lore of the different countries



## Illuminated Muffs—They Rob London Fog of Its Terrors

**I**LLUMINATED wearing apparel heretofore has been designed chiefly for men; now the women may blaze forth in glory.


Take, for example, the muff illustrated here. It is adorned with an animal's head having two eye sockets into each of which a small electric bulb is screwed. A battery nestles comfortably in a pocket in the bottom of the muff. Wires connect eyes to eyes, and eyes to battery. A push button is inserted in the circuit—and the muff is ready for operation.

If, on a dark night, our lady drops a coin, loses her way, can't find the keyhole—she need only press the button and lo! there will be plenty of light.

When the fog settles down over London, during these times when the streets remain unlighted at night on account of air raids, the wearer of one of these muffs will not be likely to become confused or disturbed.



Above: The muff illuminated. At right: Diagram of the wiring plan

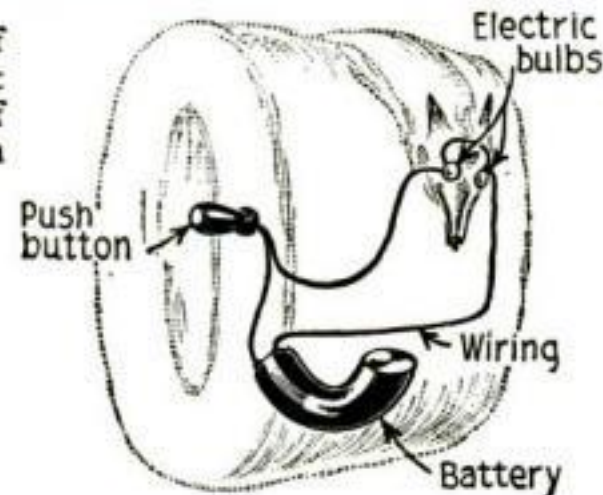

many Europeans live. But when the canals freeze over, the youngsters flock to the ice with the instinct of ducklings for water. They make a kind of sled out of odds and ends of wood—and wood is a luxury in China—and then add to their equipment a long pole having a spike in one end.

Standing on the sled, they push themselves along at a fair rate of speed, and their screams of enjoyment are not less hearty than those of boys in other parts of the world.

Generally speaking, China is a cold country compared with western territories in the same latitude. The winters are much more

severe and of longer duration than ours, so that the little Chinese boys get a great deal of enjoyment out of their improvised sleds.

## The Homemade Ice Sleds of the Chinese Boys

**B**OYS are boys the world over, and they will find a way to enjoy the ice and snow, whether they know anything about skates or not. In China, skates are a great novelty, and are seen only in cities in which



The Chinese boys fashion their sleds out of odds and ends of wood and push them over the glassy surface with spiked poles

## Mysterious Sounds That Continually Baffle Science

**M**YSTERY still attaches to certain explosive sounds, heard in various parts of the world and known to science as "brontides." On the coast of Belgium these sounds seem to come from the sea, and are called locally "mistpoeffers." In the Ganges delta, of India, similar sounds are called "Barisal guns." Brontides are well known in some parts of Italy, where they bear a great variety of names. In Haiti a sound of this character is known as the "gouffre," while in parts of Australia it is called the "desert sound." Brontides mostly take the form of muffled detonations, of indefinite direction. Probably they are of subterranean origin. Studies of eccentricities in the transmission of sound through the atmosphere, lead to the conclusion that some of the sounds hitherto reported as brontides were really due to cannonading or blasting.



# Making Flour from Pigskin


A de-hairing machine leaves the skin so free from dirt that the "cracklings" can be used for bread

By Lloyd E. Darling

**I**N Chicago a certain factory makes a business of putting out what are called "hog de-hairing" machines. The function of these devices is to clean up a hog after the slaughter—thereby supplanting an old-fashioned process which made use of knives that scraped hogs razor-fashion. Porkers used to emerge from this latter process looking like an old-time Yankee—that is, reasonably smooth-shaven as to face, but exhibiting a sizable beard under their chins that the mechanically-wielded knives hadn't been able to reach. For the same reason the under side of their legs was left unshaved.

With the newer kind of machine, however, the pigs emerge thoroughly cleaned up—so immaculate in fact that they are referred to in the pork-packing profession as "polished." This is accomplished by thoroughly scalding the hogs in the usual fashion, and then running them through a machine which is nothing more nor less than a battery of "beaters." The beaters are built up of thick canvas or rubber belting bent in the form of loops and studded with angular metal pieces which do the actual work of "polishing" a hog. These loops are attached to steel shafting which is revolved at a rapid rate by means of suitable chains and gearing.

A hog about to be polished is made to run the gauntlet of a whole row of these rapidly-revolving shafts, armored as they are with their steel-studded loops of belting. He is spanked, and batted, and massaged, and rolled over and over by the flying loops. They remove his whole outer skin or "scarf" at the same time that the hair departs. Luckily he is dead or he might seriously object to such treatment. Some of the loops revolve up and down and the others laterally, thus causing the hog in his moving around

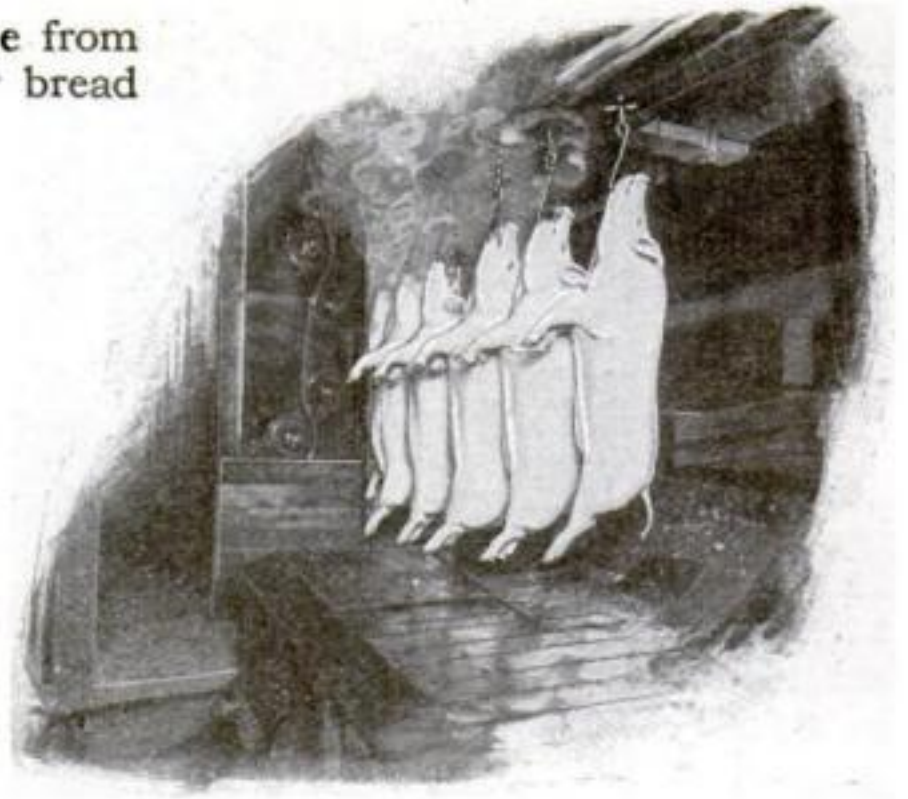


Coming direct from the scalding tub the hogs are now ready for the final polishing


to be struck from all angles so that every portion of his anatomy is reached. There is no Yankee beard effect left when these machines get through with him. His own mother wouldn't know him, as the saying goes, he is so much changed in color and general state of cleanliness.

The machines are built in a variety of forms, through some of which the hogs go vertically, through others horizontally. The machines work with great rapidity as compared with old knife-scraping forms. Some of them have a capacity of one thoroughly cleaned hog per second.

These hog-cleaning machines have been installed now in practically all of the commercial packing plants of the country. The fact that they so thoroughly clean the porkers is far-reaching in its effect, especially from the consumers' point of view.

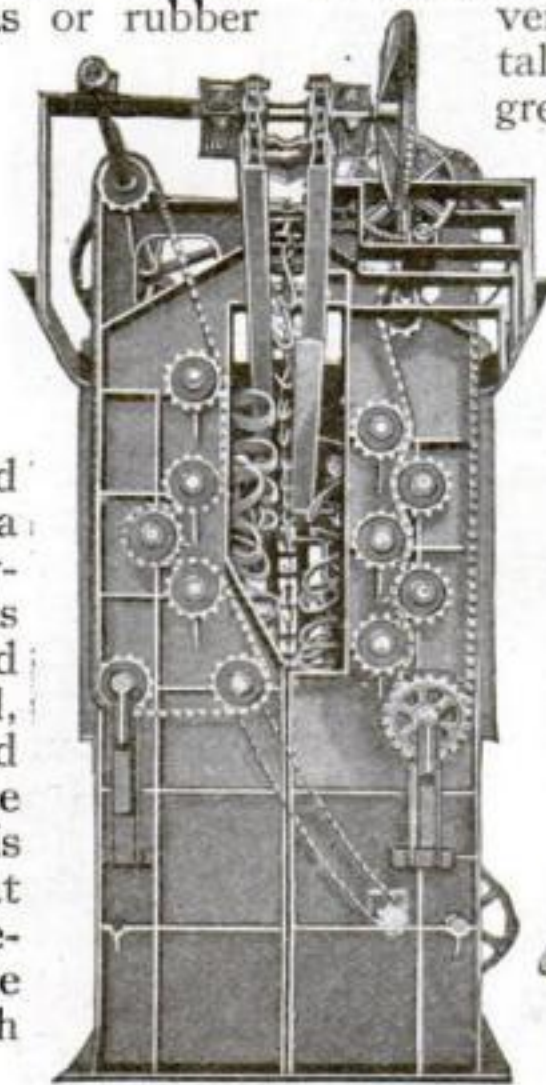


The de-hairing machine with its battery of "beaters" which polish up the hogs

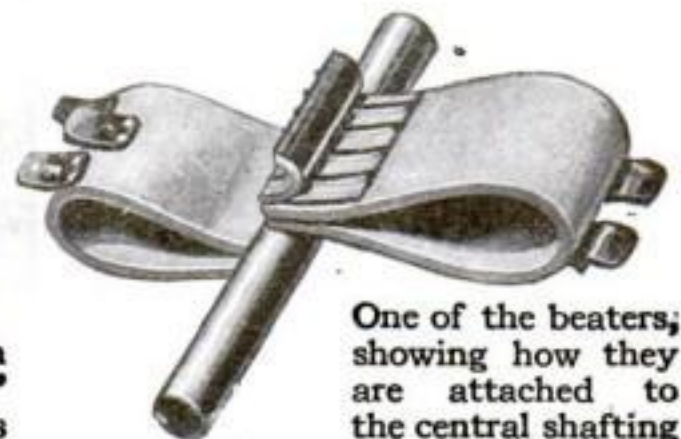

One of the beaters, showing how they are attached to the central shafting



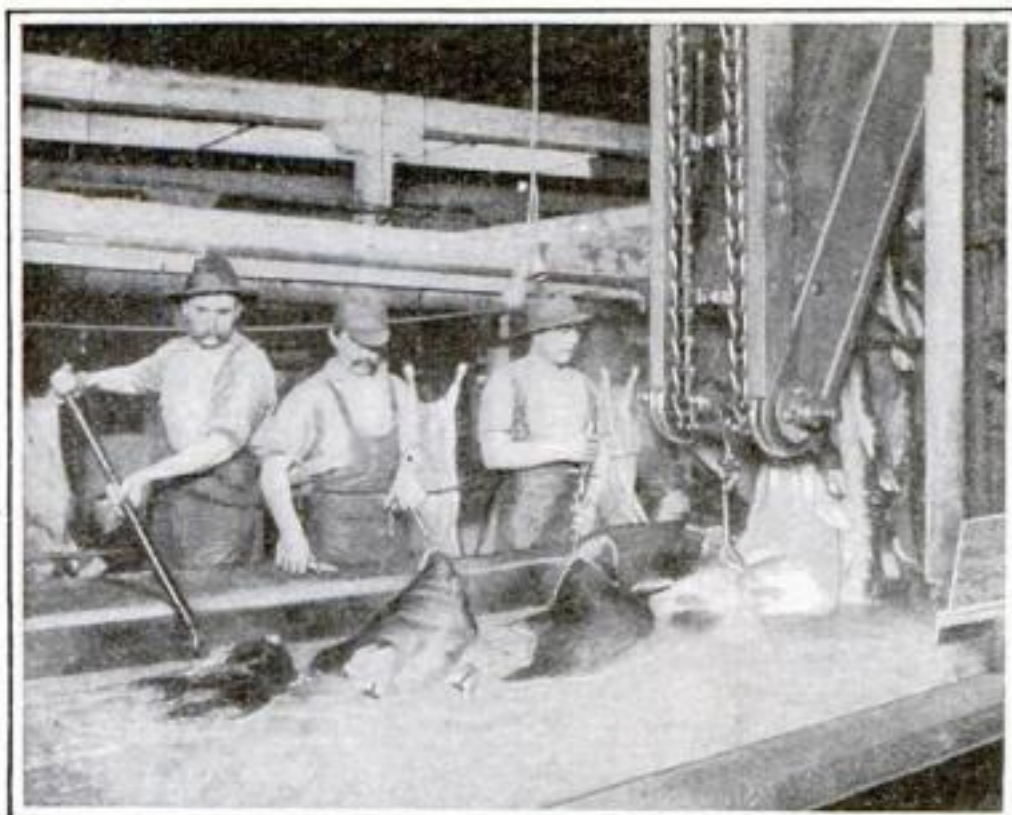


Drawing the hogs up out of the scalding tub, preparatory to passing them through the machine

As before mentioned, pickled pigs' feet, and snouts, and tails, are much more palatable because of the absolutely clean condition of the epidermis. The brine is not contaminated with hair and dirt left on the skin. Even the ears on the hog are polished inside and out.

It is through this cleanliness obtained by new packing processes that it is now possible to make desirable flour for bread from the skin of hogs.

In every pork-packing plant there is a residue left from the process of trying out lard. It is a mixture of fatty tissues and bits of skin. It is called "cracklings" and is very similar to the residue obtained by housewives when frying out bits of grease. These cracklings from a packing plant come in rather dry form, the various bits having caked together in the process of squeezing out the grease. It is these cakes that the maker of pigskin flour grinds up. The resulting powder is very clean in appearance, and is slightly yellow in color like fine corn-meal. Mixed with a slightly larger portion of ordinary flour, this substance makes very rich bread, without additional "shortening," and is considered decidedly palatable and nutritious.

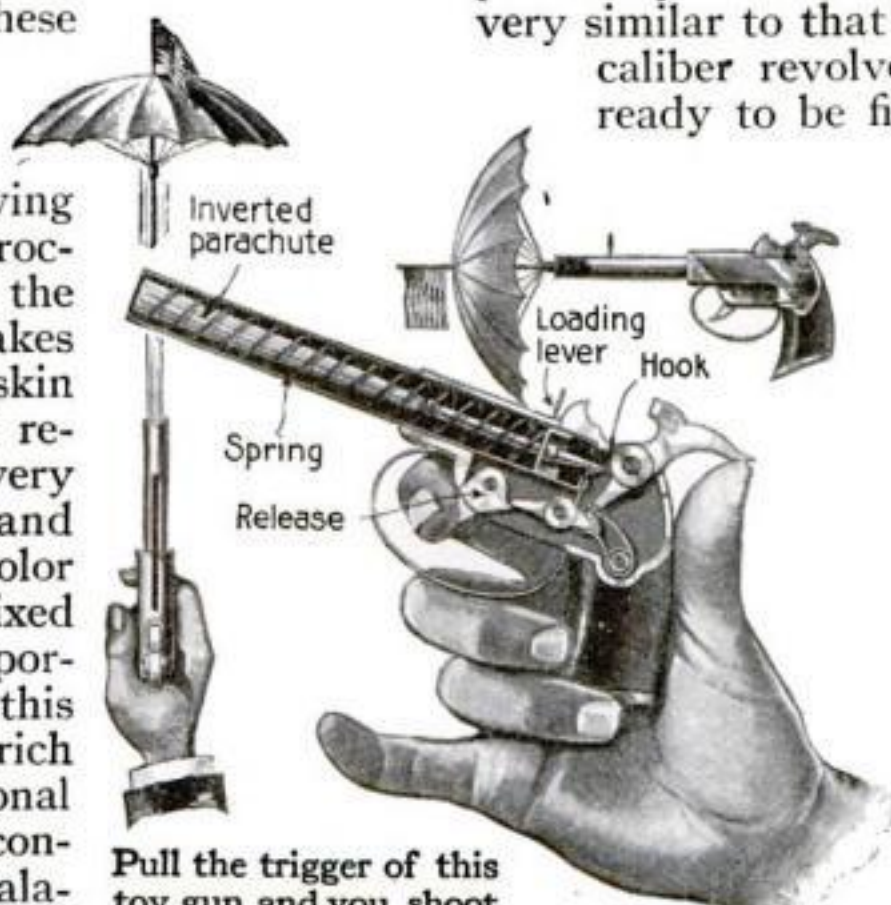

Pull the trigger of this toy gun and you shoot out—a parachute

## Reclaiming Discarded Metal from Scrap Piles

THE price of metal has risen to such an extent that many concerns are searching their scrap piles in an endeavor to find parts of machinery which may be repaired and put back into use. At one Western mine enough dollies and dies were found in the scrap pile to last three months. They were welded up at a cost of one dollar each. New ones would have cost nine dollars. In the same scrap heap enough short ends of tungsten steel were found and welded together to last a year.

In the scrap pile of a railroad shop a lot of old locomotive drivers were found. These had been discarded because of cracked spokes. The cracks were welded and the wheels are again in use. This reclamation of scrap is made possible by the oxyacetylene process of welding and cutting. Before long, searching the scrap pile will be almost as popular, and perhaps more profitable, than digging for gold.

## A Toy Gun for the Pacifists. It Shoots An Umbrella

ONE of the latest additions to the list of harmless weapons for the juvenile warriors is a gun which shoots out from its barrel an unfolded umbrella, or parachute and flag. A strong spring takes the place of powder. The firing mechanism is very similar to that of the ordinary small-caliber revolver. When the gun is ready to be fired the umbrella lies

telescoped within the barrel. When the trigger is pulled the hammer is released from its cocked position, striking the firing pin and releasing the catch holding the umbrella. Thus released the umbrella is forced out of the barrel and is unfolded, the ribs which hold the frame out and retain the extended parachute in shape being attached by cords to the gun.





The lion was photographed on the first exposure. Afterwards the man was taken

The actor must see the lion in front of him just as plainly as does the audience

### How "the Lion and the Lamb" Lie Down Together in the Motion Pictures

**W**HAT chances actors take!" you may exclaim when you examine the photograph above, showing a man and a lion, with a none too pleasant expression, in a hollow log together, each apparently unaware of the presence of the other.

It seems a pity to spoil the effect of such a good thriller by telling the truth about the filming. The lion alone was taken during one exposure of the film. When he had bowed himself out of the log and back into his cage the man was allowed to take the center of the screen, or rather of the log, and was photographed in proper relation to the lion on the second exposure of the same film. But on the screen, of course, they both appear in the log at the same time.


### A Labor-Saving Dump Car. It Does Away with Shovels

**B**OTH speed in unloading and economy of labor are secured with a new dump-car which throws material to either side of the track. The side of the car turns down when dumping and serves as an apron to carry the material clear of the track and cars. In this respect the car differs from any other made, as it discharges the material in such a position that no labor whatsoever is required for shoveling. As the regular train

crew can handle the dumping apparatus, the services of section gangs, regular laborers, or extras are not required for dumping. The speed of unloading also releases the rolling stock quickly; for the cars may be immediately returned for loading, instead of being held for about ten days as formerly.

A car is dumped by compressed air, and one car or an entire train can be dumped at one time. The dump car is all steel, and the body is supported on rockers. Equilibrium is provided for by a flat place in the center of each rocker surface. In dumping, the box is merely tipped off this flat surface. When the box is empty the low center of gravity causes it to roll back into place. The car may be dumped to either side by making a slight adjustment. A link fastens the car in the upright position, and a separate lock makes it impossible to dump the contents to the wrong side.

On a single division of an Eastern road the cost of removing waste was reduced by the side dump cars from \$100 to \$37 a day.

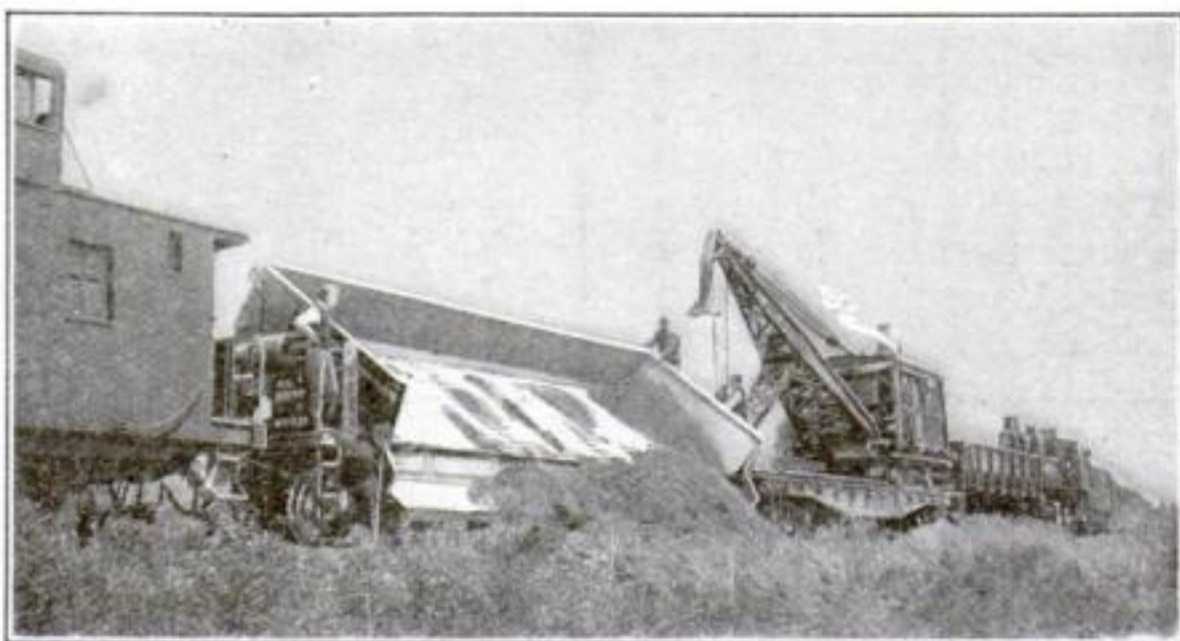

The side dump car in operation. The side piece acts as an apron to carry the waste material clear of the tracks



# Barking Wood by Machinery

The logs of wood are made to rub against each other and scrape the bark off automatically

**W**OOD barking today is not what it used to be—a hand process carried out with long sharp knives. One or two hollow steel drums are all that are now seen in the modern barking mill,—drums that remove the bark from many tree trunks at one time.

Perhaps a dozen huge trees are cut up into a thousand pieces. These are fed into one end of the horizontal, rotating drums. The angle irons, which make up the steel framework, grip the edges of the logs, tumbling them about so that they rub against one another. The bottom of the drum is immersed in a tank of water, so that the bark is soaked and easily peeled off. Fresh logs fed into the drum on conveyors push the barked logs on to discharge-conveyors at the opposite end of the drum.


The construction of this barking drum is as ingenious as is its principle. Since it would not do to immerse the bearings of the drum in the water, the drum is suspended on endless chains which run over pulleys mounted "high and

dry" on the top of the barking machine structure.

There is little about the operation that requires attention. In fact, one operator now takes the place of nine skilled whittlers. Altogether, the result in a fair-sized mill which turns out six or seven hundred cords of barked wood in a day, is a saving over the hand method of about three hundred thousand dollars a year.

Strangely enough, though theory would seem to indicate that sharp points mounted radially in the inside of the drum would be more efficient than blunt angle irons, such points are not the choice of experience. While these points would peel off the bark in considerably less time than the irons do, they would also dig into the "flesh" of the wood. The resulting saving in time

would be more than offset by the decrease in the commercial value of the wood. For this reason, it has been found best not even to grind down the edges of the angle irons. As a result the wood comes out without a bruise.

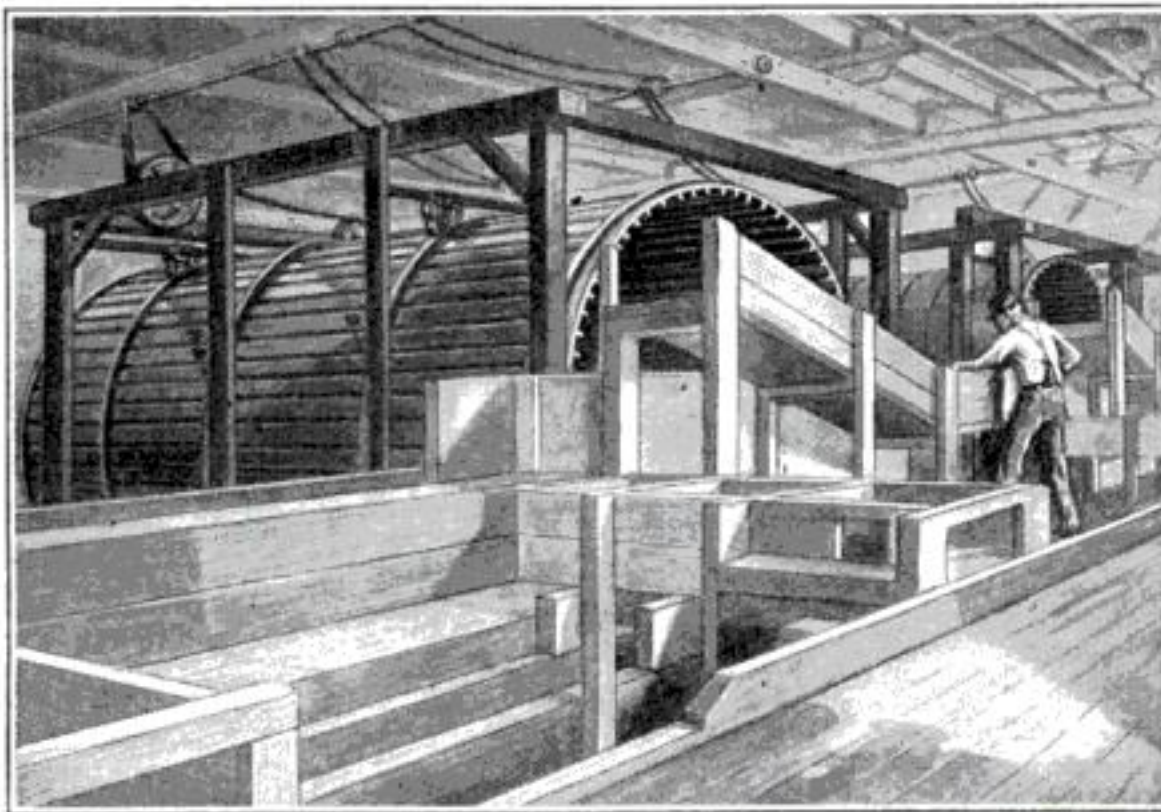

The revolving drum which makes a thousand or more logs peel off their own bark. It is operated by one man

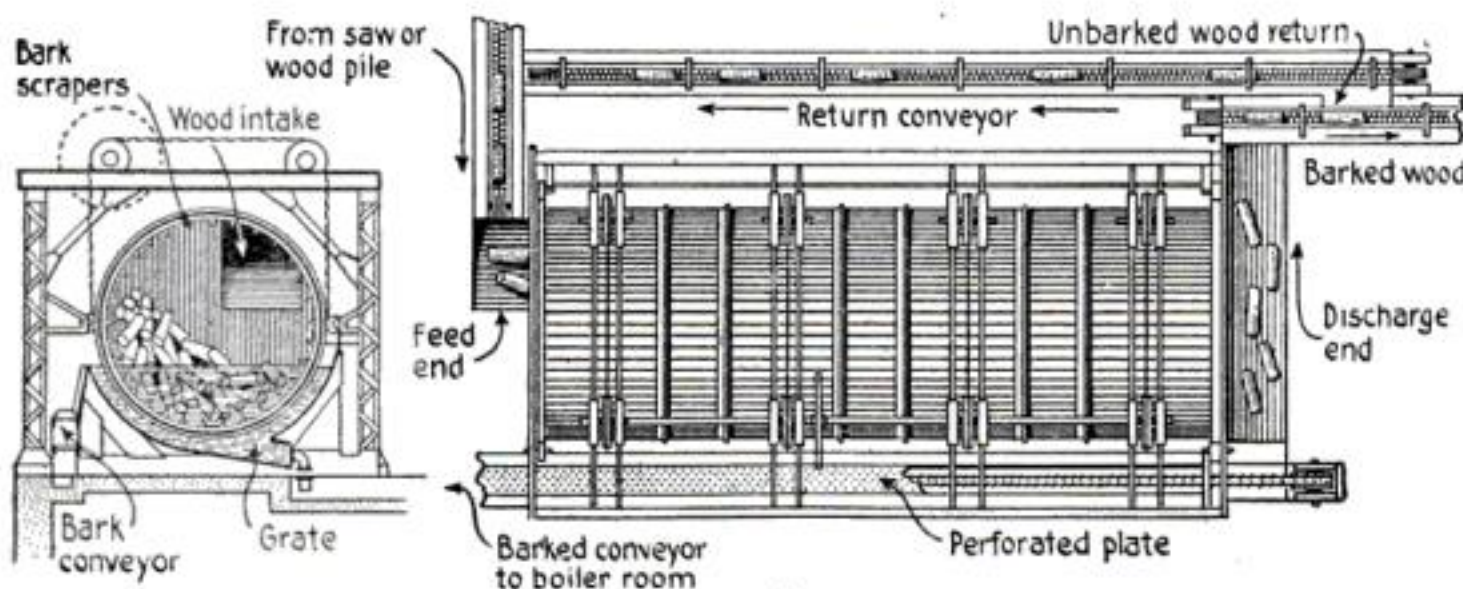


Diagram showing the principle and operation of the wood-barking machine. A dozen huge trees cut up into a thousand or more pieces may be fed into the drum at one time, tumbled about and soaked in water and finally discharged clean



# Protecting Battleships with Compressed Air

Should a vessel be torpedoed the inrush of water will be stopped by outrushing air under pressure

UNCLE SAM'S ships have been turned into giant diving bells or caissons to help protect them from torpedo attack. It sounds impossible, but it is not; for it is merely adaptation of the principle of the air lock. This has been used for many years in sinking underwater foundations or driving tunnels under rivers and even in ship salvage work. The hulls of the ships have simply been divided into a large number of compartments to be filled with compressed air.

Should one or more of these compartments or chambers be shattered by the explosion of a torpedo or mine, the adjacent compartments are filled with compressed air until the pressure of the air counterbalances that of the water in the damaged section. When this occurs, no more water can flow into the vessel and she may be towed into port or proceed under her own steam if her engines have not been damaged.

Almost the same conditions hold true in ordinary household work when an empty tumbler is plunged bottom upward into a dish-pan of water. The water enters just so far, until the air trapped in the glass is compressed to a point where its pressure equals that of the water. Then no more will enter.

As shown in the accompanying illustration, the hull of the ship is divided into a great number of compartments. Should one of these be punctured by any means, the ones next it are immediately filled with compressed air until the water pressure is equalized and no more can flow in. The compressed air may or may not come into contact with the water in the damaged compartment, according to whether one or more than one chamber is punctured. In

any event the pressure of the air in the nearest surrounding intact compartments acts equally in all directions and is liable to make the bulkheads and decks leak. For this reason air at a lower pressure is pumped into the adjacent compartments, the pressure diminishing as the distance of the chambers from the damaged area increases. In this manner, the difference in the pressures in the adjoining compartments is only a few pounds and the bulkheads and decks are well able to withstand it without leaking.

The use of this system has occasioned very little change in the design of the vessels, for battleships always have been divided into many cellular divisions for restraining the inflow of water through damage by collision. Again, means for pumping the compressed air into the compartments was already in place in the form of pipes to pump fresh air into and exhaust foul air from the chambers.

Compressed air is also a common commodity on

battleships, being used to run the refrigerating machines, to fire torpedoes as well as charge them and to remove the hot gases from the gun barrels after firing. It was therefore only necessary to provide suitable means for connecting the compressed air supply with the compartment pipes. This did not of course change the design of the inner hull or appreciably increase its weight.

The system, the invention of William Wallace Wotherspoon, a New York City engineer, was first installed on the armored cruiser *North Carolina*. All of our recent battleships have the system, so that our sailors crossing the seas or working in the war zone have a chance against torpedoes.




© Press Illus. Serv.

The wake of the torpedo. It is the only warning which the threatened vessel usually has



# The Air-Lock Principle Applied to the Battleship

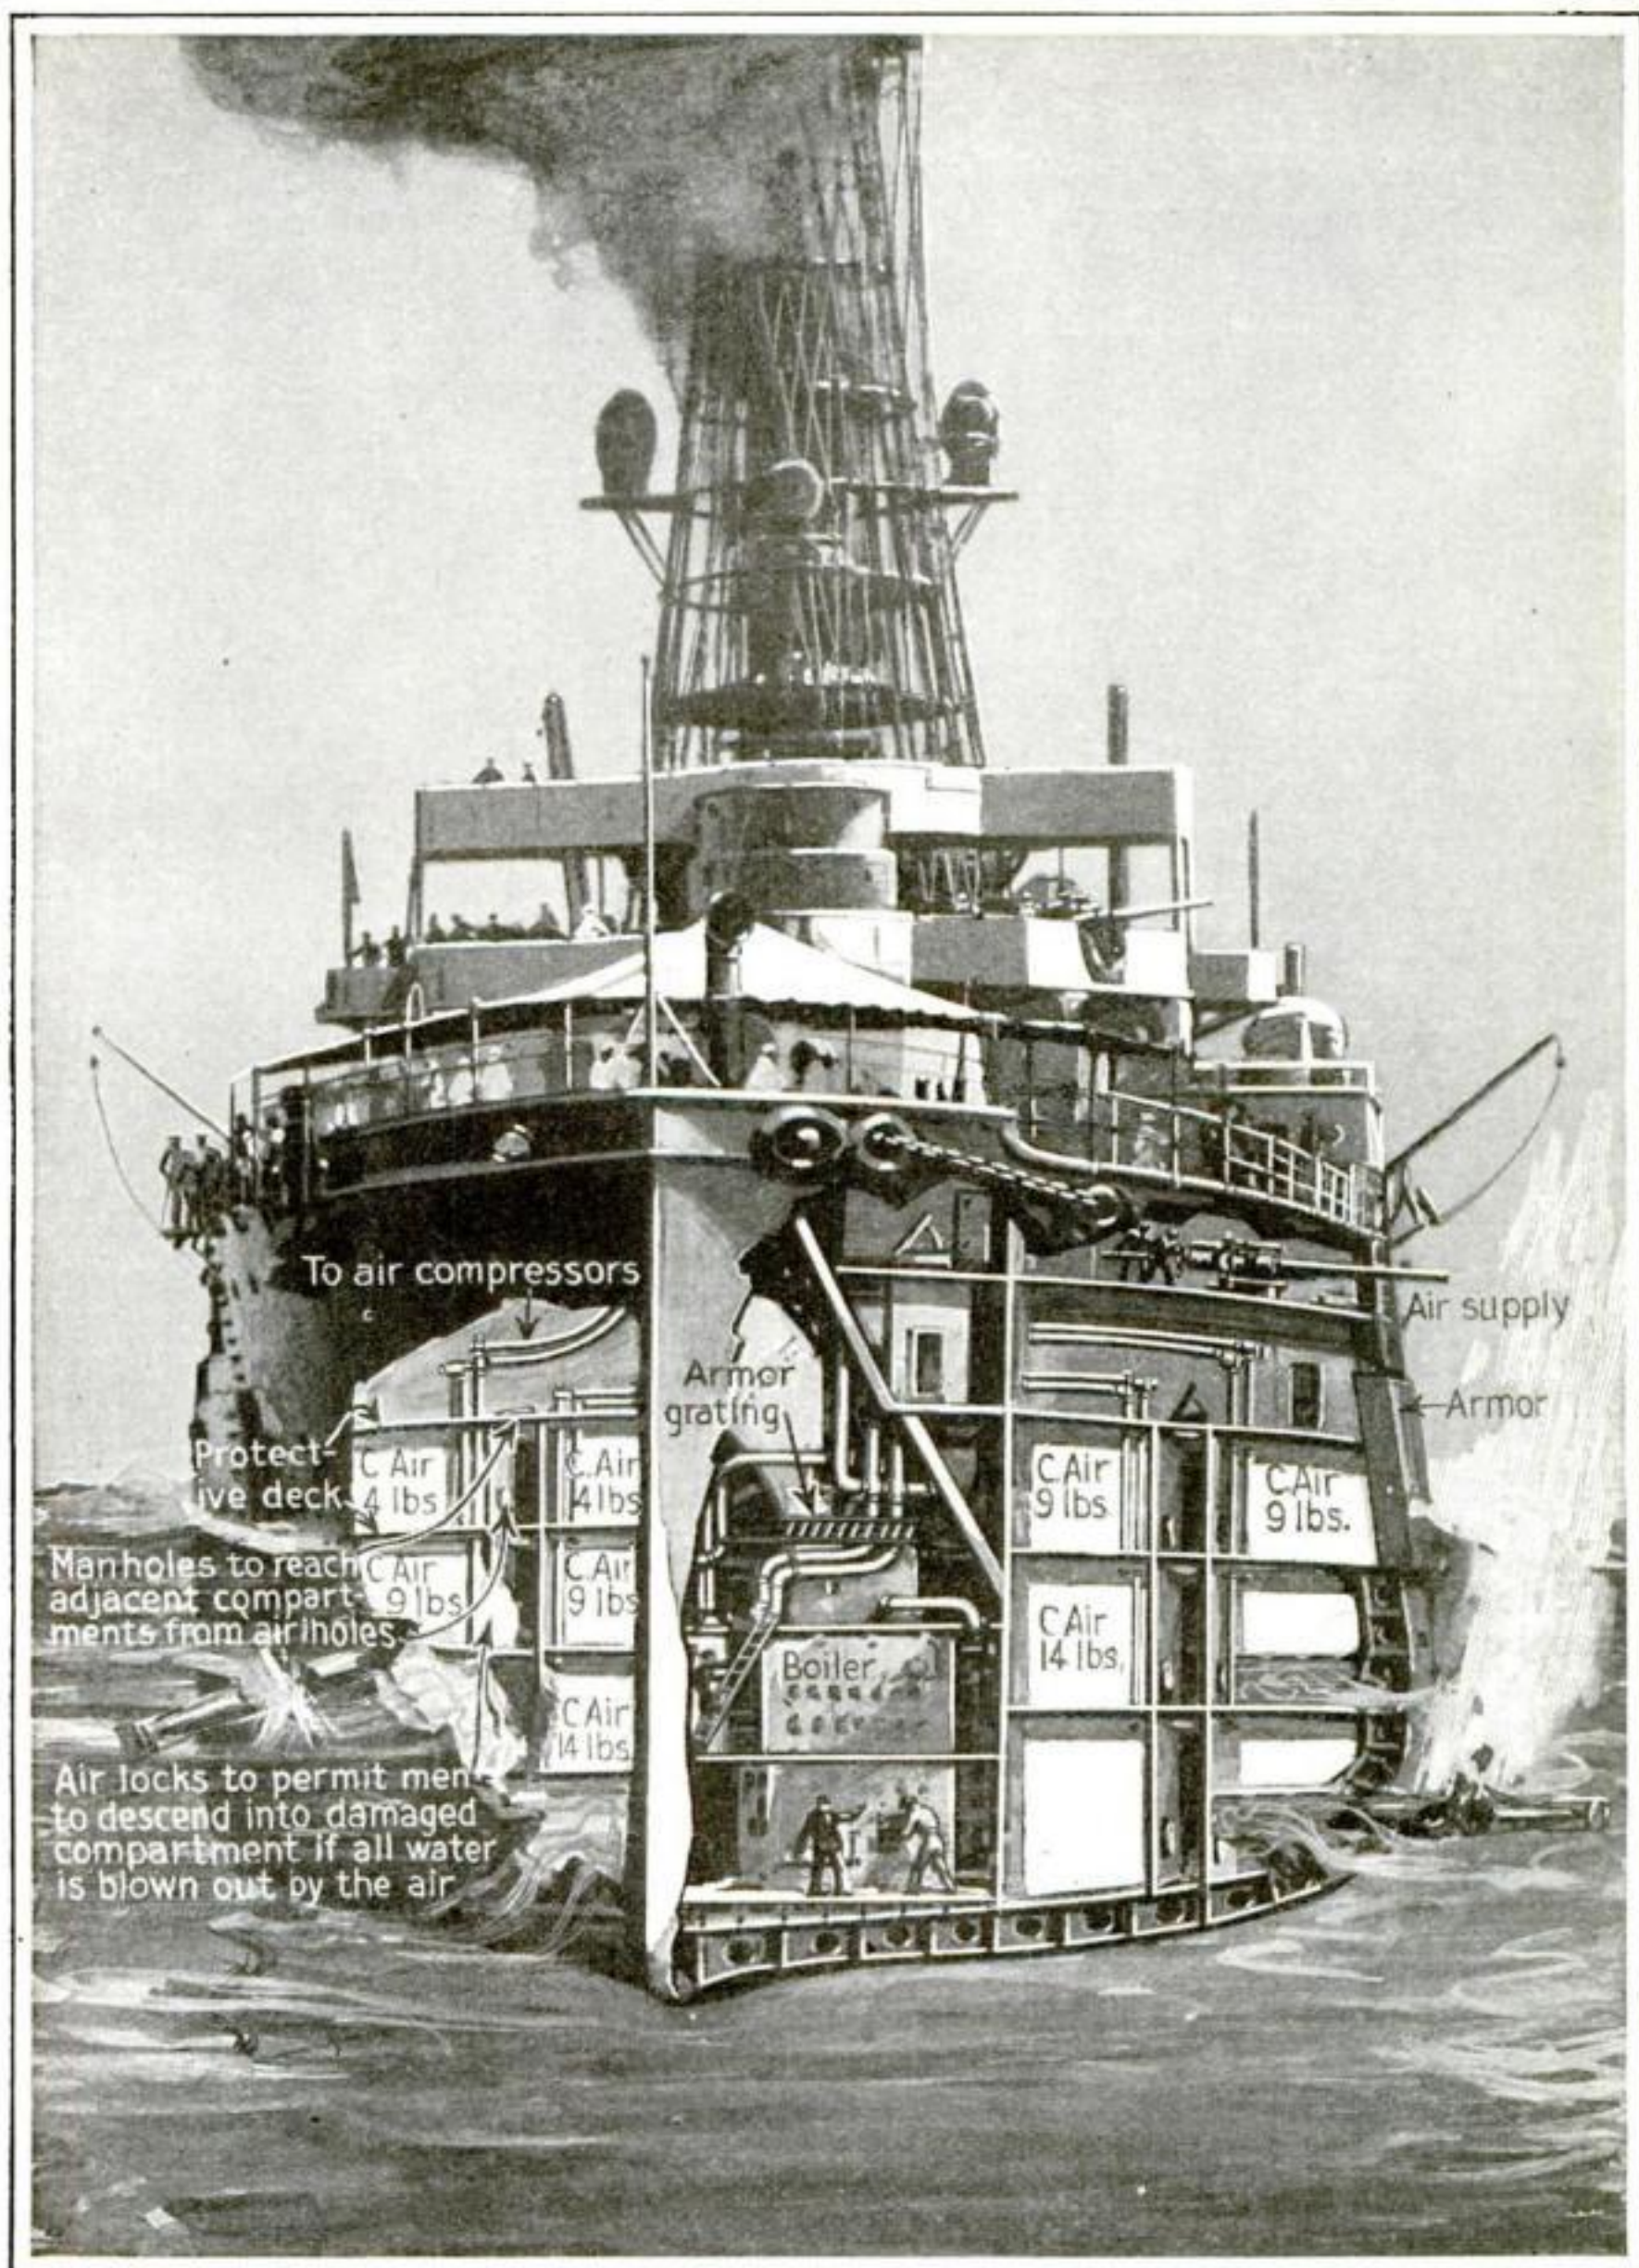

## Foiling the Torpedo with an Armor of Air

The broken-away section at the left shows how the compartments in the way of the boiler-room would be filled with compressed air were the vessel hit amidships. Similarly, the section at the right shows how the compartments would be filled if the boat were hit near the bow. At the left it is noticed that the intact compartment nearest the damaged area is filled with


compressed air at a pressure of fourteen pounds to the square inch. Adjacent compartments are filled with air at the lesser pressures of nine and four pounds, according to the distance from the punctured section. A ship thus injured could proceed to port under its own steam. The air locks permit men to descend into the injured compartment to make temporary repairs.



### A Novel Color Mixer for Teaching Blending Effects

A VERY simple and novel device for illustrating the various color effects produced by mixing different paint pigments can be made in the following way:

Prepare a series of pigment "matches," as shown in the illustration. This can be done by obtaining the soluble pigments in different colors and making each into a thick paste by mixing with a little glue. Dip the end of a match stick into the pigment and when the adhering mixture dries, mount it on a cardboard with one or two other similarly prepared "matches." When these are immersed in a cylinder of water, the pigments at once dissolve, and as they intermingle, the true color effects of the mixed pigments are at once apparent. This is by far the best method yet employed for teaching color effects to a class of pupils.

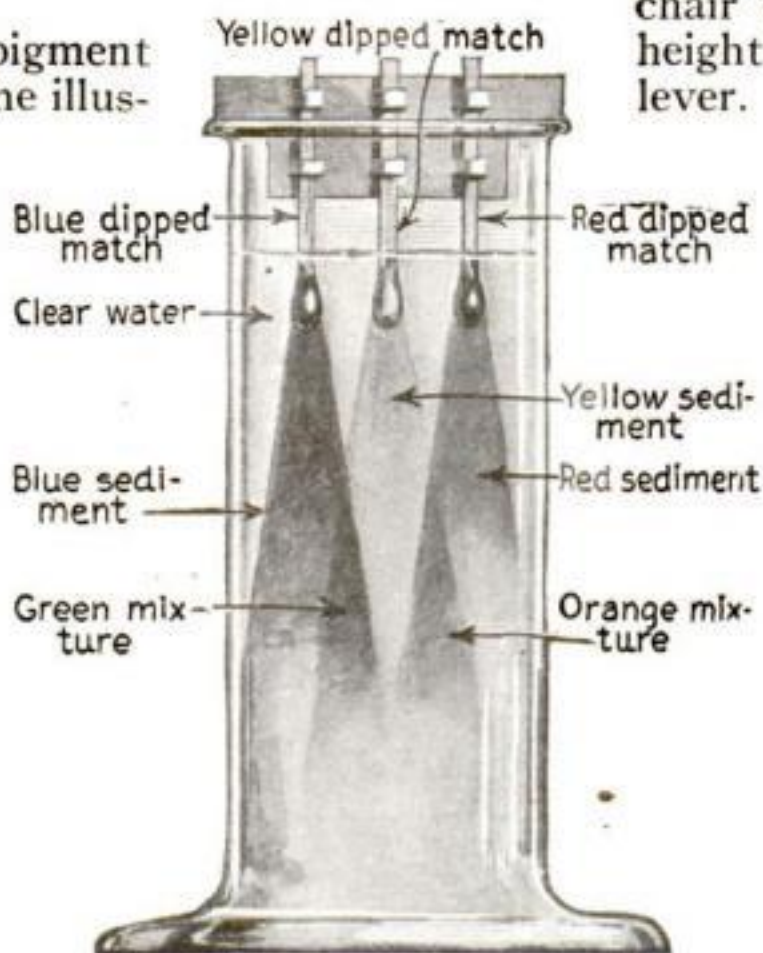

Pigment "matches" dissolved in water to show the effects of blending different colors

### Shoe-Shining by Electricity in a Self-Elevating Chair

A NEW shoe-shining machine, invented by Otis R. Hasty, of Elgin, Ill., is a combination of an ordinary chair and an electric elevator. You mount the chair at practically the normal height. The bootblack throws a lever. An electric motor drives some gearing which raises a rack-pinion constituting the supporting column of the chair. The foot rest is rigidly connected with this column, so that it rises at the same time.

After rubbing on the paste, the bootblack plugs a short flexible cable to a shaft jutting out at the bottom of the machine. The shaft which is geared to the motor also, imparts its rotation to the flexible cable and to the circular buffer at the end of the cable. The buffer speeds around and brushes your shoes in a twinkling. Such little time is required for the operation that one bootblack can attend to two patrons at a time, polishing the shoes of the first while the paste on the second pair is "setting."

### Employing Deadly Gases Against the Sleeping Sickness Fly

IN British East Africa great annoyance has been caused by the tsetse-flies, a species closely allied to the ordinary house-fly, but which in that locality is considered particularly dangerous to health. In New Langenburg, a district recently acquired from the Germans, it has been impossible to maintain horses, cows or cattle of any description on account of the mortality caused by the diseases which the flies are said to carry.

The extermination of the flies has therefore become a matter for Governmental consideration. The latest suggestion awaiting experiment is the use of gases, poisonous to the flies. These, it is believed, could be carried across the fly-infested areas by the monsoons, in the same manner as the destructive gases are carried in trench warfare.




You don't have to be an athlete to climb into this chair. An electric motor raises you to the proper height



## German Trenches as Comfortable as Houses

GERMAN trenches taken by the enemy have excited considerable comment because of the complete manner in which they are fitted up. Many of these trenches have been found to be unaffected by the heaviest bombardment. Some of the shelters taken had been excavated to a depth of about forty feet. They had galleries one hundred and fifty yards long and seven feet high. Large rooms opened out from the galleries. Both galleries and rooms were lined with strong timber. Ventilation was afforded by oblique shafts. The exits, of which there were many, consisted of staircases. The steps were fitted with steel treads, and ramps having a gentle incline.

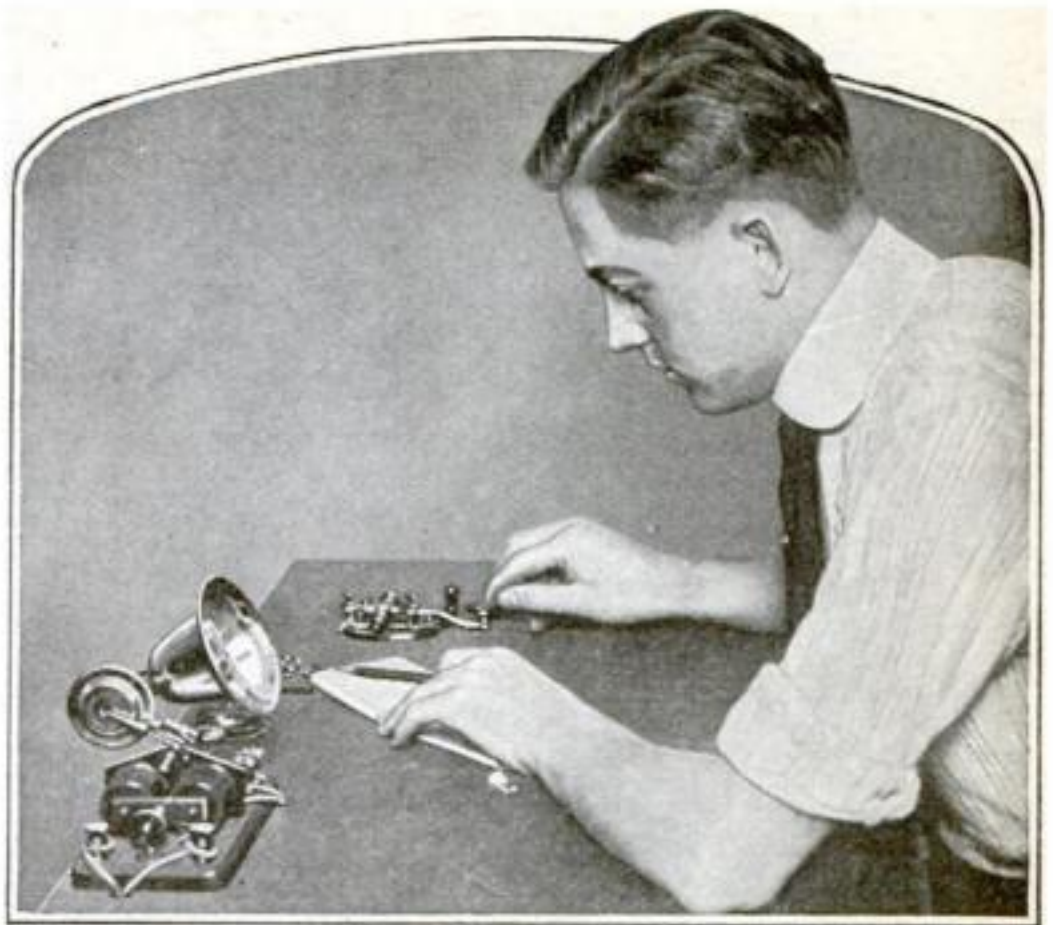


The device is nothing more than a phonograph diaphragm and a horn which amplifies the weak sounds of the relay

## Wearing Spikes on Your Feet to Prevent Slipping on Ice

EVERYBODY knows the difficulty of maintaining a foothold when walking on ice or sleet and slush-covered streets. A device which can be worn either on shoes or rubbers to prevent slipping has been invented by C. A. Anderson and G. H. Schepstrom of Illinois. Mr. Anderson, who is a shoemaker, noticed that every winter there was a demand for creepers but that few of the creepers on the market gave satisfaction to the wearers. Not having facilities to make the steel spikes necessary to construct creepers, he called for assistance on his friend, Mr. Schepstrom, who is a sheet metal worker. Together they produced a type of creeper which has distinct advantages over the ordinary kinds in use.

The new creepers are fastened by straps in much the same way as are some skates. There are steel studs on both the sole and the heel which enable the wearer to stand securely in any position.

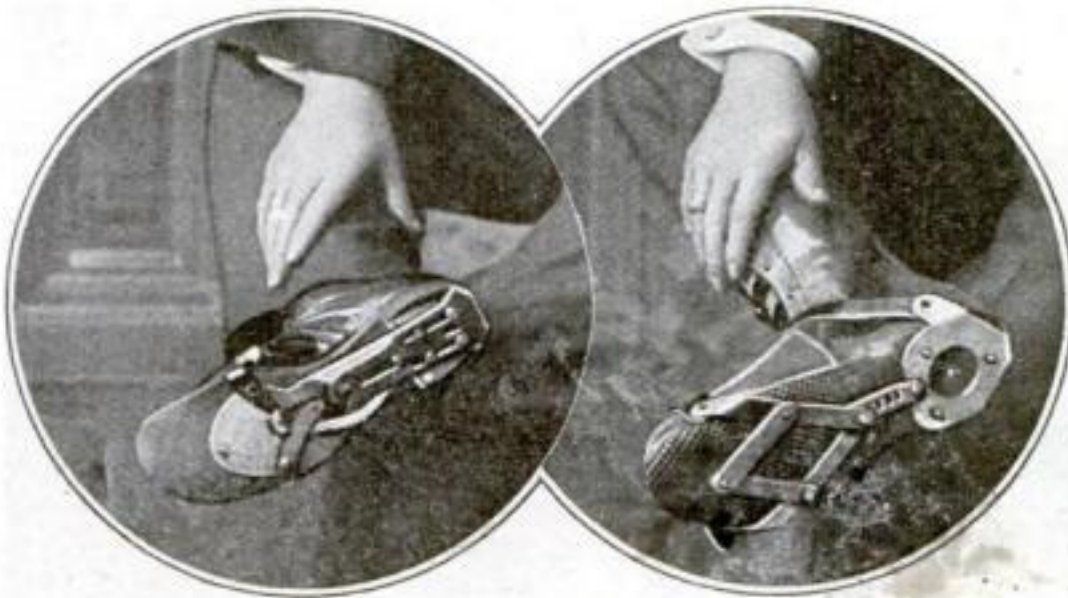

A new ice-creeper which may be worn over shoes, boots or rubbers. It is strapped on like a skate

## Applying the Principle of the Phonograph to the Telegraph Sounder

ON long telegraph lines, the current coming into a station is generally so weak that it cannot even pull down the magnet of the loud-sounding instrument. The current can, however, operate a small magnet on a very sensitive telegraph instrument. By making this small magnet close a heavy battery circuit in which the loud sounder is placed, the sensitive instrument acts as a relay and overcomes the difficulty.


Extra batteries and instruments are therefore needed at every station. In any large size telegraph system, the expenses of their upkeep are considerable.

A very clever invention of R. A. and B. M. Grout, of Davenport, Iowa, does away with this expense by amplifying the

weak relay clicks directly by means of a diaphragm and horn such as are used in all phonograph instruments. The weak clicks are transmitted to the diaphragm whose vibrations act upon the air and shoot their corresponding sounds out through the horn.



# Housekeeping Made Easy

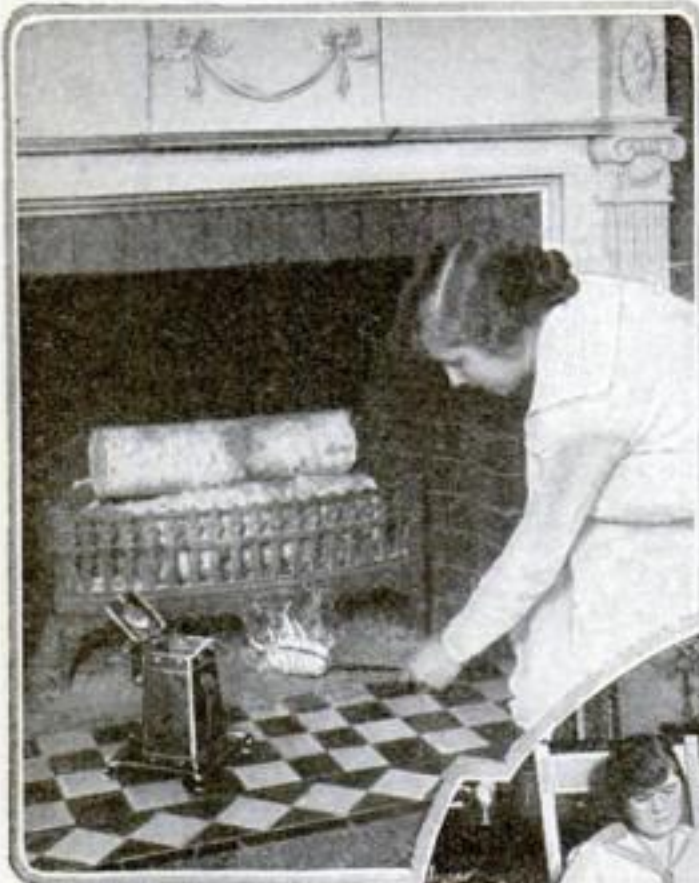

A lighter for starting fires without using paper. Into a decorative can holding kerosene an asbestos mop is dipped. When lighted, the mop is held under the wood until it catches the flame

The picture below shows a skein-holder for yarn. The yarn can be used directly from the holder, if desired, without the trouble of winding it into the usual balls



An ordinary tin pail decorated with hand painting and used as a flower pot for the porch or living room. An ivory-white lattice work on which gayly colored birds perch furnishes support for the plants



This unique tea wagon is provided with an electrical attachment under its metal cover




A new book-holder for the library table will please the automobilist



With this tiny grain mill you can grind your own corn-meal, a little at a time



# Housekeeping Made Easy

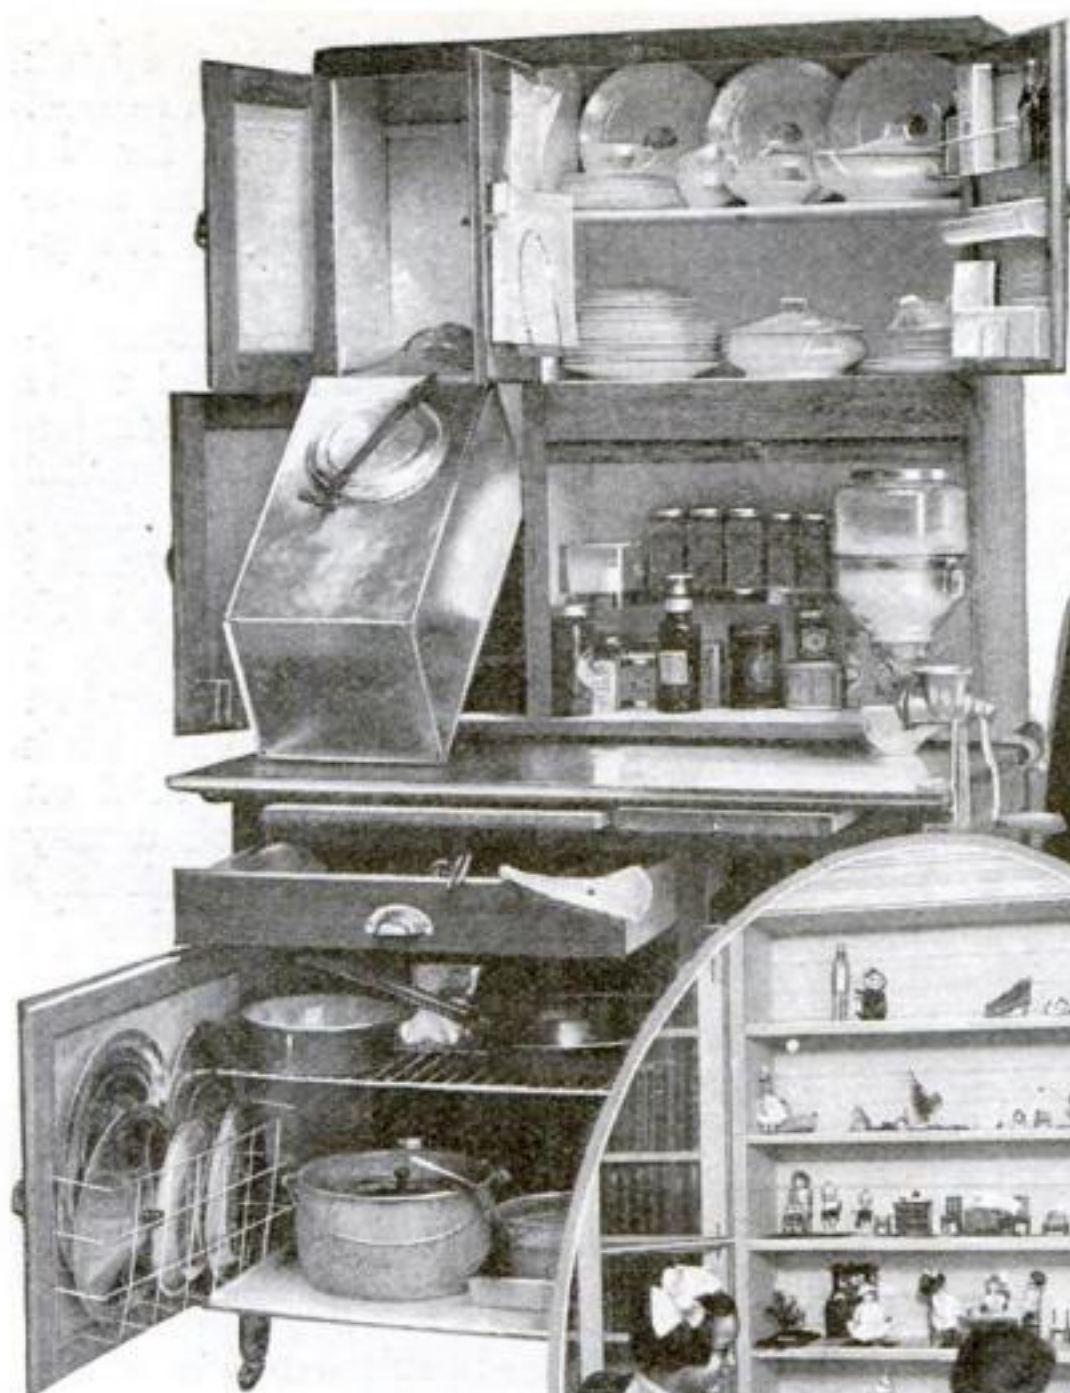


A spacious kitchen cabinet which will accommodate every kind of kitchen utensil. It even has a ventilated compartment for food



Below: A vegetable dicer. It cuts potatoes, carrots, etc., in small cubes without extracting any of the juices



In center above: A bookcase which has been transformed into a dolls' house for the nursery. Here the toys are kept dust-free and orderly

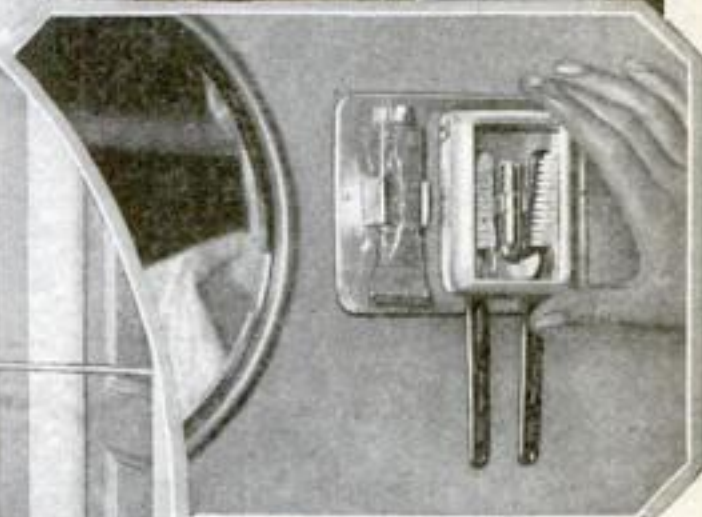

A sanitary case for the toothbrush. The tube of tooth paste is held in a clamp at the side. The base of the device is attached to the wall



A light-weight magazine holder made of hand-painted tin which is decorative enough for an ornament



In center: A combination step-ladder and stool with large round top. It folds up to four inches in width and weighs six pounds



Carved wood figures are popular in decorations. Here a flower-holder is concealed by a dainty lady doll



### A Chimney With Windows—But They Are Not Real

**A** CHIMNEY on the outside of a house is, in popular opinion, unattractive in spite of the fact that it is safer than an enclosed chimney. The builder of the house in the photograph worked out a novel effect by cutting windows through the brick to relieve the plain surface. Shutters were also provided so that the chimney windows might be in perfect harmony with those of the house proper. The windows are mere imitations, the flue being built up on the inside to insure a perfect draft. However, arrangements have been made so that it is easy to get to the inside of the chimney through the window spaces, when repairs are necessary.



To relieve the bareness of the brick wall of the chimney the builder provided dummy windows

justed to individual requirements and which will support the weight of the book in such a manner that the hands are free. A lady who is anxious to knit for the soldiers may read and knit at the same time if her book is supported on a rest.

The device is constructed of two parallel angle bars which are connected with a sheet metal book-supporting tray. The tray will fold against the bars so that the book rest can be stowed away in a very small space when not in use. The book support may be used on the table in such a way that a paper or book may be propped up against it. A great convenience for the early morning commuter who likes to devour his news with his breakfast!

The device might also prove exceptionally useful to the musical director.

### Hang That Book from Your Shoulders and Read in Comfort

**J**OSEPH J. SLEEPER, of Philadelphia, had to consult a number of books of reference one day, and before he got through he was very tired. He then experimented with a shingle which he suspended about his neck by strings attached to the four corners. He found that he could rest his book on this and relieve himself from the weight, from the fatigue caused by stooping and from the eyestrain caused by reading a page not in proper focus. He could also jot down notes of reference without bending over or otherwise inconveniencing himself.

Since that early experiment the inventor has perfected a book rest which can be ad-

### A Telltale Echo—It Repeated Secrets of the Confessional

**I**N Shipley Church, Sussex, England, there was formerly an echo which repeated sounds twenty-one times. The most remarkable of all multiple echoes was that of the Simonetta Palace, near Milan, which repeated the sound of a pistol shot fifty or sixty times. In the cathedral of Girgenti, Sicily, it is possible to hear, on the steps of the high altar, remarks in an undertone made at a place near the main entrance, a hundred feet distant. A confessional was once indiscreetly placed at this spot, and the discoverer of the echo is said to have amused himself by listening to the confessions of many fair penitents.



A new book or music rest which may be suspended from the neck




## Incandescent Lamps May Now Be Used to Project Motion Pictures

IT has always been more or less difficult to give motion pictures in places other than a regular theater equipped for the purpose. A lamp has been devised recently which will make motion pictures possible in churches, schools and even in the home. There is nothing which equals motion pictures as a means of popular entertainment. Many a small fair, held for charity, would be more successful from a financial point of view if the added attraction of lively motion pictures could be offered.

A low voltage concentrated filament lamp has been developed which may be used with a new lamphouse designed especially for motion picture use. The lamphouse contains a double lamp holder with several adjustments, a reflector and two sets of condensers, one for stereopticon and the other for motion picture use.

A compensator with ammeter and resistance regulator is used for alternating current and a small rotary converter for direct current. Where the amount of electricity consumed is not important a specially designed resistance with ammeter may be used on direct current.

All conditions which might make operation difficult may be met by the use of this lamp and lamphouse. A twelve-foot picture has been shown successfully at one hundred feet. The apparatus may be used, however, to project small pictures such as would be suitable for an entertainment to be given at home.

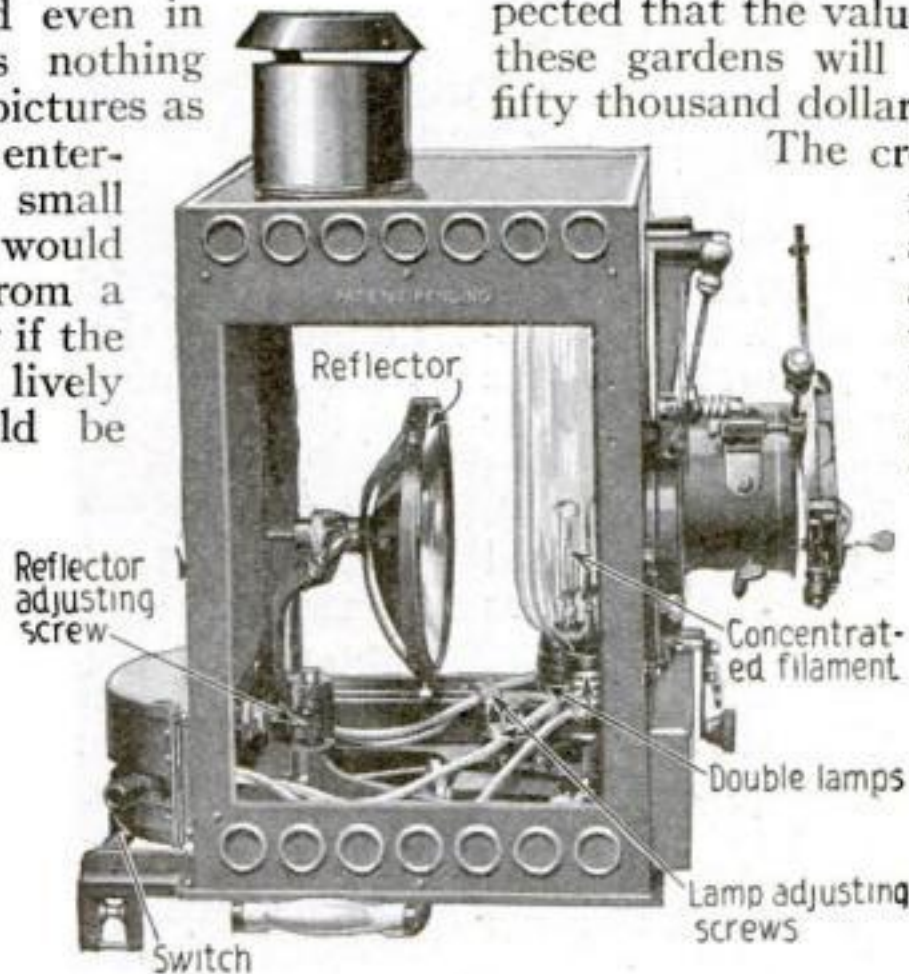

Details of the low voltage concentrated filament lamp and lamphouse for motion pictures

## The War Gardens of Railroad Employees and Station Agents

STATION agents of many railroad companies have become war gardeners this year. There are one thousand two hundred such war gardens on the vacant lands of the Pennsylvania Railroad. It is expected that the value of the crops raised in these gardens will be two hundred and fifty thousand dollars.

The crops tilled by the railroad employees average a little less than an acre. They are planted with potatoes, peas, beans, tomatoes, corn, and various other vegetables.

An agent on the New York Central, stationed at Chaumont, New York, has specialized in beans. He planted a plot one thousand five hundred feet long and twenty-five feet wide on the off-side of the station platform.

## A Dipper Dredge That Served as a Temporary Dry Dock

THE propeller of a tug on the Black River was injured. It was necessary to straighten the propeller shaft. But the owners did not want to put the tug in dry dock. So the dipper of a dredge was lowered on to the stern of the tug. Then a cable was passed around the hull of the tug

and fastened to the dipper. When the dipper was raised the stern of the tug was lifted out of the water to allow the propeller shaft to be taken out. The shaft was straightened and replaced in much less time than if the tug had been put into dry dock and with no inconvenience.



How a tug was raised out of the water by the dredge and held until the propeller shaft was repaired



# The Eagle Spreads His Wings

By Waldemar Kaempffert

How 23,625 American airplanes will be built at the rate of 3,500 a month to crowd the Germans out of the air



The Liberty motor, which will solve the engine problems of the airplane, and how it will be built

**B**ETWEEN 1908 and 1916 our army ordered fifty-nine airplanes and received fifty-four. In 1916, with the possibility of being plunged into the war ever present, orders for 366 machines were placed, but only sixty-four were delivered. Even little Bulgaria in time of peace had almost three times the number of airplanes that we owned when we declared war.

And now we are planning to build 23,625 airplanes at the rate of 3,500 a month. From less than a hundred a year to over thirty times that number in a month!

Airplane building is essentially a military industry. The great French and German builders of flying machines would have starved to death had they been dependent on the general public, and this despite the rich prizes that were offered by sportsmen and despite all the interest whipped up in flying contests by the daily press. Because the airplane builder never received adequate support from the Government we have to create a real industry. In 1916 the American airplane industry, such as it was, had a capitalization of only \$50,000,000 and gave employment to about 14,000 men. The money invested in the airplane industry of England now amounts to \$375,000,000; the number of employees is 66,000; the capacity of the plants is 41,000 machines a year. Compare these American and English statistics and it will at once appear how much ground we have to cover.

Unfortunately the airplane is not like the automobile. It can hardly be compared, from a manufacturing point of view, with anything in the world.

## The Automobile and Airplane Compared

It does not matter very much whether an automobile engine weighs thirteen, fourteen, or fifteen pounds to the horsepower. An automobile-engine maker can think and work in pounds; but the airplane maker must consider ounces. The airplane itself is essentially a lifting device. It must elevate and transport not only itself but a useful load. The less of itself that it has to lift the greater the load that it can carry. Sometimes it must be fast—faster than any artificial thing except a bullet. Great speed

can be attained only with a bigger engine, and that means more weight.

## How An Airplane Engine Is Built

To make an automobile engine, molten metal is poured like so much water into a mold of sand; when the metal cools the crude form of an engine congeals. The Liberty motor is not so easily produced; it is machined out of a solid block of steel—the very best steel that the most knowing metallurgists can produce. The casting of an automobile engine is a matter of minutes; the machining of a Liberty engine is a matter of hours, even days. Automobile engines are produced by the hundred in the working day



© Brown and Dawson  
Stitching the fabric of a stabilizing surface. Linen, for which we depend on Ireland, is used


machining of a Liberty engine is a matter of hours, even days. Automobile engines are produced by the hundred in the working day



of many a plant; but the best airplane plant in the country now produces only five engines a day.

The difference between an automobile and a Liberty engine is as the difference between a cheap alarm clock and the finest chronometer. The excess metal on as many as eighteen automobile-engine castings is sliced off at once like so much butter by huge automatic machines. A single

into the cylinder or into a bearing, the engine must suffer. If even the head of a screw is slightly mutilated in driving it home or a pipe is ever so slightly indented that screw and that pipe must be rejected. And so it is with every part. Every third man in the engine plant is an inspector—usually a Government inspector. Fully sixty per cent, sometimes eighty and even ninety per cent of the parts produced are

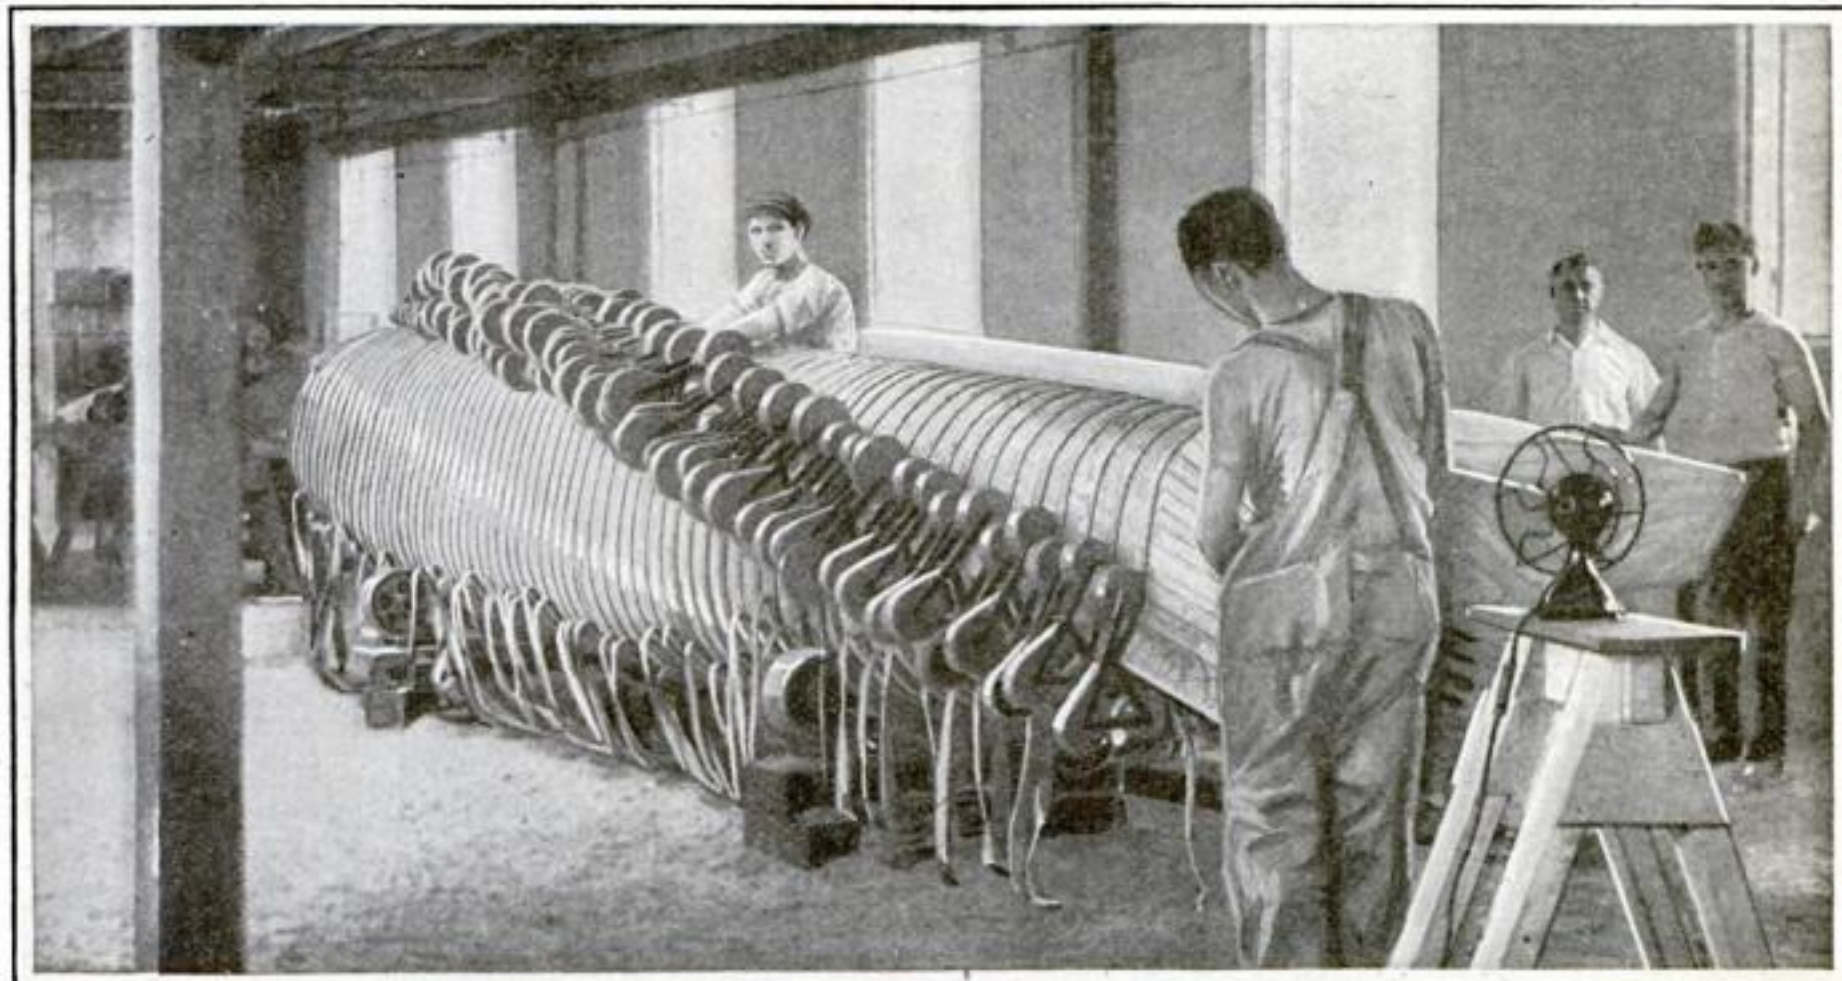

© Press Illus. Serv.

Wrapping fabric around the body of a fuselage. Note how the strips are held during the application. Each strip has been carefully tested, and so has every piece of wood

machine-tool will bore out or ream as many as half a dozen automobile-engine cylinders to receive their pistons. Automatic machines are also found in airplane-engine plants; but the airplane-engine is essentially the product of the craftsman rather than of the machine. The magnifying glass is not an essential tool in the making of an automobile engine; it is never missing in the airplane-engine factory. And why is it used? Simply to examine steel for minute flaws. It is unnecessary to worry much about the interior of pipes or crankcases in making automobile engines; if an automobile should stop in the middle of the road for no apparent reason no one is endangered. But if a Liberty motor should suddenly stop in midair a brave man may lose his life. That is why the maker of Liberty motors scrapes the interiors of pipes and crankcases. Little grains of sand imbedded in the metal are picked out by hand, because if the minutest particle should find its way

rejected. Is it any wonder that Liberty motors are worth five and six thousand dollars apiece, and that there is less profit in selling them at that high price than in selling automobile engines of equivalent horsepower?

### Climbing and What It Means

Yet despite all this care the engine is not perfect. When you want it to do its best it does its worst, which means that at high altitudes it is least instead of most efficient. A mountaineer who must first climb two miles before he can fight is in the same position as a fast fighting airplane. He has had all the hard work of climbing and must then puff very hard in order to inspire enough air in a rarefied atmosphere. An airplane must climb five, ten, fifteen, even twenty thousand feet, and the higher it climbs the less power is delivered by the engine. The engine cannot breathe as much air as it requires, and air is as essential to an engine as



it is to a mountaineer. When two fighters seek to kill each other three miles above the earth every bit of extra power counts. All this means that although an engine will weigh only three and one-half pounds and even less for each horsepower developed at sea-level, it weighs very much more for each horsepower the higher it climbs; it is much heavier than it ought to be.

Painstakingly built as they are, airplane engines must be scrapped or rebuilt at the end of eighty or a hundred hours. By that time the bearings are sure to be scratched; carbonization has set in; other defects appear. It is said that a man is rebuilt every seven years in that ever-recurring process of discarding old tissues for new. An airplane engine is rebuilt every few days. New parts are constantly substituted for the old, until very little of the original construction is left. Even a single steep, long dive

means overhauling. Flames due to excess of gasoline, and smoke due to the oiling up of the front cylinders, pour out of the exhaust. The sparkplugs must then be renewed. Indeed, sparkplugs are the engine-maker's bane. They must be renewed after a few hours in order that they shall not fail in the air.

The Liberty Motor is not essentially different from other airplane engines. But it will be put together in a new way.


It is standardized. And that means—? Simply that cylinders can be combined to produce an engine of any desired power; that the nuts and bolts made in Boston will fit the threads tapped in a part made in Detroit; that the elements of the engine are interchangeable so that a power plant can be improvised on the spot.

### The Sensitive Air-Propeller

Propellers are hardly less delicate than motors. They are almost humanly sensitive to temperature. In the dry altitude of the Mexican border, of northern Africa, of India, and of Bagdad, days are hot and nights cold. Hence propellers buckle, warp and fall apart in the air. That disintegration is highly dangerous; for a blade may smash the front of the airplane and kill the pilot. Propellers for use under such trying circumstances in the tropics are now made on the spot. But wherever they are made the best woods are used, usu-

ally walnut and mahogany. They must be balanced with the utmost nicety. The speed at the end of the blades is seven miles a minute. Hence the least nick throws the propeller out of balance, which may mean a wreck.


No less difficult is the making of the wings. They must be as light as a feather and as strong as a bridge. Flimsiness and strength—could anything be more paradoxical? Yet the whole machine itself is a

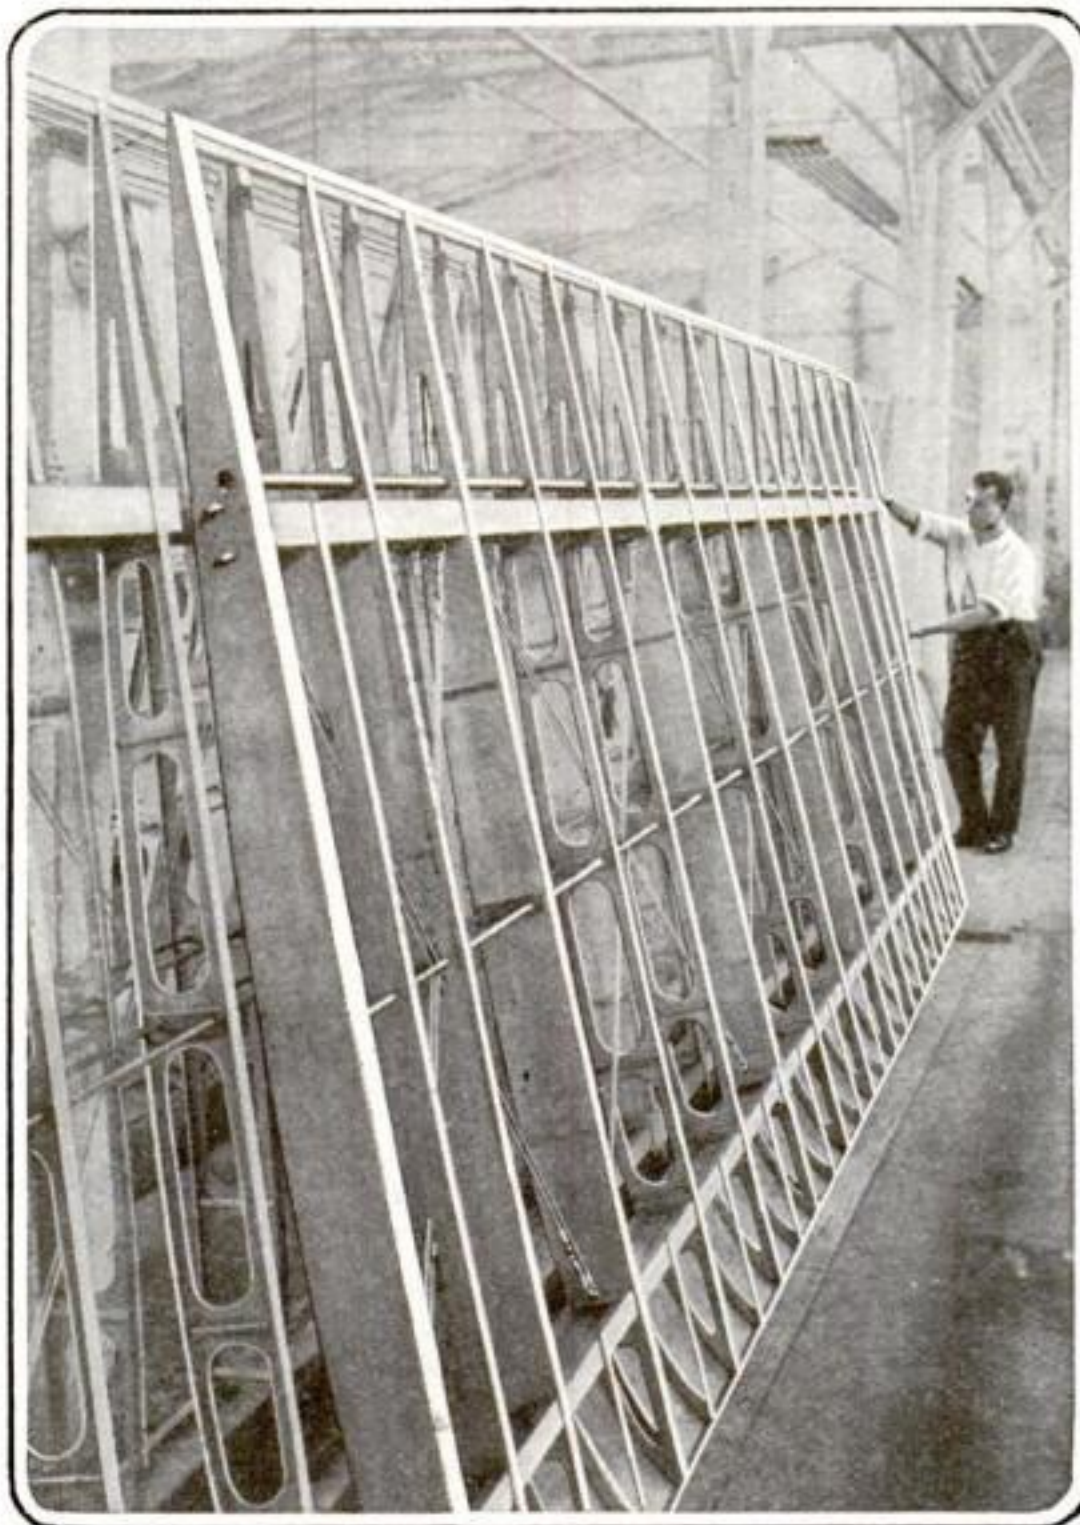

© Brown and Dawson

The frame of an airplane wing is made of spruce. It takes only two hundred feet of spruce to make an airplane, but one thousand feet must be examined and eight hundred rejected to obtain two hundred perfect feet. A wing must be as strong as a bridge and yet as light as possible



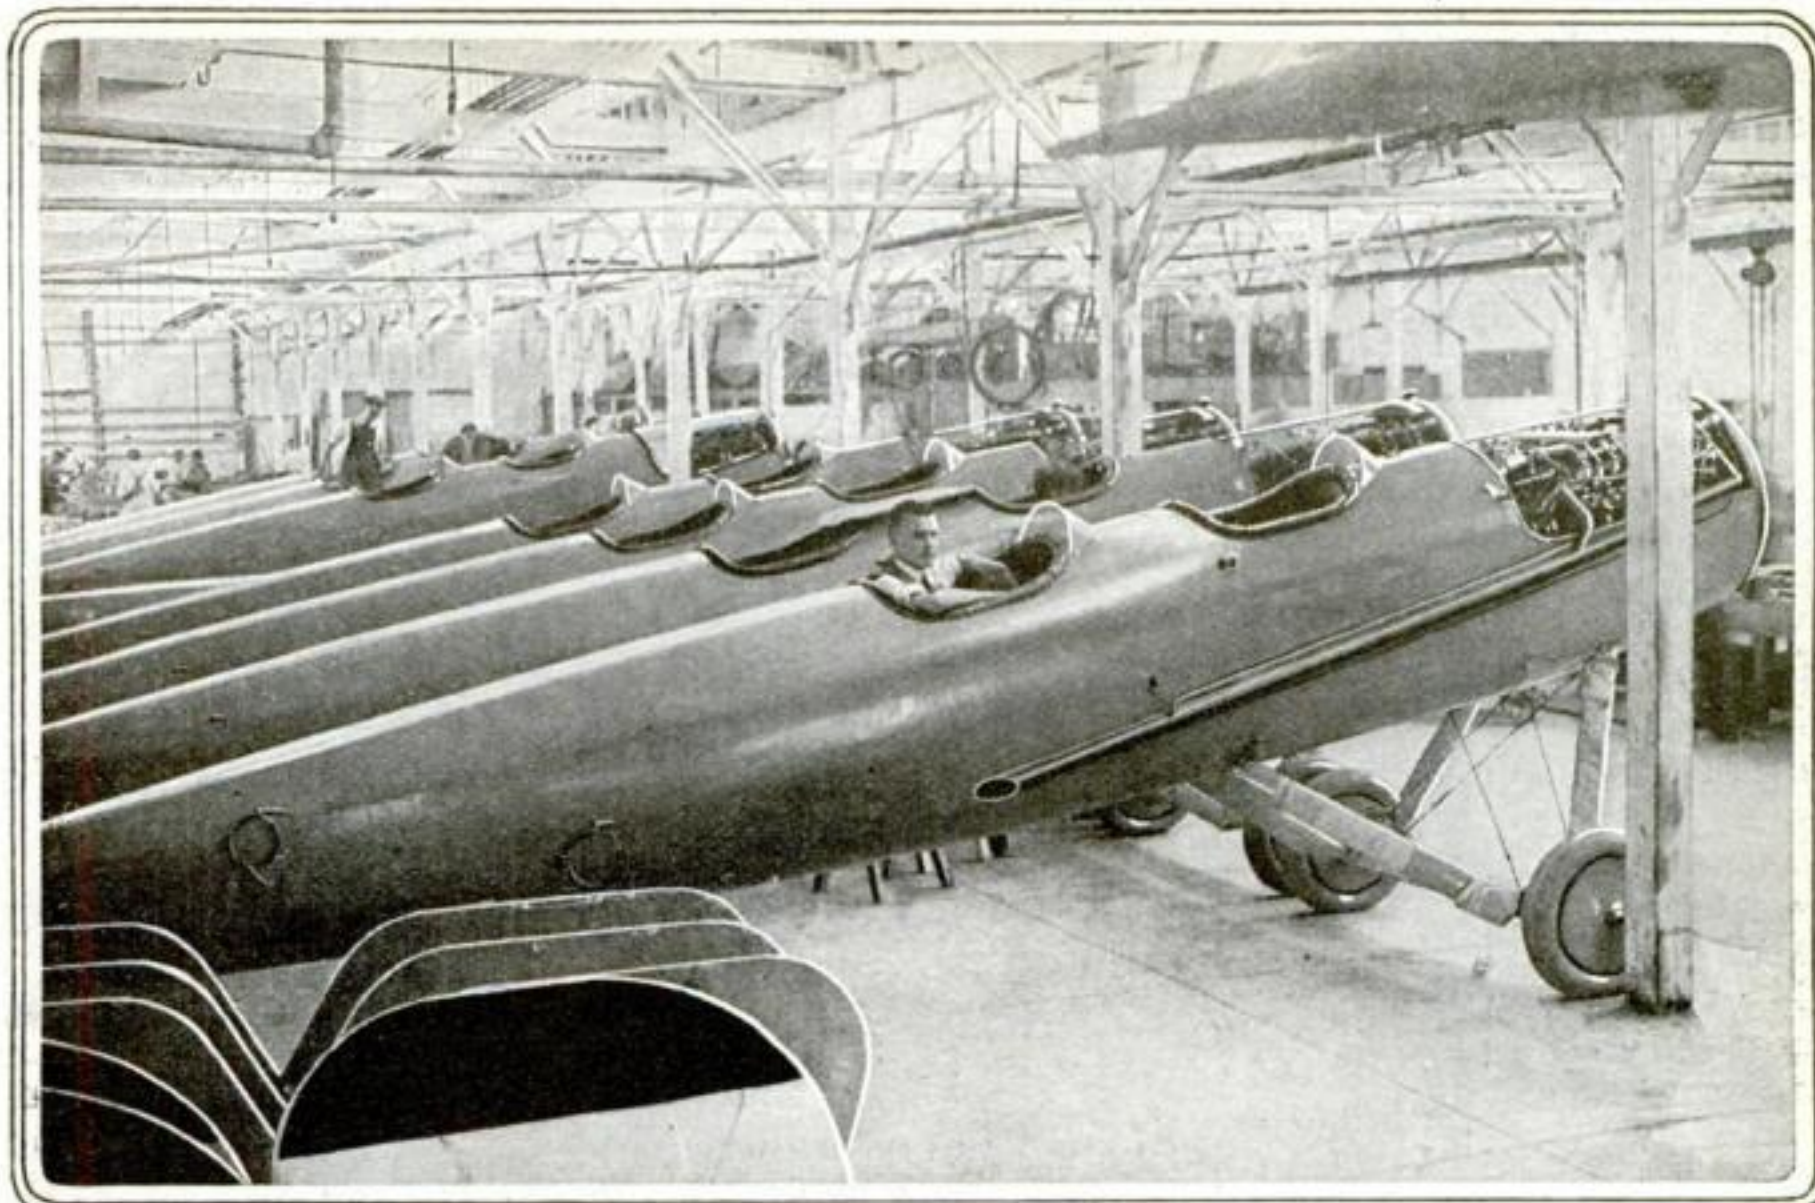

© Underwood and Underwood

Thousands of such machines must be made if we are to win the war in the air. Airplanes must be built on the progressive assembling system adopted in automobile plants. We must be prepared soon to make three thousand five hundred airplanes a month


kind of mechanical paradox. The frame of the wing is in effect a very carefully designed, very carefully constructed bridge. There is probably no other structure in the world that is so light and yet so strong. A pilot who flies at a speed of over a hundred miles an hour, who climbs more than six thousand feet in seven minutes, and who makes a sickening drop two miles in the air in order to escape an adversary subjects his wings to terrible strains. Cyclones, which are nothing but winds traveling with airplane velocity, blow down houses and uproot trees, because the houses and the trees are not stiff enough to withstand such enormous pressures. The modern airplane is a storm machine. It forces itself through the air with cyclone speed; which means that it is subjected to exactly the same pressures as if it were lashed firmly to the ground in

the worst Kansas cyclone. Years of research and mathematical calculation have taught the airplane builder how to make a wing so strong that it is not likely to snap off like a clay pipestem.

#### Where Shall We Get Spruce?

To make the wings strong, yet light, spruce is used. If we are to build airplanes at the rate of 3,500 a month we must make deep inroads into our forests. There is none too much spruce of the superior kind required for airplane construction. It is hard to find good wood. But the task of building wings is further complicated by the fact that although the spruce is bought by experts, fully two-thirds of it is rejected because of its faulty grain or some other defect.

The building of an airplane wing is hardly a commercial art. It is

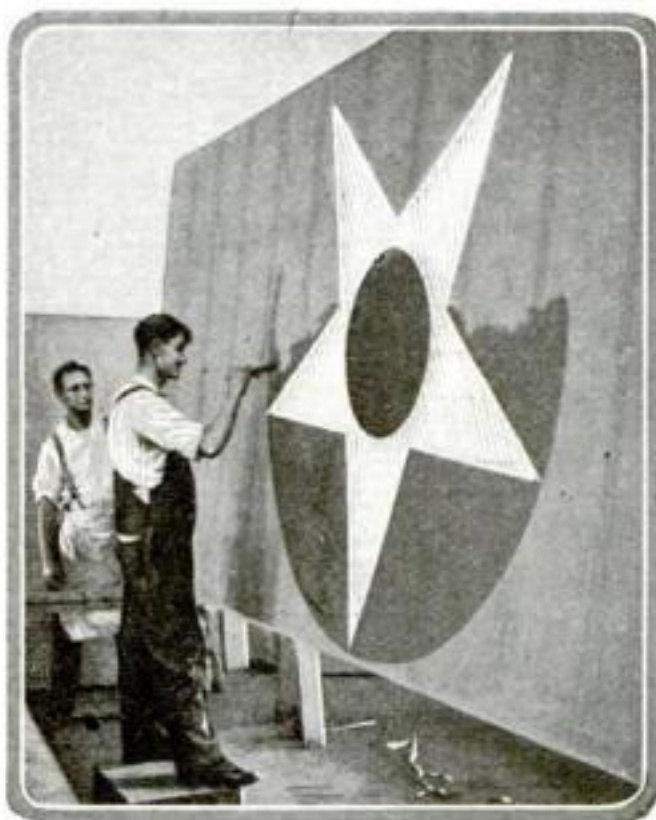

© Brown and Dawson

No iron cross for us, but the red, white and blue of Liberty



more like the fashioning of some exquisite musical instrument. Stradivarius never selected the wood for his violins more carefully than the men who shape the spars for a wing pick their pieces of spruce. Human life depends on the proper choice of wood. No one in an airplane factory "takes a chance"—least of all in building a wing.


It takes at least a thousand feet of this carefully selected spruce to build a single airplane. We must find enough for thousands and thousands of machines. To meet the demands of present English construction alone, more spruce is wanted than the entire present annual output of the United States.

Perhaps the most serious problem with which we are confronted in building whole flocks of battle eagles within the time demanded by our allies is the necessity of air-drying the spruce. The wood cannot be used as it comes from the forest and the mill. It must be seasoned, preferably air-seasoned, a process that requires about nine months. The Bureau of Standards is at work on the problem of devising a means of so treating the wood that it can be used in building wings soon after it is cut; but even such research takes time. Some efforts have been made to use steel. Perhaps our salvation may lie in that procedure. Airplane builders, for the most part, prefer spruce to steel; it is lighter and stronger per pound.

The difficulties of building 23,000 airplanes in a year or less, difficulties inherent in the very nature of the flying machine as well as in the scarcity of material are not disheartening. Automobile production methods must be adopted; which means minute subdivision of manual and machine work, and above all standardization. Factories must concentrate on one or two types.

The surveys of the country's manufacturing facilities made by the National Advisory Board and the Aircraft Production Board will enable us to avoid most of the mistakes made by England during the early months of the war. Automobile makers and munitions manufacturers must be taught how to produce good trustworthy

engines and cylinders; furniture makers and coach builders must learn how to make wings to which human lives may be trusted; sewing machine and typewriter companies must also cooperate if we are to turn out 3,500 machines a month. England has

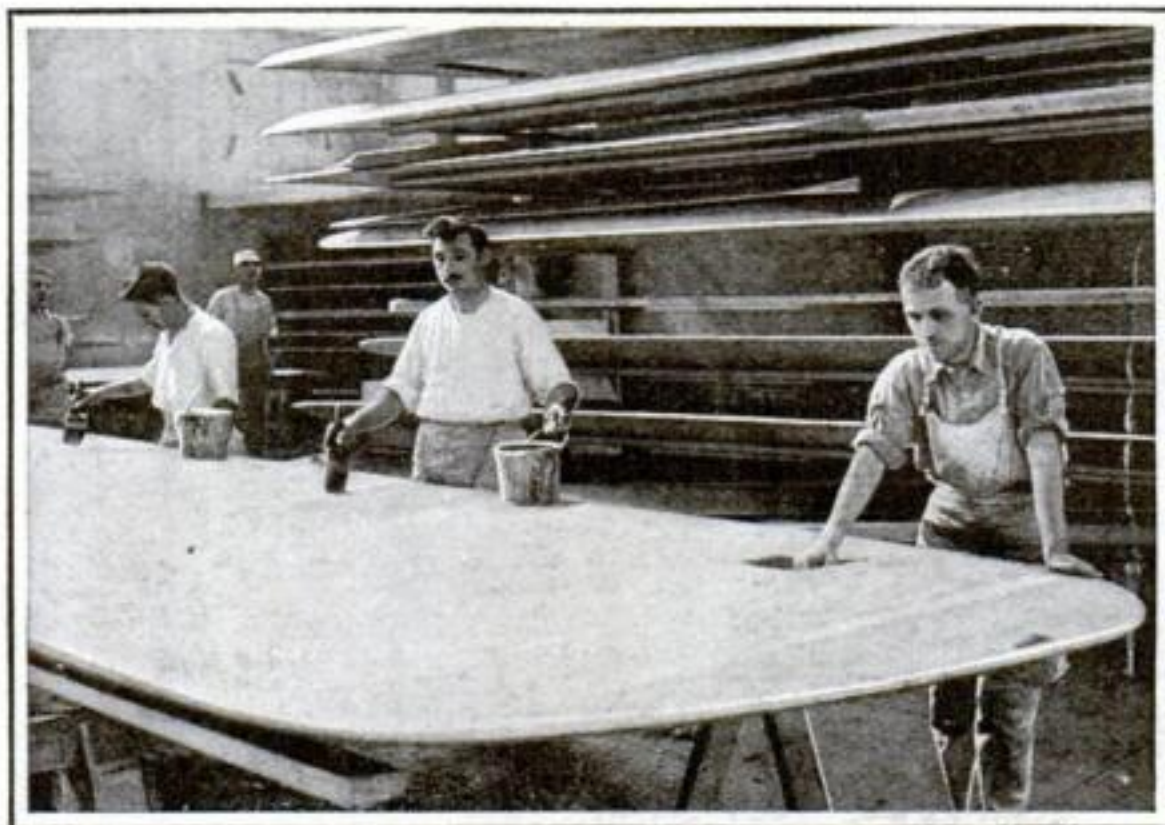

©Brown and Dawson

The fabric of an airplane wing must be as tight as a drum-head. It is therefore stretched to its limit of endurance and coated with a preparation termed "dope," a nitrocellulose compound which is thus far the best coating discovered

taught us the way. At present no fewer than one thousand British factories are engaged in making parts for flying machines.

The Aircraft Production Board has done invaluable work in standardizing the airplane. The wonderful Liberty engine has been created—the composite invention of the foremost authorities on metals, radiators, cooling, carburetion, and ignition. The Board will determine the sizes of nuts and pins and wires. They vary now. It should be possible to build an airplane on the battlefield from the parts of several old machines. How can that be done if a bed will receive only a certain size and type of engine, if nuts will not screw on the bolts at hand, if, in a word, parts cannot be interchanged?

There are far too many types of airplanes now. France entered the war with no less than thirty. Of course she could not foresee in 1914 that half a dozen would suffice, simply because the half dozen that have been developed are utterly different from the thirty that marked the pinnacle of achievement in 1914. Standardization sometimes means stagnation; but military exigencies will prevent that at this time.



## Using Brine Baths as a Cure for Shell Shock

**M**ANY officers and men are returning to England suffering severely from shell shock and other ailments contracted in the trenches. The peculiar nervous condition in which these men find themselves is difficult to treat. At Droitwich, England, are some remarkable natural brine baths which have done much to restore these unfortunate victims of the war to their normal state.

The treatment consists of a number of baths such as douche, needle and spray. Men who are able to swim are encouraged to use the swimming baths. There are a number of these. In cases of rheumatism and frost-bite much relief has been obtained through the use of a brine spray and massage. The attendant has a hose attached to his arm so that he can massage and spray the patients at the same time. This hose is used to spray the more delicate portions of the body. At the same time, a stronger spray from a wall-shower, shown at the back of the patient being treated in the illustration, keeps the entire body well doused. At first the brine spray is applied warm. The invigorating effect is soon felt, however, and after a few treatments the patient is able to stand a cooler temperature. Soon he enjoys a cold spray, and before many days have passed at the baths he is able to carry on his own treatment in the swimming pool.

More than 22,000 cases have been treated at the Droitwich salt baths free of charge.



A soldier suffering from shell shock being given a brine bath and massage at the same time


## Two Locomotives Supply Heat to a Manufacturing Plant

**A** LARGE manufacturing plant at Arlington, New Jersey, was cold as a refrigerator one winter's morning and there was no immediate relief in sight. It seemed as if the three eight-hour shifts of three thousand employees might have to

be dismissed. There was no time to install a new heating plant; besides that would have been too costly. The superintendent wanted just enough steam to furnish heat for a few hours.

Two Erie locomotives were placed on a side-track, a steam line connection was made between the hot water pipes and the steam dome of each engine,

and the plant was heated at an expense of fifty dollars for the day, which was the cost of the engines and fuel. Valves were placed at the points shown in the drawing to enable the source of steam to be controlled. Cold water was supplied to the tenders by an underground pipe.

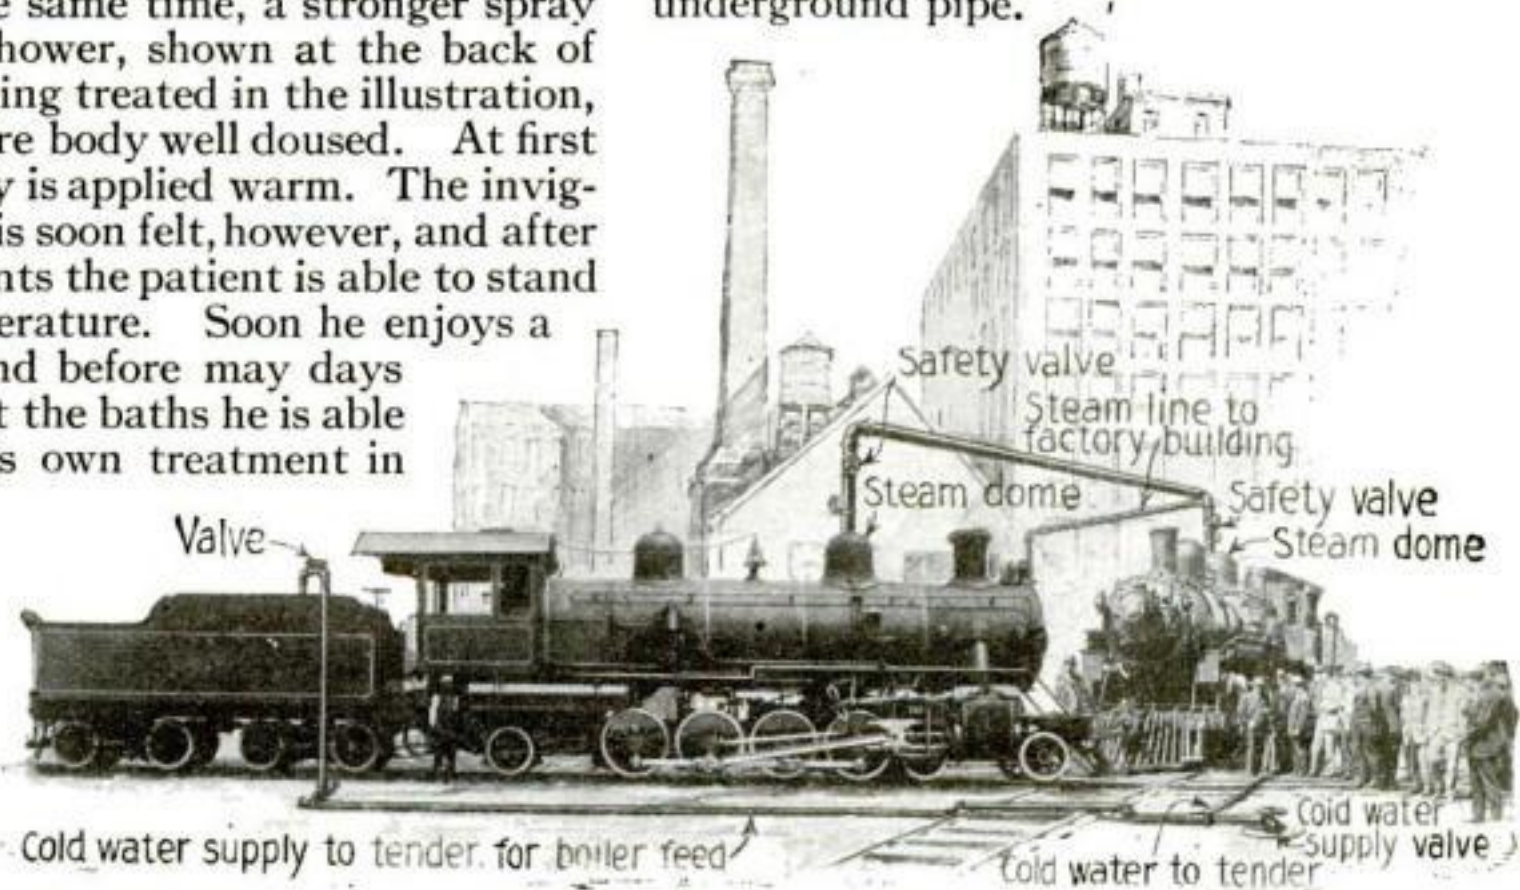


How two locomotives supplied steam heat to the three thousand shivering workmen of a manufacturing plant last winter when the heating system was out of order





A lever operated by the thumb of the hand holding the soldering iron feeds the solder pellets down the hollow shank to the point

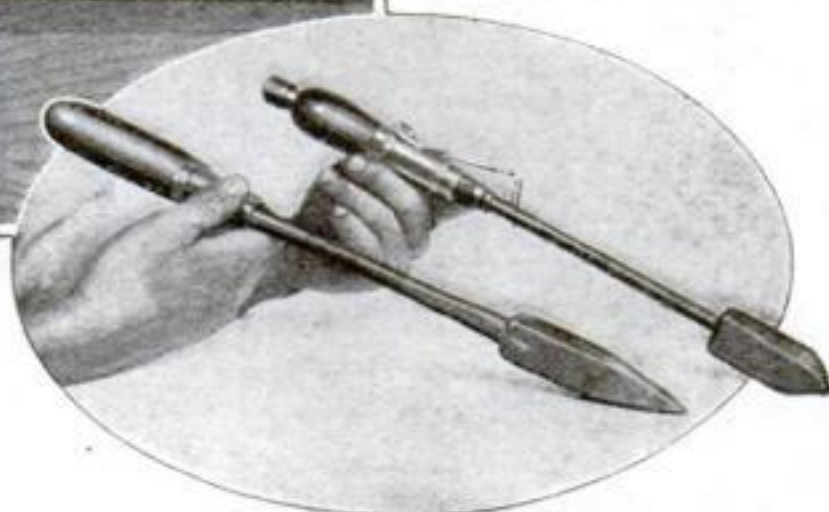

There is little difference in appearance between the new iron and ordinary types

### Doing the Work of Three Hands with Two, on a Soldering Job

WHEN a careful workman has a difficult soldering job he often feels that two hands are not enough; yet a helper, especially if he is inexperienced, is more likely to be in the way than helpful. So thought Ray M. Tilton, of Panora, Iowa, when he first began work on a soldering iron which would hold its own solder and apply it where it was needed, leaving the operator's left hand free to hold the work. Mr. Tilton employs a magazine in the handle of his soldering iron. In this the solder is kept in small pellets, which may be fed down the hollow shank directly to the inside of the hot copper point of the iron. Naturally when the solder pellets encounter the hot point they melt and flow in liquid form directly on the spot to be soldered.

In order to prevent the passage in the copper, through which the

pellets pass, from becoming clogged on account of the oxide from the copper, the inventor tinned the passage. As a further means of keeping the new soldering iron up to its maximum efficiency, he made the part of the iron containing the tinned passage easily detachable, so that there would be no difficulty about cleaning and re-tinning the passage occasionally. But since the tin is not exposed to the air, it lasts much longer than it would if it were on the outside. If the copper should be allowed to become red hot, or "burn up," as it is called, it would, of course, destroy the tin; but if the tool is kept at the right soldering heat the tinning will last almost indefinitely.

### The "Complete Dinner" Container for Long Trips

HERE is another ingenious "full dinner pail" which keeps hot things hot and cold things cold. It is the invention of Julius E. Heimerl. It has three separate compartments, one

for hot foods and one for fruit, cake and bread, etc. The third holds a fuel box.

The container itself is a metal box having a handle like that of a pail and a lining of heat-insulating material. The hot meat and vegetables are placed in the compartment directly over the fuel box. The heat from bits of burning charcoal in the fuel box keeps the food piping hot until served.

Holes are provided in the walls of the compartment for fruit and foods to be served cold, so that air may circulate freely through it. In the flanged cover of the cold food compartment a cup is set which may be used as a food container or as a drinking cup. Another

cup fits over it as a cover. This, too, may be used as a drinking cup. Just above the fuel box is a space large enough to accommodate a coffee pot, so that by adding enough charcoal to boil the water, coffee or other beverages may be readily prepared as needed.



A compact food container with compartments for hot and cold food



## Which Way Will the Tree Fall? A Machine Which Controls the Direction

**T**REE felling machines not only facilitate the felling operations but also reduce the hazard and the consequent damage. The machine shown in the accompanying illustration consists of a pole, a plank, and a pair of levers. The pole is usually three to four inches in diameter, fifteen to twenty feet long, and often shod at the upper end by a metallic socket armed with a spike and at the other end by a similar but larger socket armed with a toe and two lateral projecting pins. The wooden plank is about eight feet long, four inches thick, and eight inches wide. It may be simply notched regularly on the upper surface, so that it presents an appearance similar to an ordinary washboard, or it may be surfaced with a firm corrugated metal. At regular intervals along each side of the plank are about twenty-five projecting pins. By pressing forward and upward on levers, the workmen are able to move the base of the pole, groove by groove, towards the base of the tree. The levers consist of wooden handles usually about five feet long. To set up the machine the plank is laid upon the ground with the grooved surface uppermost at a distance of ten to fifteen feet from the tree to be felled. In case of large trees and sometimes in wet or snowy weather it may be necessary to fasten the plank to prevent slipping. This can readily be accomplished by driving a stake into the ground against the far end of the plank or by tying the near end of the plank to a nearby tree, or even to the stump of the tree to be felled, provided it is not being taken



By pressing forward and upward on levers, the workmen are able to make the pole exert a strong pressure against the bole of the tree, compelling the tree to fall in the desired direction


out by the roots. The pole is then placed against the tree in an inclined position with the spiked end fixed against the tree trunk and the other end armed with a toe resting temporarily in a groove towards the far end of the plank.

## Pull Out a Cigarette and a Lighted Match with One Motion

**W**HY should cigarettes and their matches be packed in separate packages? Why not carry them in one, and not two, boxes?

So thought George E. Lamberson, of Brooklyn, New York, and he devised a box to hold cigarettes, matches and sandpaper to ignite the match as it is drawn out of the box.

The ordinary cardboard cigarette box is surrounded with a thin wrapper, which serves to hold the matches.

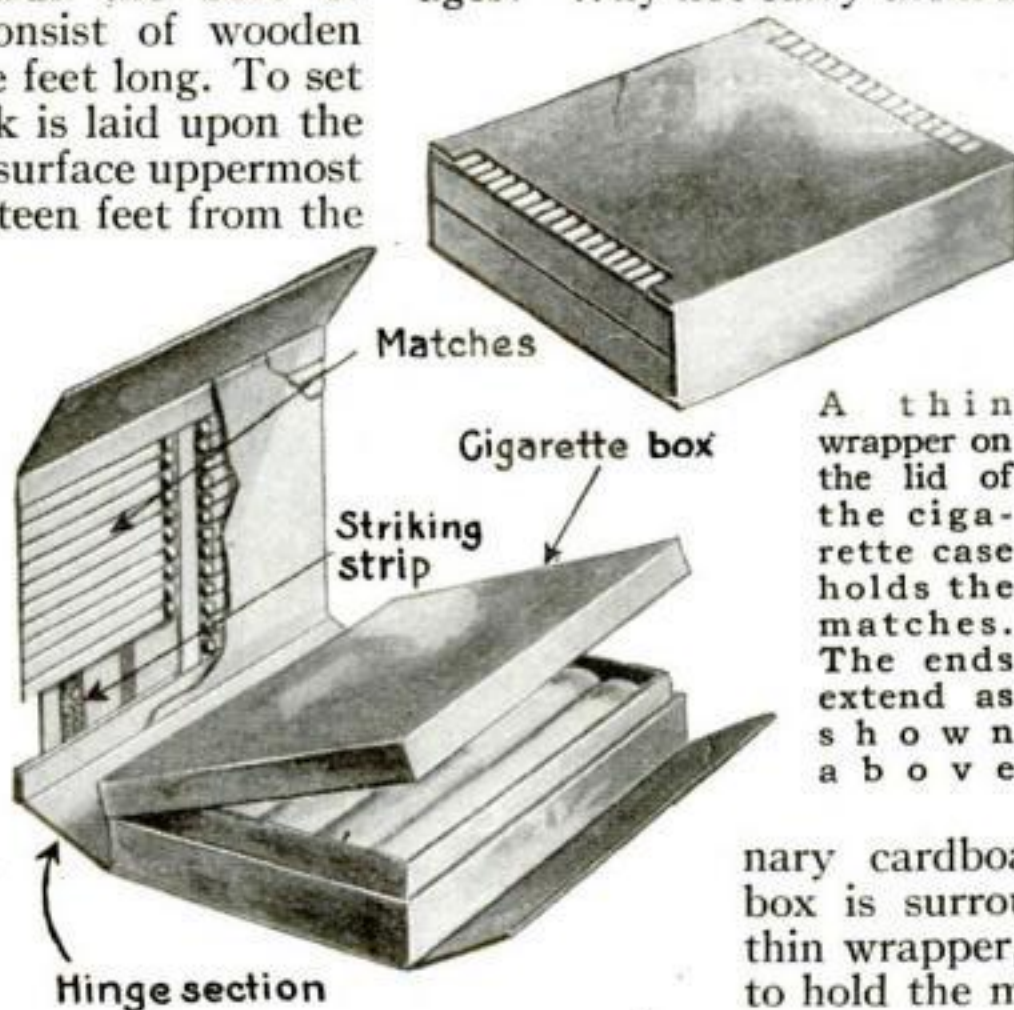

A thin wrapper on the lid of the cigarette case holds the matches. The ends extend as shown above




# His Majesty, the Turkey

How the young birds, more delicate than babies, are coaxed along to your table

ON turkey ranches the flocks are managed like sheep. By day they are herded by men on foot and horseback and by dogs specially trained for the task; at night the flocks are driven home to roost. But the small cultivator of turkeys has discovered a way around the natural roving instinct of the fowl. In order that he may not lose a good portion of his flock, or all of them, through their wandering too far away, he keeps them confined in a lot of about an acre or more, until noon time, when he lets them roam where they will. The reason for this is that turkeys do most of their roaming in the early morning. During the middle of the day they loll about in the shade, starting toward their roosting place as the afternoon wanes.

The inexperienced may find difficulty in locating the nests of the turkey hen, but to the initiated rancher the task is easy. He simply keeps all the hens penned up until late in the afternoon. When they are finally let out, those that are laying will strike out on a run in a bee-line for their hidden nests.


The eggs are gathered daily after the turkeys have gone to roost, so as to prevent them from being chilled or stolen. When the hens become broody they are allowed to sit on about eighteen eggs, which hatch out in about twenty-eight days. Then, according to the poulterers, the turkey-raisers' real troubles begin. The young poults are more delicate than babies and require constant care. This means that the youngsters catch cold easily from

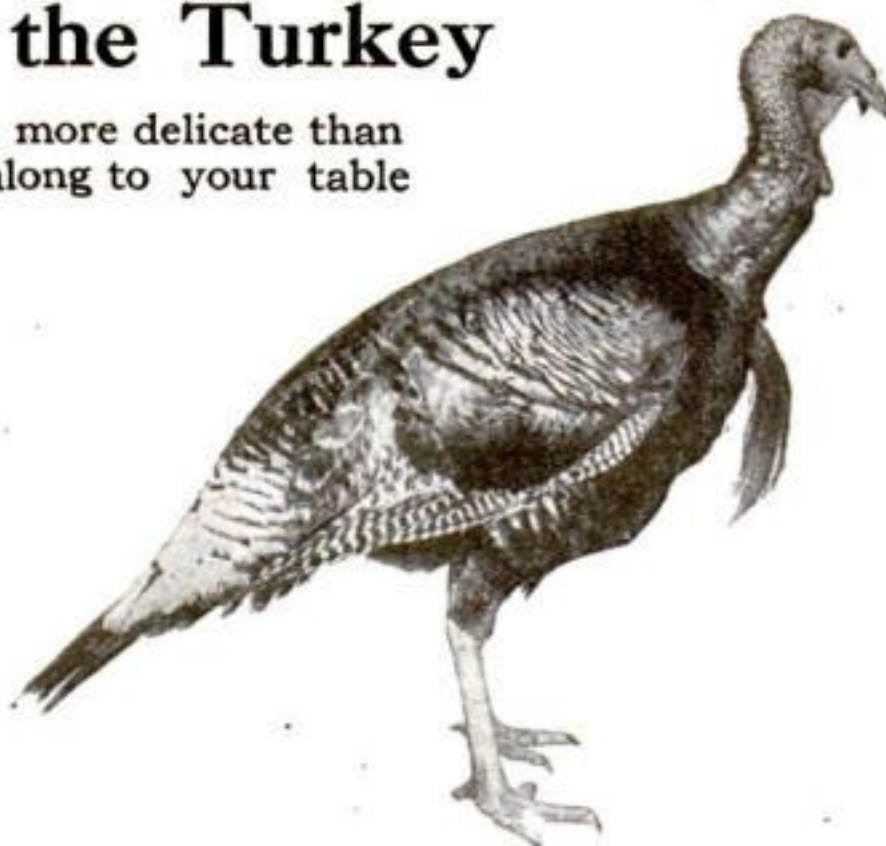

wet feet and from dampness in general.

In the illustration pictured below, a method is shown of housing the nesting turkey hens which minimizes the danger from dampness. The birds are placed in an enclosure as close as possible to the farmer's house, so that they may be easily watched and cared for. The nests are made on well-sanded and preferably slightly sloping ground, under a low shed, each nest being tightly enclosed on three sides and open toward the south. Here the young birds can be given constant oversight. After the poults have feathered out there is little further trouble with them.


About the first of October, fattening is begun by gradually increasing the evening allowance of grain. Soon afterwards comes the marketing period. This, among the small poulterers, is preceded by a regular turkey-picking bee, similar in social jollification to the corn-husking bees, famous in song and story.

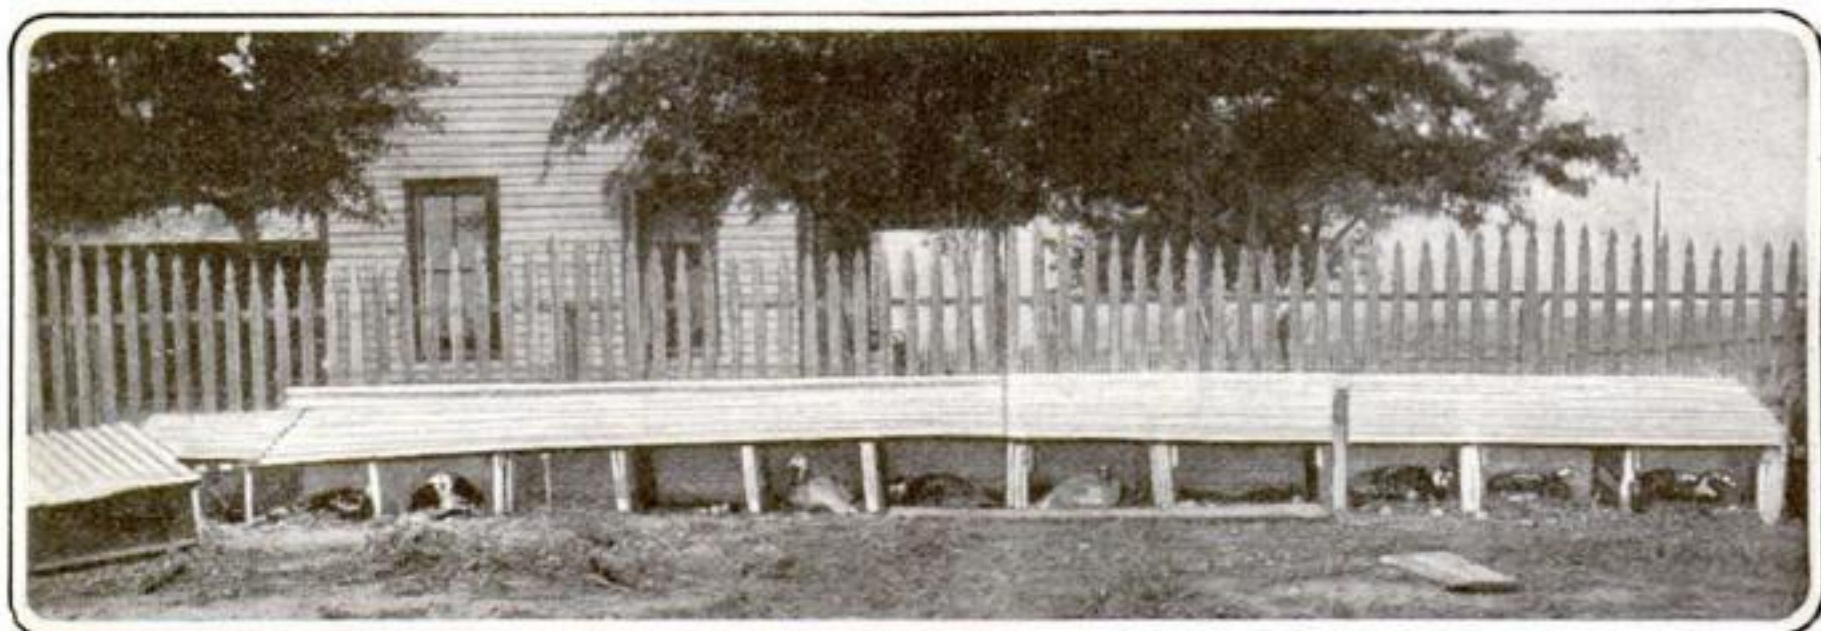

Nests made on well sanded, sloping ground under a low shed close to the farmer's house where the birds can be under constant watch. Each nest is open only on the south



The dressing plant into which the turkeys from the surrounding farms are driven, to emerge later crated for market

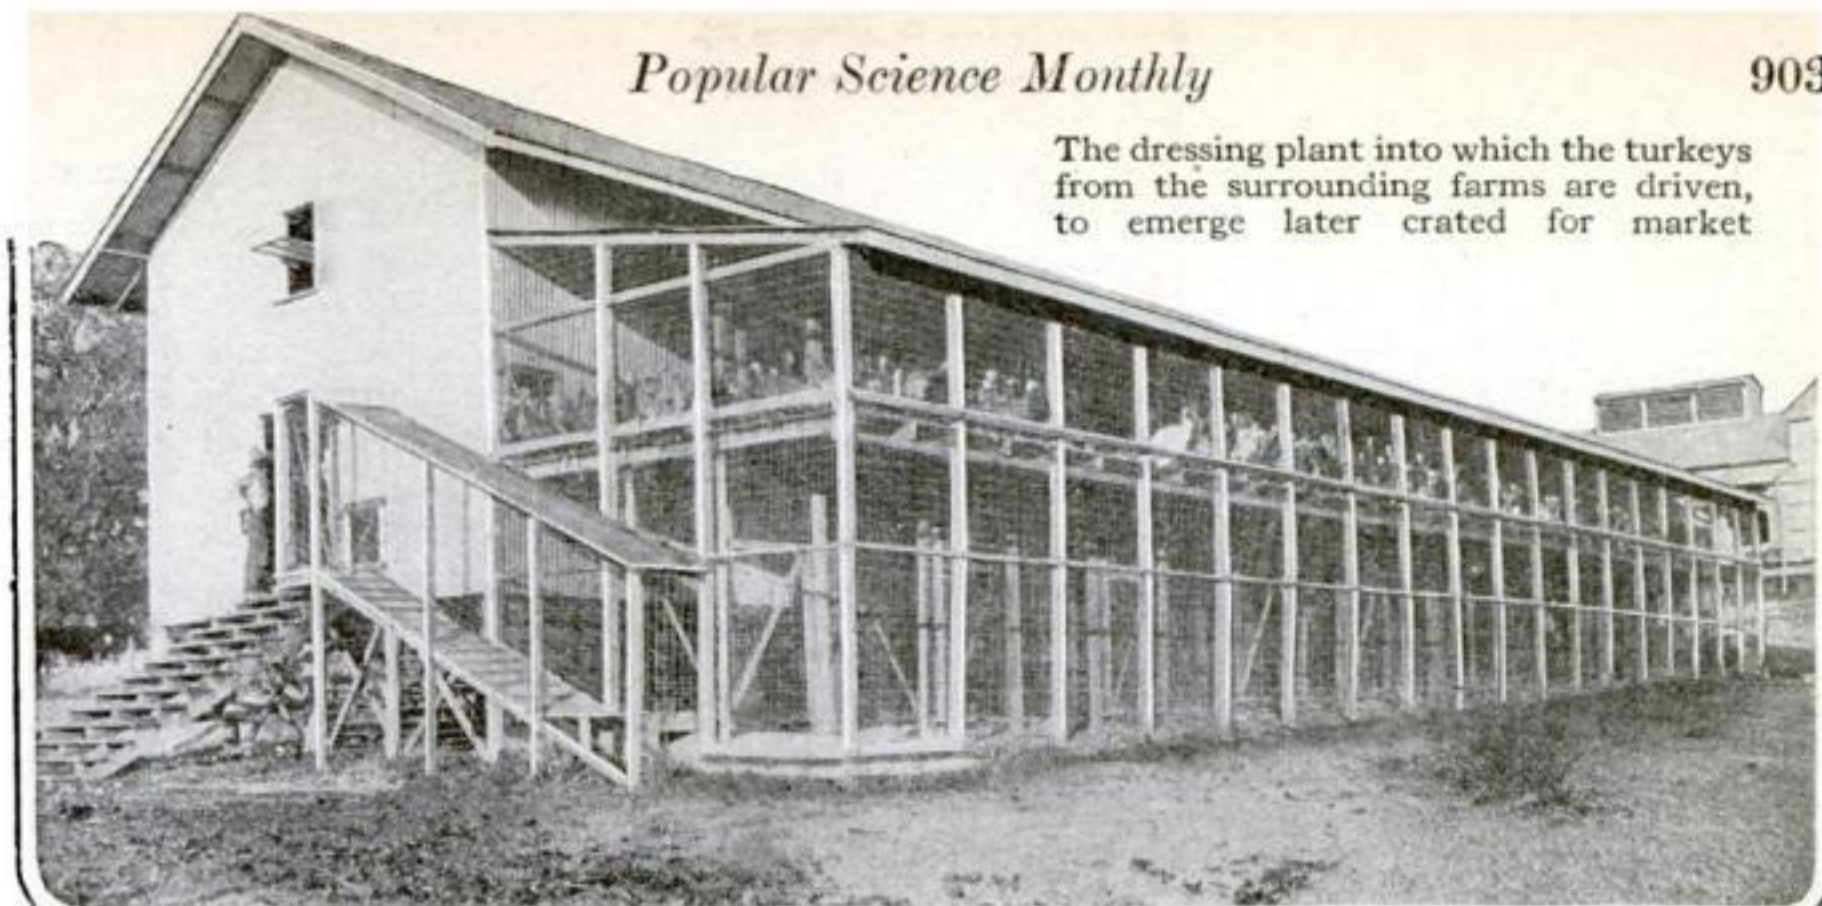


Flocks composed of a thousand or more turkeys are sometimes driven miles to the community dressing plant. Stops are made at nightfall near a grove of trees where the birds may roost

In most large turkey-growing districts, however, dressing plants have been built to handle the birds during November and December. During other months of the year the plants are used as clearing houses for butter, eggs and other farm products. Here the turkeys are killed and dressed as quickly as possible after their arrival to prevent shrinkage in weight. Often huskers in the vicinity of a dressing plant will go out through the surrounding country and buy up from the farmers all the available turkeys, driving them in to the dressing plant in flocks of sometimes a thousand or more birds.

At the dressing plants the turkeys are driven into cages arranged in

long rows and leading through an alley into a smaller inner cage. Not more than twenty turkeys are allowed to remain in the inner cage—or dressing room—at one time. This is to prevent the pickers from choosing the smallest and most easily picked birds and leaving the large ones for the last.

Although it is considered best for all concerned to ship the birds already killed and dressed to market, on account of the heavy shrinkage of live birds during transportation, the rule is not arbitrary. In fact, there is a special train, known as the "turkey special" which travels regularly from Morristown, Tenn., to New York loaded with live turkeys.

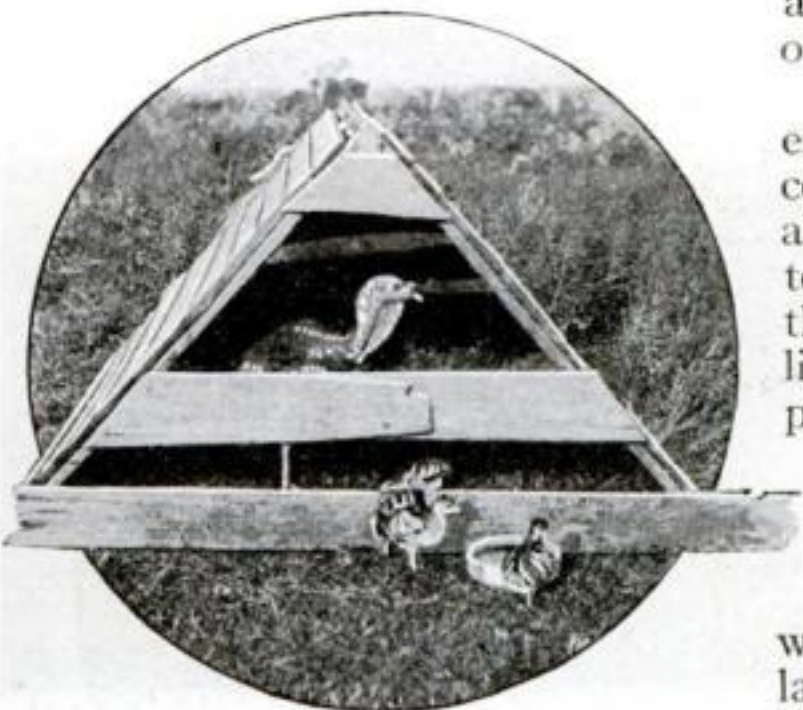

An economical brooding pen in which the motherbird is kept from straying



## A Pelican in Your Wardrobe to Hold Your Coat

AMONG the many wooden novelties which have been brought out this year, the pelican coat hanger is conspicuous because of its amusing appearance. The bird is painted in vivid colors. A flock of bird hangers adds to the attractiveness of any wardrobe. The bill and tail of the pelican support the shoulders of the coat, while the collar fits around the body of the bird.

These novelty coat hangers are especially approved for use on the clothes-tree, where the coat is usually hung more or less carelessly because hangers are not provided there. The gorgeous pelican is so ornamental that there is no objection to his remaining in full view when not in use, wherever he may be.



The pelican coat hanger. A wooden novelty, designed to keep your clothes in shape

home in America has doubtless crossed the ocean three times.

Since the abolition of the queues after the recent fall of the Manchu dynasty, long pig tails of Chinese hair are no longer readily available. The dealers are relying more and more on the combings of women, although there are men who make it a part of their business to let their hair grow to about eight inches in length and then sell it to the barber who in turn sells to the small trader in hair. For exporting, hair is assorted according to length and tied in bunches. Most of the exports go to England, France and the United States, where the hair is bleached with peroxide, thinned with acid and boiled in dye. It is thus rendered finer in texture and, incidentally, absolutely sanitary. The appearance of the hair is also completely changed.

## We Exclude the Chinese but Not His Queue and Combings


ALTHOUGH the traffic in human hair has not been so brisk during the past few years as formerly on account of the veering of the fashions in hairdressing toward the extremest simplicity, still there are millions of pounds of human hair exported from China. One of the peculiar facts in connection with the trade is that often after the Chinese send the hair to us we treat it and dye it and send it back to be made up for special use. This is usually true in regard to the invisible hair nets which American and European women use to keep their own locks in order on a windy day.

The hair-net business has become of great importance to the province of Shantung, which now provides practically the entire supply for the market. Thus the hair net worn by the veriest stay-at-

## New Looms for Old—A Wartime Improvement Demand

NOW, as never before, the manufacturers of wool and cotton fabrics feel the need of putting in new machinery, on account of shortage of labor and other industrial conditions due directly to the war and to the cutting off of immigration.

Thousands and thousands of old looms are making scrap heaps like the one below.

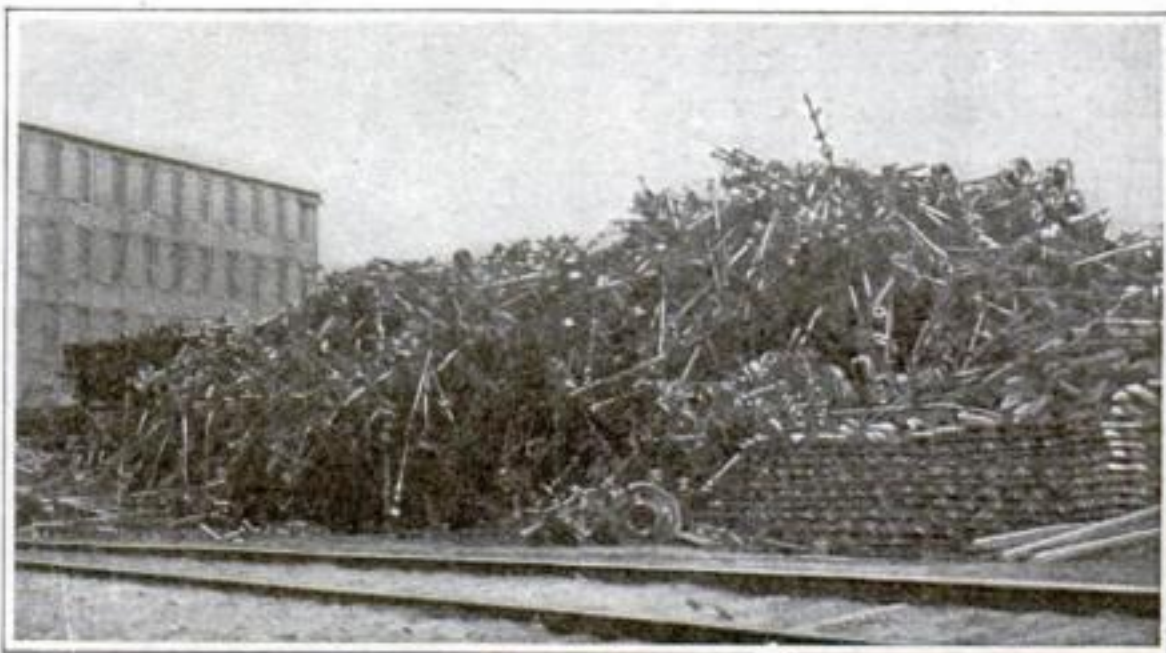

This mound is made up of scrapped looms which have had to make way for new ones requiring fewer workmen



## A Cattle-Guard Made of Cactus. Horses and Cows Avoid It

**A**N ingenious foreman on an Arizona railroad recently conceived the idea of using the cactus plant as a cattle-guard at railroad crossings. The first, which was planted a few months ago, has proved an unqualified success. Not a single animal has attempted to cross it. As a matter of fact, both horses and cattle are thoroughly familiar with the species of cactus used, and fight shy of it as they would of a rattlesnake.

A frame of two inch by six inch timbers was placed on edge and fitted between the tracks. In the bottom of this structure are a few inches of sand and gravel in which the cactus plants were placed. The cactus is very long lived, but as it grows in abundance along the railroad, it can be renewed if necessary. As the thorns will pierce an ordinary boot or shoe, it was necessary to place a piece of timber along the bottom bar of the fence to allow employees to cross.

This is by far the cheapest form of cattle guard in use on any railroad.



The cactus hedge for railroad crossings. The frames at the side furnish a footing for workmen

## A Collapsible Concrete Form Which Works Like an Umbrella

**A** NEW type of adjustable and collapsible steel concrete form works on the principle used in constructing the ribs of an umbrella. The form is made in

two types, one for circular culverts and the other for small bridges with semi-elliptical arches. Both types are collapsible for greater ease in shipment from point to point or for movement ahead, as each section of culvert or bridge is concreted and hardened in place. Each type is also

adjustable, the culvert type from twenty to forty inches in diameter and the bridge design from spans of six feet to forty feet. The fact that both units are adjustable within such comparatively wide limits greatly reduces the cost of the forms used because

of their reduction in number. With the ordinary wood types a special form would have to be made for each diameter culvert or each differently spanned bridge. Because both types are

of steel instead of wood, they last indefinitely and reduce the cost of form construction.


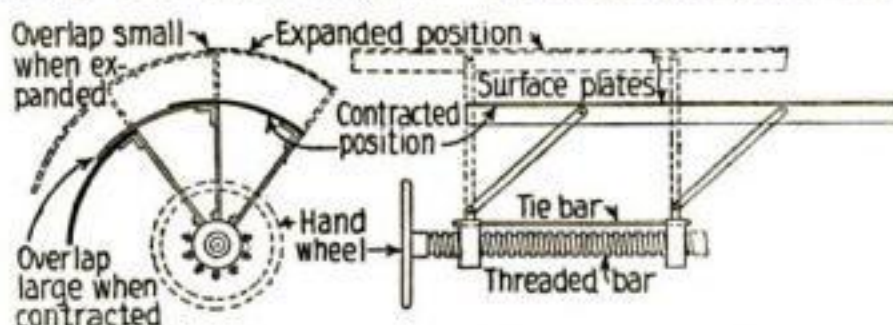


Diagram showing the principle on which the diameter of the form is increased or decreased



Turning the hand-wheel adjusts the angle of inclination of the radial arms

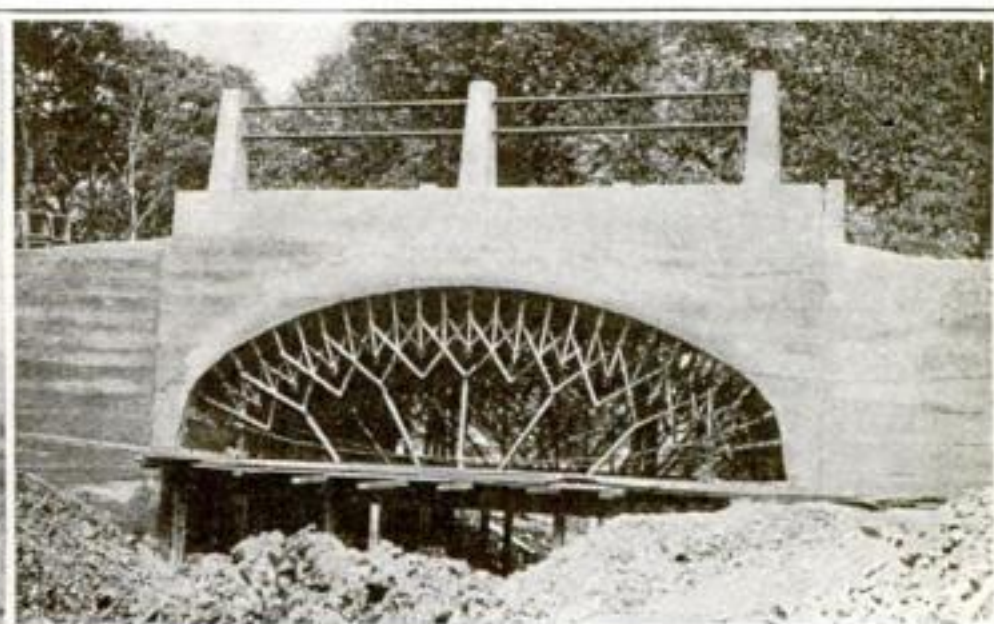

The adjustable bridge form. The overlapping surface plates are forced in or out



# Raising Terrapins on the Farm

They require little more than sun, sand and water, and bring from \$50 to \$60 a dozen in the market


**G**OOD Chesapeake terrapins measuring six inches in length on the lower shell bring from \$50 to \$60 a dozen in the city markets. Clearly, it would pay to raise these turtles extensively. The attempt has been made over and over again, but no private enterprise has met with any commercial success because the turtles would not hatch out.

In 1902 the Bureau of Fisheries began breeding terrapins in captivity. In the experimental pounds at Beaufort, North Carolina, there are now two thousand terrapins of various ages which have been hatched and raised in confinement. Beside these the Bureau has distributed several thousand terrapins in other places for experimental work.

The oldest brood in the Beaufort pound dates from 1909. The females of this brood have attained marketable size and have produced eggs. Some of the brood of 1910 also have grown large enough to be marketed.

The essentials of a good terrapin farm are some dry land for part of the day and some water all day. The females should be able to resort to sand beds when they desire to make their nests and they should have space in which to crawl about and sun themselves. Each adult terrapin requires ten square feet of space and each young one one square foot for health and comfort. An enclosure 100 feet square will provide satisfactory quarters for 750 adult turtles and twice as many young ones.

At Beaufort the terrapins are fed on fish with variety furnished by an occasional meal of blue

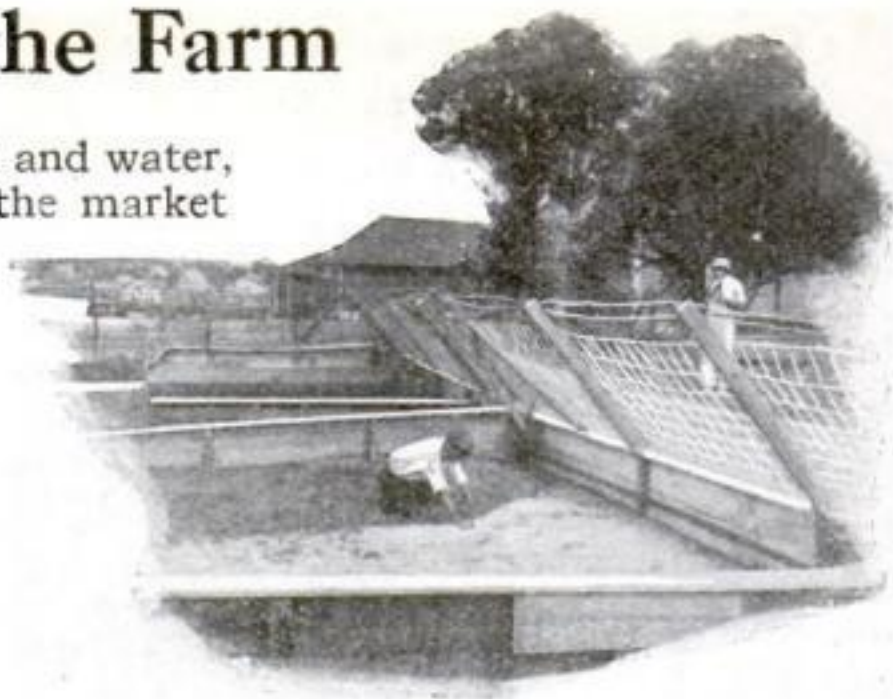


An enclosure 100 feet square will accommodate 750 adults and many young ones

crabs or fiddlers. In the winter the young terrapins are given oysters. The fish are cut into small pieces, and the crabs are crushed before being fed to the terrapins. The daily cost of feeding one hundred terrapins is only five or ten cents.

The terrapin is a hibernating animal. During the cold weather it burrows into the mud and remains there until the return of warm weather. The terrapin farmer need not dread disease among his turtles. Terrapins seem singularly free from epidemic diseases.

Eggs are laid from May to August. The average number of eggs in a nest is from eight to nine, although as many as sixteen have been found. The young appear in August. They can climb over a concrete wall two or three feet high and crawl through any hole they can find. They must be kept from the adult terrapins while young because the older animals are likely to destroy them by trampling on them or by eating their food. This is not done through viciousness or even through greediness, but occurs accidentally.

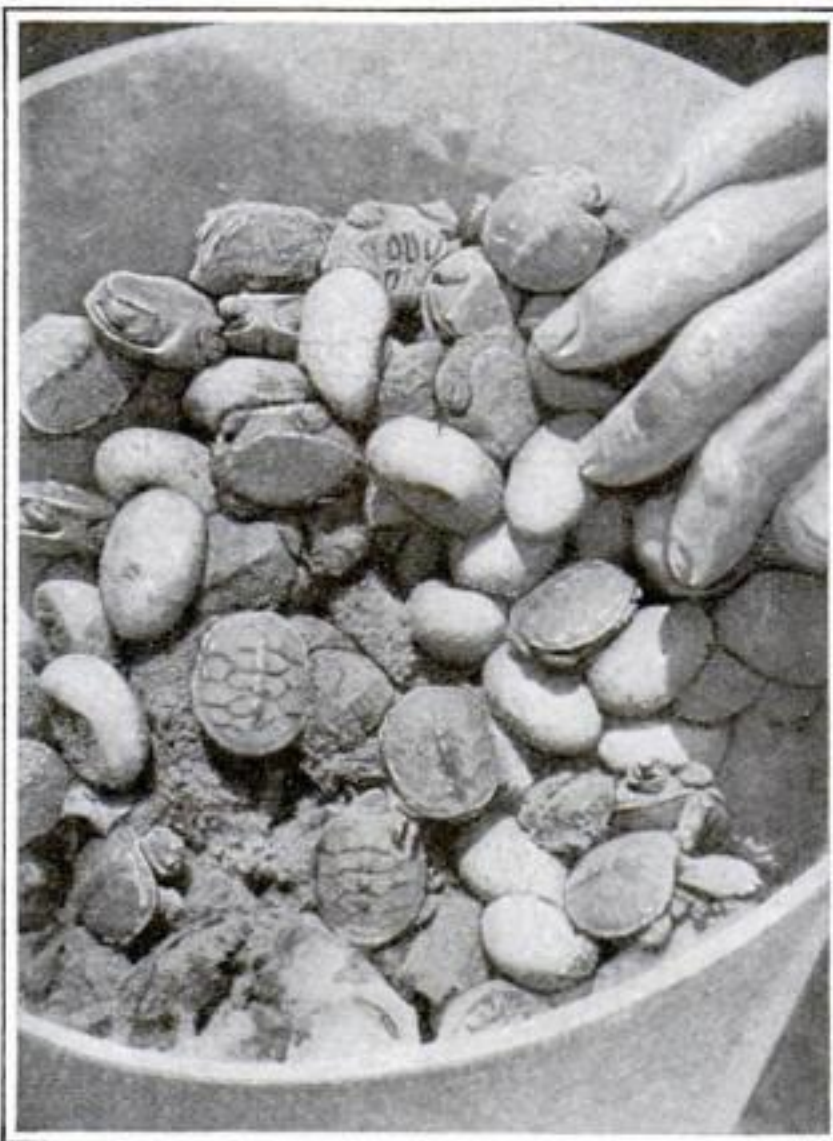


Diamond-back turtles hatching out in a farm hatchery at Beaufort, North Carolina. The objects resembling small stones are the eggs



## To Open a Stubborn Knife-Blade, Throw It From You

THE next time the best blade of your pocket-knife refuses to open when you need it badly, give it a good reprimand and throw it away from you. But first place a corner of your handkerchief over the back of the blade and wind the rest of it tightly around the knife. Hold the opposite corner between the first and second fingers of your right hand, if you are right-handed, and give vent to your annoyance in the force of the throw. This will calm you considerably and by the time you traverse the distance over which you have flung the knife you will be in a forgiving mood. When you pick up the knife you will find the blade opened. This is a bonafide method which will open the rustiest of knives without injury to the fingers.—C. S. MINTER.

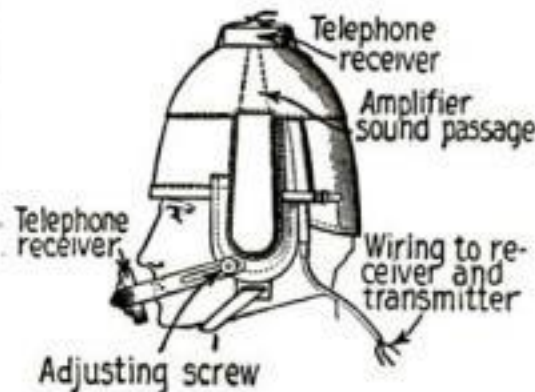

Above: The helmet carries the telephone receiver and holds the transmitter in place


At left: Diagram of helmet and of the telephone appliances which make conversation in an airplane possible

## The Smallest Bandsaw—A Time and Labor Saver

THE smallest bandsaw ever made is that recently patented by John A. Carlson of Seattle. Mr. Carlson was impressed by the need of a saw which would cut close on very fine work.

His small machine can be placed between every two benches. It is a miniature bandsaw which has all the features of the ordinary bandsaw and several others of special value in a pattern shop. It can be set on a stand or on the floor or attached to a bench or table. It is electrically operated.

Among the unusual features are safety devices which make the tool practically fool-proof, a tilting table with degree register and a locking device.

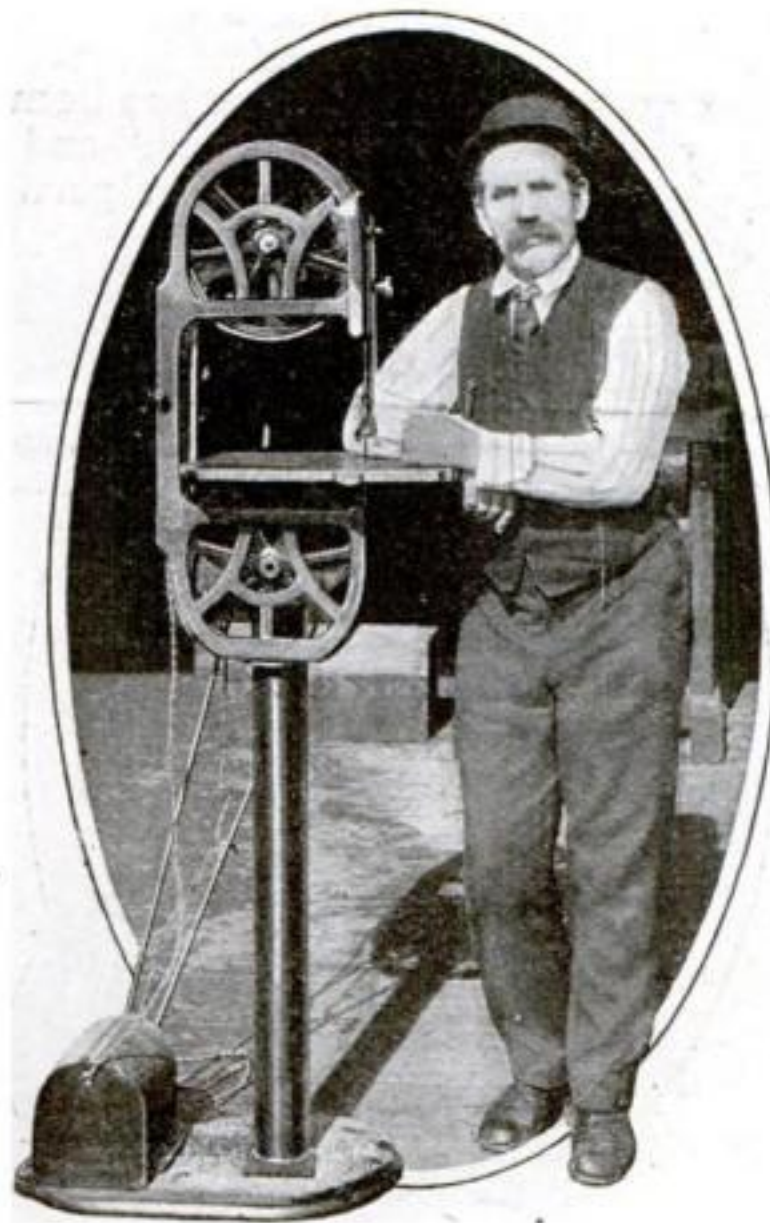

The smallest bandsaw and its inventor. It is practically fool-proof

## Aviators Now Can Carry Their Telephones Under Their Hats

A NEW YORK man, Jesse L. Spence, has invented a helmet for the use of aviators which not only provides them with a head covering but a telephone as well. Any one who has ever tried to talk while in an airplane knows how difficult it is. The loud noise made by the engine and the high wind pressure make conversation well nigh impossible.

The type of helmet invented by Mr. Spence has a pocket which holds a telephonic receiver, ear tabs and a flaring tube leading away from the pocket which connects with an opening inside of the ear tabs. When two or more persons are in the airplane each wears a helmet.





Trucks having six shelves, each shelf capable of carrying seven telephone sets, are taken down on the elevator to the loading platform

### Reducing Packing Costs in Handling Telephone Sets

**T**HE tremendous cost of handling hundreds of thousands of telephone sets yearly in the factory has been greatly reduced through the use of small wheeled trucks, each carrying forty-two complete sets. Once a telephone set has been inspected and passed, it is not handled individually until it is taken from stock in a building several miles away.

Before the trucks were introduced, sets were handled over and over again. They passed from the testing bench to an ordinary handtruck, from that into a motor truck, from the motor truck to another handtruck at the main storehouse and lastly from that to the stock shelf. Now the sets are handled twice only. They are placed on the trucks at the start and taken

off at the end of several trips.

The trucks have six shelves each; seven sets are carried on each shelf. The truck is taken down on the elevator to the loading platform, where it is pushed into a large motor-truck capable of holding eight racks, or 336 telephone sets. At the other end of the route, the racks are removed in the reverse manner.

This method lessens the liability to damage; saves more than half of the former re-handling expense and enables the company to concentrate in one place all the packing activities from a number of buildings thereby reducing packing costs and the time usually required for the work.

### Arrowhead Lamp Posts Mark the Arrowhead Trail

**M**ANY motor routes have been opened up across the continent during the past few years. One of the most popular of these has been designated "The Arrowhead Trail," and the trail for a part of the way,—that portion which passes through San Bernardino, California,—has been "blazed" by lamp posts in arrowhead design.



The wooden arrowhead frame with seventeen lights was substituted for the old top of the lamp post

The arrowhead lamp posts were made simply by cutting off the top of the ordinary street lamp posts and substituting a wooden arrowhead, on top of which the regular electric lamp was placed. The arrowhead structure contains sixteen incandescent globes of a buff tint, to represent the rocks of the trail. These in conjunction with the large light at the top of the post make the trail brilliant through the streets of the city at night, advertising the route.




## A Billiard Table that Folds Up to Be Stored Away When Not in Use

A GREAT many persons would like to play billiards at home but have no space for so large an article of furniture as a billiard table. A table has been devised which will allow such billiard lovers to gratify their desire for a game whenever they please.

The table is demountable and can be folded up and put in a closet when not in use. It is light enough to be handled with ease and may be set up ready for a game at a moment's notice.

The best feature of this new billiard table is that it has the necessary rigidity for scientific billiards. It has accurate angles, fast level beds and quick acting cushions. When the legs are unfolded in order to set the table up, they lock automatically so that there is no danger of the table wobbling when the game begins to grow exciting. Except that they are stronger and heavier, these legs resemble those of an ordinary folding sewing table.

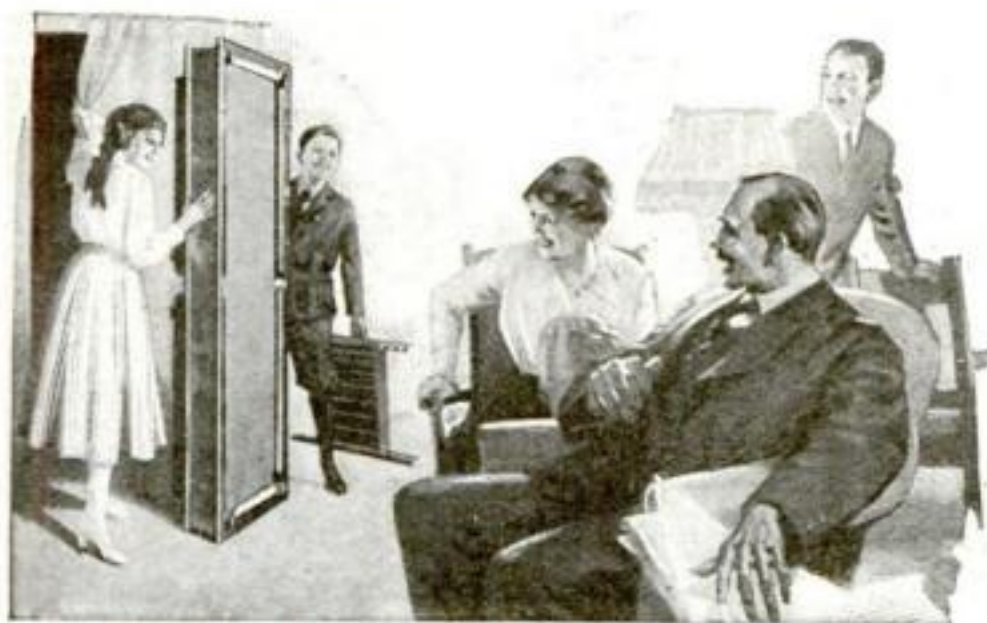


A demountable billiard table folded up. It may be set up for a game as easily as a checker board

## Examining Recruits for Tuberculosis and Avoiding the Mistake France Made

AN American physician, Dr. Hermann M. Biggs, was sent to France by the Rockefeller Foundation to study health conditions among the soldiers. He found

that France is a hot-bed of tuberculosis. When the war broke out there were in all France, only 1000 sanatorium beds for the treatment of tuberculosis, and no tuberculosis dispensaries at all. When France mobilized her great army she sent thousands of tubercular men into her trenches.

The United States Army officers are anxious not to make that mistake. They are, therefore, very particular about the examination of the recruits.

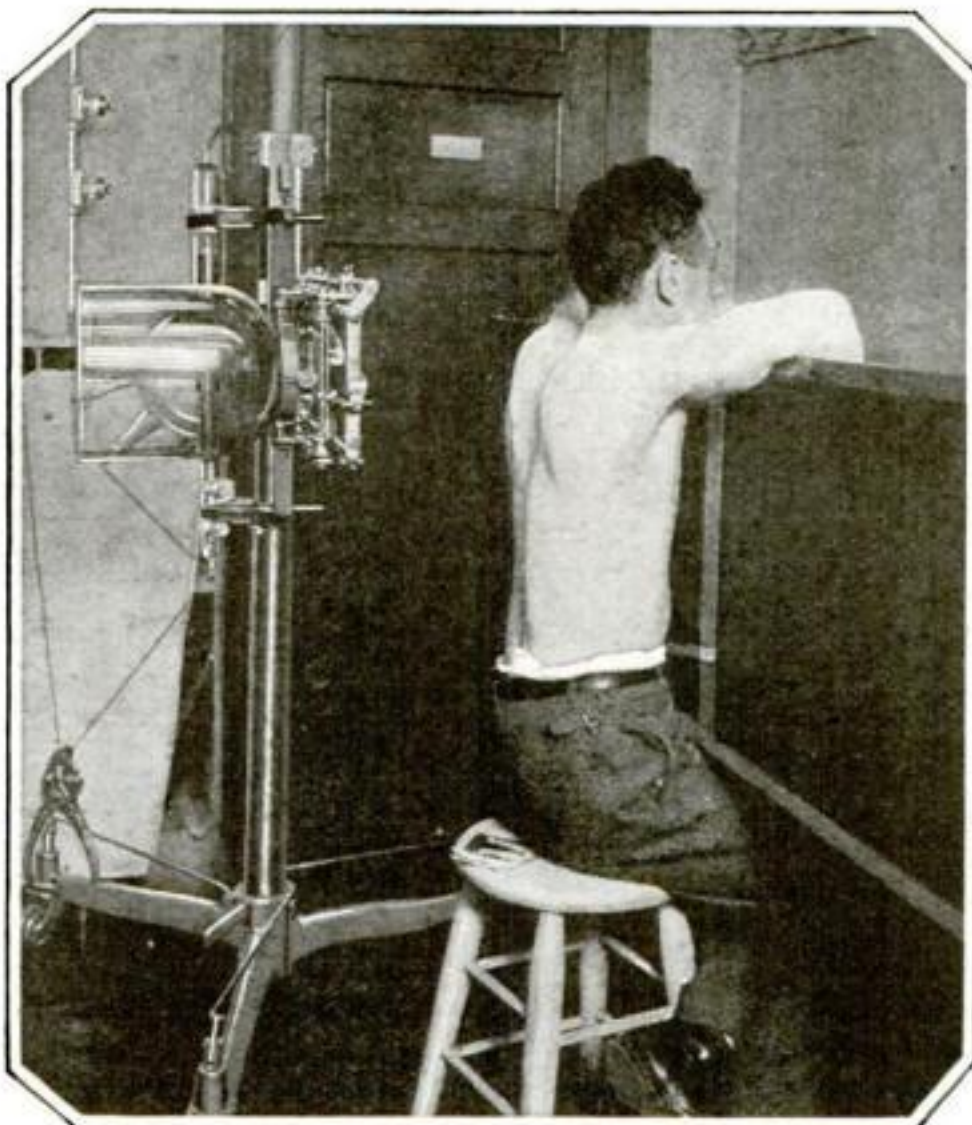

A recruit being photographed by the X-ray for indications of tuberculosis or lesion of the lungs

## Sausage Made from Cottonseed—An Economical Tidbit


THE United States is certainly the "land of cotton." Nowhere else in the world is cotton grown in such abundance, and put to such a variety of uses. The fiber, of course, is made into cloth; the oil from the seeds is used as a good substitute for olive oil and as a basis for lard, and now the seeds themselves are being ground into flour and used for food purposes. Gingersnaps and jumbles are made from it, and it is mixed with finely chopped meat and tied in sausage links.

To make the cottonseed sausage, three pounds of sausage meat is mixed with one pound of cottonseed flour. This flour is said to contain as much nutrition as the meat which it takes the place of, and to effect a considerable saving on each pound of sausage.



# Testing Airplanes in a Man-Made Storm

At the Washington Navy Yard a seventy-five-miles-an hour wind is shot against warships and airplanes to determine their air resistance

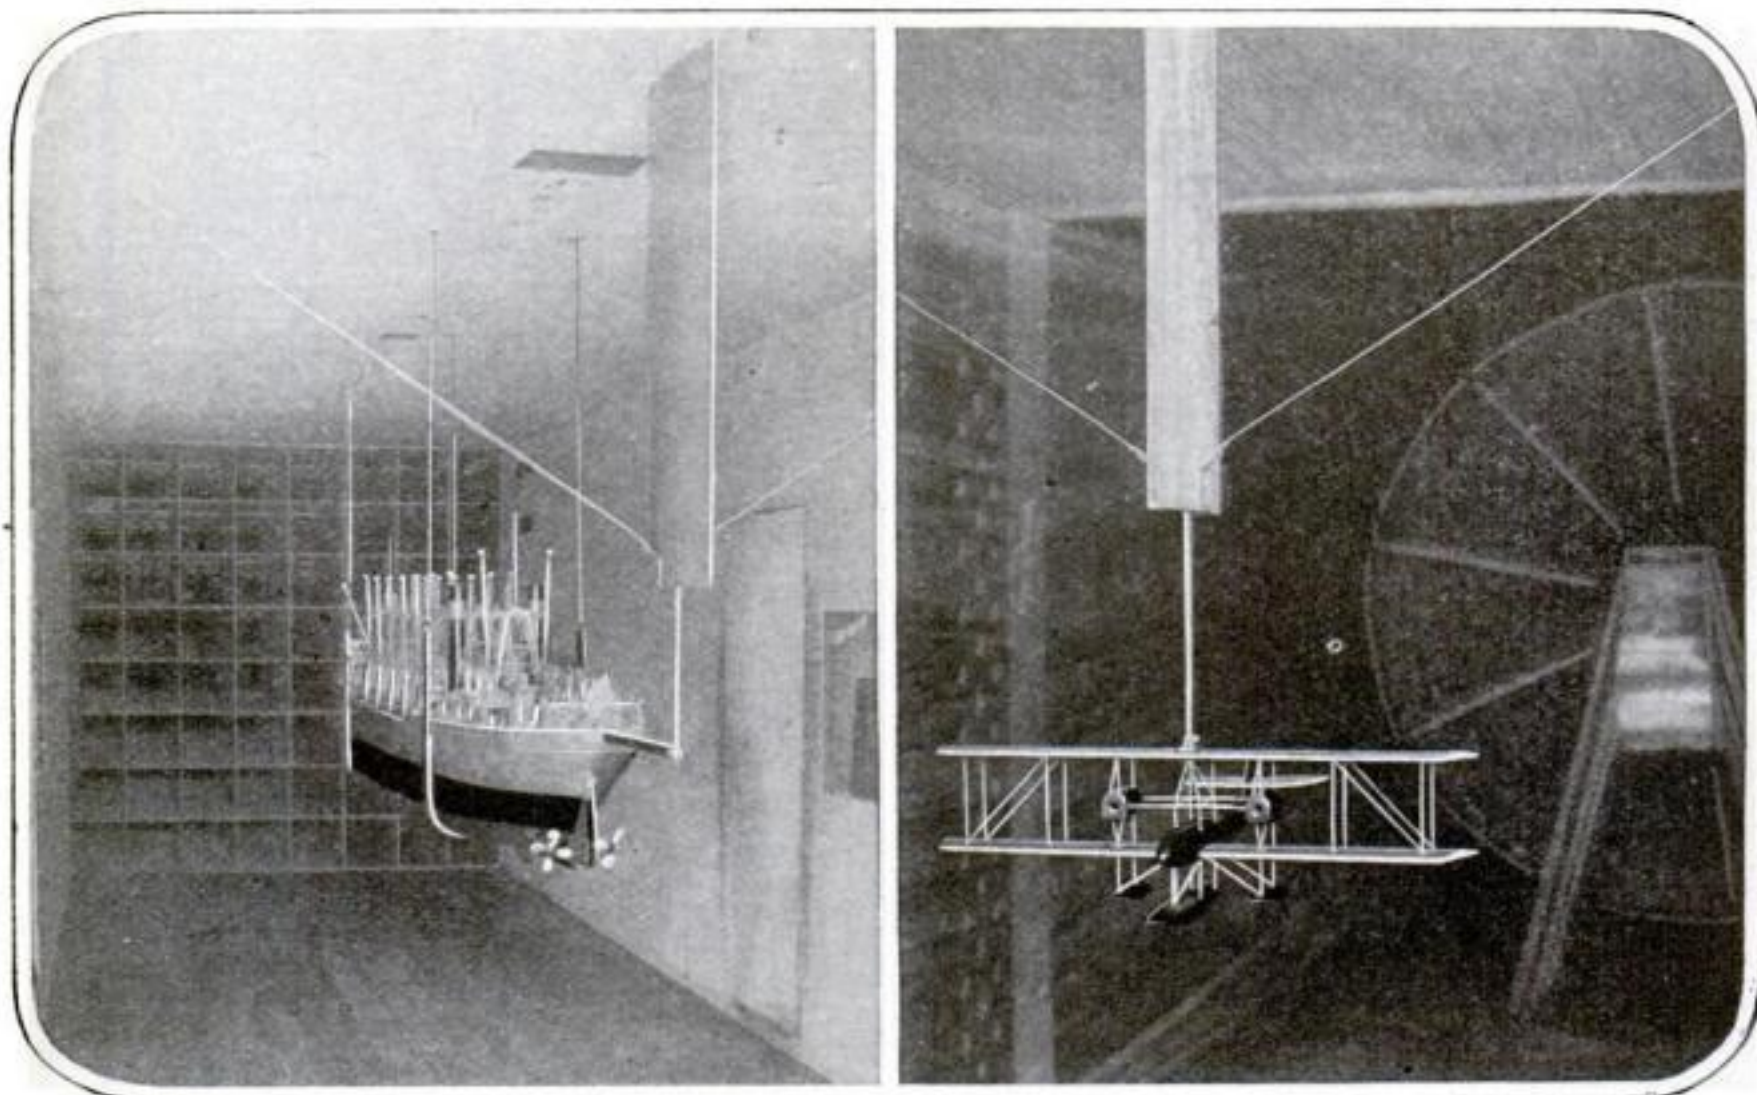

Because the tunnel is so large the models are made big enough to represent the actual machines faithfully in every particular. The wind attains a velocity of seventy-five-miles an hour

**W**HAT the model basin for towing small models of ships is to the naval architect, the windtunnel is to the aeronautical engineer. In the past, ships developed good shapes through centuries of service only. A faulty design might prove slow, but rarely unsafe. On the other hand, faulty airplanes are death-traps, incapable of that continuous service from which experience grows.

The invention of the airplane is due to the windtunnel. Models of wings were exposed to an artificial current of air and the force and direction of its pressure weighed. When the Wright Brothers found that they could not rely on previous experiments made on the airpressure of wings (the German pioneer, Lilienthal, had exposed them only to the irregular natural wind), they resorted to a primitive wind-tunnel. All early windtunnels were too small. They could not produce air currents fast enough; they were merely ventilating fans that forced fresh air continuously into a small passage. Nevertheless, we owe to them, such as they were, the modern

fast and stable airplanes and the racing Zeppelin.

Nothing has so retarded aeronautic progress in America as the fact that work with Professor Zahm's pioneer windtunnel of 1903, at the Catholic University, Washington, D. C., was discontinued. For a decade, while Europe was waking up to the full importance of the subject, our country lacked this most necessary instrument.

The new windtunnel of the United States Navy is a model for the world. It is endless, forming a complete circle, or rather a circuit flattened into the shape of a chain-link. As there is no resistance against the motion of the air contained within a closed circuit, except its friction against the walls, and as the blower does not overcome the inertia of continuously renewed quantities of air, this arrangement gives the artificial wind a cross-section of eight feet and a velocity of seventy-five miles an hour. The artificial storm is produced by a blower of five hundred horsepower.


Because the tunnel is so large the models are made big enough to reproduce the actual



machines faithfully. The high speed of the wind is identical with the actual flying speed. Arrangements for slowing and accelerating the air, smoothing its flow, measuring its speed and impact, and eliminating resistance other than that offered by the object under test are provided.

In such a tunnel the model to be tested does not move. It is rigidly fastened in place. Only the artificial wind moves. But the results obtained are exactly those that would follow if a full-sized model were made to fly in a wind of known strength.

Not only have models of aircraft been tested, but the air-resistance of ships can now be ascertained.

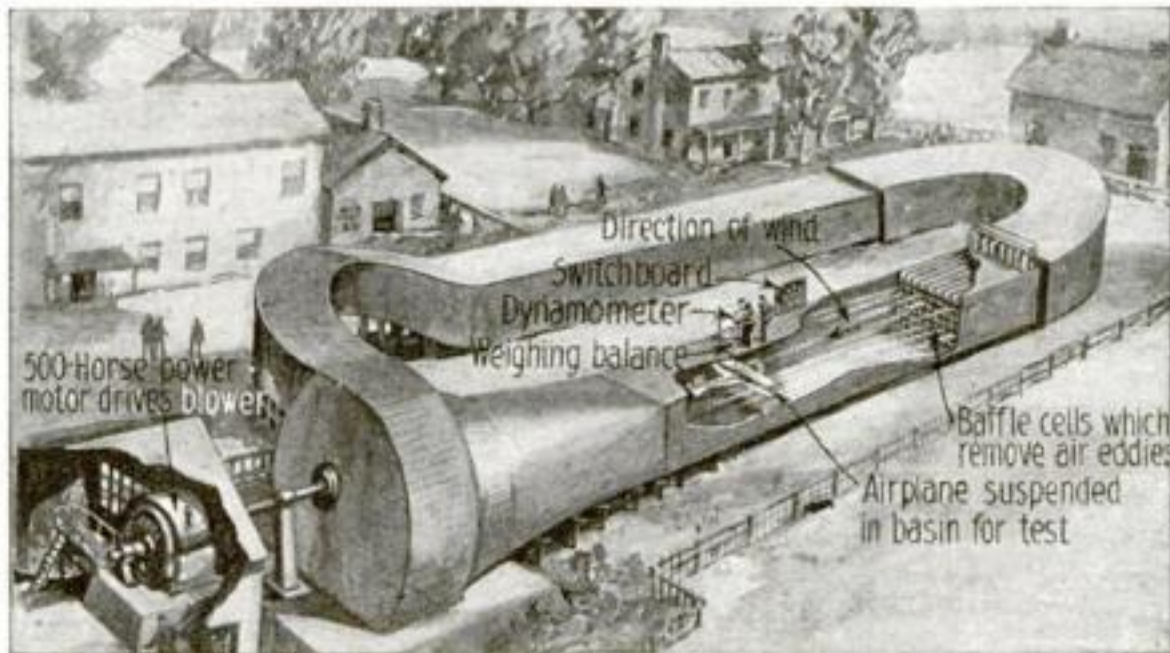

The windtunnel forms a circuit flattened out like a chain link. There is practically no resistance to the blast of air

tuted for one of a different volume and the record started over again, the defective tone will assume its proper value. But in so doing it will also be found that a different

tone in the selection has been improperly reproduced. Why? Because the horn which serves to magnify all sound directed through it, is in itself tuned to a certain key by virtue of its size, shape and weight,


and readily responds to vibrations of a tone to which it is keyed. Have you noticed that when a certain note on your piano is struck some object in the room vibrates with it in sympathy and produces a harsh effect? In a phonograph this sympathetic keying results often in undue amplification of an unimportant tone.

In this new cabinet the sound, instead of being directed from the horn to the atmosphere, is thrown downward into the

### Filtering Out the Harsh Tones from a Phonograph

A PHONOGRAPH cabinet calculated to sift, correct and beautify sound before it is thrown to the atmosphere, has been invented by Henry C. Miller of Saratoga, New York. The inventor's principal object is to correct the defects in some of the tones which are unduly magnified by the horn or amplifier. The operative principle of this cabinet will be better understood when it is made clear just how and where a tone is changed from true to false in your phonograph before it reaches the atmosphere.

Assuming all sound vibrations recorded in the grooves of the disk to be true and that they are now passing before the needle to be transmitted through the reproducer into the horn, it is noted that a certain tone is unduly magnified. If the horn is now substi-

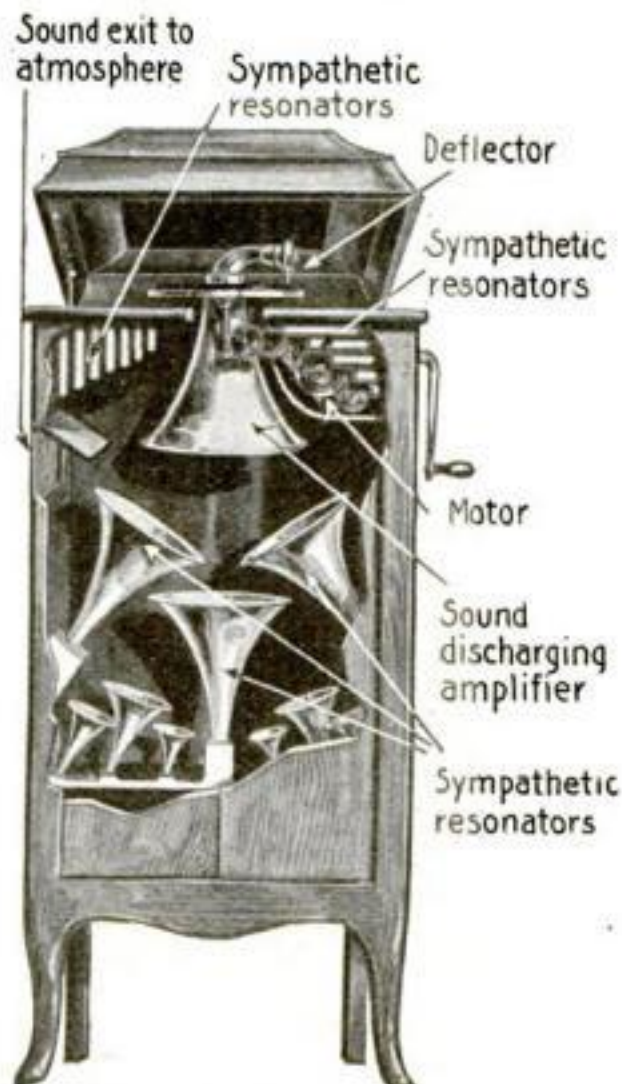

The sound is thrown downward upon carefully keyed resonators

open ends of a series of sympathizers and resonators, each carefully keyed to vibrate in sympathy with a different tone. It is, of course, necessary to provide enough sympathizers to correspond with every tone (sharp and flat) in the musical scale.

When a record is played on this phonograph, each tone of the selection will set into vibration the particular amplifier which has been tuned to correspond with it. Thus every tone will receive equal amplification relatively to fit its original value before it is finally thrown on the air.





Above: The stairway closed. At right: The stairway lowered. The pulleys are fastened to rafters in the attic



### Want to Go to the Attic? Just Pull Down the Stairs

**I**N a house in which every inch of space was utilized to advantage, a novel plan was worked out to reach the attic. In fact, no stairway was provided, so far as eye could see. But the ceiling in the hallway of the second story had an unusual panel with a brass handle at one end.

If you desired to visit the attic the secret would soon be made clear. You would simply be advised to take a curved-handled cane which stood in the corner nearby, hook it into the brass handle in the panel, and then pull down on it. Immediately the panel would be lowered and you would find on the upper side a ladder-like stairway leading directly into the attic.

The panel-stairway is operated by a pulley attached to the rafters in the attic and to the inner side of the panel, as shown in the illustration above. The arrangement was found desirable in this case because the attic was used only occasionally.


### Something New in Industry—A Mouse Spins Cotton Thread

**A** THRIFTY Scotchman, David Hutton, conceived the idea of using mouse power commercially. He experimented with mice and found that a mouse will run on an average of ten and one half miles a day. One mouse in Mr. Hutton's collection actually ran eighteen miles in one day. The power of a mouse is not much when compared to horse power; yet it is enough to spin cotton thread.

The cost of mouse upkeep is not very high. One mouse was kept in fine working condition for thirty-five days on one-half penny's worth of oatmeal. During those thirty-five days that mouse ran three hundred and sixty-two miles. Mr. Hutton built a thread mill for his mice which was so constructed that the mouse was able to twist, and reel from one hundred to two hundred and twenty threads a day.

The mouse ran ten and a half miles every other day. Two mice were kept constantly engaged in the spinning of thread for more than a year.

In five weeks, on a half-penny's worth of oatmeal, one mouse spun three thousand, three hundred and fifty threads, twenty-five inches long. Counting the earnings of the mouse at the rate paid to women for making thread, it was found that the mouse earned nine pence every six weeks. After deducting the yearly cost of the mouse's rations and the wear on machinery, the profits from the mouse were about a dollar and a half.

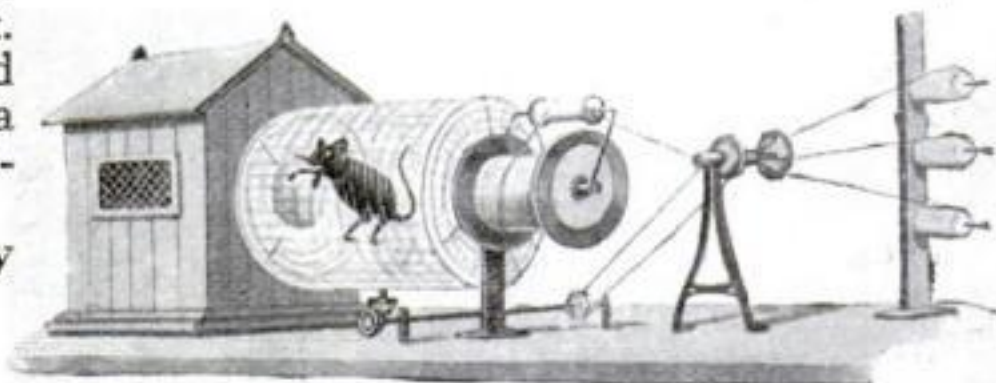

A spinning mill designed to utilize the now wasted mouse power of the world. A mouse operating the machinery can spin three thousand, three hundred and fifty threads, twenty-five inches long, in five weeks



## A Telephone Conversation May Be Almost "Private" Nowadays

A SILENCER which is easily attached to the ordinary telephone makes it possible to talk into the transmitter without being overheard by any one in the same room.

The silencer is provided with a tube and a diaphragm to increase the vibrations. This is so effective that even a whisper may be heard. At the speaking end is a pliable rubber mouthpiece that fits closely over the lips. Sanitary mouthpieces for the purpose come in nests so that frequent changes are possible.



The mouthpiece entirely incloses the mouth so that no sounds escape

the piston cylinder. Every square inch of piston area gives a hundred-pound push to the piston rod. Since the resulting force is again multiplied by levers on the top of the riveter, it is no wonder that so mighty a pressure is obtained.

The "reach" of the machine is twenty-one feet. By turning the pair of plates around, therefore, girders over forty feet wide can be joined.

The reenforcing of the joints of this riveter was something of a problem. The tension at the base joint amounts to nearly three hundred tons. The heavy toggle joint shown, however, withstands even this tremendous pressure.

## Another Biggest Thing in the World— This Time a Riveting Machine

THE largest riveting machine in the world has been brought out by an engineering company of Chicago. Aside from its giant proportions (it will take the widest girder ever made) the machine is capable of driving a rivet home with blows each exerting a pressure of a hundred tons.


The machine is mounted vertically. This enables a pair of girders to be fed through with the greatest facility. An overhead traveling crane carries two overlapping plates into the machine. The vertical line of bolts which are to join the plates together are then riveted one by one as the crane moves the girders either up or down.

The pressure exerted upon the bolt heads makes the seam steamtight. Compressed air under a pressure of a hundred pounds to the square inch is admitted to

## The Marconi Company Sues the U. S. Government for \$1,000,000

THE Marconi Wireless Telegraph Company of America has filed in the Court of Claims a petition against the United States, claiming that the Government, through the War and Navy Departments, and also the Department of Commerce, has unlawfully been constructing and using since June 25, 1910, wireless telegraph instruments which infringe upon their patents. Some of the patents involved date back to the beginning of practical wireless telegraphy. The Marconi Company charges that the damage amounts to a million dollars, and accordingly, is suing the Government for that prodigious sum.

Interest in the case is increased by the multiplied uses to which wireless apparatus is being put at this particular time.

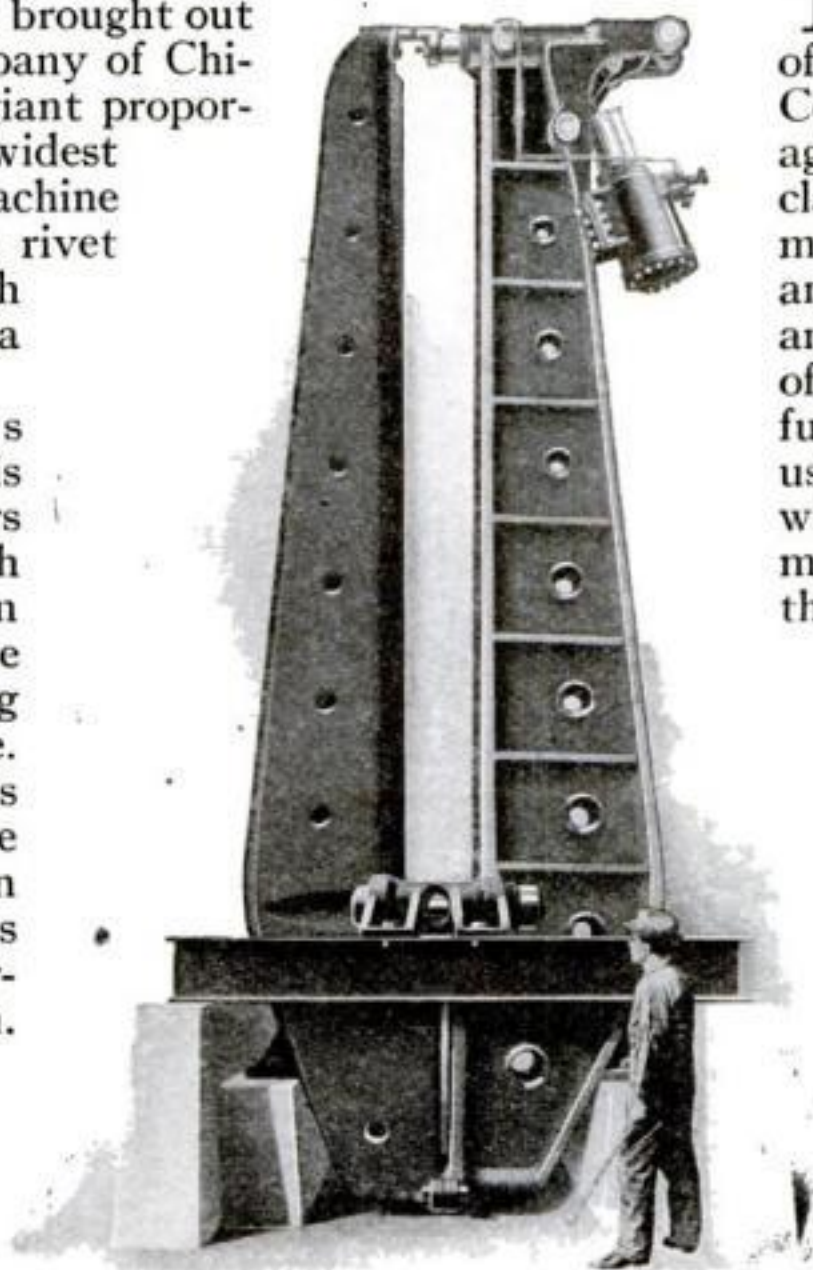

The giant riveter which does its work at one hundred pounds pressure






For the antenna and ground for his wireless the lineman uses a pole with metal end-caps which are connected with the receivers

### Detecting Defective Insulators While Standing on the Ground

**L**INEMEN usually climb transmission towers to find defective insulators. T. F. Johnson, of Georgia, has a device which will detect leaking insulators without the tower.

The invention employs the same type of instruments that are used in wireless telephony. In the transmission of high tension alternating current, when electricity breaks through an insulator, little wireless waves are sent off. The inspector, therefore, simply carries a wireless receiving set with him. A decided buzzing in his receivers is a sure sign of trouble in the wires.

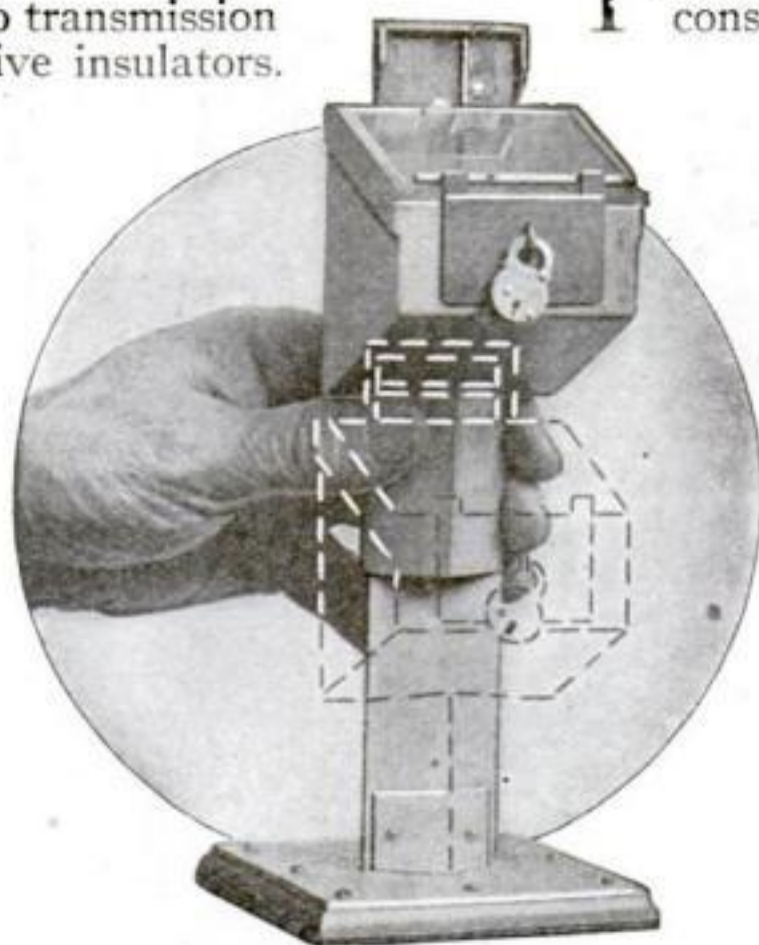

When the match safe is raised to its highest position a match is dropped down on the glass cover and rests within easy reach

### We Use Eighteen Times as Much Light as Did Our Grandfathers

**D**R. WALTER CLARK, of Philadelphia, has recently made some interesting investigations to find out how the old-time lighting conditions in his city compare with those of to-day. He has discovered that until as late as 1855, only flickering sperm oil and candles were in use. Not until the following decade did the "highly improved" kerosene lamp appear. Gas did not come out until the period between 1865 and 1875. And then only the wealthy could use it. It sold at \$2.50 per thousand cubic feet! The efficient Welsbach mantle came out ten years later, revolutionizing artificial illumination. The present era began in 1895, when gas and electricity came into general use—gas selling at \$1.00 per thousand cubic feet and electricity at ten cents per kilowatt-hour. Since this time the gas mantle and the electric filament have seen vast improvements, so that to-day the average family is obtaining about eighteen times as much light as the people of half a century ago had, though they pay only about three-quarters as much for it as their grandfathers did for the dim lights of other days.

### Matches? Take One At a Time, If You Please

**T**HIS counter match safe is a conservator of matches as well as a dispenser. It is so arranged that not more than one match is delivered at a time unless the safe is unlocked for the purpose. A small hook at each side of the carrier grasps one match, which is lifted when the operator raises the box from its normal position and lets it fall back into place. A small projection on the standard dislodges the match from its holder as it rises above the rear part of the glass cover. The match rolls down the sloping glass and rests within easy reach of the customer.



# England's Great Under-Sea Wall of Bombs

A combination of nets, bombs and patrol boats affords protection from the most daring submarine


**S**TRETCHED across the Straits of Dover, to guard the English Channel, and strung opposite many other strategic points around the coasts of England are hundreds upon hundreds of miles of explosive raid-preventing nets. These silent, lifeless contraptions of bombs and cables are nevertheless the most vigilant watchers of the sea. German torpedo boat destroyers and even submarines may steal past British patrol boats. But if they get through the nets, it can only be said that a miracle has happened.

England, after three years of experience has made the nets too foolproof for that. A special rust-resisting cable is suspended from an uninterrupted line of buoys. The buoys are merely steel barrels made water tight. Directly below each barrel is a corresponding anchor to keep the nets vertical and taut at all times. At every few intersections of the net cables, the high-explosive bombs are placed. The slightest jarring of the net by an intruder will set off the bombs

held in the adjacent meshes. Against the resulting explosion the intruder has not a chance. At least once a week, more often

twice and sometimes three times in a week, an explosion is heard at the "barriers," as the lines of nets are called, which announces that an enemy vessel has gone down in its attempt to break through.

What is especially significant about these nets is that they work as well at night as during the day. Here, again, they have an advantage over the patrol boats. Nevertheless the patrol boats must guard the nets and see that nei-

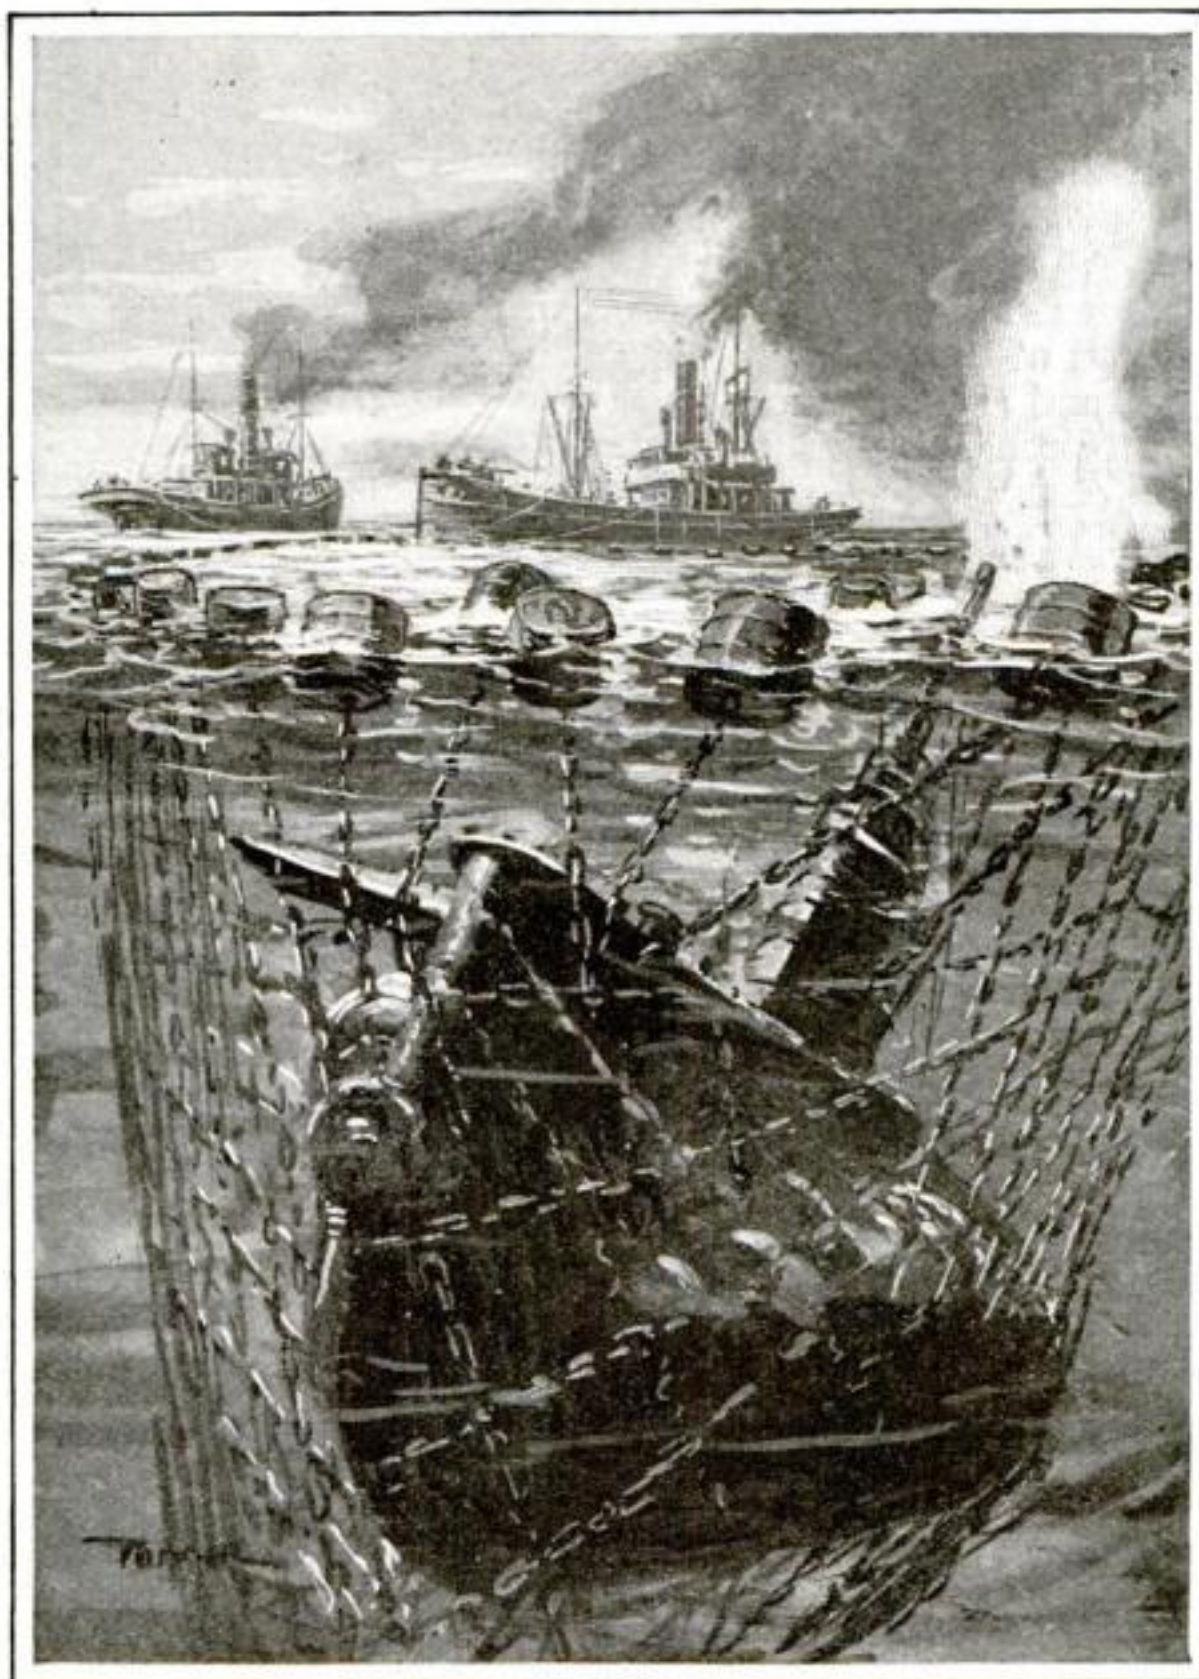

German torpedo boats and submarines may steal past England's patrol boats. Through her nets, however, they cannot go

ther enemy airplanes nor torpedo boats have a chance to sink the steel buoys. The combination of nets and patrol boats forms a practically invulnerable protecting wall, which is never allowed to become broken or disarrayed.

Repair boats are constantly making needful patches, and are ready to renew even an entire section of a net should that be necessary at any time of the night or day.



# Consider the Rat

The most destructive mammal that lives with man. It costs \$200,000,000 to keep our rat population every year

By Fred Telford

**R**ATS probably destroy more property than any other mammal. They are a luxury hard to support. A little incident reported by Edward Howe Forbush, Massachusetts state ornithologist, in his booklet "Rats and Rat Riddance," illustrates the prevailing ignorance with regard to the depredations of this unconscionable pest.

A grocer in a Massachusetts town complained to his landlord of the injury to his stock caused by rats, and asked to have the building made rat-proof. As this involved considerable changes, the landlord proposed that he pay the amount of the damages instead. When he was presented with a bill for \$25 at the end of the first month, however, he refused to believe that the damage was really so great until shown the ruined goods. Then he decided it was cheaper to make the building rat-proof. When this was done and the rats in the building destroyed by phosphorus, the depredations ceased.

Just at present the damage done by rats is particularly serious because their principal food is grain and grain products. Corn is eaten both in the field in the shock, and in the crib. Wheat if not actually consumed is rendered unfit for the table or manger. An Iowa farmer had such a numerous colony of rats that they destroyed one-fourth of the corn in two cribs containing two thousand bushels. He killed as many as one hundred and fifty rats a day.


The rat population of farms of all kinds where grain for food is abundant is nothing less than startling. An Illinois farmer killed 3,435 rats on his farm, while on two Georgia rice plantations it was estimated that forty-seven thousand rats were killed during the spring and summer of one year. A rat hunt in Ohio, with sides chosen, yielded over eight

thousand rats. Many ships also have a big rat population; when the steamer Minnehaha was fumigated at London some years ago seventeen hundred rats were killed.

## 100,000,000 Is Our Rat Population

The most reliable estimates of our rat population are based upon the figures obtained in the rat-killing campaigns instituted when the bubonic plague, a rat-borne disease, invaded the United States a few years ago. In the first four months of the campaign about 130,000 rats were killed in San Francisco; up to May, 1908, 278,000 were actually captured, and probably 500,000 poisoned. The most careful estimates place our rat population at 100,000,000, or about a rat per person.

The direct cost of maintaining this enormous rat population mounts into large figures. David E. Lantz, assistant biologist for the United States department of Agriculture, several years ago estimated that the cost of feeding a rat on grain was from 60 cents to \$2 a

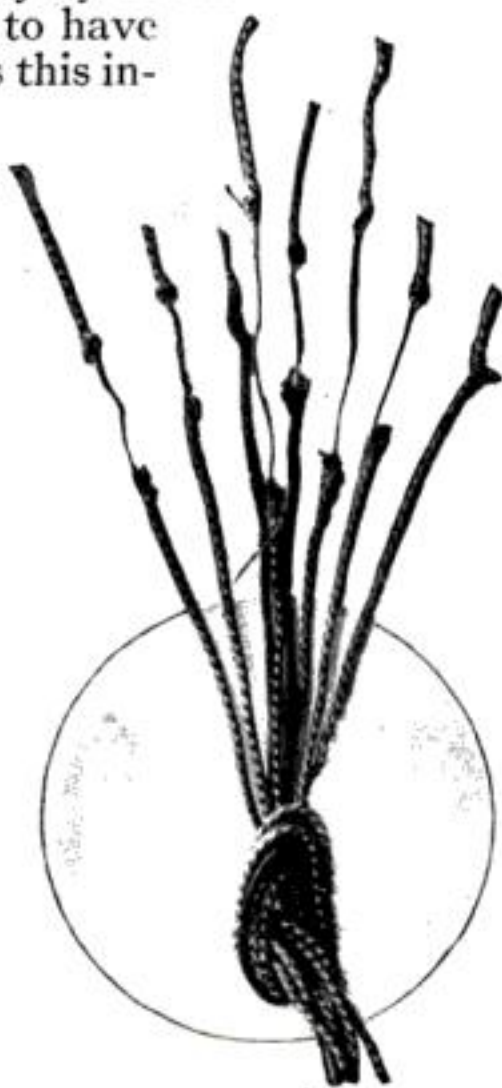

Wires from which the insulation has been gnawed by rats



A few examples of the rat's costly depredations




year, and that on a farm at least 50 cents more was wasted; he believed that in a city the damage is greater. Hotel managers and restaurant keepers put the cost of keeping a rat at \$5 a year or even higher.

These figures were reasonable before the war sent prices soaring. Now they are far too low.

### The Rat Is an International Problem

It would be tedious to enumerate the different ways in which rats cause direct or indirect loss. Some of them are injury to furniture and clothing, destruction of valuable papers, stripping labels from canned goods, hiding jewelry, destruction of poultry, and the catching and destruction of hatchings in fisheries. They even gnaw into the hoofs of horses until the feet bleed, and have been known to kill young pigs and lambs. The variety of articles carried away for nest building is shown by a nest in which were found bits from three bedroom towels, two table napkins, five dust cloths, two pairs of knick-

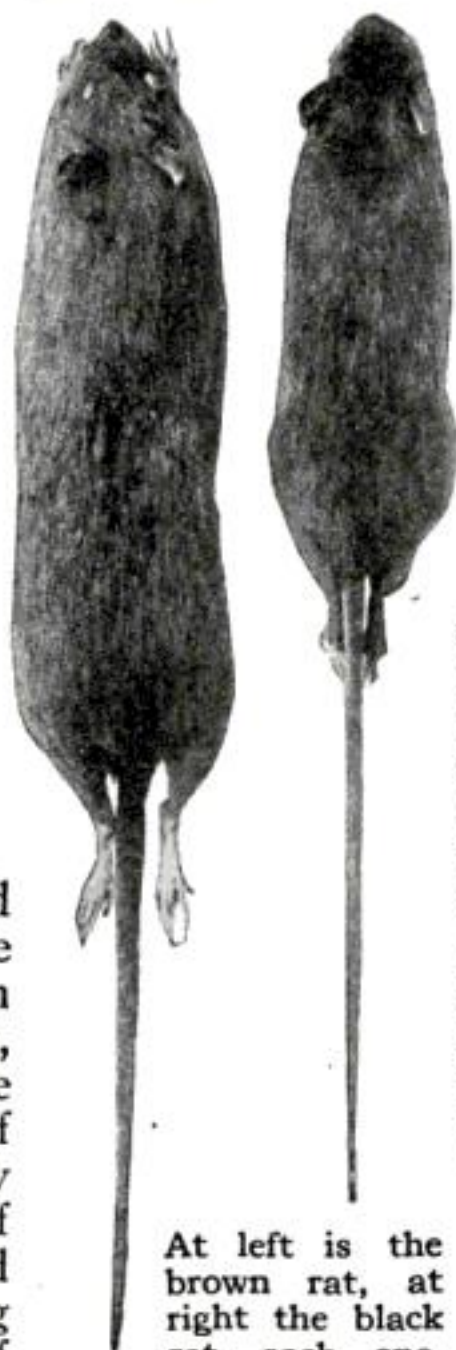

At left is the brown rat, at right the black rat, each one-third its size

erbockers, six linen handkerchiefs, and one silk handkerchief. Near the same nest were stored one and a half pounds of sugar, a pudding, a stalk of celery, a beet, carrots, turnips, and potatoes.


Another count against the rat is the spreading of disease germs. The bubonic plague is spread almost entirely by a rat-borne flea. Trichinosis is also spread by rats. As the rodents are frequenters of drains, privies, and sewers in their search for food, they spread ptomaines. In slums, where they are present in large numbers, they are a factor in spreading highly contagious and malignant diseases. Owing to their prevalence on ships, they carry disease from seaport to seaport, and are a menace to be considered in the international control of the world's plagues.

The rat that is most common and most troublesome in the United States is the brown rat. The black rat, formerly abundant in the eastern part of the country, is now rare in the United States; it was introduced earlier than the brown rat, but seems to be unable to hold its own here successfully.

At left: A single corn stalk showing how completely the rats stripped the corn-cobs of grain



An entire cornfield devastated by rats, which climbed the stalks, tore off the husks and ate the grain, leaving only the cobs

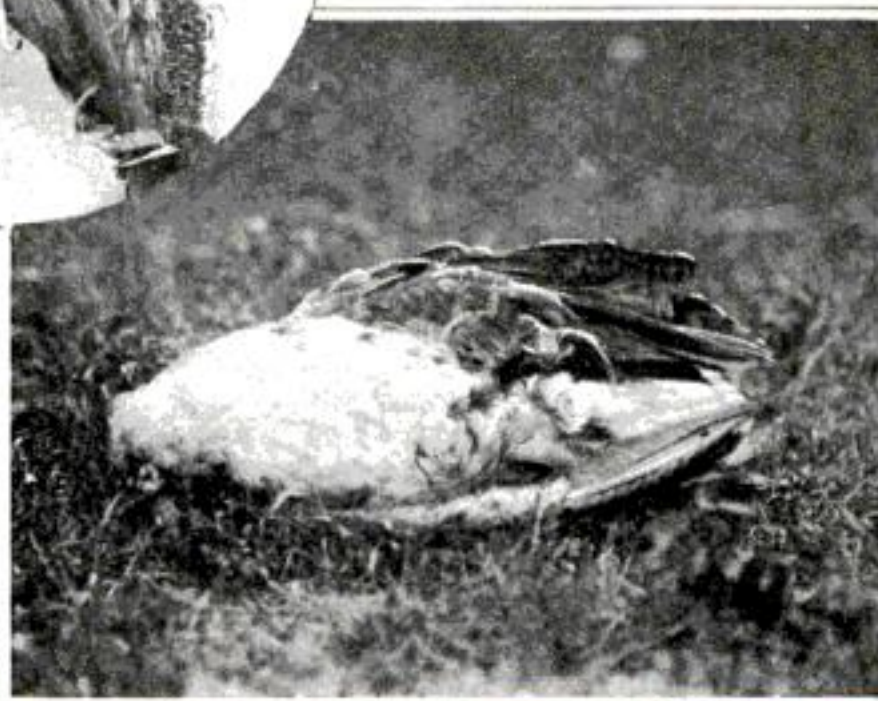

The carcass of a young Canada goose, killed like hundreds of others by a rat which gnawed off the head and drank the blood





Tree-branches on which skulls of animals are placed, are set at strategic points to keep evil spirits away from date palms

### Eat Your Dates with an Easy Mind. They are Protected from the Evil Eye

**T**HE Arab date-grower worries about the Evil Eye more than about anything else in growing dates. If the Evil Eye can be kept from bewitching the palms the date crop will be large and the owner prosperous.

So he looks over his garden and selects strategic points where he plants branches of trees on which he places the skulls of goats, sheep or horses. While these grim bones stand guard over the garden it is utterly impossible for anyone to cast a spell on it. That is why, according to Arab lore, some date-growers have so much larger crops than others. They know at just what angle of approach to plant the spell-breaking skulls.

### Removing Disfiguring Scars by Electricity

**A**S the war progresses, the means employed for treating the wounds of the soldiers become more and more numerous. A new application of electricity is one of the latest treatments for removing disfiguring scars, straightening out shriveled muscles and making a man his own handsome self again, however badly he may have been wounded. In the French method, the electrode connected with the negative terminal of the battery is applied directly to the scar. The electrode is covered by a thin sheet of sterilized asbestos. This is soaked in a suitable caustic solution before the application. The remaining positive electrode is placed on the other side of the limb, directly opposite the wound. Then when the current courses through, the color of the scar slowly begins to fade, the skin begins to soften, and the scar to thin out once again. After a few months' treatment of at least one hour each day, all but the most obstinate scars will have disappeared.

### Sharpening Your Pencil Without Soiling Your Fingers

**H**ERE is something which will appeal to youngsters as well as to grown-ups—a pencil sharpener which will not sharpen the pencil all away before it makes a point and which will not leave the fingers smudgy.

The principal feature of the sharpener is a sliding block whose position determines the degree of sharpness of the pencil. This movable block contains an emery sharpening stick which may be easily removed for the purpose of sharpening the cutting blade whenever this becomes necessary. The sharpener is flat so that it may be carried in the pocket or in the leather pencil cases now becoming so popular among the school children.



The pencil-sharpener in use and (below) its emery sharpening stick





## A Turn in the Road? Swing the Headlights Electromagnetically

A NEW electromagnetic device for automatically turning the headlights of an automobile so that the rays of light will follow the wheels instead of being thrown straight ahead while the car is turning a corner has been patented by a Mississippi inventor. The device may be connected up to work in conjunction with the steering apparatus or be manipulated by hand through an electric switch to vary the amount of current sent through the electromagnets and thereby vary the angle at which the lights are turned.

Each headlight is carried in a yoke at the top of a vertical shank made of non-magnetic material and inserted at the center of a hollow cylindrical case. The shank is rigidly attached to the case by a washer at the top and a nut at the bottom. The lower portion of the vertical lamp shank is threaded to mesh with the threads cut on the surface of a vertical hole of a cast-iron core carried in the bottom of the cylindrical case. This core is square-ended at the bottom and retained in an enveloping L-shaped bracket on the bottom of the case. At the top it is provided with two springs attached to an inverted cup-shaped collar of slightly less diameter than the main case. The energization of the magnets, which are carried in the top of the case, causes them to make the iron core move upward, since it cannot revolve because its end is held in brackets. Since the lamp shank cannot move upward, it is caused to revolve, turning the light with it in direct proportion to the lift of the iron core and the amount of current used. Springs between the top of the core and the cup-shaped collar and threads of little pitch on the inside of the collar and the top of the core prevent the light from becoming unstable through the jolting of the vehicle over rough roads.


This swinging of the headlights protects the tires from puncture by lighting up the road in all directions.



The ordinary telephone receiver is placed over a base which carries the sound to the Y-shaped tube

## Must You Telephone a Secret? Whisper Into This Device

WHILE a telephone booth shuts out all disturbing sounds, it cannot increase the power of the voice projected from the receiver. Both of these desirable objects are accomplished by means of the new device shown in the accompanying illustration.

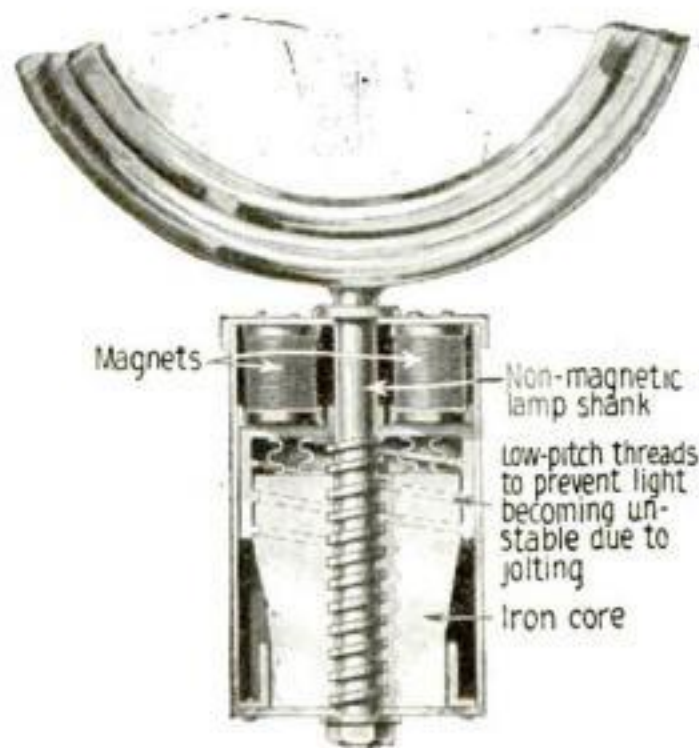

Each headlight is carried in a yoke at the top of a vertical shaft made of non-magnetic material

The device is in reality two receivers instead of one, and yet the conventional receiver is not used directly but merely as a medium to transmit the sound to both ears. The instrument consists of a small base of hard rubber with a felt bottom. From this base a Y-ended tube with hard rubber ear pieces on the ends of the Y is employed to carry the sound to both ears at once, thereby doubling the volume of the sound. A flexible wire inside the tube serves to carry the sound waves and to keep the contour of the ear pieces so that

they will not drop off.

Experience has proved conclusively that most of the confusion of sounds encountered in telephoning is due to the fact that only one ear is used in listening. The other ear is receiving other sound waves from the room. This is not true with this device.



### Forty-Five Miles an Hour on This Motorcycle Sleigh

WHILE all the automobiles and other vehicles in his neighborhood were stalled on account of the snow, Clarence H. Lydamore, of Lake Placid in the Adirondacks, was hard at work planning to convert his motorcycle into a powerful motor-sled. The result was that soon he was successfully riding into town on business trips, and was sleighing on the lake for pleasure while the other cars were rusting in their garages.

The conversion was simple enough. The front wheel was removed and the sleigh runner shown in the photograph was put in its place. A sidecar, also mounted upon a runner, was attached to the motorcycle framework. This served the double purpose of providing for another passenger and of preventing the new sleigh from tipping should it skid on the ice or snow.

On attaching extra heavy anti-skid chains to the driving wheel, the sled was ready for work or play. Over the roads, a speed of forty-five miles per hour has been attained on it. Over the lake, with the assistance of the wind, a party of four has almost doubled this speed.

### Hot Water in an Instant Is Promised by This Heater

THERE is a new hot-water heater on the market which comes as near to being "instantaneous" as it seems possible for a heater to be. So cleverly is it constructed that you can draw as much heated water as you want to use without any appreciable "wait" between the pailfuls that you draw.

The body of the heater is placed just below your kitchen boiler. It consists of a large globe of comparatively thin iron and a large gas burner secured just below this. A two-way pipe connects the boiler

with the globe so that the water can flow as easily from the boiler to the globe, as in the other direction. An auxiliary tap connects the bottom of the globe with a faucet. This addition is the principal improvement which makes the heater different from others. No sooner has the water

in the bottom of the globe become heated than you draw it off through the faucet, if you desire.


You do not have to wait for the heated water to permeate slowly upward to the top of the boiler, as with the ordinary heater. Not that you can't use this arrangement as an ordinary heater, too; for if you wish a whole boilerful of hot

water, you simply let enough of the water which is being heated in the globe rise through the two-way pipe.

You could then tap the water off through the faucet at your sink, or from any of the faucets connected with the piping from the boiler, instead of drawing it off by the pailful from the faucet at the bottom of the heater.



The motor-sled, devised from a motorcycle frame and a sidecar, makes forty-five miles an hour

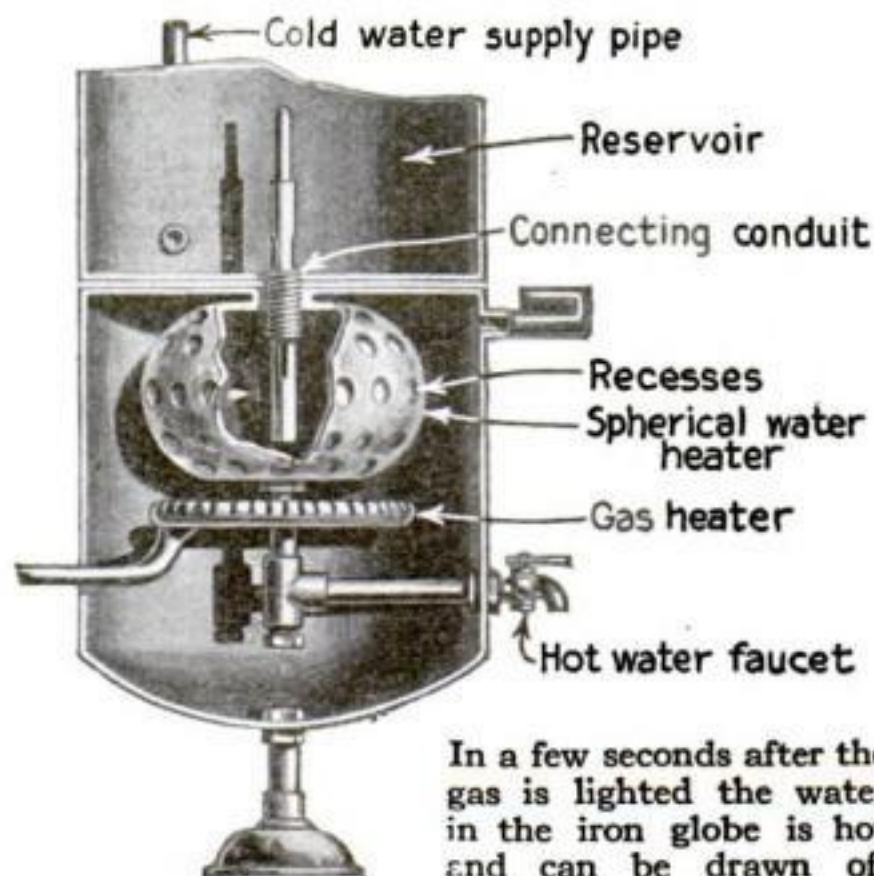

In a few seconds after the gas is lighted the water in the iron globe is hot and can be drawn off





## FOR PRACTICAL WORKERS

### Chemical Flasks Made from Electric Light Bulbs

**C**HEMICAL flasks are indispensable around the laboratory. Very serviceable ones can be made, at practically no expense, from worn-out electric bulbs. Since the bulbs are manufactured in various sizes, it is possible to construct flasks of many dimensions according to the sizes of the electric globes.


The essential materials are a Bunsen burner and a three-cornered file. If a Bunsen burner is not available, any burner giving a hot blue flame can be utilized instead. Hold the brass base of the bulb in the flame for a few seconds, until the cement surrounding the glass has melted sufficiently to enable you to pry the base off with the pointed end of the file. Allow the glass to cool; then with warm water clean off the cement that still adheres to the bulb.

Carefully make a scratch with the file around the circumference of the bulb where the globe proper is sealed to the filament. A light blow will separate the filament from the bulb. If the mouth is left rough, it may be smoothed by revolving it in the flame. While the bulb is soft at its mouth, it may have a small taper put on it with the sharp end of the file. When it has cooled, hold the mouth of the flask in a cloth, and permit the large end to revolve in the flame, taking care to heat the glass evenly until it softens. Have a clean dry slab of marble, slate or similar substance at hand, and press the flask down on it evenly so that the flask can stand by itself.

After a few flasks have been completed, they should be placed in a strong salt solution. Heat the solution, while the flasks are in it, bringing it gradually to boiling point; then when the brine has cooled, take the flasks out. They are then ready for use.—HERMAN NEUHAUS.

### A Concrete Mixer Made Out of an Old Mower

**A**N old dismantled mower constituted the foundation for this unique concrete mixer. One mower wheel was planted in the ground and weighted with rocks, while the other was supported on a beam to stand the axle at an angle. The sickle driver head was removed and a band wheel put in its place. A rough wood box constructed of matched lumber to make it water-tight was fastened to the spokes of

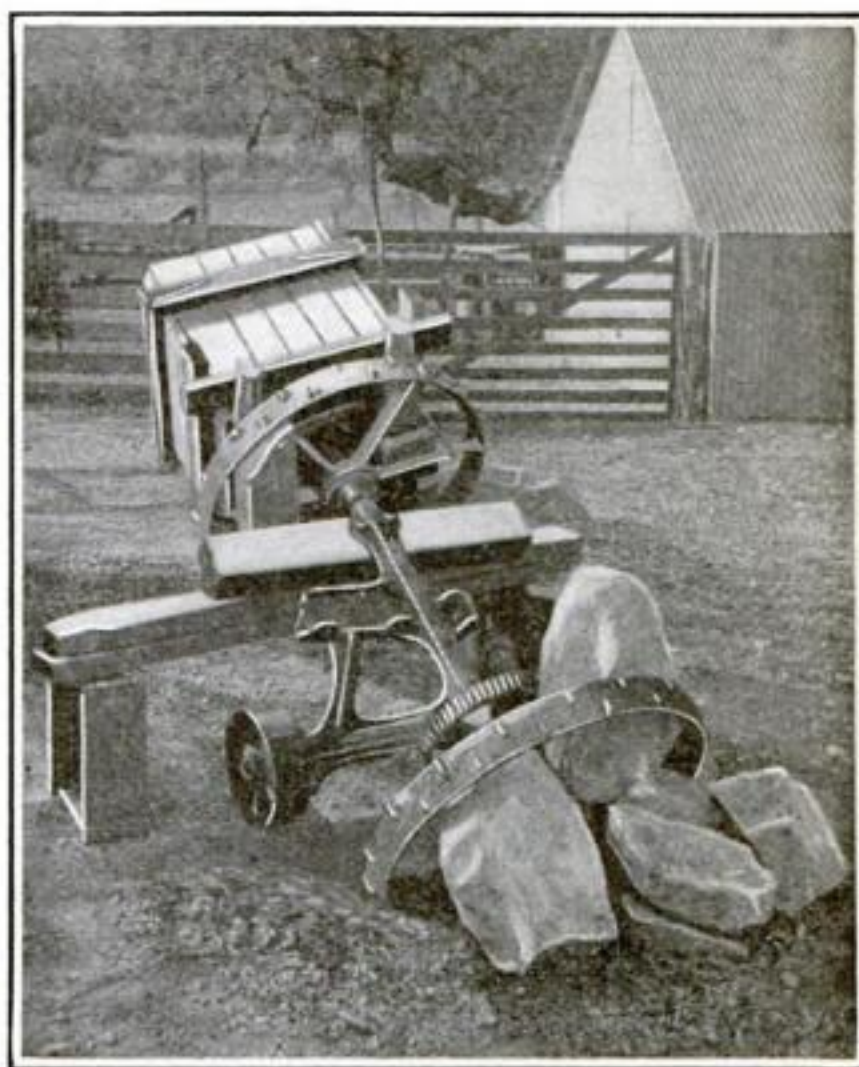

The axle of an old mower set at an angle and used to revolve a box for mixing concrete

the upper wheel. A hinged cover was fastened to the open end. In this the cement was whirled.

A portable farm engine was used for the power, which was connected up to the mixer with a belt.—J. E. GRINSTEAD.



### Comic Photographs Made With Film Negatives

**S**OME very interesting and simple comic pictures can be made with old films and film negatives in the following manner.



The pen and ink picture drawn on plain film and the finished comic photograph

The pen and ink part of the picture is drawn upon an old film that has been thoroughly cleaned. This comic part may be drawn in free hand with India ink.

The head and shoulder part of a portrait film is cut out on the outlines of the figures and pasted on the comic film. These are printed in the same manner as other negatives.—C. BUSH.

### Testing the Strength of Norway Iron While Hot and Cold

**I**RON made in Norway owes its fine qualities to the exceptional purity of the ores from which it is made, and the care taken in its manufacture. The smelting is done with charcoal. The metal has a purity of 99.8 per cent of iron, the remainder being sulphur, slag, carbon, silicon, manganese and phosphorus. This iron is very low in sulphur and phosphorus, the two ingredients which modern manufacturers strive to keep as low as possible in their product.

Sulphur makes iron brittle when hot, thus causing it to break in the rolls. Phosphorus, on the other hand, makes iron brittle when cold and interferes with its strength and ductility in bending. Norway iron, on account of its exceptional purity, has come to be recognized as the world's standard, to which the quality of all other irons is compared.


A round bar of Norway iron will stand the severest cold bending test. You can bend and hammer it back on itself, and

then bend and hammer it at a right angle to its previous position so that one part is touching another. The iron will show no signs of cracking at the bends. One bar of this metal was tied into a knot while hot, and showed no signs of cracking at the bends. Cracking at the bends when the iron is hot is due to sulphur. When pulled apart in a testing machine, this iron showed a very fibrous fracture. Steel made from Norway iron by the crucible process makes the finest kinds of razors, tools, etc., which keep their edges sharp for a long time. It is a metal that can be depended upon in every respect.—W. S. STANDIFORD.

### A Protection Curtain for a Mechanic's Work Bench

**I**N a large railway shop heavy cloth screens are provided on the work benches around devices which are used by metal workers, especially in cases where babbitt or other soft metal is removed from armatures. This protects passing workmen or bystanders from flying pieces of metal. The curtain also tends to confine the chips to the bench and keep them from littering the surrounding floor space.

The curtain is extended on a frame made from two upright round iron bars, connected by another iron bar. From this connecting bar rods extend which are of

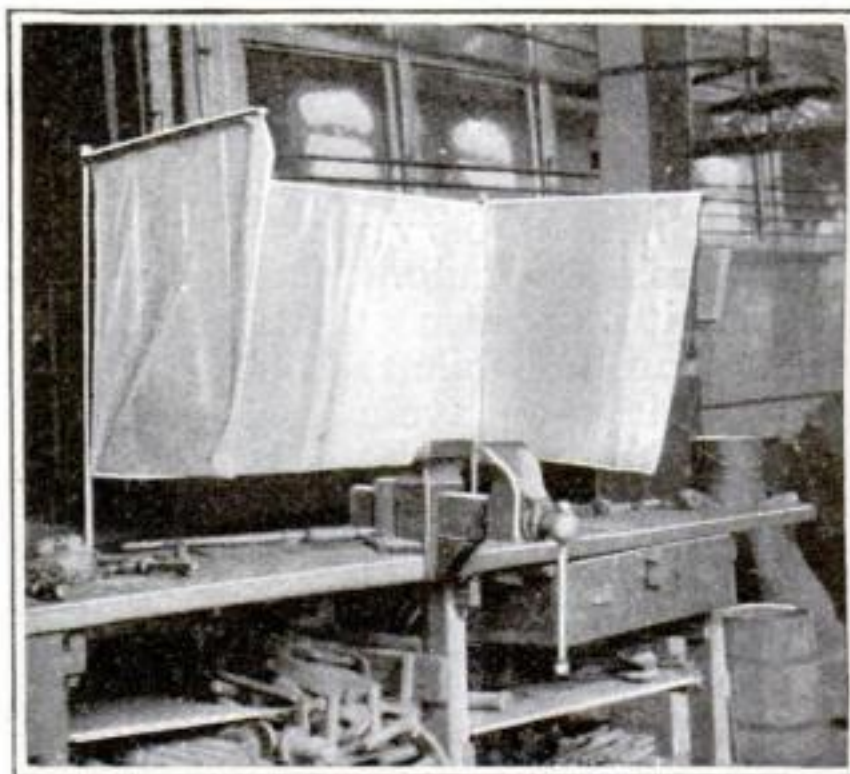

Protecting passing workmen or bystanders from flying pieces of chipped metal


sufficient length to carry the curtain across the bench.

This is an inexpensive but effective arrangement for the purpose and could easily be adopted for other uses of a similar nature.—RALPH O. MCGRAW.



## Drill Holder for the Tailstock of a Lathe

THE drill holder illustrated was designed to comply with a law enforced in many states which demands that a drill must be

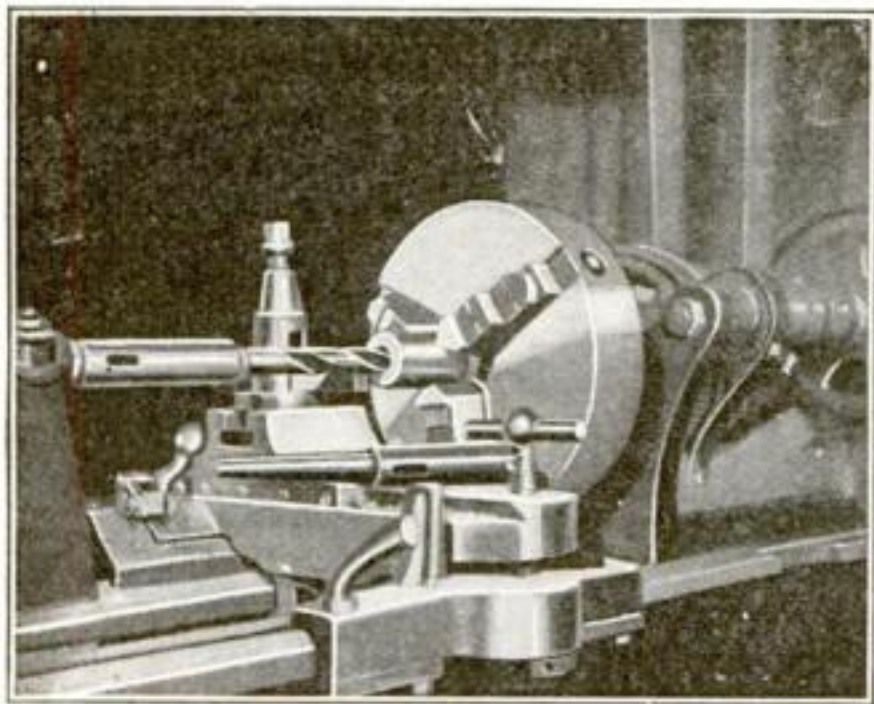

A drill chuck for the lathe center that provides a holding device without projections

firmly held in a chuck or other suitable device without projections when used on work held in the chuck or fastened to a faceplate of a lathe. An efficient chuck is shown above, in use in a lathe.

The holder is made of machine steel, the shank *A* being turned on a taper to fit in the tailstock. The socket *B* is bored to fit the Morse taper. This taper in No. 2 will take all drills up to and including 29/32 in., and is best suited for small lathes. A No. 3 taper is better for lathes of 14-in. swing or larger.—HARVEY MEAD.



Details and dimensions for the lathe drill holder

## Some Useful Hints for the Owner of a Phonograph

IF the spring rubs or jumps when the phonograph is playing it is a sign there is a dry spot somewhere between the leaves. Wind it up fairly tight and let it run completely down two or three times. This will open up the leaves and distribute the grease between them.

Phonographs equipped with metal horns can be much improved in tone and the metallic effect killed by wrapping the horn with electricians' or tire tape.

Camels' hair brushes are of little use in cleaning disk records. Glue a piece of

clean Brussel's carpet to a block of wood and rub the record well with a circular motion. This removes grit and dirt that the brush might pass over and does not injure the record in the least.

The troublesome vibration occurring in many machines can be remedied by inserting felt between all joints in the cabinet and where the motor touches the wood.


Loud needles can be made to play as soft as desired if they are inserted only part way in the holder.

## Coating for Window Glass to Keep Off the Frost

FIRST clean the panes thoroughly and wipe them dry. Dissolve 1 oz. of glycerine in a pint of alcohol, (denatured alcohol will answer the purpose) and add a little amber oil to improve the odor. Let the solution stand until it clears, then rub it over the inside of the window panes with chamois or a hard cloth. This treatment of the windows in cold weather is inexpensive and often reduces complaints about insufficient heating made by storekeepers whose grievance is founded only on the obscuring of their show windows.—PETER J. M. CLUTE.

## Instruction-Marker Plate for Photographic Plate Holders

A GREAT many amateur photographers who have their exposures finished at a studio frequently have their instructions misunderstood as to how many prints are wanted and when. The illustration shows how a thin strip of celluloid on which any information can be written can be glued to the side of the holder. On the majority of cameras using or accommodating plates, this does not interfere with the entrance of the holder into the slide at the rear. The upper side of the strip can be slightly pointed as shown, toward the side of the holder to which the information refers. The other strip would of course be inverted. Use a good grade of glue so that the small thin strips will adhere permanently. Any kind of light celluloid has sufficient grit for a lead pencil to make a perfectly legible mark on it.

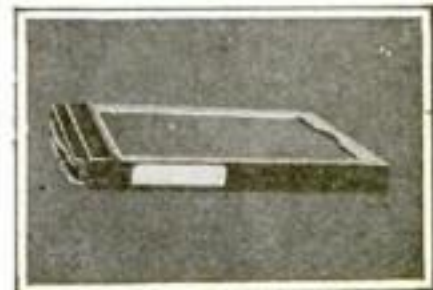


Instruction-marker plate for plateholder







One requirement of a balanced aquarium is a rich alluvial soil in which the plants may flourish. A few rootless aquatic plants, as *Fontinalis* or *Ceratophyllum*, grow in clean sand. The best soil for the aquarium is a mixture of top soil loam and sand. Before placing the soil in the aquarium, a small piece of glass should be put in one corner. On this all refuse will accumulate so it can be easily removed.

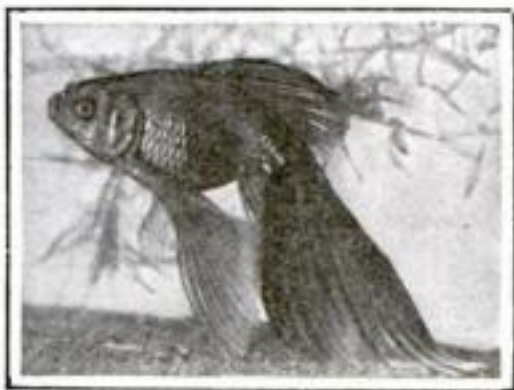

A peculiar and very beautiful variety of gold fish

Arrange the soil in the aquarium so that it slopes gently toward the refuse corner. The highest part of the soil is placed diagonally opposite it. Place marsh plants in the highest part. Of all marsh plants *Cyperus Alternifolius* is recommended, although it is often cultivated as a pot plant. If the *Cyperus* has been used as a pot plant it must first be inured to the water by placing it in a pail of water with the water flush with the top of the pot. Later the water is gradually raised. After several weeks of this treatment the *Cyperus* will be inured to the water and may be transplanted into the aquarium. The soil is then packed down firmly and evenly. Over this a layer of sand which has been washed perfectly clean is placed to prevent the water from becoming muddy.

Plants, however, are placed in only one half of the aquarium. Draw an imaginary diagonal from corner to corner. That half of the aquarium containing the *Cyperus* is used for planting, while the other half holding the refuse corner remains free for the fish.

It is comparatively easy to plant water weeds. Bore a hole in the sand with the finger and place the roots of *Vallisneria* and *Sagittaria natans* in it. Then cover the hole with sand. The *Cabomba*, and similar small plants are treated differently. Only the tips of these plants are used for cultivation. They are almost buried in the sand, the tips only peep forth, for only that part of the plant which has grown in the aquarium remains green. These shoots, a few of which are usually placed in one hole, root very rapidly.

When the aquarium is completely planted it must be filled with water. To prevent


the water from stirring up the sand, lay a piece of paper over the refuse corner. Pour the water carefully on the paper until the aquarium is about a quarter full. The rest should be siphoned in with a small rubber hose.

The aquarium should be placed in a well lighted window so that the plants may receive a sufficient quantity of light. When the plants have grown sufficiently, fish may be procured and placed in the aquarium. A convenient method of computing the number of fish an aquarium will hold is to allow a quart of water for every fish 2 in. in length.


Such a balanced aquarium shows the family life of the fish. The Paradise fish builds a foamy nest on the surface of the water, plays at love making, lays its spawn and cares for its young. The peculiar and odd varieties of gold fish lay their spawn on delicate aquatic vegetation. The *Chanchito* digs a small ditch in which the young are taken care of. The stickleback builds a delicate nest for its spawn from plant fibers. This nest is a work of art rivaling many bird-nests. Mention may be also made of the mouth breeders, the female of which carries the spawn in her mouth until it matures.—DR. E. BADE.

### Making A Sprinkler Hoze Nozzle for the Boiler Room

THE illustration shows the details of an easily constructed sprinkler hose nozzle. The deflector plate is cut from 1/16-in. sheet or galvanized iron, and soldered to the pipe used as a tube. The angle of the

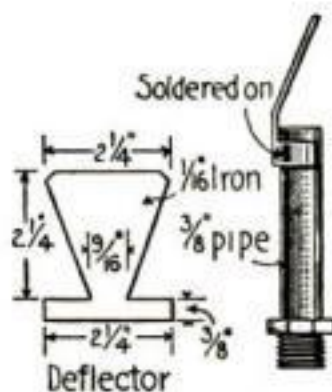

A deflector for a hose nozzle to make a sprinkler

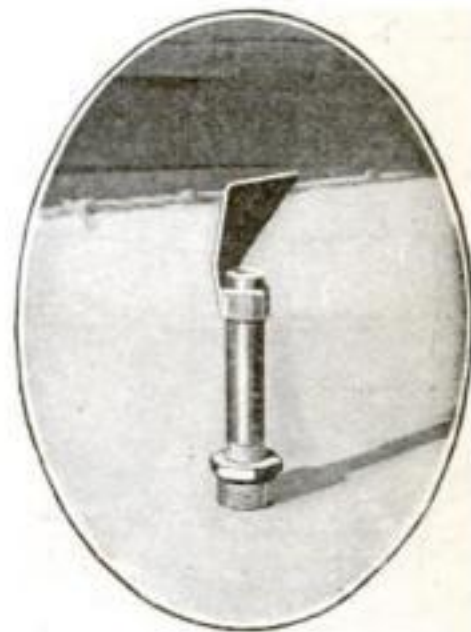


spray is adjusted and governed by bending the neck of the plate. The whole arrangement is quickly and easily made and it is conveniently handled. It will be found very useful for many purposes, especially around the boiler room. —F. W. BENTLEY.



## Making a Book Trough with Natural Wood Finish

**B**OOK troughs are pleasing variations of the conventional book rack and they serve a very useful purpose. Food for thought in the shape of books can be dished out in no better way than a book

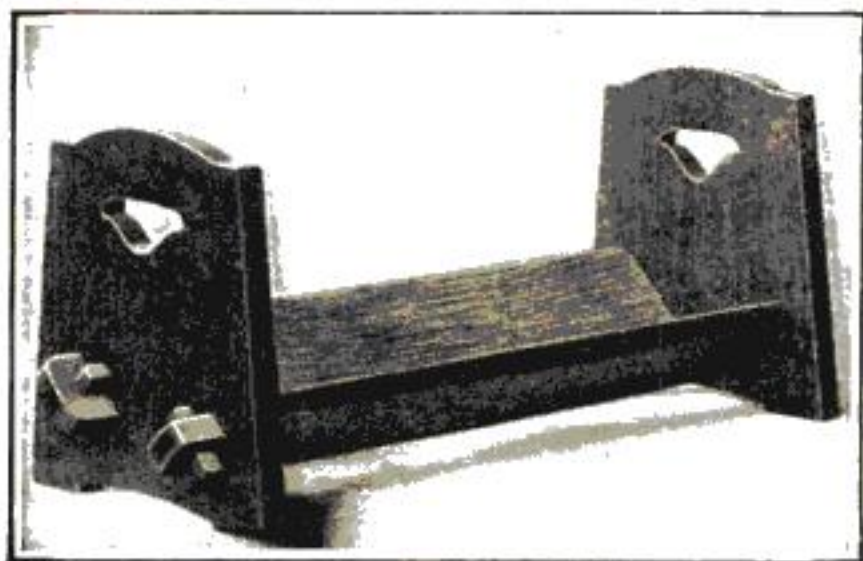


A simple conventional design for a book trough to be used on the library table

trough full of books conveniently located on the library table. The list of materials required for this one is as follows:

- 2 end pieces 10 $\frac{1}{4}$  in. square and  $\frac{7}{8}$  in. thick.
- 1 rail 25 in. long, 4 in. wide and  $\frac{7}{8}$  in. thick.
- 1 rail 25 in. long, 2 $\frac{3}{4}$  in. wide and  $\frac{7}{8}$  in. thick.
- 1 piece for keys 2 $\frac{3}{4}$  in. long, 1 in. wide and  $\frac{1}{2}$  in. thick.

The selection of the wood should be well considered. All dimensions given are generous, to allow for planing and finishing to the sizes given in the illustration. The layout for the ends is detailed, the mortises being marked from both sides to enable the worker to cut clean lines on both surfaces when chiseling out the stock. Cut the outline of the ends carefully on the band-

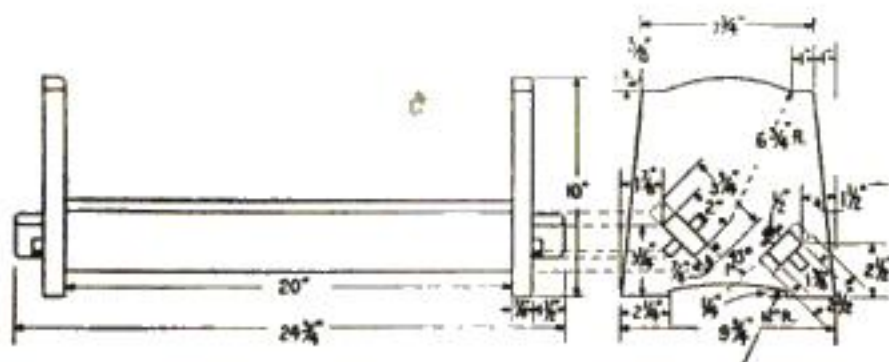

Dimensions of the parts of the book trough. These may be varied to suit the maker

saw or with a turning saw or scroll-saw if there is no band-saw at hand. Smooth the straight edges with a plane and the curves with a wood file. In cutting the mortises, bore holes first and then cut carefully to the size with a wood chisel, working from both sides.

The long pieces or rails joining the ends should be cut to width and length, and the tenons laid out and cut on the ends. The holes for the keys are next cut. Fit the tenons carefully to their respective mortises and mark them so that they can be returned to their places. Fit the keys carefully and mark them. The steel figures are just the thing for making these marks.

The pieces are now scraped and sanded and they are ready for the finishing process. A good oil stain gives the best results in the hands of the amateur. When oak is used, spread on the stain evenly and rub off the surplus. When this has dried for 24 hours apply a coat of filler which has been colored with a little of the stain used. Let it stand for a few minutes, or until it is dull, and then rub off the surplus with a piece of burlap, rubbing across the grain. After the filler coat has dried, apply two coats of shellac, spreading evenly. Rub the pieces with steel wool after each coat to prepare a smooth surface for the wax. Two applications of wax will complete the finishing process. The pieces should now be assembled, after which the book trough is ready for immediate service.—HARRY W. ANDERSON


## A Homemade Oil-Gage for a Large Storage Tank

**W**HERE a large storage tank is kept filled with gasoline for private use it is necessary to have some means of knowing the quantity of oil within to prevent running short. The illustration shows a homemade gage constructed of discarded parts which can usually be found about a home garage or shop. The body of the gage consists of a breather-tube *A* and a cap *B*. A slot  $\frac{3}{8}$  in. wide was cut in the side of the tube, extending to within  $\frac{3}{4}$  in. of each end. The lower end of the tube was rethreaded to fit in the threads of the filling hole. A guide *C* was turned to the shape shown from a piece of solid brass bar. The hole through the center was drilled to make a sliding fit for the rod *D*. Four  $\frac{1}{4}$ -in. holes were drilled through the base so that oil could be poured in when the cap *B* was removed. To hold the guide in place it is made a press fit, but it was finally soldered.

The rod *D* is a  $\frac{1}{8}$ -in. drill rod with a float *E* fastened to the lower end. A knob *F* was fastened to the upper end of the rod, which served as a gage block and to prevent the



rod from coming out of its bearings. To prevent the oil gushing out through the slot cut in the brass tube a glass tube was inserted within, its diameter permitting a close fit in the hole of the brass tube. The length of the glass tube brought it into position so that the cap *B* clamped it in place.

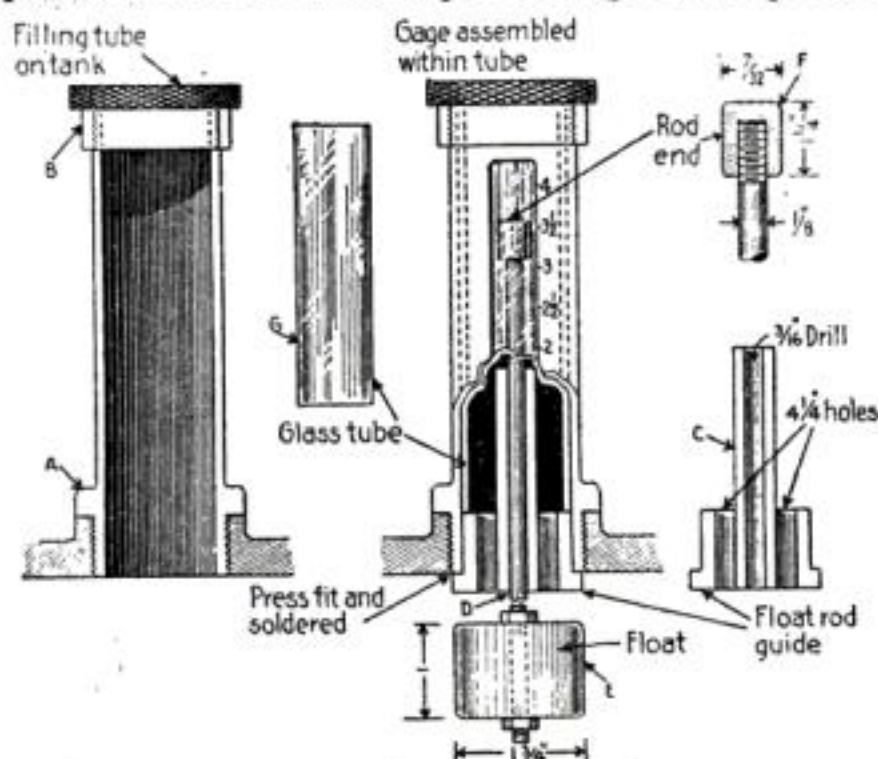



### A Door Catch Made from a Spring Shoe Tree

**W**ITH this simple homemade catch you can push the door as wide open as you like and it will remain so. There are no levers to push down. It is self-contained and very cheap.

First secure a pair of "shoe trees." Take one portion, as shown in the illustration, and fasten the metal end on your door about 6 in. from the floor. Fasten it with nails, screweyes or anything that will hold. It is advisable to hold the metal end over the gas range for a few moments to take out the temper;



Manner of fastening the spring shoe tree to door for a stop

then a nail driven through it will not split the metal. The tension of the metal after it is fastened on will push the wooden knob firmly on the floor. With the pressure "just right" you can move the door freely, yet it will remain wherever it is set. The knob will slide over a rug or doorstep. It will not be in the way if fastened on the inside of the door, and the wind will not be able to blow the door shut or further open.—CLARENCE T. HUBBARD.

### Tearing a Pack of Cards in Half with Ease

**A**LTHOUGH the popular trick of tearing and quartering a deck of cards can be classed as a feat of strength, there is a "wrinkle" which, if mastered, will permit the pasteboards to be torn with very little exertion. The method described is a sure one, and is just as effective as if actual strength were used. A girl can do the trick if the instructions are carried out. Take a pack of new cheap cards and "bake" them in an oven for more than an hour. Cut a slit about  $\frac{1}{2}$  in. deep on each side of a card case. This cannot be seen, and when the cards are passed around for the usual preliminary examination by the spectators the case is retained by the per-



The cards will tear in two easily after they have been baked


former, by whom the cards are returned to the case after the inspection. The cards after being baked will be very brittle and when placed in the case will tear easily, as the slit will give away and the two portions of the card case will act like grips in severing the 52 cards it holds.

### Reshaping Artists' Paint Tubes for Refilling

**T**HE tin-foil tubes used as containers for artists' colors are usually thrown away when empty. These can be refilled or used for other purposes by blowing them out with a bicycle pump. Sufficient pressure will straighten out all the kinks and render them almost as good as new. When blown out to their original size, open the bottom end, insert the contents and fold over again as before.—L. B. ROBBINS.

### An Automobile Steering Wheel for a Bob-Sled

**N**O automobile ever has its steering wheel directly over the front axle, and no bob-sled to steer best should have the wheel over the front bob. The illustration shows an arrangement which has the "feel" of a real automobile when coasting down a

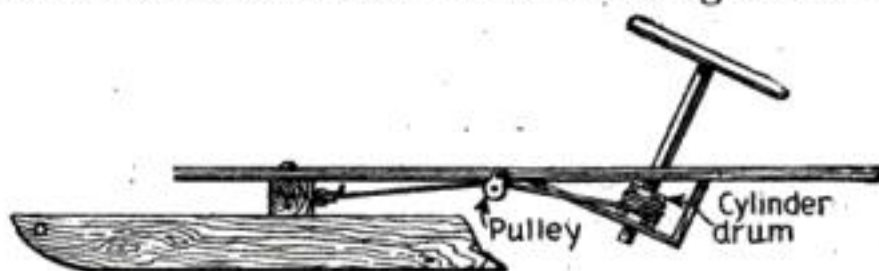

Cylinder drum attachment for a bob-sled. It is like the steering mechanism of an automobile

hill. The steering wheel and post were set nearly half way back on the top plank of the bobs in a leaning position, like the wheel and post of an automobile. On the lower end of the post a wooden roller about 6 in. in diameter was fastened. About the middle of this a  $\frac{1}{4}$ -in. rope was wrapped several times, and then the ends were taken through a pulley on either side to the ends of the cross-piece of the front bob. Any turn of the wheel thus revolves the roller which wraps the rope, pulling the front bob in the direction desired. Such a pair of bobs can be built at home with materials found in the scrap heap. For my bobs I used seasoned oak, soft pine for the top plank, and old carriage tires for the runners. The wheel of an old corn cutter makes a fine steering wheel, or the steering wheel may be sawed out of hard wood with a compass saw.—F. E. BRIMMER.



# Making a Trusty Bob-Sled

Plans for the construction of a coasting bob-sled that will carry several persons

By B. Francis Dashiell

**T**HE bob-sled described and detailed in the accompanying plans is very strong and capable of carrying any weight that can be placed upon it. The powerful brake and steering apparatus will give a strong sense of security when coasting down even the steepest inclines.

The frame should be built first. This consists of two lengths of spruce, pine or oak, 2 by 3 in. and 13½ ft. in length. The various holes and notches are cut and bored in the required positions as shown. At the location of the steering wheel and front or guiding sled, oak boards 6 in. by 12 in. and 1 in. thick are bolted across, as shown.

The sleds are next constructed. The rear sled is 24 in. long and 18 in. wide, the sides being of oak boards 10 in. wide and not less than 1¼ in. in thickness.


The edges are rounded off as shown. Three cross-pieces of oak are cut out 18 in. long and 8 in. wide and notched to receive the side pieces and also the two long frame pieces. The parts of the sled are joined together with long screws. The front or guiding sled is of the same width as the rear sled but is only 18 in. long and the sides are only 8 in. high. Four cross-pieces are used on this sled and are made of oak 18 in. long and 5 in. wide. They are screwed between the two sides in the same manner as those of the rear sled. The top of each cross-piece has a notch ½ in. deep and 6 in. wide cut in it to receive the 6 by 16-in. oak board as shown. Use screws for all fastenings.

The runners for the sleds are made from iron bars ⅛ in. by 1 in. and bent around the edges of the sled sides. Screws are placed on about 3-in. centers and have their heads countersunk in the run-

ners. Smooth the iron well with a file, then polish with oil and emery cloth. Make two iron straps or U-rings and bolt to the rear of each side piece of the front sled as indicated in the drawings. These are used to fasten the ends of the steering cables.

The brake is made from oak or pine 1 in. in thickness and is in the form of a box with the ends turned up or rounded off. The two side pieces are 6 in. wide and 18 in. long with the ends cut off at an angle of 45 deg. as shown. The bottom and ends are covered with 1-in. boards, using screws for fastening them in place.

Get three 1½-in. iron angles 6 in. long, and bolt them to the bottom of the brake box as shown. The box is suspended between and from the two long frame timbers by

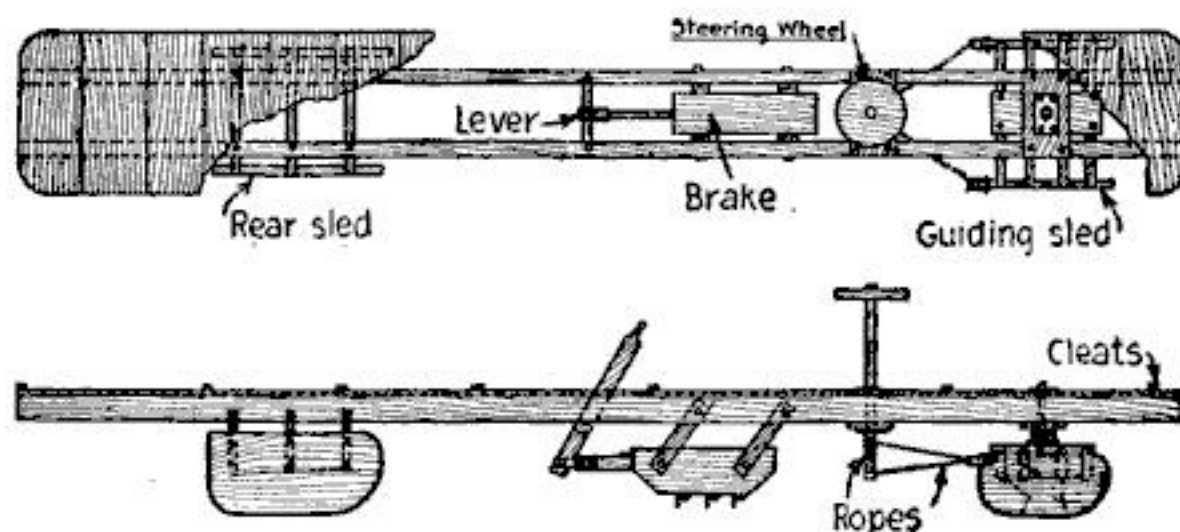

Plan and side elevation of a bob-sled that is capable of carrying any weight that can be placed on it

means of four swinging arms, each of oak 12 in. long, 2 in. wide and 1 in. thick. Make all the connections with bolts, using washers and lock nuts. Rivet over the ends of the bolts to prevent the nuts from working loose and coming off. The brake is operated with a lever of oak 28 in. long, 2¼ in. wide, and 1 in. thick. It is pivoted on a cross-support bearing made of a 12-in. length of ¾-in. wrought iron water pipe. Make two plates from sheet iron about 1/16 in. thick and bolt one on each side of the lever. A hole with a diameter of 1-3/32 in. should be cut in the plates and lever so that it will fit nicely on the pipe bearing. Drill the holes in the pipe support as called for in the plans and then place the lever over the pipe. The two ends should now be hammered down flat and drilled for the bolts. Place cotters in the holes, one on







hole in the center of each. Fasten these two pieces together with the grain running in cross directions or at right angles to each other. Get a piece of iron pipe  $1\frac{1}{4}$  in. in diameter for the steering wheel shaft. It should be 27 in. long and drilled with two holes  $\frac{1}{2}$  in. in diameter, one to be 2 in.

from the end and the other at right angles to it, and  $\frac{3}{4}$  in. from the end. Fit a piece of rod or pipe with an outside diameter of  $\frac{1}{2}$  in. in the lower hole.

The rod or pipe is to be about 9 in. in length. Now place the steering wheel over the pipe shaft and resting on the cross  $\frac{1}{2}$ -in. pipe.

Fasten the wheel to this cross pipe with four eyebolts as indicated in the detail drawing. Now slide in the other cross pipe which will just come on the op-

posite side of the wheel and fasten that with four eyebolts, also as indicated. This method gives a very solid and strong connection between the shaft and wheel.

Smooth up the wheel with a file and sandpaper. The wooden wheel will be found easier and warmer to handle in cold weather than a metal one. Now drill the two cotter, and the  $\frac{1}{4}$ -in. holes in the shaft as called for in the illustration.

Make two plates and drill them to make a hole  $1\frac{3}{4}$  in. in diameter for the  $1\frac{1}{4}$ -in. pipe to pass through.

Bolt the plates to the upper and lower cross boards of the frame and then place the steering wheel shaft in place. Put on a sufficient number of washers to take

up any play and insert two heavy cotter or taper pins—either will answer very well. This is clearly shown in the sectional drawing of the steering wheel and detailed at A.

The steering motion is carried from the shaft to the sled through a cable of either

bronze or other metal—a flexible woven or stranded wire cable of  $\frac{1}{4}$  in. diameter will answer the purpose very well. A length of the cable is passed through the hole in the lower part of the shaft

and a knot tied in either side so as to prevent the cable from slipping through the hole. Make five turns of the cable around the shaft below the hole, from left to right and take five turns from right to left


above the hole. Fasten the two ends to the rings on the rear of the sled, being sure to draw the wire tight before fastening.

The sled should be covered or floored from end to end with some light weight material, the planks


being nailed crosswise. Each plank length, or the width of the flooring on the sled, should be about 20 in. Nail on cross footrests or cleats as desired.

The brake box is supposed to be filled with some heavy stuff so that its own weight will suffice when only a slight drag or braking is wanted. Fix up

a hook and chain so that the brake handle can be held down when not in use. A strong pull on the handle will stop the sled.

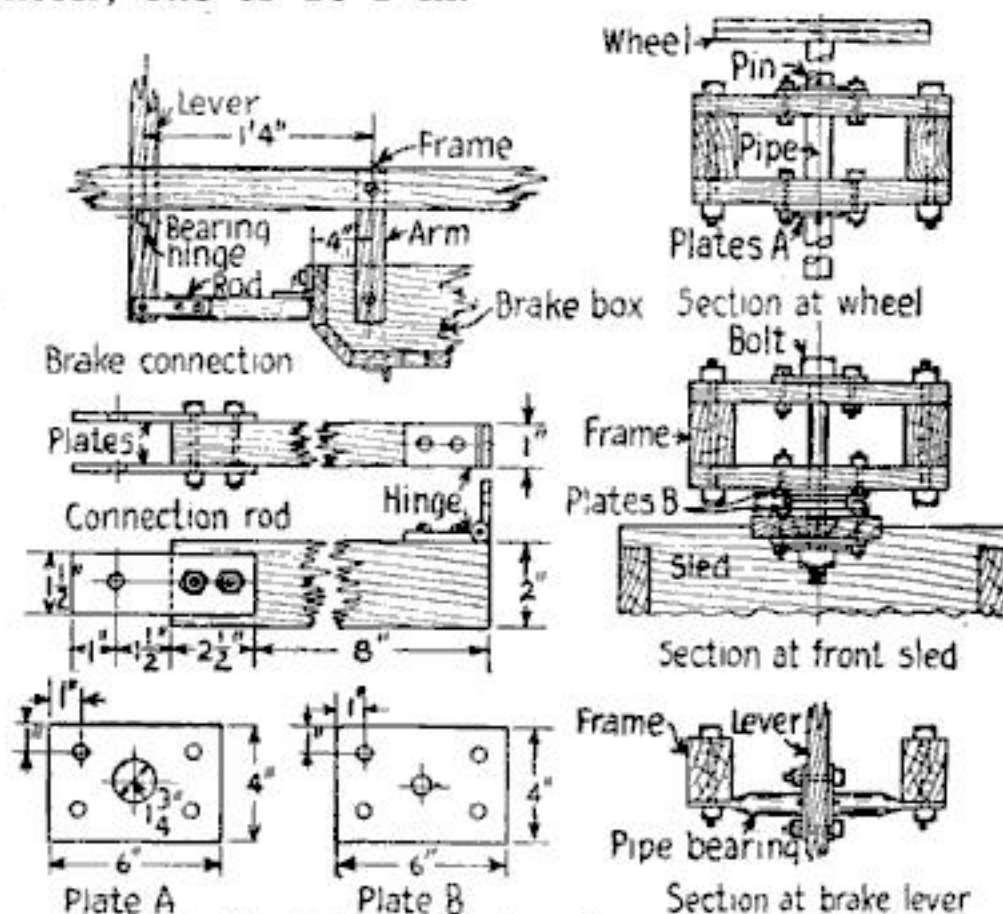

Details of the mechanism for operating the brake, the steering wheel and the front bob, all hung to the underside of the frame

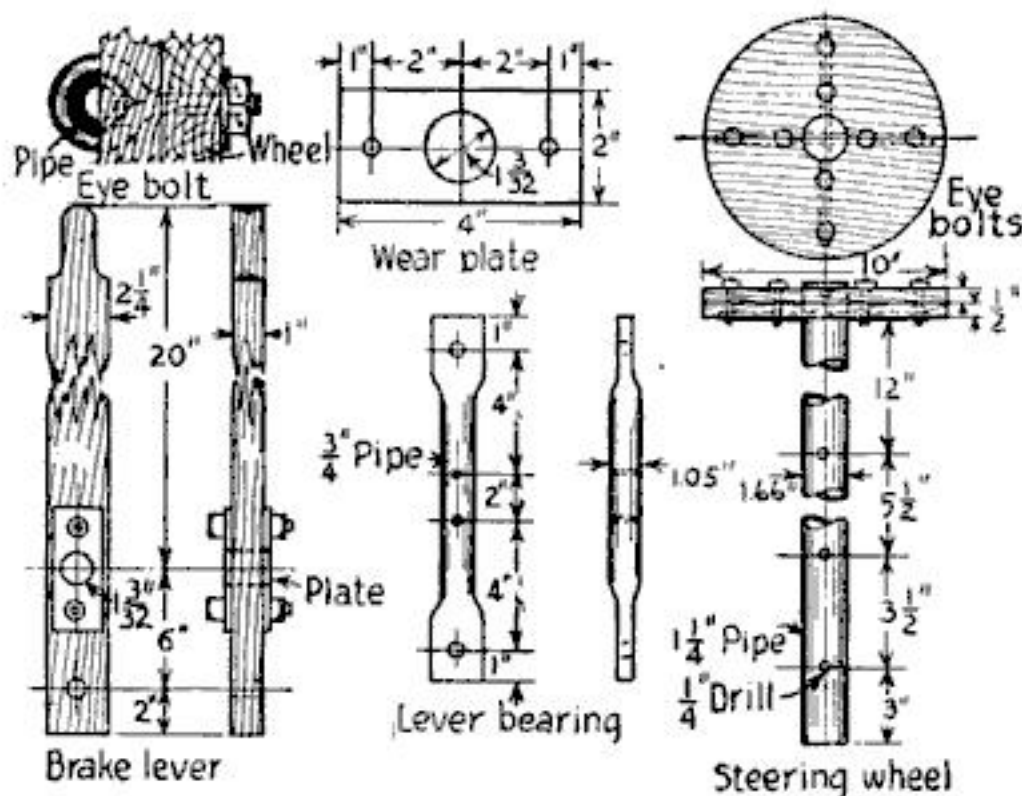


Details of the brake lever and the steering wheel and post with cross-bar for the ropes



### A Steel Boring Mill Tool-Holder Requiring Little Material


WITH the price of high speed tool steel soaring, devices for the conservation of this kind of material are being sought. With this thought foremost the device for holding a boring mill tool, as illustrated, was developed and a great saving in material effected. The entire tool, made of high speed steel, will weigh about 1½ lb. The piece of steel used in the holder weighs about 4 oz. This holder can be made in a variety of shapes, and different tools can be used. Pressure exerted by the set-screw on the round-pin holds the tool in place. The round pin is roughened or knurled on the end to hold on the steel surface.—J. R. MINTER.

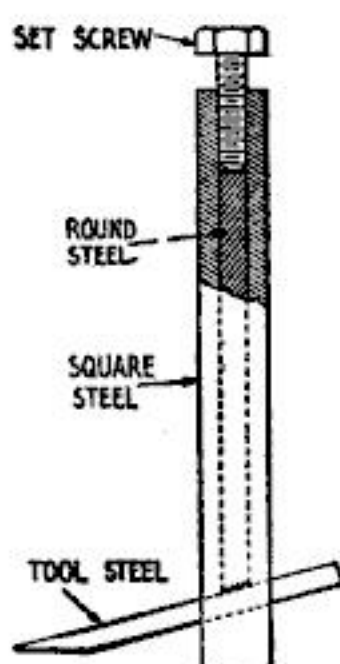

A steel tool-holder for a boring mill

### A Treadle for an Automobile Foot Accelerator

ON a great many cars the accelerator consists of a plunger rod, with a metal disk at the end, for the foot to rest upon. As it is often difficult to keep the foot pressure steady upon the button, a constant increase and decrease of speed is the result.

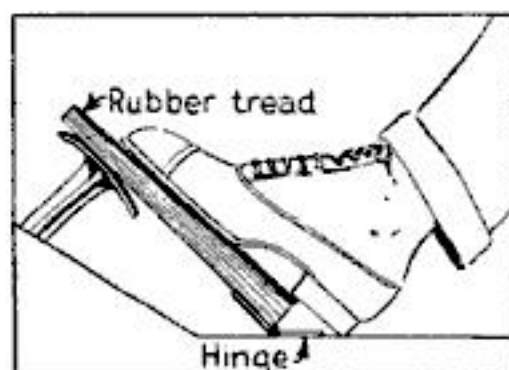

Treadle to ease the foot on accelerator pedal

With this in mind, I constructed a treadle along the lines shown in the sketch, which overcomes, to a great extent, the uneven pressure, and also gives an easier position for the foot.

The under side of the treadle was channeled so as to keep it always in place on the button. The top surface was furnished with corrugated rubber and the lower end hinged to the car floor. As a result the car ran much more smoothly and the leg muscles were relieved from the constant strain of adjusting the pressure upon the accelerator.—L. B. ROBBINS.

### An Improvement on the Old-Time Back to Back Card Trick

THIS trick originally consisted in reading off the cards one by one as they were shown to the audience without your having had a chance, apparently, of seeing them at all. The secret consists in placing two halves of the pack back to back, so that one half faces one way and the other in an opposite position. Notice what the face card is on one side and hold the pack up so that the audience can see it. While you are doing this you will have a chance to notice the rear card, that is the card facing toward yourself. As soon as you have done this place the pack behind your back or under the table and transfer the rear card to the front of the pack, thus bringing into view the one you have just named and at the same time disclosing the next card in the rear. On holding the pack up to the audience you will be enabled to name the card next to appear. It is needless to say that no one should be allowed behind the performer while this trick is in progress.

The variation of this trick employs a mirror in order to deceive the "knowing ones" who are familiar with the older method of working it. For this newer method, the pack is not cut and put back to back, but the cards all face in one direction. Somewhere overhead a mirror is placed where it will reflect the cards to you, but in such a position that it will not be seen by the spectators. As the cards are reflected in this you will be able to read them off without lowering the cards. Be careful to hold the pack between your eyes and the spectators so that the direction of your glance is not detected.


### Newspaper as a Substitute for Chalk Talk Lecturers

CHALK talkers, lecturers and teachers who use paper and crayons to show diagrams, sketches, figures, etc., now find the prices of large sheets a serious consideration. Their outlay may be materially reduced if they will use old newspapers that have a comparatively even gray appearance from a distance. Select the sheets that have no dark or heavy cuts, headings and the like, such as the "Help Wanted" pages, and use the regular "chalk talker's" crayons. The printing will not detract from the drawing; in fact it can scarcely be noticed by the audience.—A. B. WAGENER.



## Coal Is Dear. Learn How to Burn It in the Furnace


THE many little leaks in the boilers and furnaces of our homes are going to cause a waste of a hundred million tons of

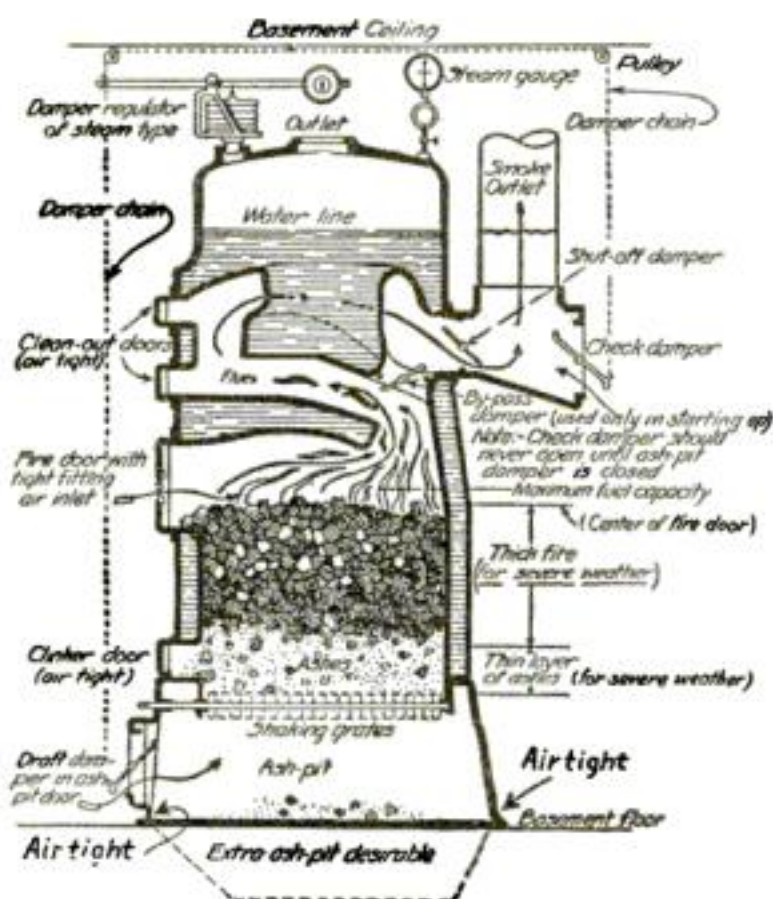

Sectional view of a small steam heater showing necessary dampers and doors for proper regulation

coal in a year unless we do something about it. The remedies for these leaks are simple and it behooves all of us to give attention to them this winter.

The problem has been studied by the Engineering Experiment Stations of the

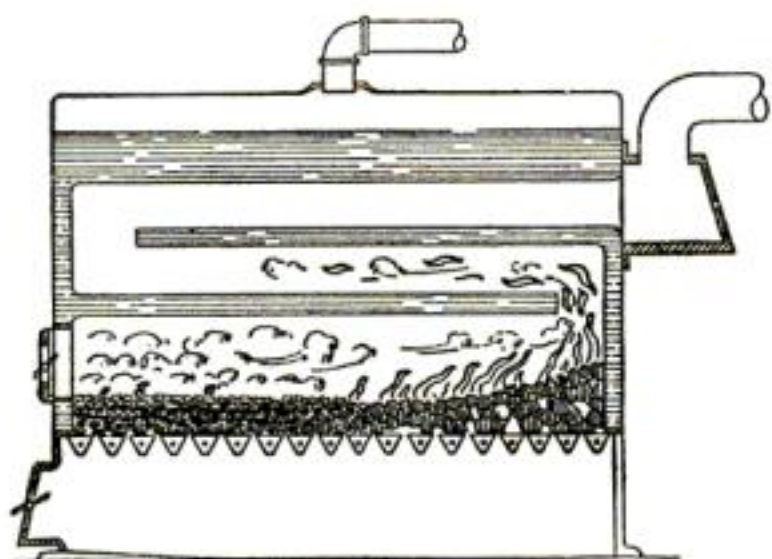

The first stages of the coking method of firing in which fresh coal is spread over only the front of the fire pot

University of Illinois, and some results of that study are summarized here.

The most important single part of any heater is the grate. It should be large enough to allow sufficient air to feed through

the coals to form a highly combustible mixture. The setting of the furnace should be airtight to prevent too great a draft when the fire is burning low. This applies equally to the doors of the furnace, and even the slides. Then, too, the cleaning doors should be used often to remove the soot from the interior of the heater, since the soot insulates the water from the heat of the fuel. If just these three points are heeded,


you can save as much as twenty per cent. of your fuel expenses.

Next in importance is the consideration of the draft. This must be capable of being accurately increased and decreased at all times. This means that first of all your chimney must be airtight and minus obstructions of any kind. The top of the chimney should be at least two feet above the surrounding objects so that the wind can create a strong enough draft.


Another point so often neglected by house owners is the matter of firing. Fresh coal should be shoveled only at the very front of the fire bed at first. This assures the burning of the gases that escape when the coal becomes heated. The gases must pass over the coals on their way to the chimney. After a few minutes, you can spread the fresh coal over the entire grate area.

Only two other points remain. The first is that all distributing pipes should be covered with asbestos sheet-

ing to prevent radiation. The second concerns weather strips which should be attached to all doors and windows.

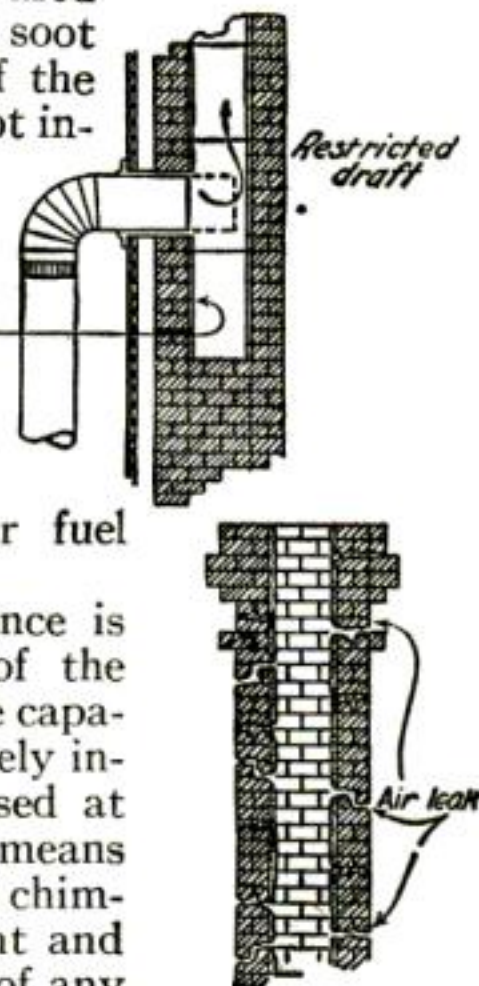

Draft is checked by a defective or broken joint in the chimney

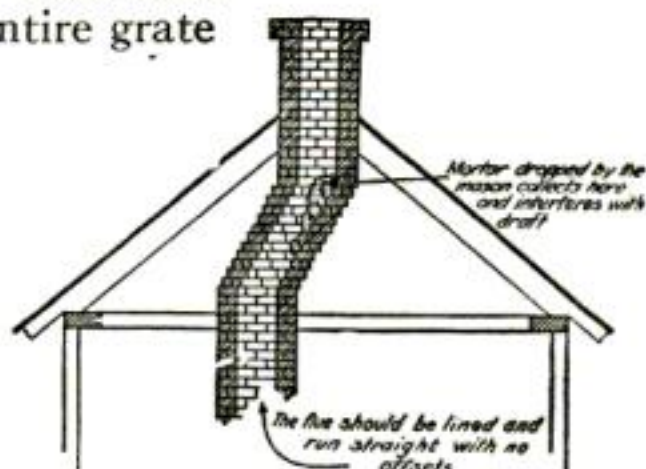


Showing what may happen in an offset chimney



### Winding a Coil Spring Automatically and Evenly

A SPRING-WINDER that will wind accurate and evenly spaced coils can easily be made out of two pieces of hardwood and an ordinary stove-bolt.

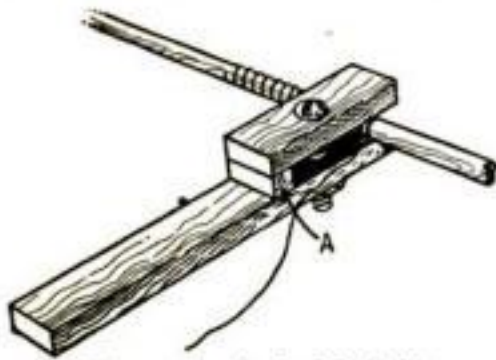

The wire is held tight until the winder can be placed as shown and clamped tight

Take 2 pieces of  $\frac{1}{2}$  by 1 in. close-grained hardwood, one about 8 in. long, the other 3 in. long. In the center of the 3-in. piece drill a hole of a size to easily take a stove-bolt.


About  $1\frac{1}{2}$  in. from one end of the long piece drill a similar hole. A small block of wood A, of the same diameter as the mandrel on which the spring is to be wound, completes it.

To wind the spring, fasten the mandrel and the end of the wire in the chuck. Start the lathe slowly, winding the spring by hand until the proper space between coils is obtained. Hold the wire tight until the winder can be placed as shown in the sketch and clamped down tight enough to force the wire into the wood. If it is too tight for the lathe to turn, loosen slightly.

By letting the end of the winder rest against the lathe bed, it will feed itself along automatically, thus leaving both hands free for handling the coil of wire.—F. L. MATTER.

### Making Butt Mortises with an Ordinary Rabbet Plane

LEVELING the bottom of a butt mortise is usually the most difficult part of the job, but this work can be done quickly by using a small plane, preferably a narrow wood rabbet plane. All that is necessary is to set the cutter down below the bottom of the plane a distance equal to the depth of the mortise and cut out the stock to be removed after making a few chisel cuts in the customary manner. The plane will cut out the chips and accurately level and gage the bottom.

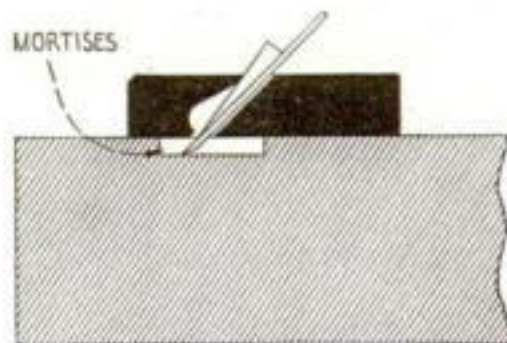


Cutter set deep in plane to cut mortise

### Making a Talking Machine Stylus Out of a Toothpick

OWNERS of talking machines will find a toothpick an excellent substitute for a record needle should the supply of steel needles give out. The toothpick should be whittled to a fine point at one end and cut off blunt at the opposite end. Insert this improvised needle in the reproducer, point end down. The result will be a soft, pleasing tone. It can be tried as a novelty or to help out in case of an emergency.—CLARENCE T. HUBBARD.

### Making a Whistling Weather Vane for the Barn

AN ordinary wood or metal whistle is used for this novel device. It is attached to the crossbar of an ordinary arrow weather vane with the open end toward the arrow head. A number of these whistles,

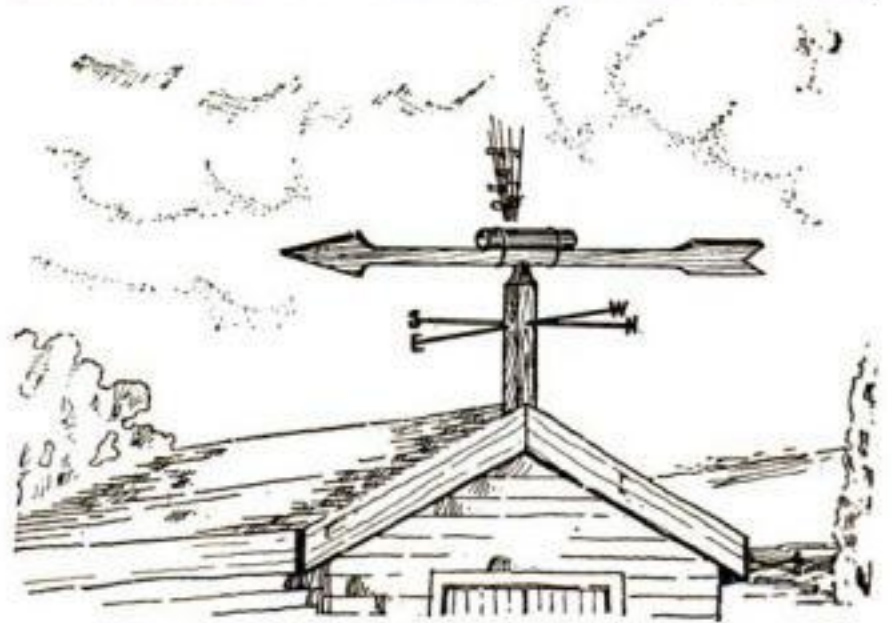

The whistle placed on the weather vane is always in the right direction to sound its note

each of a different tone from the others, all on the same scale and each attached to an individual weather vane will make a pleasing and peculiar concert on a windy day.—VAUGHN BAKER.

### Hand Bob-Sleds Made of Barrel Staves

THE illustration on the following page shows a pair of hand bob-sleds that did fine service about a farm, when it became necessary for one man to carry bags of feed, grain, wood, etc. They can be made in half an hour's time and from no other material than some barrel staves and pieces of 2 by 4-in. sticks.

Select four good staves for the runners. On each one nail a block of the 2 by 4-in. stock of any convenient length by its thin edge. Spike a cross-piece 15 in. long from



the bed piece of one runner to the other. In the front bob use an inch board for this piece, as it must turn. Two pieces of the 2 by 4-in. material about 48 in. long should be nailed in place for the top, covering these with barrel staves cut in half. In the case


6 or 8 ft. apart, depending on the size of the barn and are tied together by 2 by 4-in. pieces that run crosswise or lengthwise of the structure. These 2 by 4-in. pieces are "dapped," that is, set into the main rafters, almost 1 in. Then to these 2 by 4-in.

pieces are nailed 1 by 4-in. pieces in the opposite direction or running from plate to peak, so as to support the roof sheathing boards. Since the 2 by 4-in. pieces have been set into the rafters 1 in., these 1 by 4-in. strips will be just flush with the rafters. The rafters are built up out of 1-in. boards cut out with a band saw in segments to fit the curve. Mark out the roof pattern on the barn floor and build all rafters before hoisting them into place on the plates. Gothic roofed

barns are exceptionally strong on account of their shape; the mow is free from trusses or cross-beams, but will stand heavy winds in spite of the light framework. These barns are very neat and exceptionally attractive.—W. E. FRUDDEN.

### The Proper Care and Upkeep of a Soldier's Wardrobe

THE 84th Article of War states that "Any soldier who sells or wrongfully disposes of or wilfully or through neglect injures or loses any horse, arms, ammunition, accoutrements, equipment, clothing, or other property issued for use in the military service, shall be punished as a court martial may direct." The prescribed punishment for violation of the above article is three months confinement at hard labor and forfeiture of two-thirds pay for three months if the value of the articles lost or damaged is less than \$20.00; if more than \$20.00 and less than \$50.00 the penalty is double that given, and if the value is more than \$50.00 the penalty is six months confinement at hard labor and a dishonorable discharge forfeiting all pay and allowances due and to become due. If any of the articles are sold or otherwise wrongfully disposed of the penalty is a dishonorable discharge and from six months to five years confinement at hard labor, depending upon the value of the articles sold or disposed of. Attention is called to the first penalties outlined, as they apply to "injuring or losing, through neglect." Certainly it behooves the

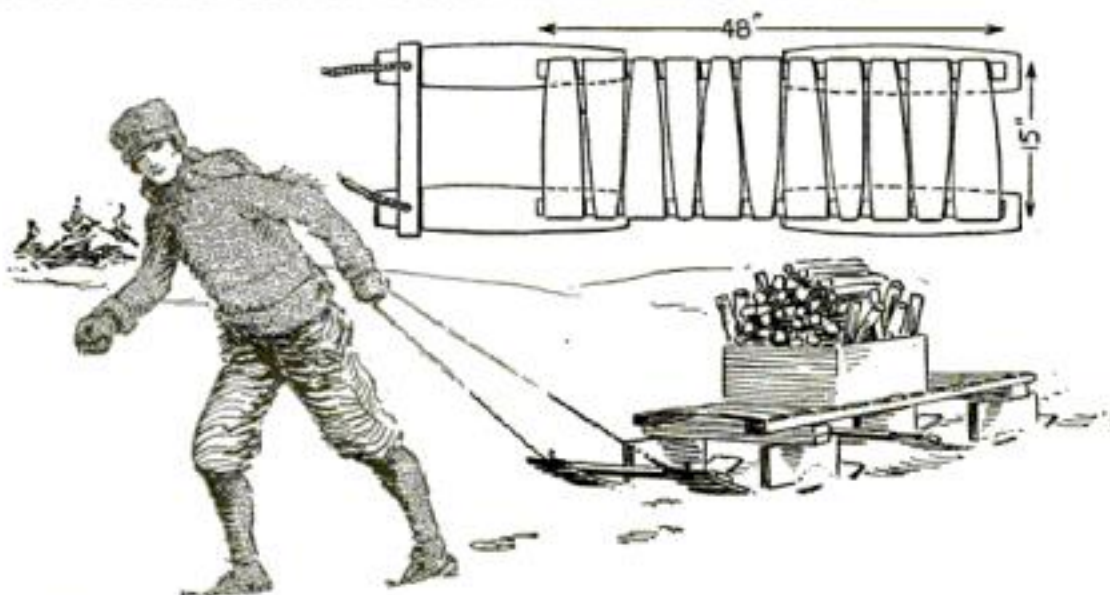

The runners on this bob-sled are made of barrel staves set on knees supporting the top which is also made of staves


of the front bob a 1-in. piece should be used to hold the two top pieces in place. A hole is bored through for the king bolt. It is a good plan to strengthen the front end of the runners by a 1-in. strip. Attach the rope by which you will pull the sled, and you have a handy set of bobs that cost practically nothing.—F. E. BRIMMER.

### Fruit-Jar Rubber Ring to Repair Bicycle Tire Puncture

A SATISFACTORY repair for a small puncture in a bicycle inner tube or bicycle single tube can be made by taking a common fruit-jar rubber ring, previously melted by holding over the flame of a match, and applying it over the puncture if in an inner tube, or by forcing it into the puncture if in a single tube.—H. K. CAPPS.

### Cutting Rafters for Gothic Roof Barn Construction

THE farmer who is anxious to have a barn that is different, distinguished looking, and out of the ordinary and at



Manner of cutting the material for making a Gothic-roofed barn to provide mow space that is free from trusses or cross-beams

the same time practical and strong will be impressed with the Gothic-roofed barns. The rafters start from the plate and curve to the peak where they meet at a sharp point. The main rafters are placed every



soldier to take care of the clothing and other articles issued to him in order to escape severe punishment. Again, it is not the slovenly soldier who gets along well with his officers and wins promotion, but rather the one who takes good care of his clothing and equipment and keeps himself looking clean and fit. The following suggestions may be of use to the recruit who really wants to "soldier" correctly.

1. Always keep a complete uniform for inspections, parades and ceremonies, thereby avoiding extra details for being un-presentable at these formations.

2. Fold all clothing carefully and with the fewest possible creases, and be sure that it is thoroughly dry before putting it away. See that all buttons are in place, that all spots are removed and all torn places mended so that when it becomes necessary to put the clean things on in a hurry they will be ready to wear.

3. Wash the leggings often with laundry soap and a stiff scrubbing brush. They will dry in half an hour in the sun and may be washed between formations if necessary.

4. As a rule, never dry anything in the sun as the color will fade; but leggings are seldom harmed by the sun.

5. Sweat stains cannot be removed, so do not worry yourself sick over them. The color may be partially restored by dipping the garment in a solution of one part of ammonia to two parts water.

6. Remember that gasoline or benzine will remove grease spots and also that both are highly inflammable. Paint spots can be removed with turpentine.

7. Watch your shoes and keep them repaired. Keep a whole sole under you and keep the heels straight. Shoes require an oily dressing and saddle soap should be well worked into the leather at least once a week. This removes the old polish and allows a higher polish with less effort. It also helps preserve the leather and assists in making the shoes waterproof.

8. Never dry wet shoes, or any other leather for that matter, with artificial heat or in the intense heat of the sun. Heat a collection of pebbles and put them in the shoes if it is necessary to dry them in a hurry.

9. Use only the best polish. Never clean tan shoes with lemon juice or acid as it has a tendency to rot the leather.

10. New shoes can be fitted to the foot, or "broken in," by putting them on and standing in water until they are well wet and then

walking two or three miles in them. Take them off and immediately rub saddle soap or oil into them and they will be none the worse for the experience but will fit like an old shoe.

11. Leather goods in general should be washed off with a thick lather of castile soap and clean water. Rub them well so as to remove all salt, sweat and dirt. Oil occasionally or rub in saddle soap. A little neatsfoot oil is beneficial at times but too much of it has a tendency to rot the stitches. Neatsfoot oil should never be used on any leather which will come in contact with a horse's hair as it will burn the hair off. Oil should be applied while the leather is damp and should preferably be applied from the under side.

12. Have plenty of socks and underwear and change them every day. If it is impossible to carry a large supply of these articles they should be washed every night. Sweaty underwear causes chafing and that means misery to the infantryman. Dirty socks or socks with holes or rough darns in them cause blisters on the feet and make marching a thing to be dreaded.

13. Keep all of your buttons buttoned at all times. An unbuttoned pocket, shirt sleeve or neckband has been the cause of a good many days kitchen police being given out as punishment.

14. Watch your shoe, leggin and breeches lacings and put in new ones before the old ones break at some inopportune time.

15. Keep your hat brim flat, just as it is issued to you and don't turn it up or down. Wear your hat on top of your head and not on the back of it.

16. Be as careful about keeping your clothing clean as you are about keeping your body clean.

### Improving the Writing Qualities of Cheap Lead Pencils

THE ordinary cheap lead pencils can be greatly improved, the sharpening made easier and the lead made to wear better, by soaking them in linseed oil. Use boiled oil and add a few drops of perfume. Immerse the pencils for three-quarters of their length, placing them in a vertical position in a bottle or tin can. Keep them in the solution for seven days. Remove them, wipe off the surplus oil, wash in benzine and let them dry. You will find the writing qualities greatly improved by this process.—W. S. STANDIFORD.



# A Barrel Stave Iceboat




**A**N iceboat that will scoot across the ice at tremendous speed with little risk of an accident must appeal to every boy and girl, but the cost of such a plaything is generally too great and the difficulties of making a small one are often beyond the young mechanic; however, there is no reason why every boy who can handle a saw and hammer should not be able to build a boat with barrel staves for runners as described here, since the construction is simple and the materials inexpensive.

Procure an old barrel with stout, thick staves, and knock it apart, selecting three of the best staves for the iceboat. Barrels in which oil, molasses, tar, and hardware have been packed are the best, as the staves are thick and stout and will not split easily. There will be needed three perfect staves of equal length and thickness for the boat. The underside of these should be well polished with sandpaper until they are smooth. Three blocks of wood are then cut out 6 in. long and 3 in. square. Nail one of these blocks to each of the three staves, driving long wire nails in from the underside. In the center of one block bore a 1-in. hole 4 in. deep. This is to receive the steering post. Procure a board 2½ ft. long, 4 in. wide and 1 in. thick and nail it on top of two of the blocks, thus joining the two forward runners of the iceboat together. It is now ready for the main

carrying board. This should be 6 ft. long, 6 in. wide and 1 in. thick. An oak or pine board that will not break when loaded should be used. Nail it to the cross board as shown at *A*, about 6 in. from the end, and fasten the other end to the steering runner by means of the steering post. Bore a 1-in. hole through the board at the proper place and put the steering post through it, driving it firmly into the hole in the block of wood. The hole in the runner board must be long enough so that the steering post will work

in it freely. The steering post should be of stout oak 1 ft. long and 1 in. in diameter. It should be a tight fit in the hole in the runner block and nailed to prevent turning.

The body or hull of the iceboat is then finished, although the builder may desire a cockpit for comfort. This can be made of any box of the right size nailed to the runner

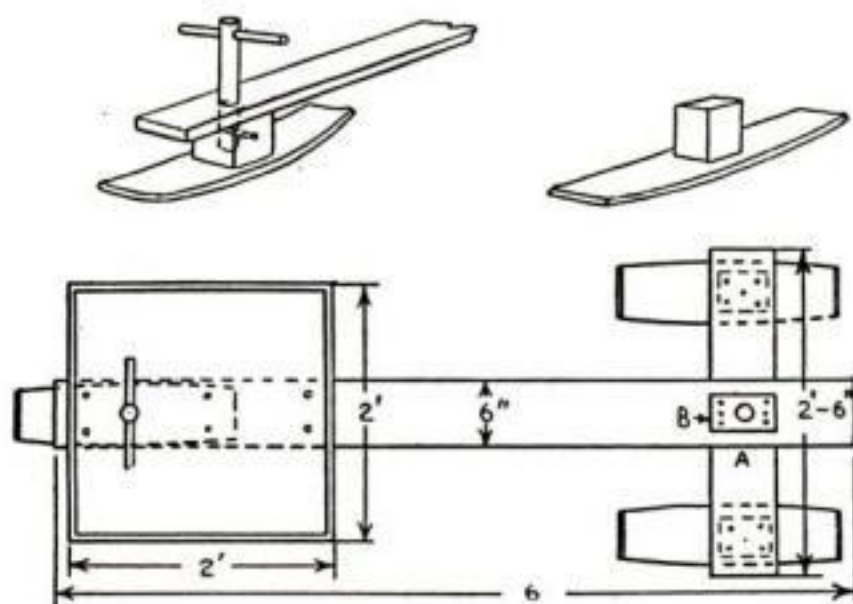

General details for making a smooth-running, speedy and very economical iceboat in which the runners are barrel staves

board, with a hole bored through the bottom for the steering post. The mast can be cut in the wood or made from a fine bamboo fishing pole, which although light is strong enough. Nail a block of wood 2 in. thick with a hole in the center at the place *B*, for the mast staff and insert the butt end in it. To brace it in position run a stout fish line from screw eyes on either side and forward to a point half way up the mast. No back brace will be needed as the sail will pull in this direction, keeping the mast perfectly steady and in an upright position.




Obtain two light bamboo sticks for the boom and gaff and make the sail from any material at hand. Unbleached muslin is cheap and it makes a very good sail. If it is not wide enough the strips may be sewed together. A good length for the mast is three-quarters the length of the boat. The boom should be just long enough to clear a person seated in the cockpit. The sail should be laced to the mast and boom with stout twine or fish cord. This will make it loose enough to permit a good fit, and in a wind it will blow out smooth and snug. A sheet rope is provided so that the sail can be readily handled from the cockpit and "trimmed" as the sailors say, to suit any breeze that blows.

With a small iceboat of this character one can sail with the wind or sideways at great speed. When the craft is first launched rub some thick grease on the bottoms of the staves to make them slide along easily. In time they will wear so smooth that no grease or oil will be needed. The bottoms of the staves can be covered with thick tin if desired to increase the speed of the boat, but as a rule it will go fast enough for all ordinary purposes.

### A Homemade Sight-Feed Oil Indicator for an Automobile

THE lower-priced cars are not usually equipped with an oil-gage or indicator, and consequently, if engine trouble occurs, the driver does not know whether it is the

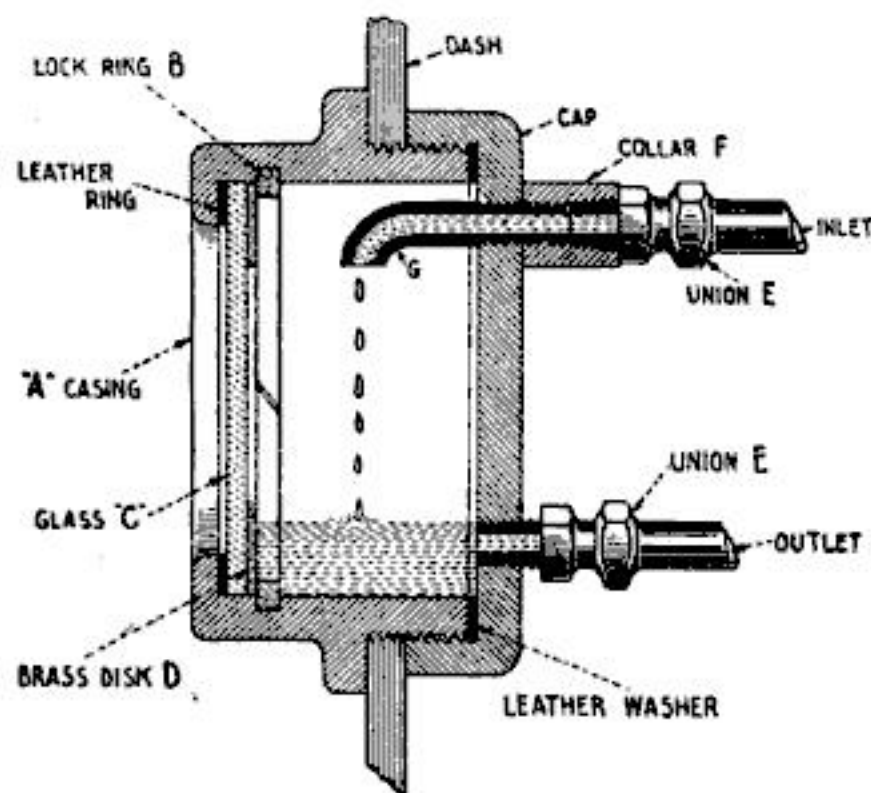


A sight-feed oil indicator made from various odds and ends collected from the scrap pile

fault of the lubricating system or not. The addition of some form of sight feed placed somewhere on the dash will readily show

any trouble of this nature which occurs.

We seldom realize when gazing at the junk pile in some forgotten corner of the garage-shop with what a little amount of effort many of the discarded parts collected

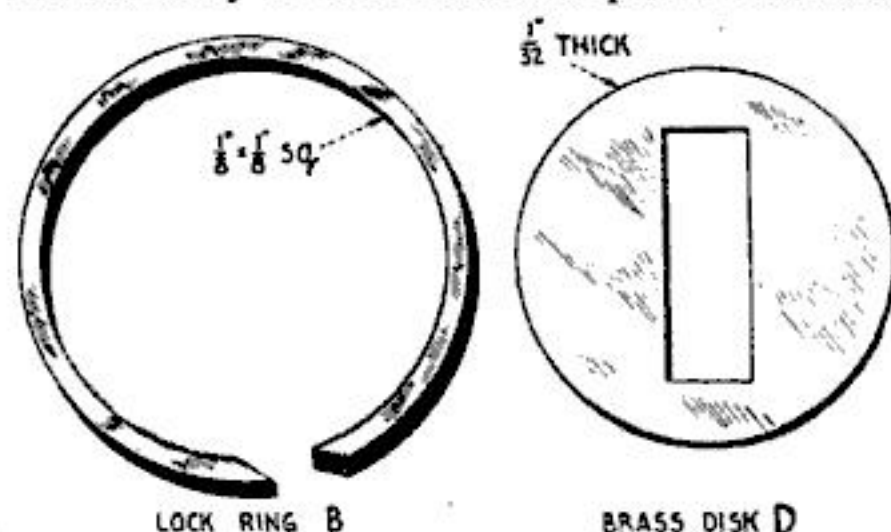

Lock ring and brass disk for holding the glass in the casing to prevent oil leakage

there could be made to save both time and money in making quick repairs or in rigging up some handy device.

The device illustrated herewith is the simplest form of a sight feed. It was made out of a discarded octagonal hub cap, A, the flat portion of which had been removed on a turning lathe. Directly beside the portion removed, a square groove was turned on the inside for the purpose of holding the ring B, which served to hold the glass C and brass disk D in position. The cover E was made from a cast iron pipe end, the thread on the inside of which fitted into threads on the outside of the body A. The brass pipe unions E were tapped into the cap D, the lower one being fastened directly, and the upper through the medium of the collar F. The tube G, bent at one end, and provided with a thread at the other, was inserted within the casing to so guide the stream of oil that its flow might readily be noticed. Leather gaskets were inserted as shown to prevent leakage. The method of connecting the device is clearly shown in the illustration.—ADOLPH KLEIN.

### Removing Nitric Acid Stains from the Hands

IT IS next to impossible to remove nitric acid stains from clothing, if it has not already burnt a hole through the material. But the yellow stains can be removed from the hands by applying permanganate of potash at the end of a glass rod or dropper, and then washing them in water. This treatment turns the stain brown. The hands are then dipped in dilute hydrochloric acid (muriatic), and then washed.



# Simple Designs for Sheet Metal Working

## VII.—Development of patterns for tee-joints of various angles

By Arthur F. Payne


Former Director of Vocational Education at Columbia University

TO those who have followed this series of articles, the new elements in the development of patterns to be considered now will be easily mastered. The tee-joint made of square pipe, as shown in Fig. 1, was chosen to illustrate this problem, because it is much easier than the tee-joint made from round pipe, although the

method used is the same in both cases.

To develop the pattern for the square tee-

Fig. 1  
Square 90°

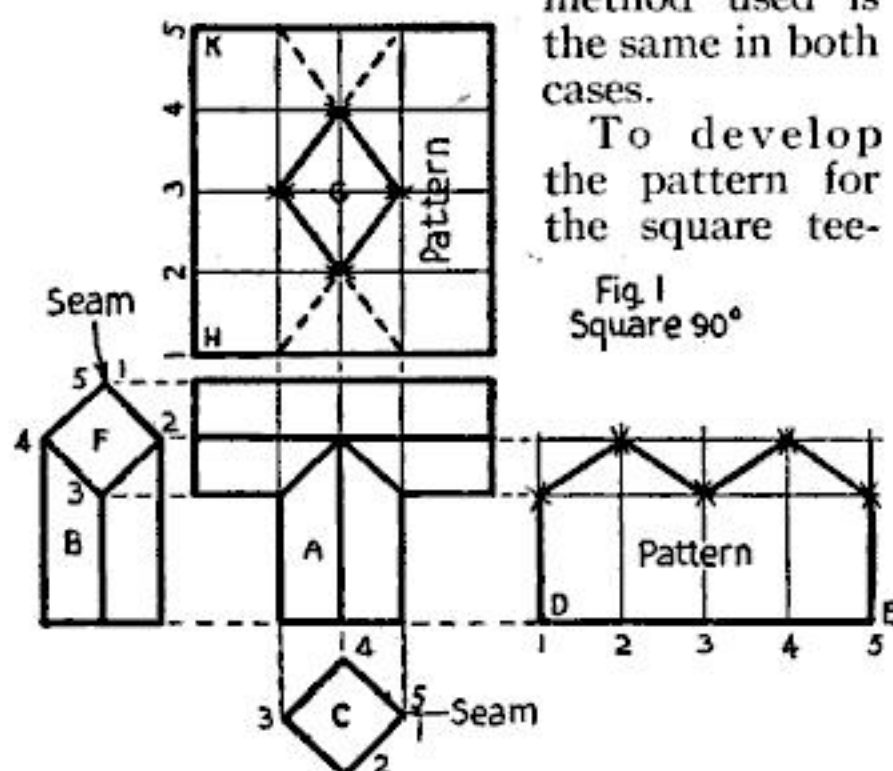

The manner of laying out the lines in making a draft for a ninety-degree square pipe

numbered lines coming up from the bottom view. Connect the crosses with straight lines and you have developed the pattern for the vertical pipe.

To develop the pattern for the horizontal pipe, number the corners of the pipe, as shown in the end view *F*; project upwards the width of the pipe and lay off the correct length on the line *H-K* by stepping off the distance between the numbered corners of the end view. To develop the pattern for the hole *G*, project point 2 of the end view over to the front view until it strikes the joint line, then go upward until it crosses the line 2 coming up from the line *H-K*, and make a cross where the lines come together. Do the same with points 4 and 3. Connect the crosses with straight lines and you will have the pattern for the horizontal pipe.

The hole *G* in this pattern will have to be cut out with a chisel or a hollow punch. Some metal workers object to this and prefer to have one half of the hole on each edge where it can be easily cut out with a pair of snips. The dotted lines on the pattern show where the hole would be in this case. To develop the pattern with the hole on the edges, simply mark the seam at

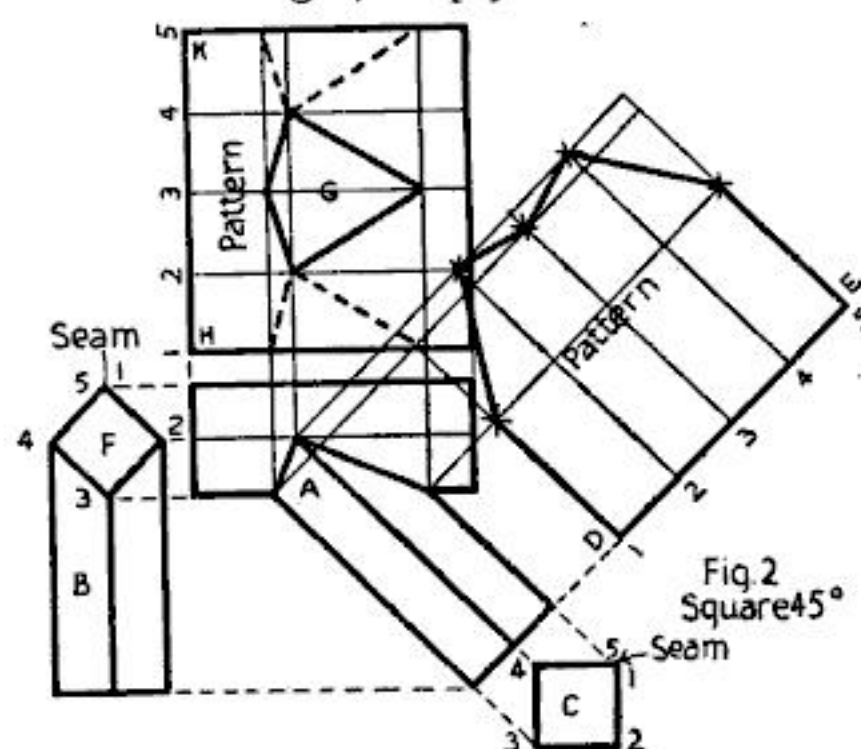


Fig. 2  
Square 45°

A square pipe pattern of forty-five degrees is developed like one of ninety degrees

the bottom of the pipe at 3 and number it 1 instead of 3.

To develop the patterns for the square



pipe tee-joint, set at an angle of 45 deg., as shown in Fig. 2. The method is exactly the same as for Fig. 1. Draw the front view *A* (to get the correct angle follow the method given in the last part of this article on easy method of laying out angle). Draw and

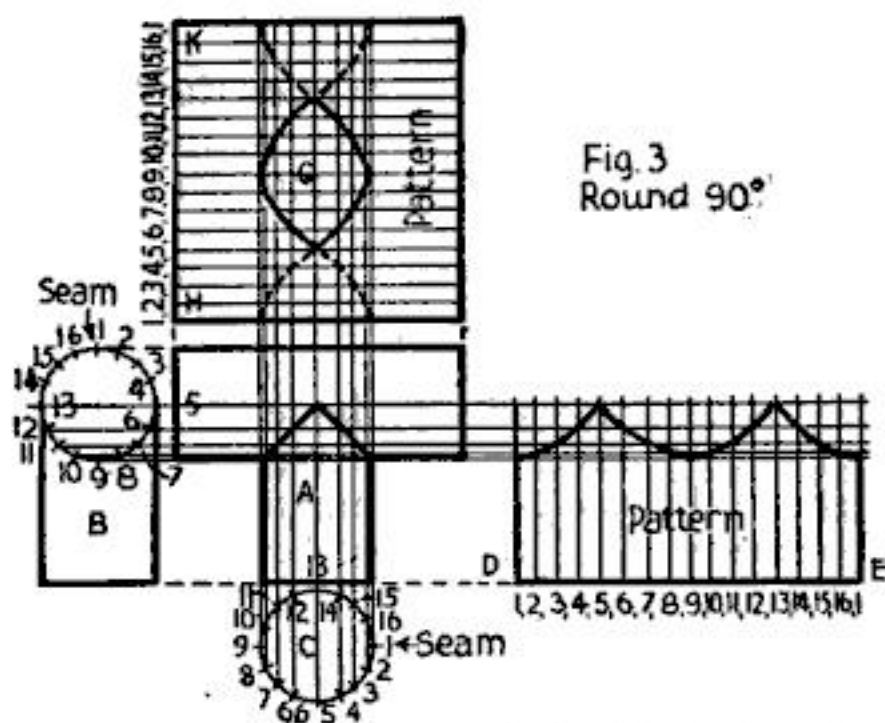


Fig. 3  
Round 90°

This pattern for a round pipe is developed in the same manner as for the other types

number the bottom view *C*. Lay off the base line *D-E* and project lines over for the pattern. For the pattern of the horizontal pipe, project the length upward and get the length of the line *H-K* by stepping off the distances from the end view *F*. To get the hole *G*, run the points over from the end view *F* on the front view *A*, then upward until they cross the same numbered lines coming from the line *H-K*.

The method of developing the patterns for the round pipe angle of 90 deg., shown in Fig. 3, is exactly the same as in the square pipe Fig. 1. A larger number of lines must be used in this round pipe than in the square pipe and the method, though the same, may appear more complicated. Draw the front view *A* and bottom view *C*. Divide the bottom into 16 parts. Lay off the base line *D-E*, and step off 16 spaces equal to the spaces on the bottom view. This will give the correct length of the base line. Project lines upwards from the bottom view until they strike the joint lines, then project them over to the right until they cross the same numbered lines coming up from the base line *D-E*. Connect these crossing points with a curved line and you will have the pattern as shown in the drawing.

To develop the pattern for the horizontal pipe, draw the end view *B* and divide it into 16 parts. Lay off the line *H-K* the correct length by stepping off sixteen spaces

from the end view; then draw lines across from these points. From the end view run points 13 and 5 (which are shown as one line on the drawing) over to the front view until they strike the lines 13 and 5 coming up from the bottom view *C*. Run them up to the pattern until they cross lines 13 and 5 on the pattern. Do the same with the other points. The dotted lines show the half hole on the edge as explained for the drawing Fig. 1. The pattern for round pipe tee-joint having an angle of 45 deg., shown in Fig. 4, is developed in the same way as for the other three joints.

Allowances for lock seams should be made on all these patterns as explained in a previous article.

### Easy Method of Laying Out Angles for Tee-Joints

Angles are sometimes laid out by means of an instrument called a protractor, but an easy method is shown in the illustration. A circle, Fig. 5, contains 360 deg.; a half circle contains 180 deg., and a quarter-circle gives an angle of 90 deg. In the circle, Fig. 6, is shown a quarter-circle divided in half, which gives two angles of 45 deg. each; the other quarter-circle is divided into three equal parts, which gives three angles of 30 deg. each. If all of the degrees in the various angles are added together they will total 360 degrees.

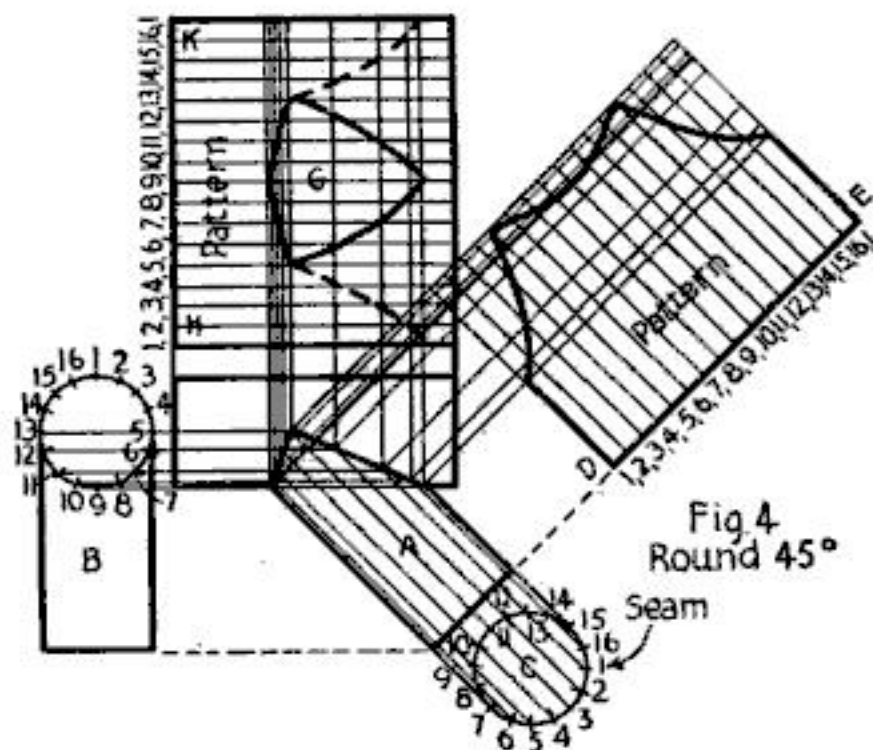


Fig. 4  
Round 45°

The plan of development of a pattern for a round pipe is the same as for the square

In the circle, Fig. 7, one quarter of it is divided into three equal parts of 30 deg. each, one of which is divided into two equal parts of 15 deg. each, and the other into three equal parts of 10 deg. each. The other quarter-circle is divided into three



equal parts of 30 deg. each. Two of them added together give an angle of 60 deg. The other one is divided into three equal parts of 10 deg. each, two of which added together give an angle of 20 deg.

The circle, Fig. 8, shows how tee-joint

## Repairing a Scratch on the Varnish of an Automobile

**I**F the scratch has gone no deeper than the finishing coat of color, take a fine thin striper or pencil, and draw a fine line the entire length of the scratch, endeavoring to fill the depression, but not running over the edges.


The varnish should be thinned with turpentine so that it will give a smooth surface and dry rapidly.

If you don't happen to fill the scratch, it will be all right as long as you get it glossed over. To be sure, the line may show on close examination, but from a short distance it will be invisible.—JAMES M. KANE.

## Eliminating Noise from Shift Levers On an Automobile


**A** CAR that had developed a case of noisy shifting levers for both change speed gears and the brake was recently brought into our garage. An examination revealed the cause of the trouble to be the bushing of the lever hubs against the gear case when the gears were being shifted or the emergency brake applied. We inserted a comparatively light helical spring beside the hubs of both levers. These springs served a twofold purpose. They helped to minimize the shock when shifting, and prevented the lever hubs from touching the case, thus entirely eliminating the noise.

When employing a remedy of this kind, care should be taken to make the springs of wire that will not cause trouble in shifting,

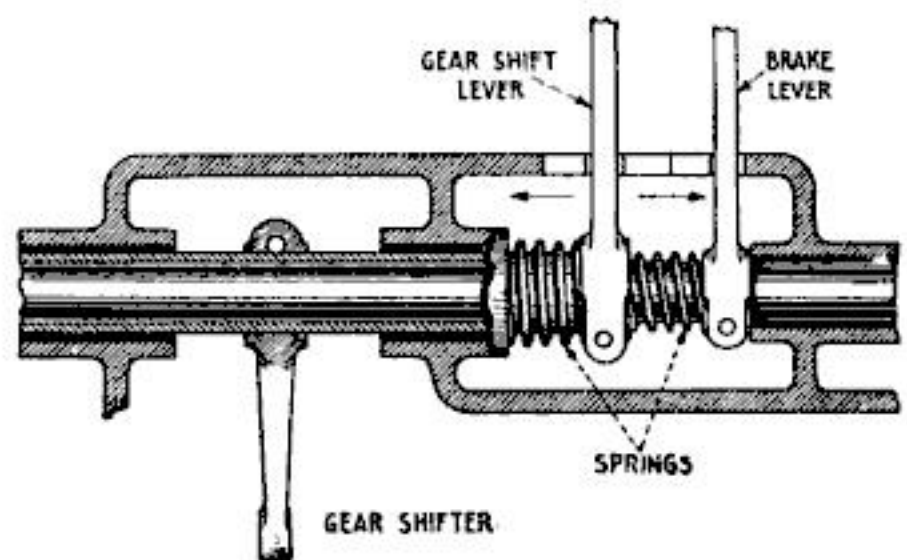

Coil springs inserted between the shift levers to take up wear and prevent noise

and to see that the springs when compressed do not occupy too much space; otherwise the amount of travel allowed for the shifting may be decreased to such an extent as to prevent proper shifting.—ADOLPH KLEIN.

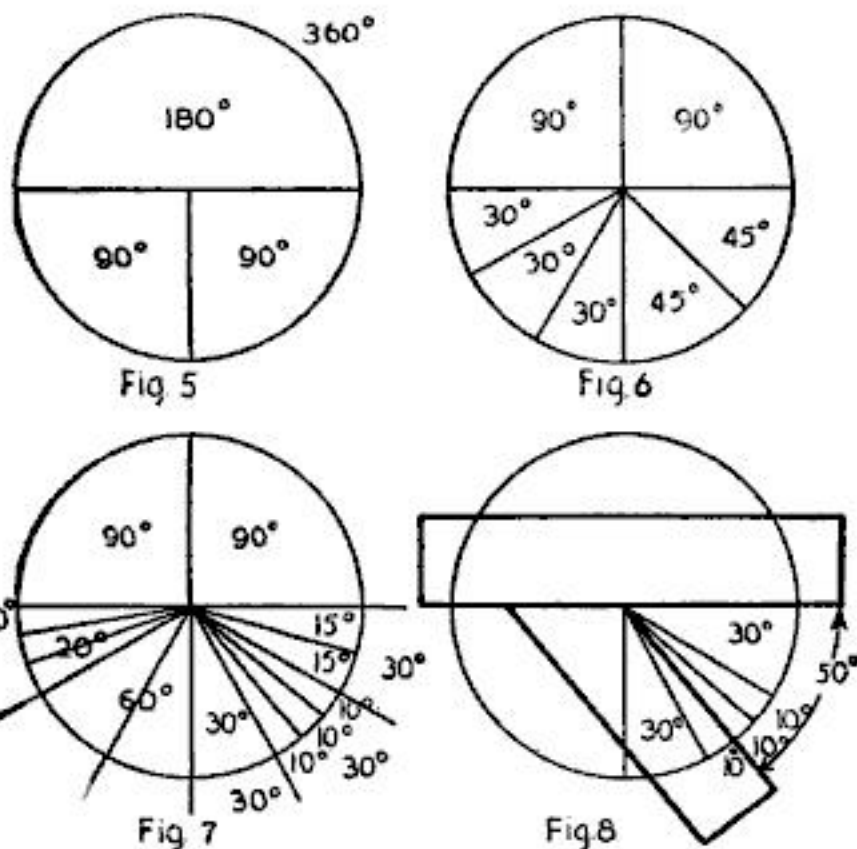

Dividing a circle into degrees to obtain the right angle in drafting an elbow pattern

angles may be laid out quickly by this method. Just suppose that a tee-joint of 50 deg. is required. Draw the circle and divide it into four quarters, each of which will be 90 deg. Take one of these quarters and divide it into three equal parts. These will be 30 deg. each. Take the middle one of these and divide it into three equal parts of 10-deg. each. If a 30-deg. angle is added to two 10-deg. angles you will have a 50-deg. angle, which is the angle desired. Draw the front view of the tee-joint on the 50-deg. lines as shown in the drawing.

## A Garden Hose Used as a Form for Cement Pipe

**A** FARMER wanting to construct a cement pipe to conduct water from a spring into the house and barn, dug a suitable ditch, poured in part of the concrete, and placed a hundred feet of garden hose in the center, filling up the ditch. Before the hose was placed in the ditch it was filled full of water with a force pump. When the cement set, the water was allowed to run from the hose. Then the hose was easily pulled out and used for the next hundred feet.—F. E. BRIMMER.



### Protecting Drawings on Front Edge of Drawing Board

WHILE making large drawings it is often necessary to allow the drawing to extend over the front end of the drawing board. To prevent the worker from crushing the drawing paper while in this position, simply fasten a thin strip of wood to the front end or edge of the board with a small block under each end. Allow the extending edge to drop behind the strip and it will be well protected.—THOS. W. BENSON.

### Setting a Lathe Quickly for Taper Turning

A SHOP recently received an order for turning a large number of tapered brass plugs of varied lengths and diameters. The lathe on which the orders were filled as they came was an old one, not having the common taper attachment, which would have made the job an easy one. The taper per foot in inches was of course given with each lot. The illustration shows the manner of setting the tapers, which, though they did not afford the rapidity of an up-to-date machine, gave excellent results.

One of the plugs out of each lot was

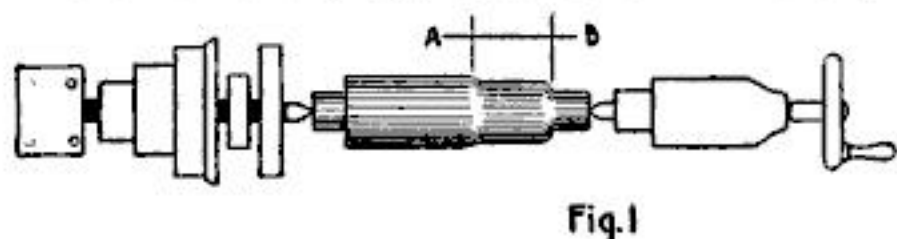


Fig. 1

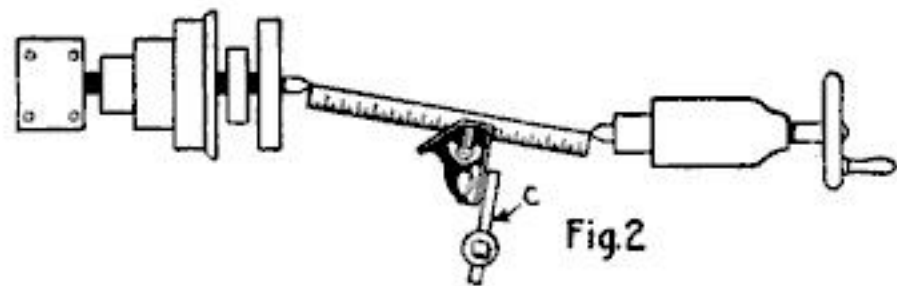


Fig. 2

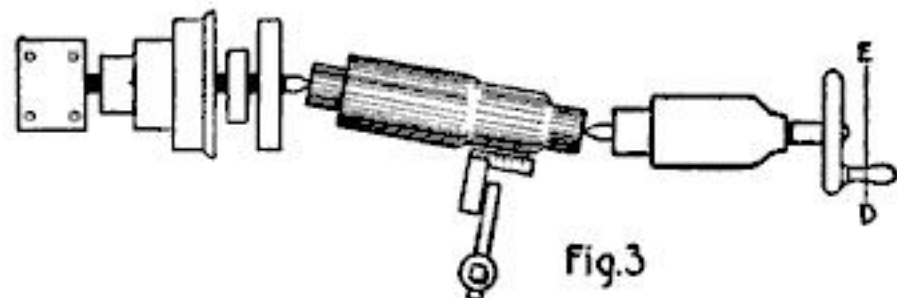


Fig. 3

Manner of setting the tailstock of a lathe for turning a taper of a given length and size

turned back for about 4 or 5 in. of its length with the centers in line, as shown in Fig. 1, A-B. The tail-stock was then set over to one-half the given taper, and the end tips of a 12-in. box scale brought in contact with the center points. In Fig. 2 a piece of

steel C squared on three sides was then drawn fairly tight in the tool post and tapped with a hammer to bring it in line with the face of the square head. The tool post was then run back and the work again placed in the machine. A small square was placed against the piece C, and the tail stock again thrown either way until the leg of the square was exactly in line with the turned portion A-B. This afforded the distance D-E, Fig 3. The sizes at the ends could then of course be readily turned. There are other ways to secure tapers by trial cuts which give good results, but owing to the size of the work in this case the method used was the most practical since it gave close and exceptionally accurate results.—F. W. BENTLEY.

### Making a High Gloss Finish on a Matt Surface Picture

A PHOTOGRAPH submitted for publication was returned to me with a request for a clearer picture. As I no longer had the negative or more prints, I naturally wanted to fix the one returned so that it would pass inspection. It was accomplished in the following manner: I laid the print on a table and rubbed over it five coats of floor wax with a soft rag. Each coat was rubbed down lightly, but thoroughly. The last two coats I finished by rubbing the print upside down on a piece of blotting paper. This resulted in a high gloss print, bringing out the detail in the shadows so that it was accepted as a new print.—HENRY SIMON.

### How to Straighten a Warped Drawing Board

IF a drawing board should warp in spite of the wooden battens on the back of it, it may be straightened as follows:

Paste strips of paper on the concave side of the warped board so that the paper strips are at right angles to the hollow. Also paste strips diagonally across these so that the board face is crossed and recrossed by strips of paper. Leave the strips on for a week and then wash off and it will be found that the board has regained its flat surface.

I have seen boards straightened in this way which were so badly warped that the paper pulled hard enough to start the glue holding the inset pieces on the back. The pull of the paper is not noticeable a few days after it is put on.



# Winning an Athlete's Laurels

## V.—Indoor jumping events

This article is the last one of a series of five. The other four will be found in the April, May, June, and July issues of 1917.

By Albert B. Wegener


**T**HERE is no difference between indoor and outdoor jumping except in equipment. There is only one distinctive indoor jumping event. It is the running high jump with the spring-board, the highest point of which is not more than 20 in. from the floor. The jump is done in the same manner as the regular event and the rules of that event govern. The only weight event that is in general use indoors is the shot put. There is no difference between this and the outdoor event except that a leather-covered shot is used.

### Indoor Vaulting Events

The pole vault indoors is exactly like the outdoor event except in equipment. The rope vault is a variation of the pole vault. It is done with an ordinary climbing rope such as is found in gymnasiums,

vault. Some vaulters prefer not to make a turn in clearing the bar. The jump should be made before the rope comes to a vertical position during its forward swing. In the two-run style the vaulter grasps the rope, runs and swings forward until his chest almost touches the cross-bar, then swings and runs backward, then forward the second time and then vaults.

The rope may be of any length or thickness, suspended from the ceiling or beams. No assisting devices, such as knots or cross-bars, are allowed. The lower end of the rope is not higher than

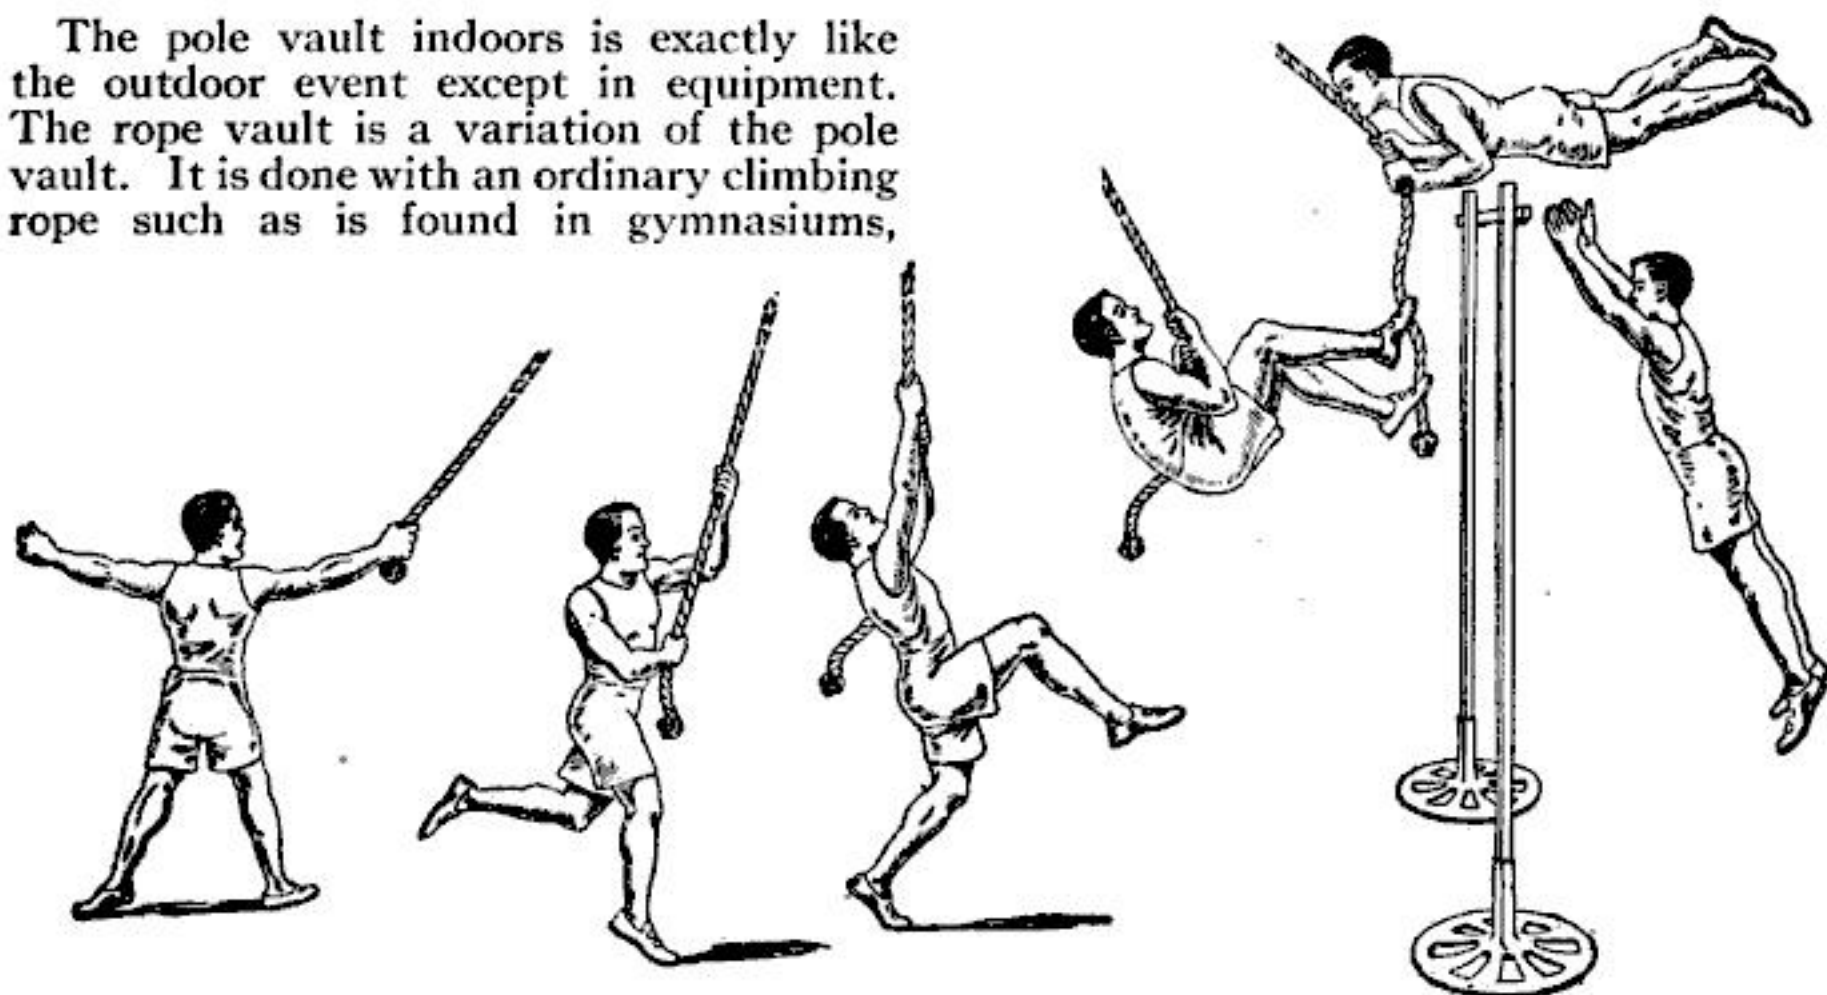

In the single run the vaulter grasps the end of the rope as far back as he can, runs forward and grasps the rope with both hands and completes the movement as in the pole vault

suspended from the ceiling. It is a much safer event for beginners than the pole vault, for which it serves as good preliminary training.


There are two good styles of rope vaulting, the single run, and the double run. In the single run the vaulter grasps the end of the rope as far back as he can, runs forward and grasps the rope with both hands about 6 in. above the head and completes the movement as in the pole

18 in. from the floor. The jumping standards must be placed so that when the bar is 5 ft. from the floor the end of the taut rope will just touch it. Standards must not be moved from that spot. The lower hand may be shifted to, but not above, the upper, and the upper hand must not be moved after the start. Contestants must clear the bar at least on the second forward swing. The feet may be used in running forward and backward and in springing



from any spot, but they must not grasp the rope. Taking more than two swings constitutes a trial. In other respects the rules for the pole vault govern.

The adjustable vaulting bar is used for the fence vault. A gymnasium mattress is suspended from the bar, which serves as the lower part of the fence. The vaulter stands facing the bar,

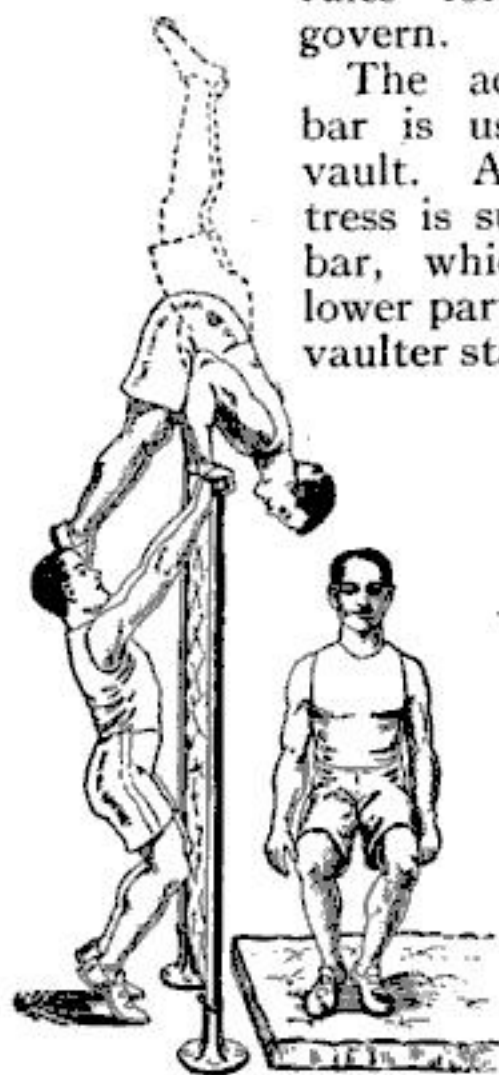

A mattress hung on the bar for a fence

grasps it with hands about 8 in. apart and then springs and pulls upward to a bent position over the bar, with elbows firmly pressed against the trunk, hips well up, feet on the near side, and head on the far side of the bar. He then straightens his legs to a momentary bent-arm hand balance and then dismounts to the mat with a quarter turn.

In making the spring, his feet must not leave the floor more than once. There must be no stop in the motion of the trunk until the floor is reached. No part of the person may touch the suspended mattress, and no part of the person, excepting the hands, shall touch the bar. The head must not be carried below the lower surface of the bar. In all other respects the rules governing the running high jump apply.


The one-hand fence vault is the same as the two-hand vault except for the obvious fact that only one hand is allowed on the bar.

The bar vault is like the fence vault except that no mat is suspended from the


bar. Thus the vaulter's feet may swing under the bar in the act of springing and pulling up over it.

The ring vault is done with the flying rings as follows: The under side of the rings in a hanging position must be not higher than 6 ft. 3 in. from the floor.

The jumping stands are placed in front of the rings in such a position that when the cross-bar is at 8 ft., the under part of the ring when stretched taut will just touch the top of the bar, and then the

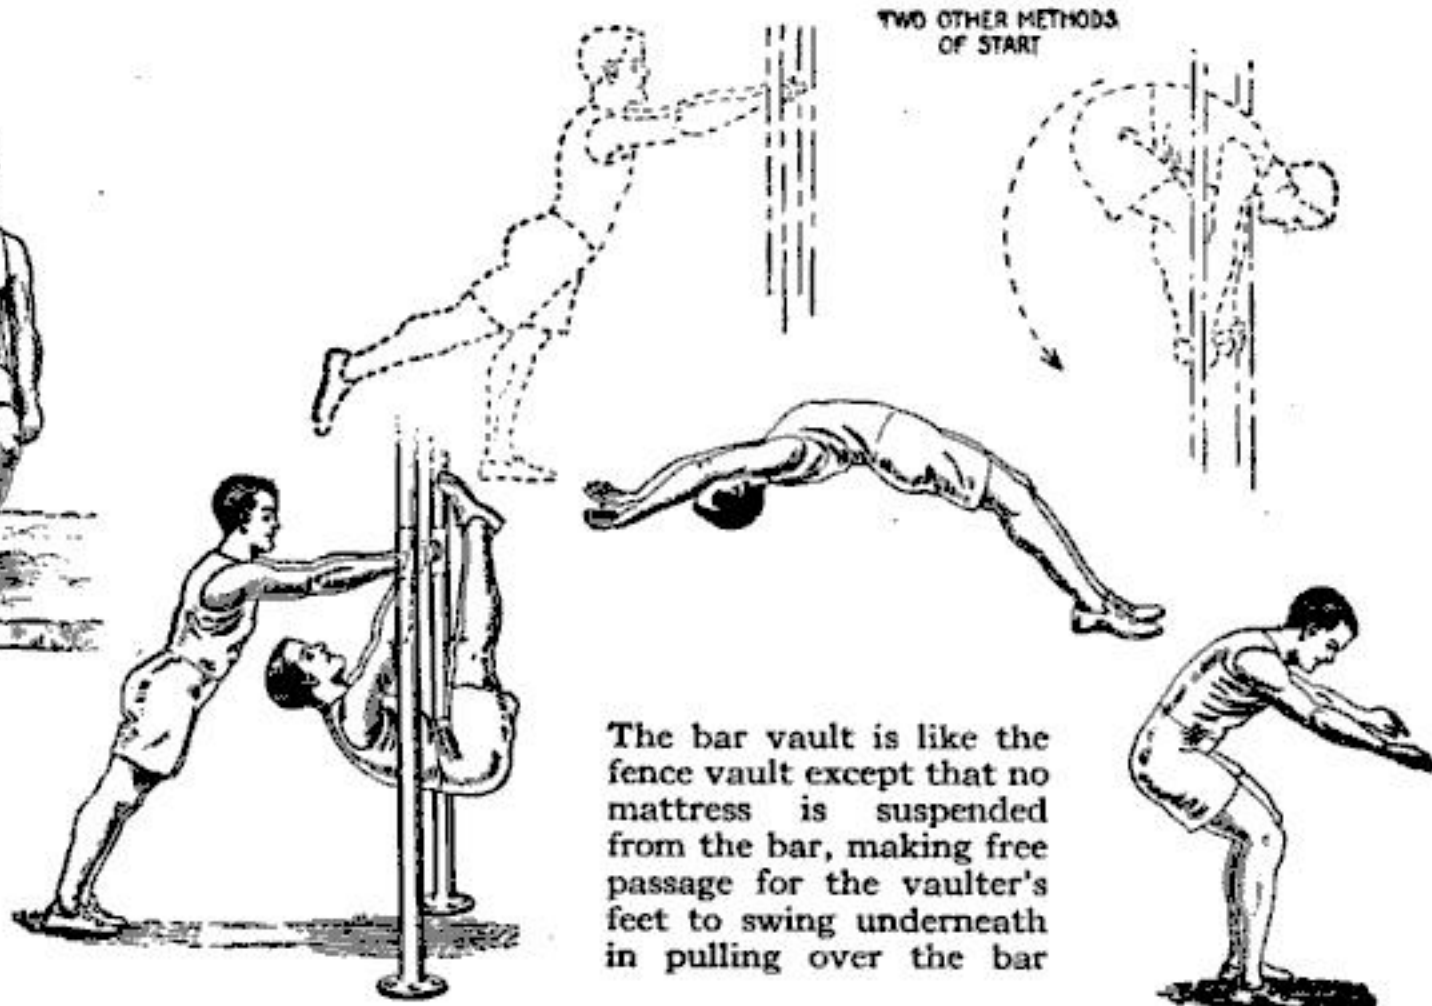

The bar vault is like the fence vault except that no mattress is suspended from the bar, making free passage for the vaulter's feet to swing underneath in pulling over the bar

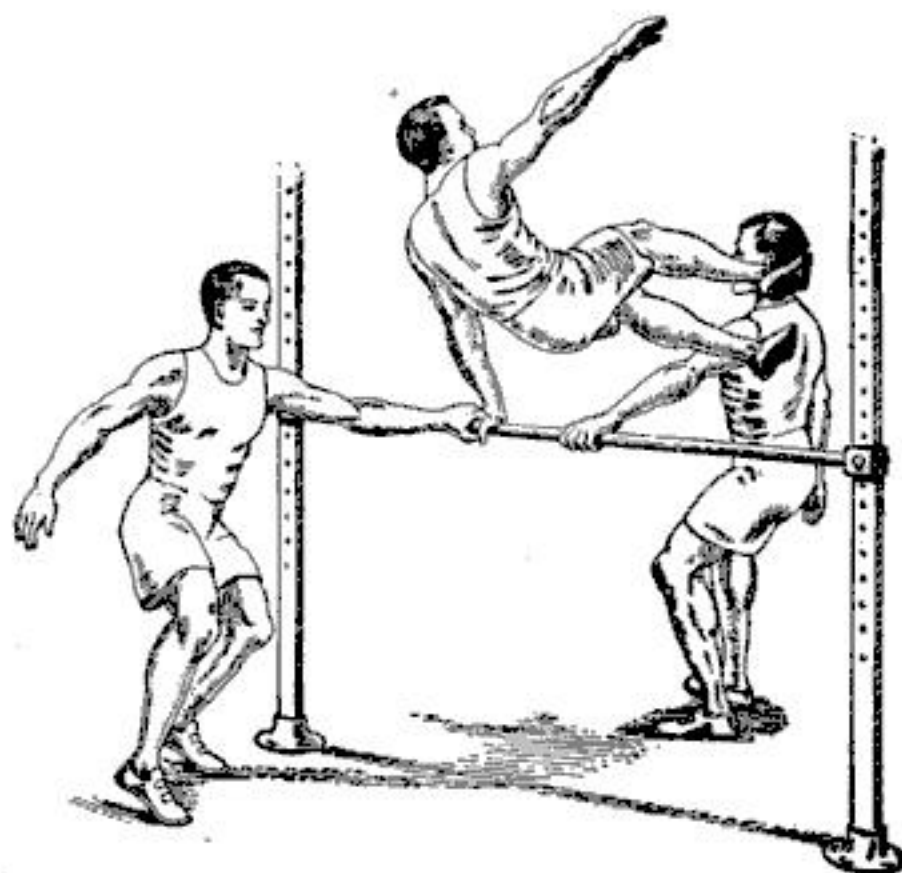

Only one hand is allowed on the bar, but the vault is made like the two-hand vault


standards must be moved forward away from the rings 1 ft. At each additional



height to which the bar is raised the standards must be moved forward 6 in. The contestant must clear the bar on the second forward swing. He may use a run or jump at any time during these swings. Taking more than two swings constitutes a trial. In other respects the rules of the pole vault govern.

### High Kicking Events

There are several styles of high kicking,

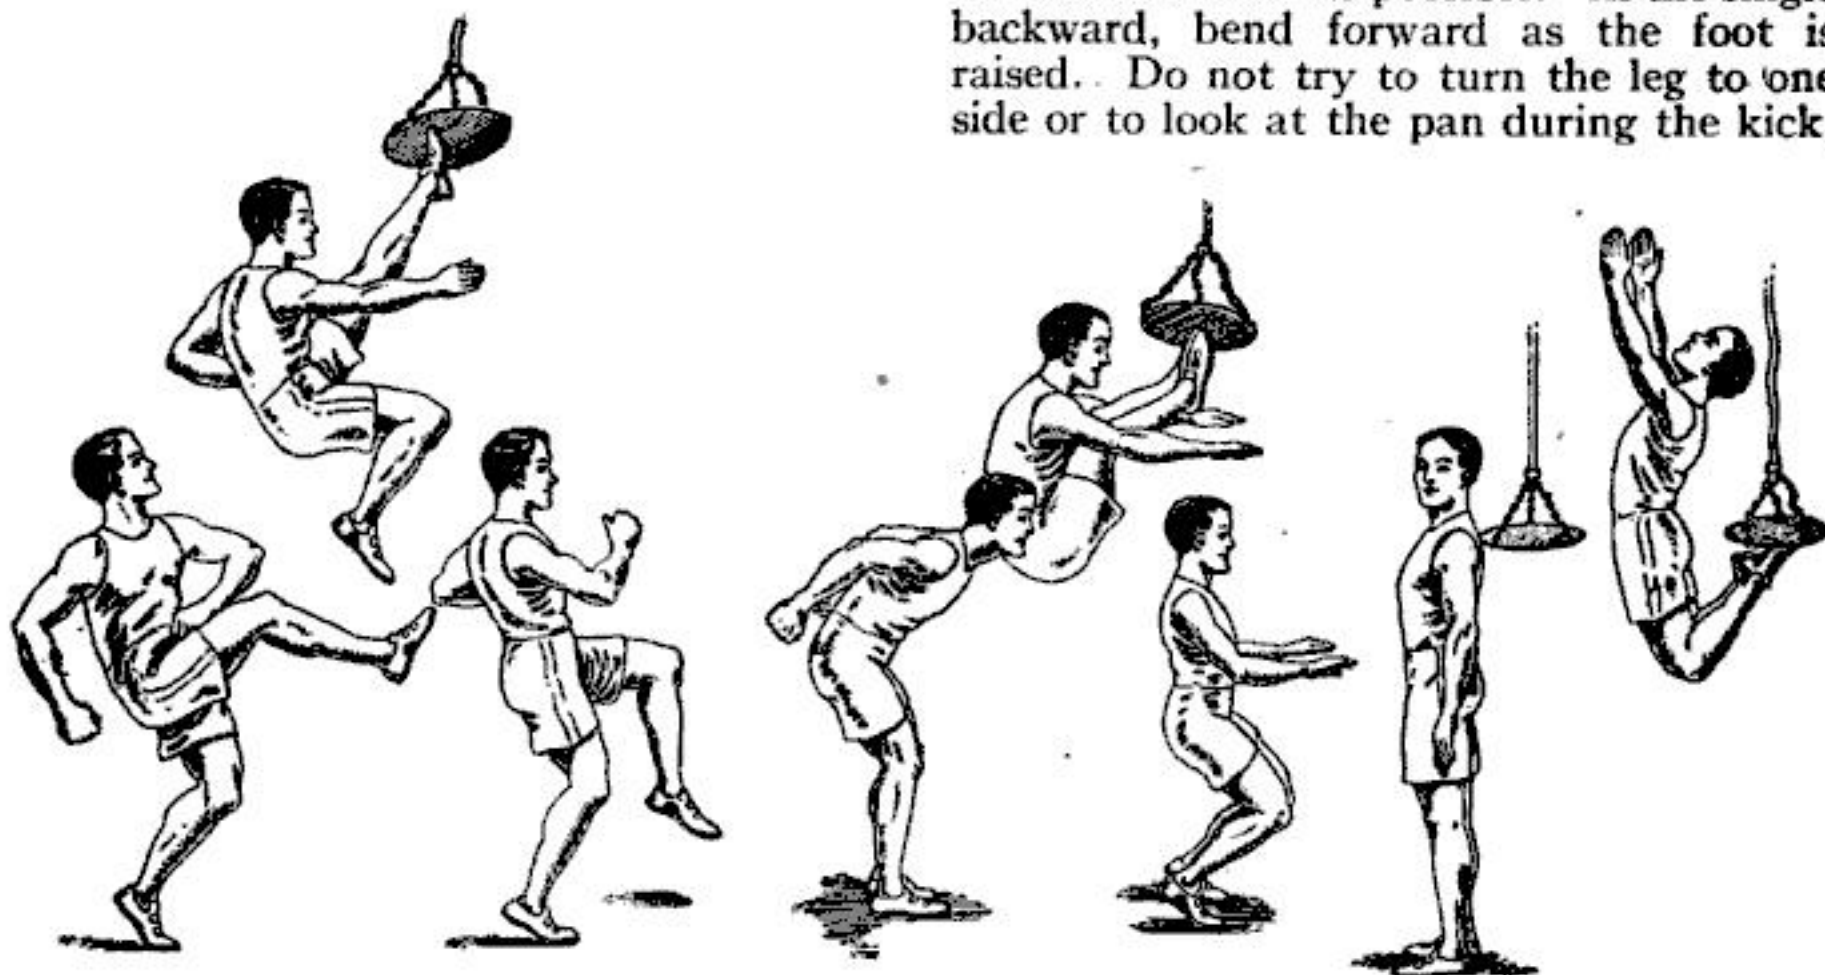

The kicker jumps and kicks with the same foot and alights on the other foot. In the second picture the kicker must jump from both feet. Some athletes like the double back kick as in the last picture

but the only ones that are used in indoor meets are the scissors, the double, and the "hitch and kick." If a high kick is scheduled without specifying any particular style the contestants may use any style they wish. There is no rule as to how the kicker must alight except that he is not to be assisted. In other respects the rules of the running high jump govern.

The scissors kick is the best style of kicking. In it the kicker jumps and kicks with the same foot and alights on the other foot. The approaching run should be made like that of the running high jump and the free leg should be used in giving a strong upward impetus.

In the double kick the kicker must jump from both feet and kick the pan with both at the same time. This requires a strong forward bend of the trunk. The legs should be raised with the knees bent sharply and spread outward.

With the hitch and kick the pan must be kicked with the jumping leg and the kicker must alight on the same foot and hop twice to demonstrate that he has his balance.

In kicking informally athletes are sometimes fond of doing the double backward, the single backward, the double forward jump and single kick, and the stretch kick.

In the double back kick the athlete should stand with his back touching the pan. After he jumps he should hollow the back as much as possible. In the single backward, bend forward as the foot is raised. Do not try to turn the leg to one side or to look at the pan during the kick,

but raise the leg directly backward. In the stretch kick the kicker must keep one foot on the floor.

### Miscellaneous Events

An ordinary gymnastic climbing rope is used for the rope climbing event. A tambourine or bell is fastened near the rope 18 ft. from the floor. The start is by pistol shot, and the time is taken from the flash to the touching of the bell or tambourine. The contestant sits on the floor, with thighs flexed and legs extended in front. He must not touch the floor with any part of his person after the pistol shot. Each contestant has three trials; the time of the best one is taken. The rope must not have any assisting devices, such as knots, balls, etc.

The best way to climb is "hand-over-hand," working the legs alternately up and down with knees bent. The knee should



be raised first and then the hand of the same side.

In gymnastic nomenclature the snap under the bar is called "short underswing for distance." It was first introduced as

an athletic event by the author in 1900, and was later adopted by the A. L. N. A. Stand, grasp the vaulting bar, jump to a momentary free front rest, then drop backward as though about to start a backward free circle. At a point just below the bar, flex the thighs and then extend them forward; release the grasp, project yourself horizontally forward as high as the bar. Just before the feet strike the floor swing the arms forward to bring the body to an erect position.

A regulation bar or an adjustable (in height) horizontal bar must be used. The height of the bar must be 4 ft. 9 in., measured from the top of the bar. The bar must not be raised or lowered. A line is



Climbing rope to tambourine or bell

drawn with the front edge extending from center to center of the uprights and directly beneath the horizontal bar. This is the scratch line, and all measurements must be made from the front edge of this line at right angles to the nearest mark made by any part of the person of the competitor.

The start is made with both feet on the floor back of the scratch line and the hands grasping the bar. Both feet must leave the floor at the same time and may not leave the floor more than once. The hands must be grasping the bar when the feet leave the floor. No part of the person of the athlete should touch the bar.

The author objects to the limitations of these rules that have been adopted by the A. L. N. A. It is far better to allow liberty in the preparatory position and movement just as in any other athletic event. Some athletes prefer to start in the

standing position on the bar, and others from a stand on one foot with a free swing with the other.


The snap under for height is an event listed by the A. L. N. A., and is not popular because of frequent injury to the forehead, due to striking the bar in the close pull-up.

(The End.)

### Teeth of a Hack-Saw Blade Used for Spacing on Section Liner

THE gaging device for the liner is made of a 16-in. hack-saw blade, *A*, having 18 teeth to the inch. This is ground on the sides to remove all set, then the points are slightly rounded to remove the sharp corners. It is preferable to select a soft hack-saw blade as it can be straightened by hammering the edge at the proper place. The straight edge *B* is made of sheet steel  $\frac{1}{2}$  in. wide and  $\frac{1}{16}$  in. thick and is pivoted at one end in the center of a half circle *C* cut from No. 22-gage sheet bronze. The heel of this piece comes to the back edge of the saw-blade and a portion of each corner *D* is turned back and over the back edge of the saw-blade. A guide-block *E* is fastened to the gage piece *C* to keep it in place on the saw-blade.

The semi-circular edge of the spacing head has a slot, as shown, in which an adjusting thumb-nut is used to set the angle to the blade. The edge is marked in degrees so that this setting is easily accomplished. The spacing arrangement consists of a

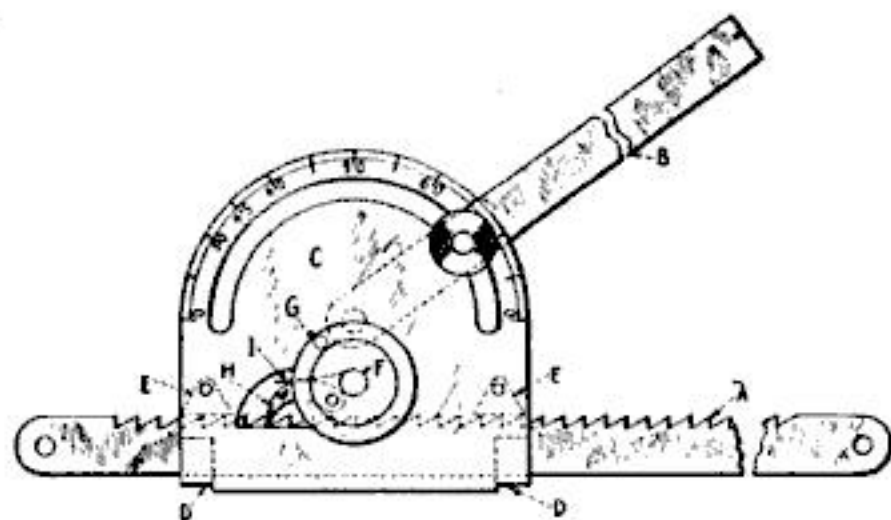

The teeth of the blade being accurately cut, the spacing is made perfectly uniform

knurled wheel *F* which has a stop-pin *G* to limit the motion of the pawl *H*. A small spring *I* holds the pawl in the teeth of the saw-blade. A turn of the wheel forward and back moves the straight edge up to a new position, making the spacing perfectly uniform with the spacing set by the stop-pin.—C. S. BEARDSLEY.





# The Amateur - Electrician

## And Wireless Operator

### Charging Storage Batteries With Direct Current


**C**ONNECT six 110-volt, 32-candlepower, 100-watt carbon lamps parallel with each other and in series with the battery to be charged. This combination will approximately give the proper charging rate of 6 amperes. If the charging rate is to be increased, add lamps. If decreased take off lamps. To fully charge an empty battery leave it connected until each cell of battery gasses freely. Each cell should show a specific gravity ranging from 1,275 to 1,300.—EDWIN JASPER.

### Simple Method of Making Storage Battery Cells

**A**N old type of storage cell reconstructed in an original and efficient manner is shown in the illustrations.

The battery plates are formed of strip lead and are separated by thin strips of rubber cut from a 10-cent sponge, which are held to the lead plates by small elastic bands. The plates are "formed" by the Planté process.

One of the illustrations in the next column shows very clearly how the

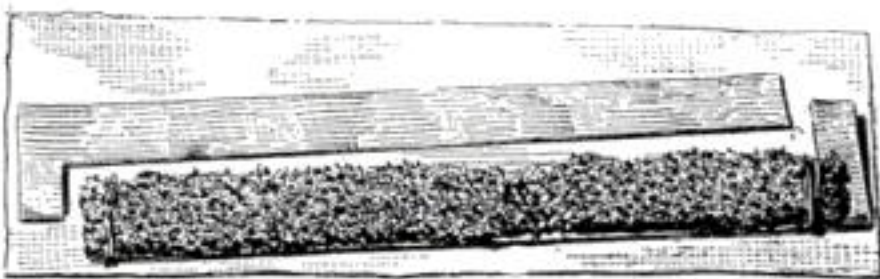

A detailed view showing how the lead plates are cut from one strip and separated by rubber

plates are assembled, while below it in the same picture is shown the celluloid jar or container, made from a 10-cent hair or puff box. The domed top of this box is slotted at opposite ends to permit the lugs to protrude.

A finished cell is shown in the upper right-hand corner of the picture, encased in a light aluminum cup. This view shows the rubber filler cap, in the center of the



The lead strips are made into a coil and set into a circular box, the domed top of which is slotted to permit the ends to protrude



celluloid cover, which is partly concealed under the ring of pitch that effectually seals the battery.

The first detailed view shows how the lead plates are cut from one strip of material about 3 by 30 in. It also gives a clear idea of how the sponge separators are attached.

The capacity of this little cell, which varies with the amount of active lead surface exposed, is very high for a given unit of weight, owing to the extreme lightness of the case, container, and separators employed in its construction. By leaving off the aluminum case, and at the same time perforating the lead plates throughout their entire surface, a very satisfactory high capacity cell of unusual lightness will result.—R. U. CLARK, 3rd.



### How to make a Secure Joint in Copper Tubing

SINCE copper tubing is so useful in radio work, knowledge of how to make a neat and effective joint should be valuable. In building helices or spirals it is impossible to splice short pieces in the ordinary way. By tapping threads inside each of the abutting ends and inserting a short threaded piece of copper or brass rod to fit, as in Fig. 1, a perfect joint may be made. Where a wire extension from the end of the tube is desired, the same general plan may be followed, as shown in Fig. 2 of the illustration.—F. MAC MURPHY.



FIG. 1




FIG. 2

A threaded plug in the  
pipe ends for a close joint

### Things to Know About Lubricants for Machinery

ALL machinery owners have had it drummed into them that only a good grade of mineral oil is fit for oiling their machinery; but there are a few extreme cases in which something else is used, and they are interesting enough to mention. The function of a lubricant is to supply a thin film between the sliding metal parts so that they do not touch each other with sufficient pressure to produce friction or heat or to cut one into the other, and to keep the sliding parts cool.

The "bearing pressure," or pressure of one part upon the other, determines to a great extent the kind or quality of lubricating oil to use; for with heavy pressure a poor or thin oil will squeeze out, or its film become broken down. Then the metal parts will rub and heating and cutting will begin, to the detriment of the machinery.

As a cooling medium, water will be found satisfactory. Where pressures are light and a flood or bath of water can be maintained without causing rusting, water is fully as satisfactory as oil and much cheaper, although the instances where it may be used are not many.

The garage man finds a great deal of trouble caused by carbon in the cylinders—pre-ignition, knocking, loss of power, etc. This carbon is considered a necessary evil,

of no good whatever. But experience shows that a certain quantity of this carbon—not an excess—is as good a lubricant as may be found. For sleeve-valve motors it has been found that if a carbon deposit is in the grooves and creases of the sleeves no other lubrication is needed. This is easy to believe when we know that carbon is a constituent of mineral oil. Such a deposit is a form of graphite, which we know is self lubricating. Therefore it is a substitute for grease.

Pure glycerine is as good a lubricant as any oil if used where there is no great amount of heat. It will stand almost any ordinary bearing pressure and has a high viscosity rating. In plants manufacturing food products, bottling plants and breweries, compressed air is used extensively in contact with the products for various purposes, such as charging, filling, etc., and there is always a certain amount of the lubricant from the cylinder of the air-compressor that finds its way through the pipes and comes in contact with the product. In almost all cases this would be disastrous if ordinary lubricating oil were used, owing to the discoloring, the various chemical actions and the possible injury to health. But for this purpose glycerine is extensively used.


Fish oils, vegetable oils, animal oils and sometimes kerosene are used for such machinery. We find the various vegetable oils used on machinery in the preparation of products where a single drop of mineral oil on, or in, the product would be decidedly harmful.

Thus, for instance, a machine working on corn products is lubricated with corn oil and the operator is supplied with a squirt can filled with this oil. None of the vegetable or animal oils, however, is to be recommended for lubricating any metal surface. They are for use only in extreme cases where the bearing pressure is low. The bearings should be carefully attended to and watched.

A mixture of lard oil and kerosene will make a sufficiently free-running journal and is often used on hand-operated feed tables of machines. When freshly applied it gives a free and easy sliding fit to roller-bearings, but owing to the evaporation of the kerosene and the gumming quality of the lard oil, it must be renewed and freshened up frequently. Soap is the best lubricant to use on wood, and soapy water makes the best lubricant for rubber surfaces.



# The Human Morse Code

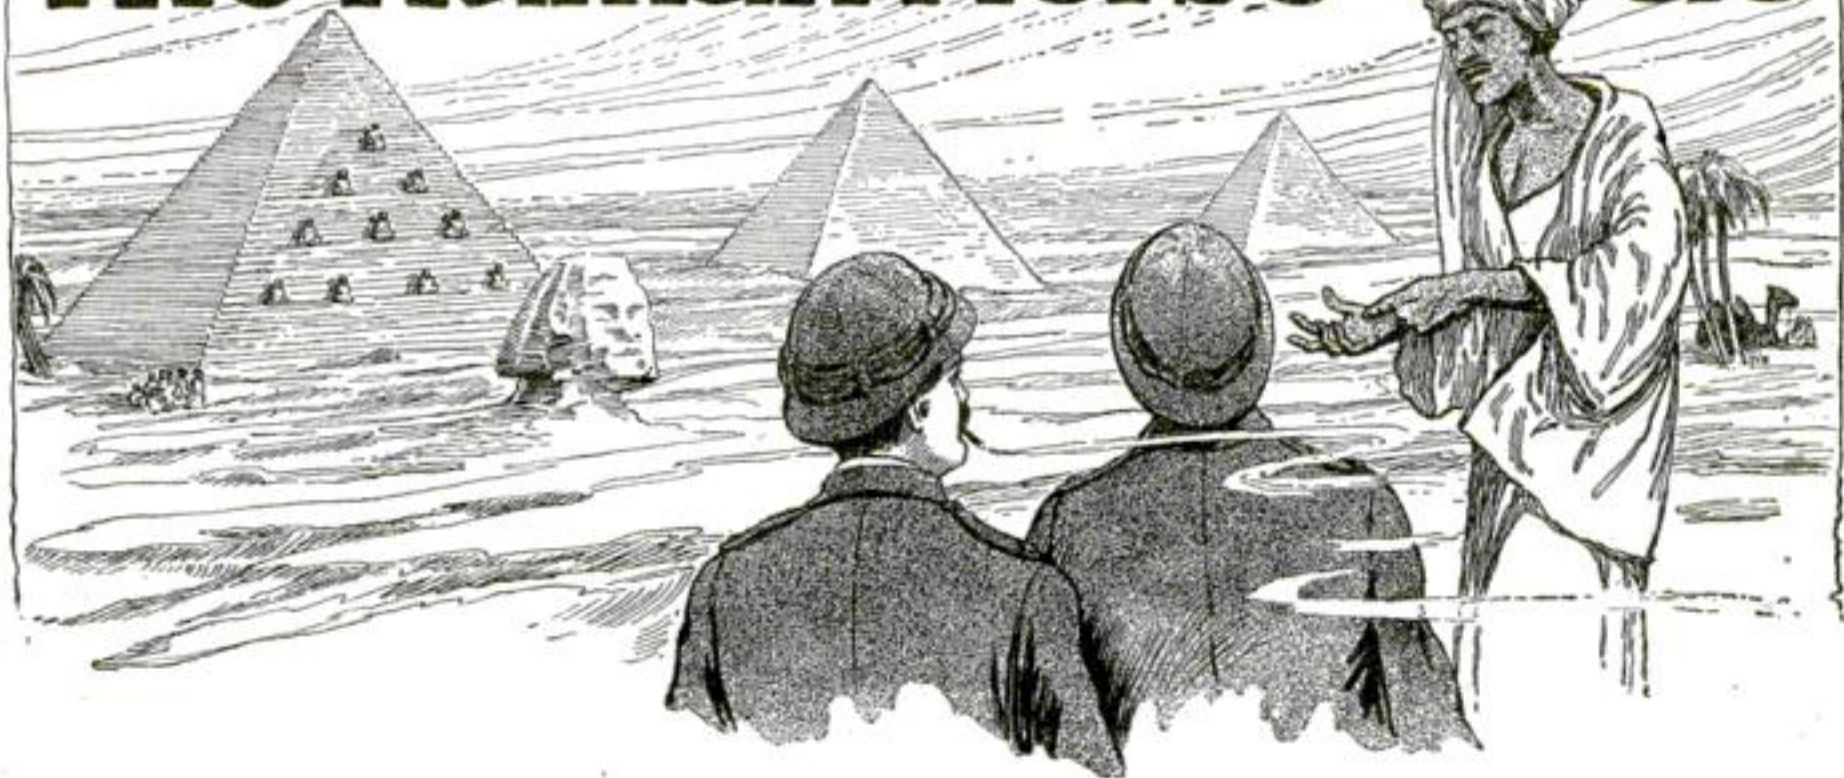

IN an article by R. G. Micklam in the *Wireless World* recently an interesting simplified method of committing to memory the Morse Code by the use of a succession of what may be termed mnemonic groups was given. He takes us on a mental trip to Egypt, where we seat ourselves directly in front of the Pyramid of Cheops. We note, as we do so, a group of Arabs standing by, who have evidently received a radiogram from England apprising them of our advent, for no sooner are we comfortably seated than they race away and begin scrambling up the face of this 6,000-year-old monument. Having reached their appointed places, they squat down simultaneously, clasp their arms around their shins and sink their chins on their knees, so that they appear to us, some 500 ft. away, like a collection of glorified full-stops, their blue *galabiehs* forming a pleasing contrast against the light brown ridges of the pyramid. We notice, too, that they have arranged themselves in a symmetrical group, as in Fig. 1, and we turn to a Dragoman standing by to ask what this figure may mean. He tells us that the Arabs take us for mere tourists (Pshaw!) and want to earn "*backsheesh*." Well, nobody begrudges an honest man a mouthful of bread; on the other hand, by quite a happy coincidence the Arabic word for bread is "*eish*" and these cunning fellows have so grouped themselves as to portray in Morse Code the four letters composing that word, since one dot (.) represents the letter E, two dots (..) represent I, three dots (...) S and four dots H, and if this is

how we are to learn the Morse alphabet, it promises to be quite a simple matter.

The second evolution appears to be the preliminary to a precipitate roll down the oblique face of the pyramid, as the six men composing the three upper groups suddenly straighten themselves out, as in Fig. 2, and we are on the point of wirelessly begging them not on any account to break their Egyptian necks for the mere gratification of our unworthy selves, when we are given to understand they threaten nothing more violent or deadly than the representation of three further code letters, the topmost man now describing himself as a T (—), the

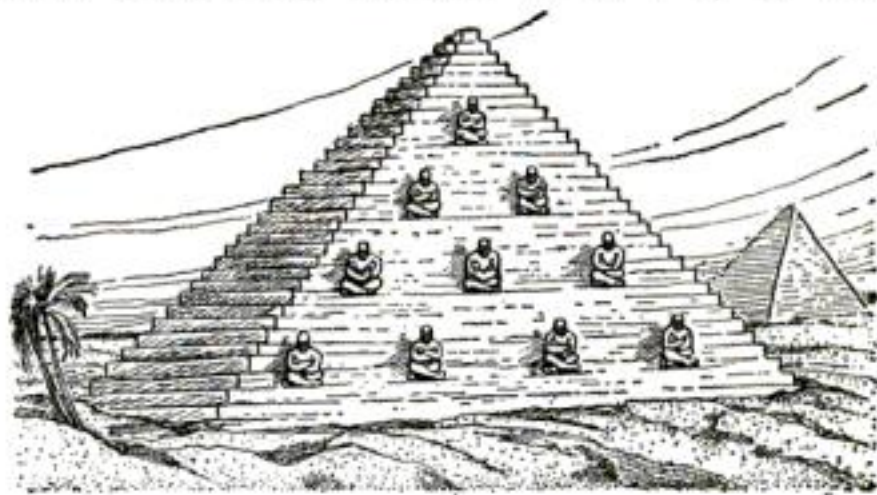


Fig. 1. The Arabic word for bread "*eish*" spelled out with human figures

second two making out that they represent M (— —), while the third group aver it is *they* not *we* who should be surprised, since they collectively represent O! (— — —). On learning this, however, we begin to feel just a trifle uneasy in our minds, for it can hardly have been a second coincidence that, by a combination of the two groupings, the word "*eishtmo*," should have been spelt,



which is the Arabic equivalent for "insult him." If these saucy sons of Ham are laughing up their sleeves at us, they will not get their mouthful of "eish" after all. And yet what reck's it? We are not out for

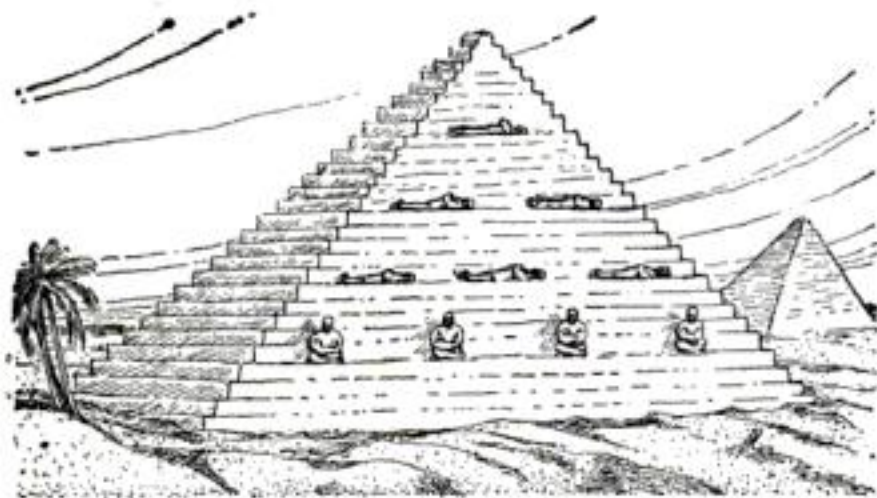


Fig. 2. The combination of the first spelling and this makes "eishtmo," Arabic for "insult him"

intellectual recreation and have the satisfaction of memorizing in these two groups no less than seven letters of the Morse alphabet.

The Arabs now call upon several more of their sun-scorched brethren to join them, and, thus reinforced, proceed to entertain us with a third grouping, a picturesque one withal, for we here get a combined figure of squatting and prone Egyptians, as in Fig. 3, which is certainly not a complicated figure, yet it helps us to tuck away in the recesses of our brain boxes six more letters, namely:

(A) . — (U) .. — (V) ... —  
(N) — . (D) — .. (B) — ...

Happily these form no equivocal word in Arabic so we conclude we have been entertaining unworthy suspicions of our desert

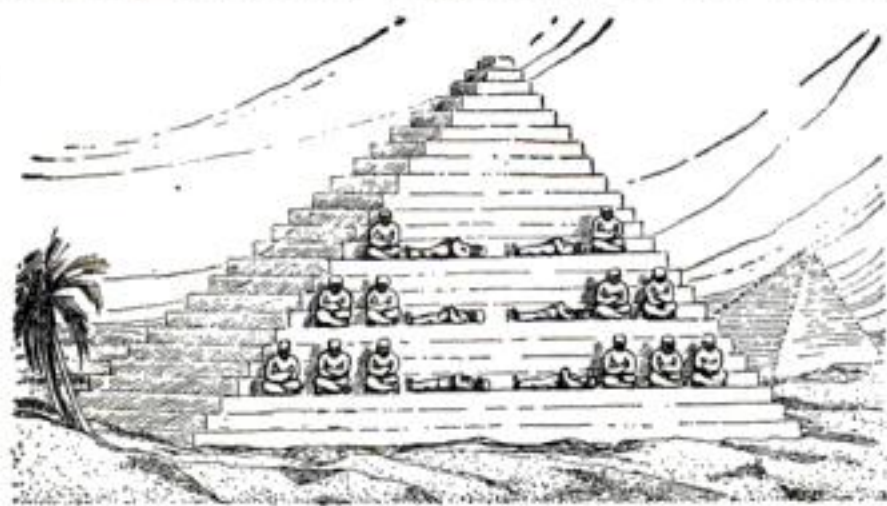


Fig. 3. Positions of the men for making A, U, V, N, D, and B in the Morse code

friends. While we are mentally registering the six symbols, however, the top two sets of men begin quarreling and approach each other in a menacing attitude; but as we are at the safe distance of 500 ft. from the seat of disturbance, we content ourselves with merely adding another letter to the tablets

of our memories, for the conjunction of the two opposing factions represents the letter P (. — — .). Meanwhile the two couples commence stealthily to maneuver round one another, so that, although they began thus . — — . they presently stand thus — .. — which may be all quite fortuitous, of course, still we manage to profit by the chance grouping, since — .. — is X.

Do we realize that we are already considerably more than half way through the alphabet? Not without casualties, however; for in the fracas above alluded to three men are injured: the first is therefore gently laid down, a dark visaged brother sits at his head, fanning him with the tail end of his robe, while another sits at the injured man's feet and tickles his toes with a spike of camel grass. We simply cannot resist the temptation to place another letter in our mental warehouse—viz., R (. — .) for the three men are now grouped thus.

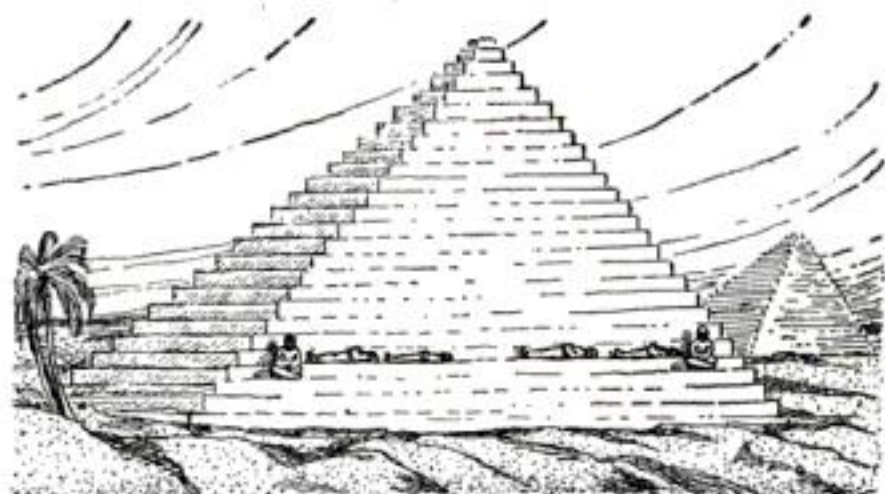


Fig. 4. The men take their places as shown which in the Morse code is W G

The two other wounded fellows call out faintly for "water," so they are likewise tenderly laid out, head to head, and one of the onlookers sits between them, giving each alternately a sip of water out of his inverted tarboosh, hastily filled from the pump of Mena House Hotel close by; thus the group becomes — . — and as it must be a hopelessly diseased wind that cannot manage to blow somebody some good somehow, we so far take advantage of the woes of these two unhappy wretches as to add the letter K to our rapidly growing Morse alphabet, thereby accounting for 17 out of the 26 letters.

Another group composed of six men evolves itself as in Fig. 4, but the component parts thereof immediately begin a 120-deg.-in-the-shade argument. As far as our obliging Dragoman is able to make out from this distance and the echoes thrown back from the face of the pyramid, they are talking about cricket, and the left three



cannot convince the right trio that "W.G." was the greatest cricketer the world has ever known. We, having no doubts about

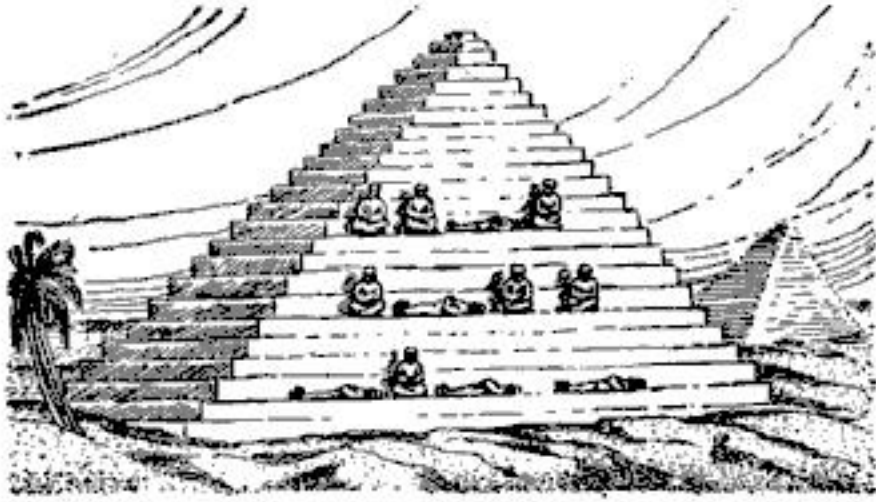


Fig. 5. Three more letters of the alphabet spelled out by the men; these are F, L, Y

the fact, take the chance of identifying the late champion with the Morse initials, though he would not have thought we knew much about cricket if we had only allowed him four stumps and two balls (. — — — .) for a country match.

The pantomime is here rudely interrupted by the sound of a buzzing airship propeller, and, looking up, we descry a beautiful monoplane gracefully winging its way, heading straight for the summit of our pyramid, behind which it presently disappears. We remember this is the French aviator, *De Vol Plane*, attempting to win the £5,000 prize by making a circuit of the world, upside down, without descending once for gasoline, but in the midst of our speculations as to his chances of success we are recalled to the business in hand by a sudden shuffle on the part of our acrobatic friends. They have forgotten their cricket controversy and hastily thrown themselves into a curious group, as in Fig. 5, which seems to us just a horrid jumble of people, until Mr. Know-all, our Dragoman, ex-

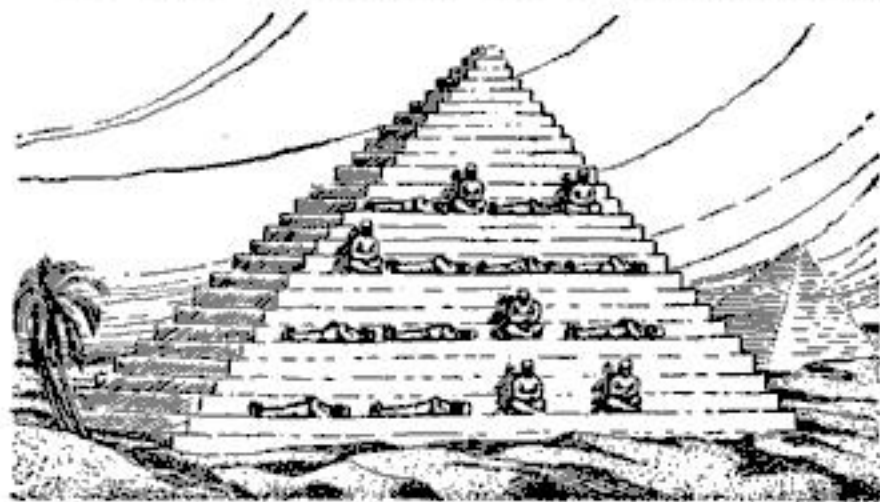


Fig. 6. The alphabet is completed by a quadruple group of men representing C, J, Q, Z

plains that the group represents the three letters F L Y, which is appropriate enough under the circumstances, as we feel bound

to admit. So we add those letters to our list.

Our dusky entertainers now complete the alphabet with a quadruple group, for which, to our chagrin, we are able to find no mnemonic peg whatever (Fig. 6), but which we are told represents the four letters C J Q Z, and I defy any man to make anything approaching an intelligible word out of that.

I conclude this article by drawing attention to a very curious fact in connection with the Morse Code—viz., that in distributing his symbols over the alphabet, Mr. Morse did not, in many cases, allocate

LETTERS IN ORDER OF FREQUENCY	PRESENT CORRESPONDING MORSE SYMBOLS	LINES OF DIVERGENCE	IDEAL ALLOCATION IN ORDER OF VALUE	SHOWING WHERE PRESENT SYMBOLS IS CORRECT
E	.		.	YES
T	—		—	YES
A	— .		..	NO
I	..		— .	NO
O	— — —		— .	NO
S	... —		... —	YES
N	— .		— — —	NO
R	— . —		— . —	YES
H	— . .		— . .	YES
L	— . . .		— . .	NO
D	— . .		— . .	YES
C	— . . . .		— . . . .	NO
U	— . . .		— . . . .	NO
F	— . . . .		— . . . .	YES
M	— . . .		— . . . .	NO
G	— . . .		— . . . .	YES
W	— . . . .		— . . . .	YES
K	— . . .		— . . . .	YES
P	— . . . .		— . . . .	YES
V	— . . . .		— . . . .	NO
Y	— . . . .		— . . . .	NO
B	— . . . .		— . . . .	NO
X	— . . . .		— . . . .	YES
Q	— . . . .		— . . . .	YES
J	— . . . .		— . . . .	YES
Z	— . . . .		— . . . .	NO

Table or chart showing the distribution of Morse signals and their ideal allocation

the shortest symbols to the most frequently used letters, the amount of divergence from the ideal distribution being shown in the diagram above.

Counting the dot as 1 and the dash as 3, we get a specific time-value for each Morse signal, and it will be seen that column four of the diagram represents the correct progressive order of the ideal Morse alphabet, beginning with a single dot valued at 1 and ending with a symbol composed of a dot and three dashes valued at 7. Thus the letter E, which is by far the




most used letter in the alphabet, is rightly given the shortest Morse signal; T being the next letter in order of frequency is awarded the next shortest signal, and so on, until we find Z, the least employed letter, deservedly saddled for its laziness with one of the longest Morse signals.

But by Mr. Morse's allocation of English letters, as will be seen on reference to column five of the diagram, only 14 out of the 26 letters are correctly suited. This means great loss of time in transmission. It may be observed in this connection that the Morse code is in use on no less than 95 per cent. of the telegraph lines of the world.

It seems almost a pity that advantage was not taken of the advent of wireless telegraphy to redistribute the Morse symbols on the ideal basis here demonstrated.

### Making a Good Outdoor Ground for Wireless Apparatus

THE outside ground wire for the wireless set or other experimental apparatus of the amateur is continually meeting with misfortune. No ordinary joint seems capable of permanency. This is usually due to

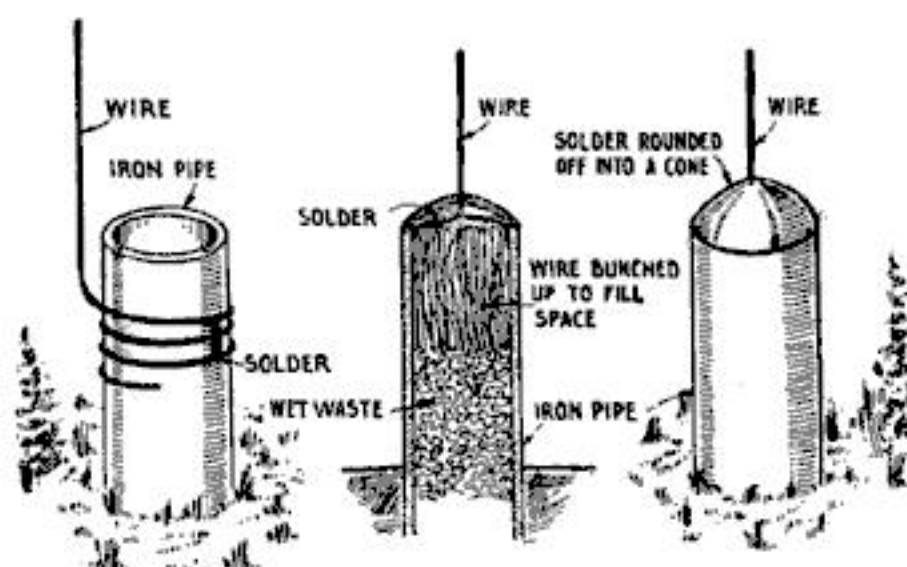

The old and the new methods of making a permanent ground for electrical apparatus

inconvenient locations, especially in crowded cities where the shed or "shop" is likely to be next to an alley fence or in a similarly exposed place.

In our usual thoughtless following after precedent we are likely to believe that the standard grounding joint customarily employed by telephone and electric lighting companies is about the only grounding joint possible. Consequently every time the ground wire gets stripped off its pipe, we replace it with another of exactly the same sort. This usual grounding joint is shown in the illustration. It consists simply of the groundwire wrapped several times

around the pipe that goes down into the earth, the turns being held in place by occasional dabs of solder. Naturally this arrangement is not very strong mechanically.

A more satisfactory joint can be made as follows: Take a round file and brighten up the interior of the pipe at the end; then wet some waste and tamp it down into the pipe a distance of about  $1\frac{1}{4}$  in. Bunch up the end of the ground wire until it fills most of the space above the waste; then heat the end of the pipe and the bunched-up wire with a soldering torch, at the same time applying a little soldering paste, in order that the solder to come may stick easily. When the end of the pipe becomes hot enough to take the solder readily, apply enough of that material to completely fill the end. This process will naturally entirely submerge the bunched-up wire. With a cloth, round off the upper surface of the solder while it is still warm, until it forms a neat cone, with the ground wire coming out of the center as shown in the illustration.

This sort of a ground connection buries the end of the wire inside the pipe, instead of causing it to cling to the exterior as best it can, as with the old way. The end of the pipe may be subjected to very rough treatment indeed, without disturbing the wire.


### Auto-Transformer in Headlight Circuit on a Magneto

HEADLIGHTS from the Ford magneto are so wired that when one of them burns out the circuit is broken and the other one goes out. This trouble may be easily overcome by the use of a small auto-transformer. Such a transformer may be made in a rectangular form from thin strips of sheet iron  $\frac{1}{2}$  in. wide, cut in lengths to make four piles 1 in. high, two of which are  $1\frac{1}{2}$  in. long and the other two  $2\frac{1}{2}$  in. long. These are all given a coat of shellac varnish and allowed to dry; then they are built up in dovetail fashion after the coils are placed on one of them.

Make two coils of 120 turns each, using No. 20-gage wire—about  $\frac{1}{2}$  lb. will be required. The method of placing the coils on the core and the necessary wiring are illustrated. Should the device fail to work satisfactorily, reverse the connections of the coils. With this outfit, the burning out of one headlight will not cause any perceptible change in the light from the other. It is also possible by winding another coil on



the core, to get a low voltage from the magneto for the dash or tail lights. Use No. 20-gage wire for this also, and the number of turns should be equal to the voltage

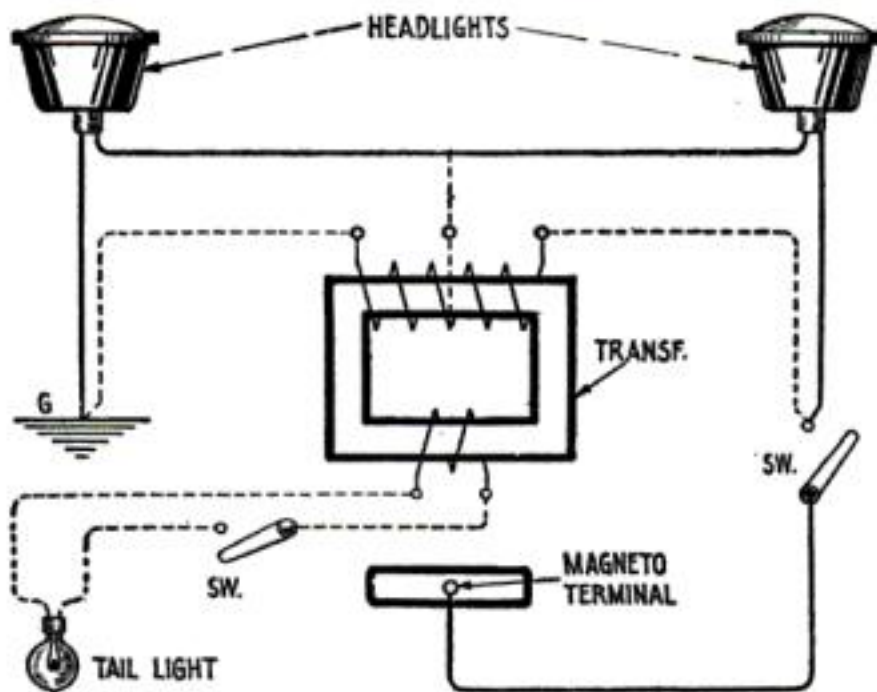


Auto-transformer placed in the circuit to keep one light burning after the other burns out

required by the lights, multiplied by 17. The wiring for this is also shown in the diagram.—CLAUDE SCHUDDER.

### Constructing a Thermostat to Regulate Furnace Heat

IT is not always necessary, but is a convenience to have a thermostat for regulating furnace heat. These instruments can be purchased at a nominal price; but one simple in construction can be made that will serve the purpose. Its working is based on the expansion of metals. The difference in the expansion of steel and brass is considerable. If thin strips of these two metals be firmly riveted together the rising temperature will cause them to bend, with the steel on the inside of the curve thus formed. This is due to the fact that brass expands twice as fast as steel.

The accompanying illustration is almost self-explanatory. The two metals riveted together are shown at *A*, fastened to a block *B*. The short end of the lever *C* is connected at the other end of the metals by

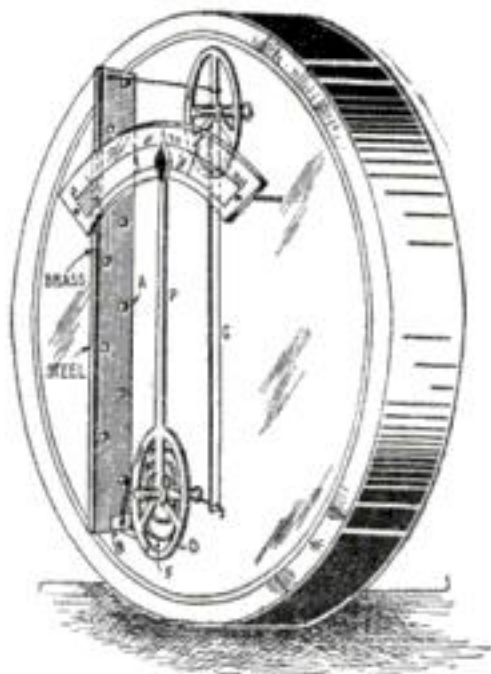

The unequal rate of expansion of the metals causes the hand to move

means of a silk thread, the long end being connected with the balance wheel *D* in a similar manner, the thread being given a few turns around the axle before it is fastened to a spoke. The pointer *P* is attached to the balance wheel and moves over a scale. The spring *F* is to return the pointer to its lowest reading.

Under varying temperature the pointer will assume various positions on the scale, which must be calibrated from a standard thermometer. It is only necessary to mark the scale between the temperatures required for its action—from 60 to 80 deg. for a furnace.

To calibrate accurately it will be necessary to place a thermometer close to the instrument and adjust the pointer to the center of the scale when the temperature is at 70 deg. A mark is made on the scale. As the temperature changes, make the markings read in degrees on the scale.

By placing electric contacts on the pointer and also at knobs on the scale the thermostat may be used to operate electric control devices.

The steel and brass strips measure  $3\frac{1}{8}$  in. long by  $\frac{1}{2}$  in. wide. Each piece should be approximately .024 in. thick. Use small copper rivets for fastening them together. The wheels shown were taken from an old clock, which with their shafts and bearings made a fine working instrument. The old case was used also and cover plates put on to make a neat finish.—O. B. HANSON.


### An Inexpensive Multi-Point Loading Coil

NEARLY every amateur wireless enthusiast has in his possession, or may readily obtain, the necessary materials for the construction of this loading coil. It is mounted in a box, which has a base 12 in. square and is 4 in. deep. The base of the box (the face of the mounted coil) is made of a single board. The knob *K* is the end of a ribbon spool about 2 in. in diameter and  $\frac{1}{2}$  in. thick. It is to be sand-papered and painted black, in imitation of hard rubber. For contacts, paper fasteners are used.

For coils, there is required about 1300 ft. of magnet wire. The number of coils is 50, each being 3 in. in diameter. For the rotary switch blade a piece of thin sheet brass is used, and for binding posts two carbon terminals of worn-out dry cells were taken.



The center of the base must be determined and a 10-in. circle drawn. With a compass set at  $\frac{3}{8}$  in. from point to pencil, and starting from the top of the circle, twenty-five points are to be established on each side of the starting point, making fifty points in all, and each  $\frac{3}{8}$ -in. distant from the next adjoining. Holes  $\frac{1}{8}$  in. in diameter are bored at each of these points, and at each of the lower corners. The box is

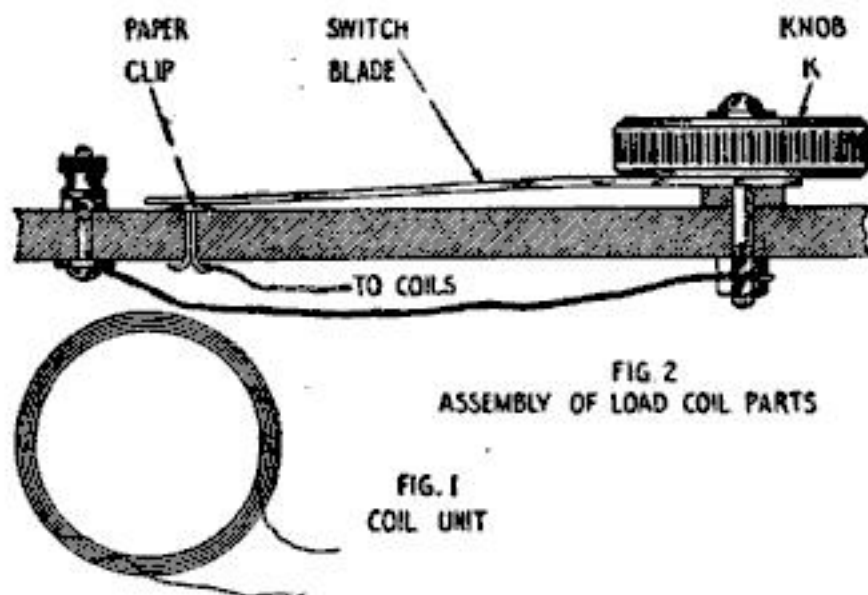

Lever with its connections and knob for making contact with clips and the coils

then sand-papered and painted black.

When the box is dry the fifty paper fasteners are inserted in holes on the circle, and the binding posts are placed in the holes in the lower corners. The switch blade is shaped and placed as illustrated in Fig. 2. To facilitate the work of wiring, the baseboard is removed. The blade is electrically connected with the lower right-hand binding post with insulated wire having sufficient slack so as not to hamper the movement of the switch blade.

Fifty small coils, as shown in Fig. 1, each having 25 turns 3 in. in diameter, are now made. One of these is connected between each pair of paper-fastener switch buttons, on the reverse side of base. That is, one end of the first coil is connected with the left-hand binding post, and the other end of the coil with the lowermost switchpoint on the left side of the circle. To this point is also attached one end of the second small coil, the other end of that coil being attached to the adjacent or second switchpoint. The remaining coils are similarly employed to successively connect adjacent points until a complete circuit is established around the arc to the last switchpoint on the right, which is, however, not connected with the binding post on that side.

The wires are secured to switchpoints

by taking two turns around the prongs or points of paper fasteners and then bending over the prongs, as is done when papers are bound together. The base is then screwed in place. All the wiring has been done on its reverse side.

The loading coil is placed in the circuit by connecting the aerial wire with right-hand binding post on the face of the base, while the primary of an inductive coupler is connected with the left-hand binding post.

For testing, a dry cell may be connected in series with a telephone across the binding posts. When the switchblade is revolved, a click should be obtained at each of the fifty contact points. Should the click not be obtained at any point, the connections at that point should be examined and firmly secured, or the small coil should be examined to see that the magnet wire is not broken.


A coil made as described has been in constant use and has operated satisfactorily.—CHARLES E. KALBACH.

### A Coating to Make a Battery-Box Acid Proof

MELT together in an iron kettle 8 parts of wood tar and 14 parts of resin, and then stir in 10 parts of finely powdered brick dust. Apply this solution warm to the battery-box, after it has been well cleaned and sandpapered.—EDWIN JASPER.

### A Water-Gage Glass Used for a Lead-in Insulator

THE diagram shows how a wall insulator may be made by combining a length of steam boiler water-gage glass with two

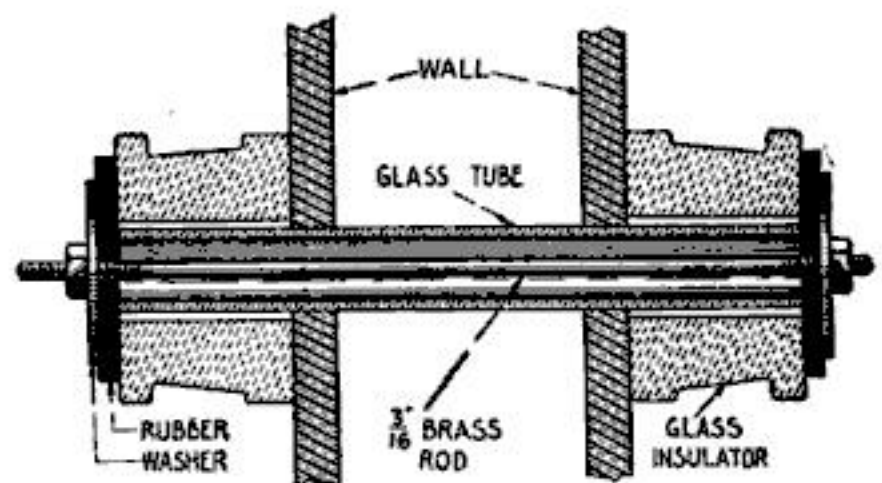

Glass insulators and a boiler water-gage glass used for a lead-in insulator

old lighting cable insulators. A piece of No. 6 wire may be substituted for the brass rod. If the glass tube is shortened, ordinary porcelain insulators may be used with good results.—ODIS REYNOLDS.



# Wireless Work In Wartime

## V.—How to secure practice in working through interference

By John L. Hogan, Jr.

THE closing portion of the November article in this series was devoted to a brief discussion of the problem of reducing interference in radio telegraphy. Of the two general types of interference which exist, we may first consider that which arises from the overlapping of radio waves when several nearby stations are transmitting at the same time. This is of considerable importance, and, since its reduction depends largely upon the training of the operators, we will do well to study it at this point. The other sort of interference, which is set up by natural or non-radio electrical disturbances, can be most effectively considered after the apparatus used in radio telegraphy has been studied in further detail.

For the present, then, let us take up the matter of "station interference," as it is called. It is not hard to see how such difficulties come up, if we remember that each radio transmitter sends its signal waves in all directions with approximately equal strength, and that all normal radio receivers absorb signal waves with equal ease regardless of the direction from which they come. Suppose that two radio transmitters of equal power are located at Philadelphia and at Norfolk, and that both are sending at the same time. A receiving station at New York will have little difficulty in deciphering the signals from Philadelphia, since the distance is so much shorter than that between Norfolk and New York that the messages from Philadelphia will be much louder than those from Norfolk. By the mere increased strength or intensity of the signals from Philadelphia, it is easy to distinguish them from the Norfolk signals. But suppose that a receiving station at Washington wishes to copy the message which Philadelphia is sending. Since the distance from Washington to Norfolk is about the

same as that from Washington to Philadelphia, the two sets of signals will be heard simultaneously and with about the same degree of loudness. Clearly, since loudness alone is no longer sufficient to permit the receiving operator (at Washington) to distinguish between the two sending stations, some other difference between them must be relied upon.

### Wavelength and Tone Frequency

There are two characteristics, in addition to loudness, which are commonly used to separate desired from undesired signal waves. The first of these, wavelength or

wave-frequency, will be considered in detail later in this series of articles. At present it will be sufficient to note that when several different transmitters use several different wavelengths, the effect at a receiver is almost as though each sending station were operating over a separate wire. A rough idea of the

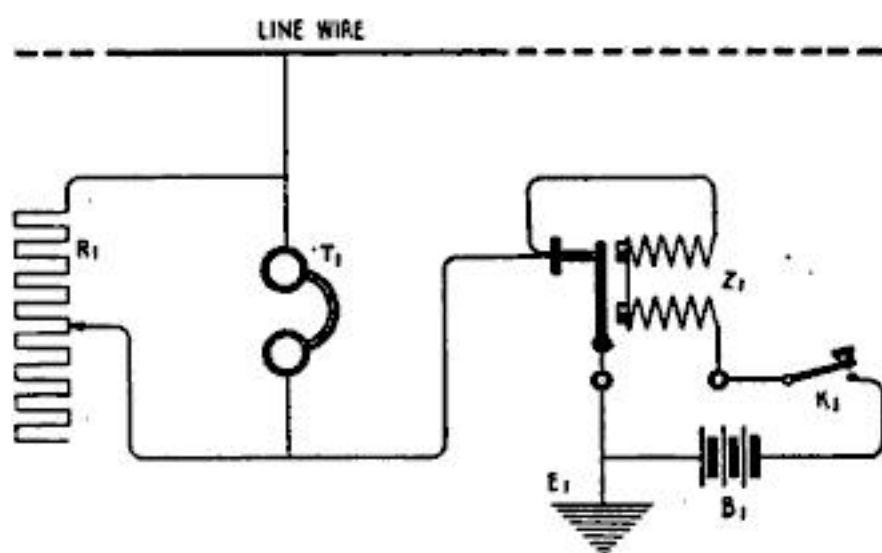


Fig. 17. Each signal station of the buzzer telegraph line is connected as shown

effect of changing wavelength may be had by considering the approximately parallel condition in which several different wires connect four line telegraph stations A, B, C, and D. Stations A and B may communicate with each other on one wire while stations C and D are also working together on a second connection, and there will be no mutual interference. The selection of the wire which is not "busy," as the telephone engineers say, must be made by trial; and the actual connection is made by "plugging in" to a terminal board to which the several wire lines lead. The analogous wireless or radio case provides several separate channels of communication between the four stations, and each channel is termed a "wavelength." Stations A and C may intercommunicate on one wavelength while stations B and D signal each other on a second wavelength, without mutual inter-



ference. The selection of the free wavelengths, on which no interference exists at the time, is made by trial; and the actual adjustment which limits the transmitters and receivers to certain definite wavelengths is made by control of parts of the apparatus according to the process generally known as "tuning." The proper use of these various wavelength channels of radio communication will be taken up later, when the limitations of tuning or wavelength selection will be pointed out.

In addition to selection by wavelength, the characteristic of tone frequency or spark sound is used to discriminate between the signals of several stations which are heard at the same time. If a pair of senders of equal power are about the same distance from some receiving station, and if both transmitters use the same wavelength, under normal conditions their signals will be heard with about the same intensity. If, now, these two signals sound alike, it will not be possible for the operator to distinguish between them. However, if the dots and dashes from one sender are heard as an intermittent rough, low-frequency sound, and if the signals from the second are high and musical in character, it is easy to see that the receiver can concentrate on either and decipher its messages without being disturbed by the other station. The condition is comparable to that in which a fife and drum corps is heard in the distance; it is easy to count the strokes on the bass drums without noticing the fifes at all, or to note the air played by the fifes without being disturbed by the booming, deep sounds of the drums.

### Practice in Concentration

Skill in reducing station interference by tone selection is mainly the result of operating practice. How well the man in charge of a receiving station can concentrate on the signals produced by some given transmitter from which he wishes to

receive, while he at the same time disregards other signals or other tones which are present in his telephones at the same time, depends almost entirely on his experience. This is one of the most important qualities which an operator can develop, and it is worthy of much practice.

Fortunately enough, practice in tone-selection for reading messages through station interference can easily be carried on without wireless apparatus. It is only necessary to make use of the buzzer telegraph line described in the earlier articles of this series. For the period of the war it is not permissible for experimenters or others to use wireless apparatus without specific permission from the Navy Department; nevertheless,

many of the branches of radio operating can be covered thoroughly by using the instruments which have been and are to be explained in this series. Thus it becomes possible to learn the most difficult and perhaps the most important parts of wireless operating without experiencing any difficulties on account of the present embargo on radio experimenting.

### The Buzzer Telegraph Line

If you have not yet arranged with a friend for building and operating a buzzer telegraph line, you should do so at once. Study by oneself is practicable in beginning operating and for certain later divisions of the work, but it is almost impossible to get the practice which is so essential unless several students cooperate in the use of a buzzer telegraph line. The best plan is to have at least three stations, in three nearby houses, connected by wire as explained in the October article. If you cannot arrange for this, set up two or three stations in as many different rooms of your own house, and connect them by wire in the way described. Then, by inviting one or two companions to work with you, you can all secure the practice which is so needful to the ambitious radio man.

In working with a three-station line it

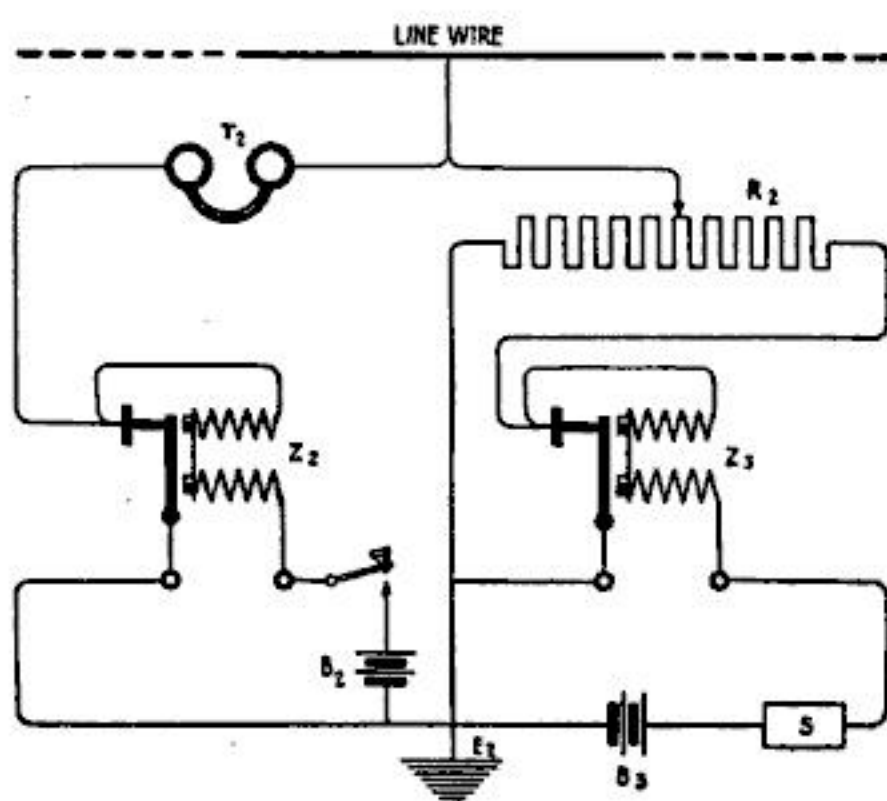


Fig. 18. At left is the ordinary type of buzzer outfit connected as in Fig. 17, and at right is the interference-maker



will be noted that the buzzer-sounds from each of the three stations possess a certain individuality, and that the identity of a sending station can be established even before the operator has given his station call, merely by noting the signal-tone character. If three of the same make or model of buzzers are used, the tones may sound very much alike, and it may be difficult to tell by tone which station is sending. If three different sizes or types are used, however, the signal tones are likely to be widely different. It is this variation in signal tone which makes possible the reduction of station interference by the operator's concentration on the sounds themselves.

Fig. 17 shows a signal station of the buzzer telegraph line. The buzzer  $Z_1$  has the telegraph key  $K_1$  and battery  $B_1$  connected across its binding posts, so that when the key is pressed the buzzer will operate. The left-hand binding post, which is connected with the vibrating armature, is made fast to the earth connection; and the contact-adjustment

post is connected with the line wire through a pair of head-telephones of approximately 1000-ohms resistance. These telephones may be shunted by a variable resistance of about the same value, for the purpose of weakening the signals heard. The resistance is not usually necessary, however. The line wire may be extended in either direction to reach as many stations as desired, within reasonable limits of number and distance. Each station is connected as shown in Fig. 17, and the system is such that signals produced by pressing the key at any station are heard simultaneously in the telephones at all the other stations.

### Using One Station to Make Interference

Obviously, such a system resembles a group of radio stations in many particulars. If there are more than two stations on the line, it is possible to arrange for one of them to interfere while the others are attempting to exchange messages. By choosing the buzzer pitch of the interfering station so that it is different from that of the sending station, the easiest interference condition is created. By gradually adjusting the interfering note

to a sound closer and closer to that of the sending station, the difficulty of receiving is continually increased and practice in concentrating on one note to the exclusion of others is secured.

A better way to develop systematically the power to eliminate or reduce station interference by tone selection is to install at one of the buzzer-telegraph line stations an equipment such as shown in Fig. 18. Here the left-hand portion represents the usual buzzer sending and receiving outfit, connected as in Fig. 17. The telephone shunting resistance is not shown, but may be added if found necessary. The right-hand

portion of the diagram shows the interference maker, which consists mainly of a second buzzer  $Z_3$  having its own battery  $B_3$  and a sending key or sending machine  $S$  connected across its terminals. From the contact-adjustment post to the left-hand (armature) binding post is connected a high resistance  $R_2$ , which should have a value of at least 1000

ohms. A sliding contact on this resistance is connected with the line wire.

This interference-maker will produce interference signals whose strength, tone and occurrence are under control, and may be arranged so as to operate automatically. When first set up, it will be noticed almost immediately that sliding the contact along  $R_2$  changes the strength of the interfering signal at all the stations on the line, and that the more resistance is cut-in between the line wire and the ground, the louder the signals are. In practicing, it is a good plan to start with fairly weak interfering signals, and then gradually to increase their strength until they are as loud as or louder than the messages it is desired to receive.

### Varying the Tone of the Buzzer

The adjustment of the interfering or sending signal tone has been mentioned several times, but specific methods of making this adjustment have not been shown. In Fig. 19 a typical buzzer of the iron-frame type is illustrated. This is useful for this sort of work because of its cheapness and reliability. The mechanical arrangements vary in detail according to

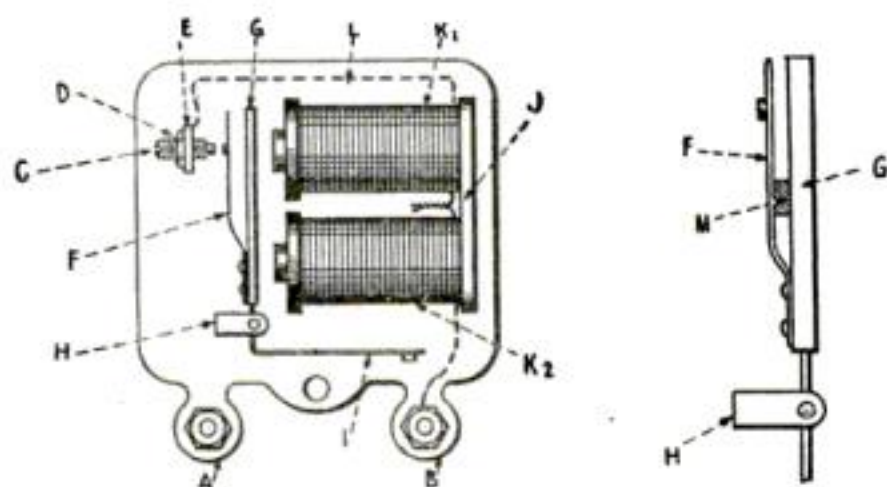


Fig. 19 and 20. A typical buzzer of the iron frame type and a method of adjustment



the make of instrument, but all have an armature  $G$  which carries a contact-spring  $F$  and is mounted to vibrate before the poles of the electromagnets  $K_1K_2$ . The contact-spring  $F$  normally presses against the tip of the contact-screw  $C$ , which is supported by the contact-adjustment post  $E$  and held in place by the lock-nut  $D$ . The

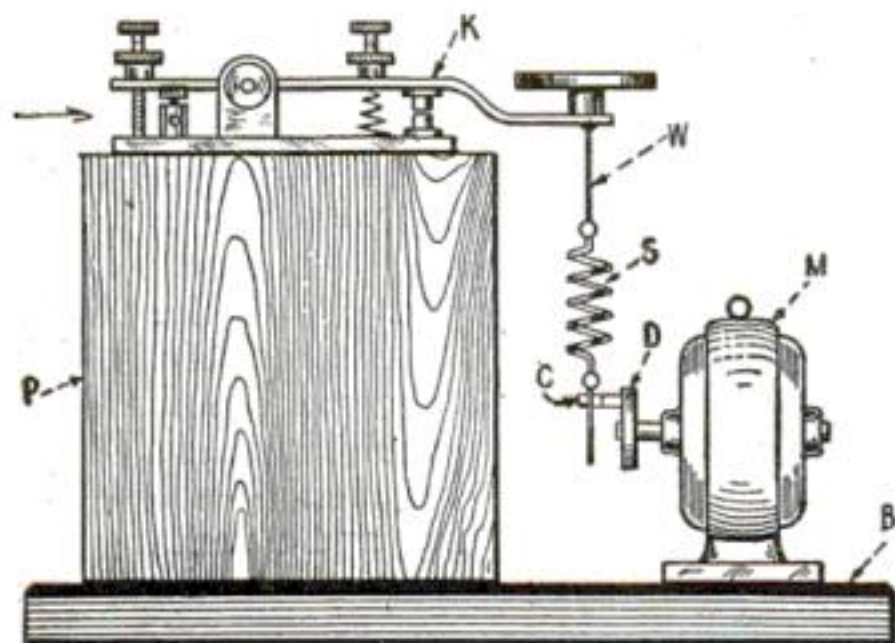


Fig. 21. An automatic sender made with a motor having a crank and pin on its shaft

electrical circuit is usually from the binding post  $A$  through the iron frame  $L$  and pivot  $H$  (or its equivalent armature-support) to the armature  $H$  and contact-spring  $F$ , thence through the contact-screw  $C$  and down its post  $E$  (which is insulated from the iron frame), from there by way of a wire to the magnet coils, through them and finally out at the insulated binding post  $B$ . The greatest control of the buzzer tone is normally secured by varying the number of battery cells used to operate it, and by changing the adjustment of the screw  $C$ . Where a pivoted armature is supplied, adjustment of the spring  $I$  will permit further variation in pitch or character.

The buzzers of the iron frame class, and even the small nickel-plated types, usually have tones which are low compared with those in common use at radio stations. Practice on the high tones. For this purpose, either install special high-frequency buzzers which may be purchased for about \$2.00 each, or adjust the cheap buzzer to produce a high tone. One way of making such adjustment is shown in Fig. 20, where  $M$  represents a bit of folded paper or a soft wooden wedge pressed in between the armature  $G$  and the contact-spring  $F$ . A little experimenting with the thickness of wedge, the setting of the contact-screw and the strength of battery will usually result in

a clear high tone much like that of the modern radio stations. The standard tone of 1000 sparks per second seems to be of approximately the same pitch as the second  $C$  above middle  $C$  on the musical scale, and the adjustment of your high-frequency buzzer may easily be verified by comparing it with a piano.

### Use of the Sending Machine

The sending-machine  $S$  of Fig. 18 controls the occurrence of the interfering signals, by stopping and starting the buzzer  $Z_3$ . At first it is a good plan to run the buzzer continuously, in one long "dash," so that the interfering noise will be heard constantly. An experiment will show, however, that interference which stops and starts is more difficult to overcome than the steady-dash variety. Consequently your practice should be directed toward the kind which comes and goes, so that you will be prepared for the worst when you get into actual radio operating. The best way to get an imitation of bad station interference is to connect your automatic sender, of the tape or disk types described in the October article, at  $S$ ; if you have no automatic sender, you can sometimes persuade a friend to take the interference key and make irregular dots and dashes for you.

A sending key  $K$ , Fig. 21, mounted on a pedestal  $P$  and base  $B$  and connected with a clock-work or electric motor  $M$  will serve for use at  $S$  in Fig. 18. By attaching a wire  $W$  and a spiral spring  $S$  between the key lever and a crank-pin  $C$  mounted on a disk  $D$  on the motor shaft, as shown in Fig. 21, an automatic sender of dots or dashes can easily be made. By varying the speed of the motor, as well as the adjustment of the key, the length of dot, dash or space can be adjusted to suit.

Those who have no electric motor available for use, may, of course, use a motor which is spring driven, instead. An old phonograph motor would be just the thing. Still another scheme would be to use your omnigraph to replace the key and motor arrangement.


The equipment described this month is sufficient to permit code practice, as well as extensive practice in reducing station interference by concentration. Future articles will take up static interference, and the adjustment of the radio apparatus itself so as to minimize the difficulties.

(To be continued)



### An Easily Constructed High Tension Insulator

THE drawing below shows a high tension insulator that is easily made, has good strength and insulation, and is businesslike in appearance. It can be made for about five cents. Two cleats are used for average power in amateur stations

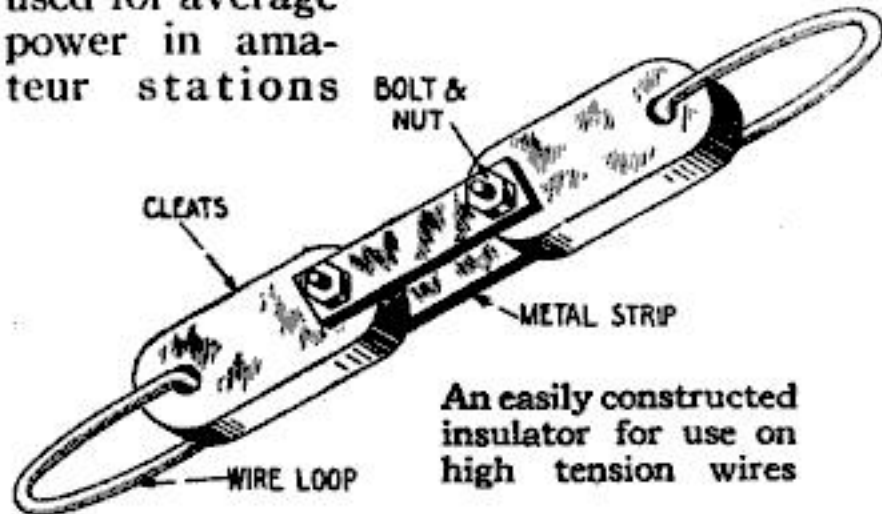

while three or more can be used for others of greater potential. The cleats are joined with  $\frac{1}{8}$ -in. iron or brass strips fastened with small bolts as shown in the sketch. For good appearance all the metal parts should be enameled black, while the porcelain can be covered with thick shellac, giving it the appearance of brown glaze.—JOHN B. RAKOSKI.

### Heating Hard Sheet Rubber to Facilitate Cutting Disks

THE amateur experimenter and worker on electrical apparatus at some time or other desires to cut hard sheet rubber into round disks for making Wimshurst machines or other devices. Hard rubber, as received from the stock house, is very difficult to cut, unless you have all the facilities for doing such work.


The writer has found a very easy way to cut hard sheet rubber up to  $\frac{3}{16}$  in. thick. The method is as follows: Mark on the rubber with a scribe or other sharp instrument an outline of the piece to be cut. Then plunge the sheet into hot water; take it out and cut on the outline with a pair of scissors. The rubber will become soft like leather and cut easily. As it becomes cooler, it will cut harder. If any more cutting is to be done, plunge it into hot water again and continue until the cutting is done. Then put a plate of glass on a newspaper on a table, dip the rubber in the hot water again, place on the glass; then put another sheet of glass over the rubber with a weight on it. When it is cooling the piece will straighten out.—W. S. STANDIFORD.

### Finding the Combined Value in Parallel Resistances

WHERE more than two resistances are connected in parallel it usually results in rather complicated calculations in order to determine the combined resistance value. It has been found that an easy way to determine the equivalent of resistances in parallel is by the use of a simple diagram, as shown.

As an illustration, the four resistance values, 225, 450, 900 and 1800 ohms were taken. The procedure is as follows: Decide on some convenient scale to be used. In this instance, each  $\frac{1}{10}$  in. equals 50 ohms. Lay off a perpendicular line  $X-Y$  to represent any one of the resistances, the one of the highest value, which in this case is 1800 ohms, probably being the most convenient. Then construct the horizontal line  $Y-Z$  of any convenient length and erect the perpendicular  $A-Z$  equal in height to the next highest resistance. On this line lay off the remaining resistances according to the scale selected.

For convenience we will start with the two highest values, although the same results would be accomplished by using the 1800-ohm resistance and any one of the other three shown on line  $A-Z$ . Draw

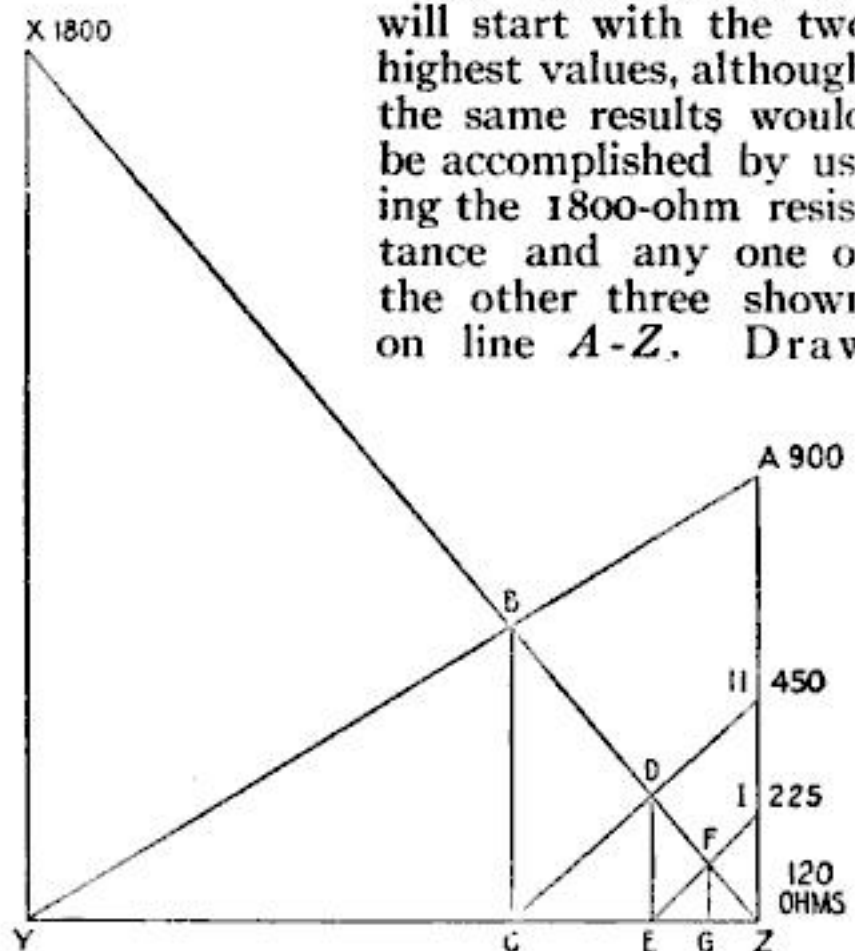

A convenient scale for finding the combined value of resistances in parallel

lines  $X-Z$  and  $A-Y$ . At their point of intersection,  $B$ , erect the perpendicular  $B-C$  whose value represents the equivalent of the 900 and 1800-ohm resistances in parallel. Combine this equivalent with the 450-ohm resistance by drawing line  $H-C$ . At the point of intersection  $D$  of this line with the line  $B-Z$ , which happens to fall on the line  $X-Z$ , erect the perpen-




dicular  $D-C$  whose value represents the equivalent of the three resistances in parallel. This equivalent combined in a similar manner with the remaining resistances of 225 ohms gives us the line  $F-G$  whose value according to the above scale is 120 ohms and represents the combined resistances of the four resistances in parallel. With the four resistances selected this result can be easily verified by the usual method of calculation.

This process may be carried out for any number of resistances. It is evident that the larger the scale selected the more accurate will be the result. The writer has personally found the foregoing method very convenient and more satisfactory than the usual methods, especially where tables of logarithms or reciprocals are not easily available.—F. H. TILLOTSON.

### Lighting the Dash-Board of an Automobile from the Side Light

MANY cars are equipped with the so-called flush side light, the lens being flush with the outside, and the back of the lamp extending in on the dash. By simply cutting away a section of the lamp casing, as shown, part of the light will follow the dash,

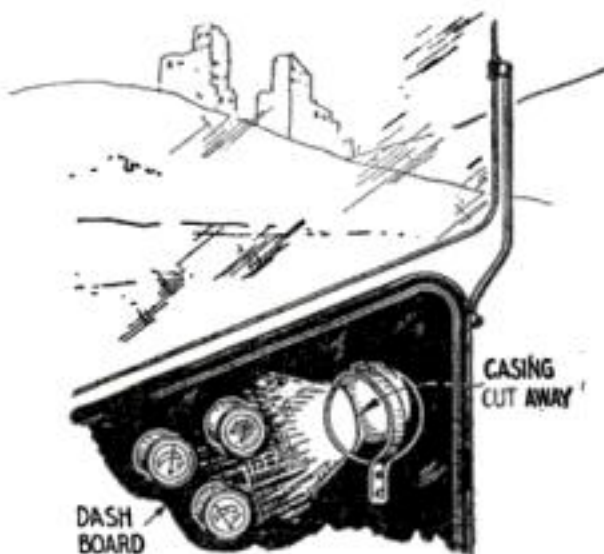

A cut-out on the flush side light to illuminate the dash


thereby illuminating it sufficiently for all needs.—THOS. W. BENSON.

### Heating a Soldering Iron with an Electric Arc

EXPERIMENTERS often find themselves with some soldering to do, but with no means of heating the soldering iron. Using the iron as one electrode of an arc I found to be a good makeshift.

This suggested the construction of the arc and brackets described herewith. As it is to be used only a short while at a time, and the amperage is small, wood may be used in its construction but it is best to cover the wood with asbestos. Two stand-

ards are fastened upright upon the base as shown and near the top of each is placed a screw hook (a nail bent up will do) upon

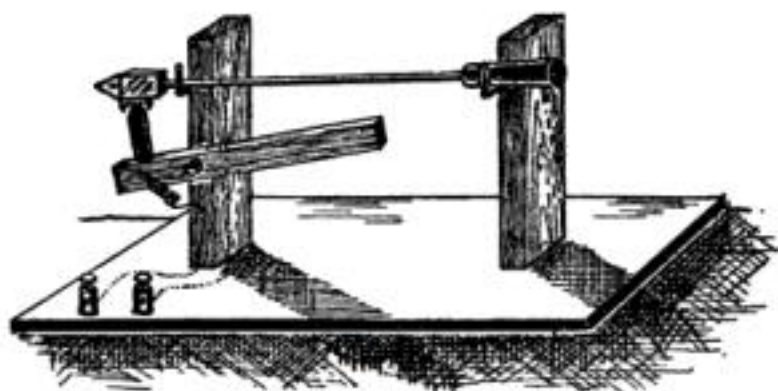

The soldering iron makes one terminal for the electric arc which heats it

which the iron is to rest. A lever having a hole bored at one end, in which is inserted an ordinary  $\frac{1}{2}$ -in. arc light carbon is pivoted at its center on a bolt which runs through the middle of the upright. The nut is tightened just enough to hold this lever in whatever position it is placed. As the carbon burns away, adjustment is made with this lever. One binding-post is connected with the hook which supports the iron and the other is connected by a flexible cord with the set screw which holds the carbon in the lever.

This is connected with the line by a resistance in series. A water rheostat which is easily constructed and regulated may be used, or a wire rheostat may be constructed. For a medium-size iron I found 3 amperes was about right. Lowering the resistance will increase the current and consequently the heat of the iron. If direct current is used it is best to connect the positive wire with the carbon, as this will avoid the possibility of pitting the iron.—KENNETH M. BARD.

### Sheet Asbestos to Make a Packing for Steam Chests

OWING to the heat imparted to the cylinders and steam chests of steam engines, rubber packing does not give as good service and last as long as it should. After some experimenting, the writer has found that a sheet of asbestos  $\frac{1}{16}$  in. thick makes a good packing for a steam chest. This material is very cheap, and if put on the engine wet, will stand a pressure of 150 lb. As an experiment, a joint made with the asbestos sheeting was taken apart and put together five times and still held its shape. Experience shows that it makes just as tight a joint as the best rubber packing.—W. S. STANDIFORD.





CHARLES E. MURNAN  
United Drug Company



C. LOUIS ALLEN  
Pyrene Manufacturing Company



C. C. HOLMES  
H. C. Capwell Company

## Big executive positions won by three young men

Three young men have recently made their mark in the business world. Each is a big executive before his fortieth year.

Charles E. Murnan began his career as a store clerk. At 25 he held a responsible position with the United Drug Company, a corporation capitalized at fifty-two million dollars. Today, in his 36th year, he is not only director of this firm's advertising but vice-president as well.

C. Louis Allen, at 32 became president of the Pyrene Company, a million dollar manufacturing corporation. In three years he has risen from a salesman's job to the highest executive position in the firm.

C. C. Holmes, is superintendent of the H. C. Capwell Company, of Oakland, California—one of the largest mercantile houses of the western United States. His salary has increased 240% in the past two years. One of his plans has reduced his company's operating expenses \$30,000 annually.

### They know the fundamentals of Business

These men are dealing with entirely different products. But they have one common factor in their careers. All three have *prepared* for success by study.

They realized that experience limited to one department of business cannot carry a man far in the modern business world. They wanted to learn the big fundamentals underlying *all* departments of business. For this reason they availed themselves of the knowledge contained in the Modern Business Course and Service of the Alexander Hamilton Institute.

### What big executives say of the Course

Charles E. Murnan says, "I would recommend it to anybody if he had to borrow the money to

take it. It is the most concise and clearly presented form of education ever offered to executives."

"From reading the Alexander Hamilton Course," says C. Louis Allen, "I am convinced that it will help every man who is filling his present job and reaching for another."

Holmes' comment: "There is no doubt in my mind but that every business man and woman of America should read your Course. My only regret is that more of our people have not taken it up."

### Based upon the experience of thousands of successful men

The Institute collects, classifies, and transmits thru the Modern Business Course and Service, the best thought and practice in modern business. It gives a knowledge that could otherwise be obtained *only* by years of experience—if at all.

### The kind of men enrolled

Presidents of big corporations are often enrolled for the Modern Business Course and Service, along with ambitious young men in their employ.

Among the 60,000 subscribers are such men as A. T. Harden, Vice-President New York Central Lines; E. R. Behrend, President Hammermill Paper Co.; N. A. Hawkins, Manager of Sales, Ford Motor Co.; William C. D'Arcy, President Associated Advertising Clubs of the World—and scores of others equally prominent.

### "Forging Ahead in Business"

A careful reading of the interesting book "Forging Ahead in Business," will show you how to prepare for the increasing number of business opportunities that are bound to come during the next few years. Every man and woman with either a business or a career to guide to bigger, surer success should read this book. Simply fill out and send the coupon below.

### Alexander Hamilton Institute

367 Astor Place New York City

Send me "Forging Ahead in Business"—FREE

Name ..... Print here

Business Address ..... City State

Business Position .....





# How Four Pitiful Failures Discovered the Road to Fortune

**NOTE:** *Men are asking—"How can I earn more money—what shall I do to reach the turning point in my life?" These remarkable instances of how four failures found the answer may point the way to you.*

By Stanley D. Hopkins

**A** YOUNG man in the East had an article for which there was a nationwide demand. For twelve years he "puttered around" with it, barely eking out a living. Three years ago he began to analyze himself. He discovered that his one great fault was his inability to come to a quick, definite decision. Time and again he had tried, in a half-hearted way, to market his goods. This time he steeled himself to fight a winning battle. He began to develop his strength of will so that no imaginary mountain could turn him aside from his purpose.

## From \$30 to \$1,000 a Week

Today this young man is worth \$200,000. He is building a \$25,000 home—and paying cash for it. He has three automobiles. His children go to private schools. He goes hunting, fishing, or traveling whenever the mood strikes him. His income is over a thousand dollars a week and he attributes his amazing success to his super-developed power of will.

## A Failure at 60—Then Sudden Success

In a little town in New York lives a man who two years ago was pitied by all who knew him. From the time he was 14 he had worked and slaved—and at 60 was looked upon as a failure. Without work, in debt to his charitable friends, with an invalid son to support, the outlook was pitchy black.

Then, suddenly, things began to happen. He went to the owner of an old vacant factory, secured the place at a ridiculously low rent, with the first three months rent

free. He almost *demand*ed a loan of \$500 with which to begin some experiments. In three weeks he was out for business. In three months his plant was working day and night to fill orders. During 1916 the profits were \$20,000. During 1917 the profits, it is estimated, will run close to \$40,000. And this genial 62-year-young man is enjoying pleasures and comforts he little dreamed would ever be his.

Ask him what made the remarkable change in his life and he will tell you that it was his life-and-death determination to whip *his own mind*—so that he could do the things he wanted to do without being hampered by a weak, milk-and-water will.

## Former Newsboy Heads \$1,000,000 Business

From "peddling papers," to the management of a concern doing business of over a million dollars a year, is a far cry indeed. Yet this is the remarkable achievement of a 26-year-old youth from the West. Born of Russian parents, raised in a tenement, with no education save that gained in the ordinary grade school, this young business giant forced his way to the front rank of his profession. For a while after he stopped selling papers he drifted around from job to job. Two years ago he made his present connection. Today he drives around in his own motor car, his income is almost unbelievable when one considers the handicaps he had to overcome, and his prospects for "five-figure" yearly earnings are exceedingly bright. He disclaims all credit for his success—stating that it was only



through systematically developing his personality and will-power that he was able to make his way so rapidly.

### A School Teacher's Rise

A teacher in a little town just outside of Chicago was so "down and out" that he couldn't pay a \$10 debt which he had contracted months before. Every cent he had scraped together had been lost through an investment in a corporation that failed to make good. Discouraged, sick at heart, he was forced to do something quickly to recoup his losses. He secured a position in a small private school, and in a remarkably short time was the owner of it. As he says, "I am the owner of a business worth many thousands of dollars and owe no man a cent." Talk to him and he will tell you what his newly revived strength of mind has done for him!

### Their Guide to Wealth

These are but a few of the hundreds of achievements brought about through systematic will-power development. Regardless of what a man may be—what failures he may have gone through—he can have practically anything he wants out of life if he will but use and develop his God-given power of will. For will-power is the secret of every great achievement. It makes weak men strong. It makes leaders out of followers. It makes doers out of dreamers. It makes dominating personalities out of cringing wrecks of humanity. It makes successes out of failures. It makes dollars jingle where only pennies clinked before.

And the most wonderful thing about a strong will is that it may easily be acquired by anyone. Prof. Frank Channing Haddock—a scientist whose name ranks with James, Bergson, and Royce—after 20 years of research, investigation and study, has prepared a remarkable set of actual exercises, lessons and new methods which have already revolutionized the lives of over 200,000 men and women in all parts of the world. This book, called "Power of

Will," is issued by the Pelton Publishing Co., of Meriden, Conn. Mr. Pelton has authorized me to say that any reader who cares to examine the book may do so without sending any money in advance. In other words, if after a week's reading you do not feel that this book is worth \$3, the small sum asked, return it and you will owe nothing.

When you receive your copy for examination I suggest that you first read the articles on: The law on great thinking; how to develop analytical power; how to perfectly concentrate on any subject; how to guard against errors in thought; how to drive from the mind unwelcome thoughts; how to develop fearlessness; how to use the mind in sickness; how to acquire a dominating personality.

### No Money in Advance

Some few doubters will scoff at the idea of will-power being the fountainhead of wealth, position and everything we are striving for, and some may say that no mere book can teach the development of the will. But the great mass of intelligent men and women will at least investigate for themselves by sending for the book at the publisher's risk. I am sure that any book that has done for thousands what "Power of Will" has done, is well worth investigating.

It is interesting to note that among the 200,000 owners who have read, used and praised "Power of Will" are such prominent men as Supreme Court Justice Parker; Wu Ting Fang, ex-U. S. Chinese Ambassador; Lieut.-Gov. McKelvie, of Nebraska; Assistant Postmaster-General Britt; General Manager Christeson, of Wells-Fargo Express Co.; E. St. Elmo Lewis; Governor Arthur Capper of Kansas, and thousands of others.

As a first step in will training, I would suggest immediate action in this matter before you. It is not even necessary to write a letter. Use the form below, if you prefer, addressing it to the Pelton Publishing Company, 14-W Wilcox Block, Meriden, Conn., and the book will come by return mail. This one act may mean the turning point of your life, as it has meant to me and to so many others.

-----  
PELTON PUBLISHING COMPANY,

14-W Wilcox Block, Meriden, Conn.

I will examine a copy of "Power of Will" and I agree to remit \$3 or return the book in five days.

Name.....

Address.....

When writing to Advertisers please mention Popular Science Monthly



# Cold When Driving?

Not if You Use a

## Clark Heater



(No. 7C) A popular heater handsomely covered with Mohair plush in maroon, blue or green, \$4.75.



(No. 5B) Light and handy heater. Oval type heater showing drawer with Clark brick, \$2.00.



(No. 7D) Strong and durable. One of the most popular sellers, \$2.50.

### Dealers and Garage-men

Clark Heaters are the **best** thing for a **big need**. They make a **live line** for the dull winter season. Write us about our attractive assortments of Clark Heaters and proposition for dealers and garage-men.

**Chicago Flexible Shaft Co.**

Dept. J, 12th St. & Central Ave.  
CHICAGO, ILL.


Don't lay up your car for the winter. **Enjoy** driving—keep warm as toast—even in coldest weather—with a Clark Heater. The cost is small, operation simple and inexpensive. No flame—no smoke—no odor.

### Keeps Car Warm Without Running Engine

The Clark Heater is self contained. Entirely independent of the engine. Gives warmth just the same whether car is running or idle. Looks like a foot rest. Handsomely upholstered with carpet. It's made of heavy metal sheet steel; asbestos lined. Uses our celebrated Clark Carbon Brick. One brick gives 12 to 16 hours heat—half a brick gives 6 to 8 hours heat. Clean, simple, easy to use. A wonderful comfort. Prices \$2 to \$10.

### Get a Clark Heater At Your Dealer's

If you cannot, send order direct to us, mentioning dealer's name. Write for our **free catalog**.

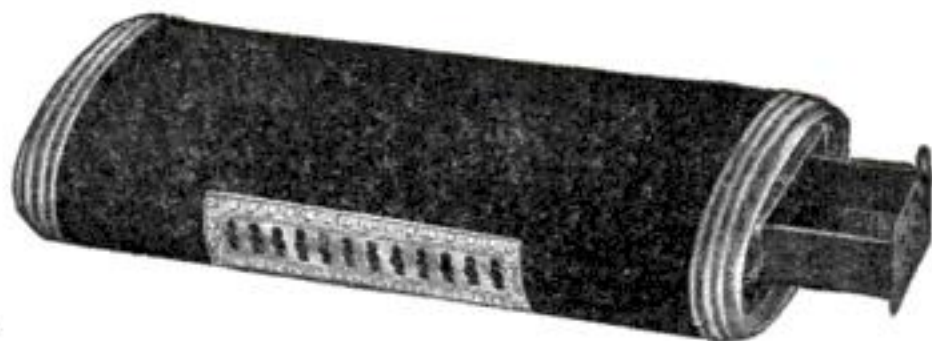

(No. 8xx) "The Duchess." Our De Luxe Heater for automobiles. Covered with rich velvet plush, \$10.00.





## The Fate of the Unprepared

Among the remarkable events of this war no fact stands out more startlingly than the tragic sacrifice of Russia's unequipped soldiers.

The army has been victimized by intrigue and treachery. Guns were sent to the front without ammunition and ammunition without guns. Supplies were provided that when unpacked proved to be rubbish. Left stranded by communications that broke down under slight pressure the brave Russian troops hurled themselves again and again against foes perfectly prepared.

From the very verge of victory they doggedly fell back fighting with stones and clubs and iron bars, resisting heroically but ineffectively.

No thought can be more abhorrent to

Americans than that of our boys ruthlessly slaughtered because of lack of equipment or support which it is the first business of us at home to supply.

Our Government, never before so powerful, is working prodigiously in the preparation of armies and means of warfare. Throughout the nation there is a unity of purpose that is piling on the altar of liberty every personal ambition and corporate gain.

Mines, factories, farms, shipyards, the counting houses and shops of every industry are laboring day and night to supply the sinews of war.

The Bell System is co-operating to mobilize production, transportation and communication, and is using its every energy to speed up American defense.



**AMERICAN TELEPHONE AND TELEGRAPH COMPANY  
AND ASSOCIATED COMPANIES**

**One Policy**

**One System**

**Universal Service**

When writing to Advertisers please mention Popular Science Monthly



# Men, Snuggle Up to This Bang-up Underwear—It's a Downright Bargain

You can bet your last cent that Hanes will give you more real value for your money than any other buy. No frills, no fol-de-rols—just downright value and a heaping lot of it, too.

Hanes is form-fitting, elastic and comfortable. The fleecy-warm cotton is mighty fine protection from the cold—and it feels mighty good, too. Pre-shrinking keeps it true to size and shape.

Greatest  
Winter  
Underwear

# HANES

Sold at  
Popular  
Prices

## ELASTIC KNIT UNDERWEAR

And just read about these special features over there in the illustration. No more high-priced underwear for the man who sees Hanes. It's just the popular price for everybody and the underwear everyone should wear.

## Mothers, Fathers — Get this Big Bargain

A jam-up boy's union suit, chock-full of all the big features on the men's suits. Downy-soft, warm and everlastingly fine, its value can't be duplicated. You sure ought to buy this splendid underwear for your youngsters. See if it doesn't put it all over anything you ever tried at twice the price!

**P. H. HANES KNITTING COMPANY**

Winston-Salem, N. C.


Warning to the Trade—Any garment offered as Hanes is a substitute unless it bears the "Hanes" Label.

This Label on Every Garment



Buy None Without It

When writing to Advertisers please mention Popular Science Monthly

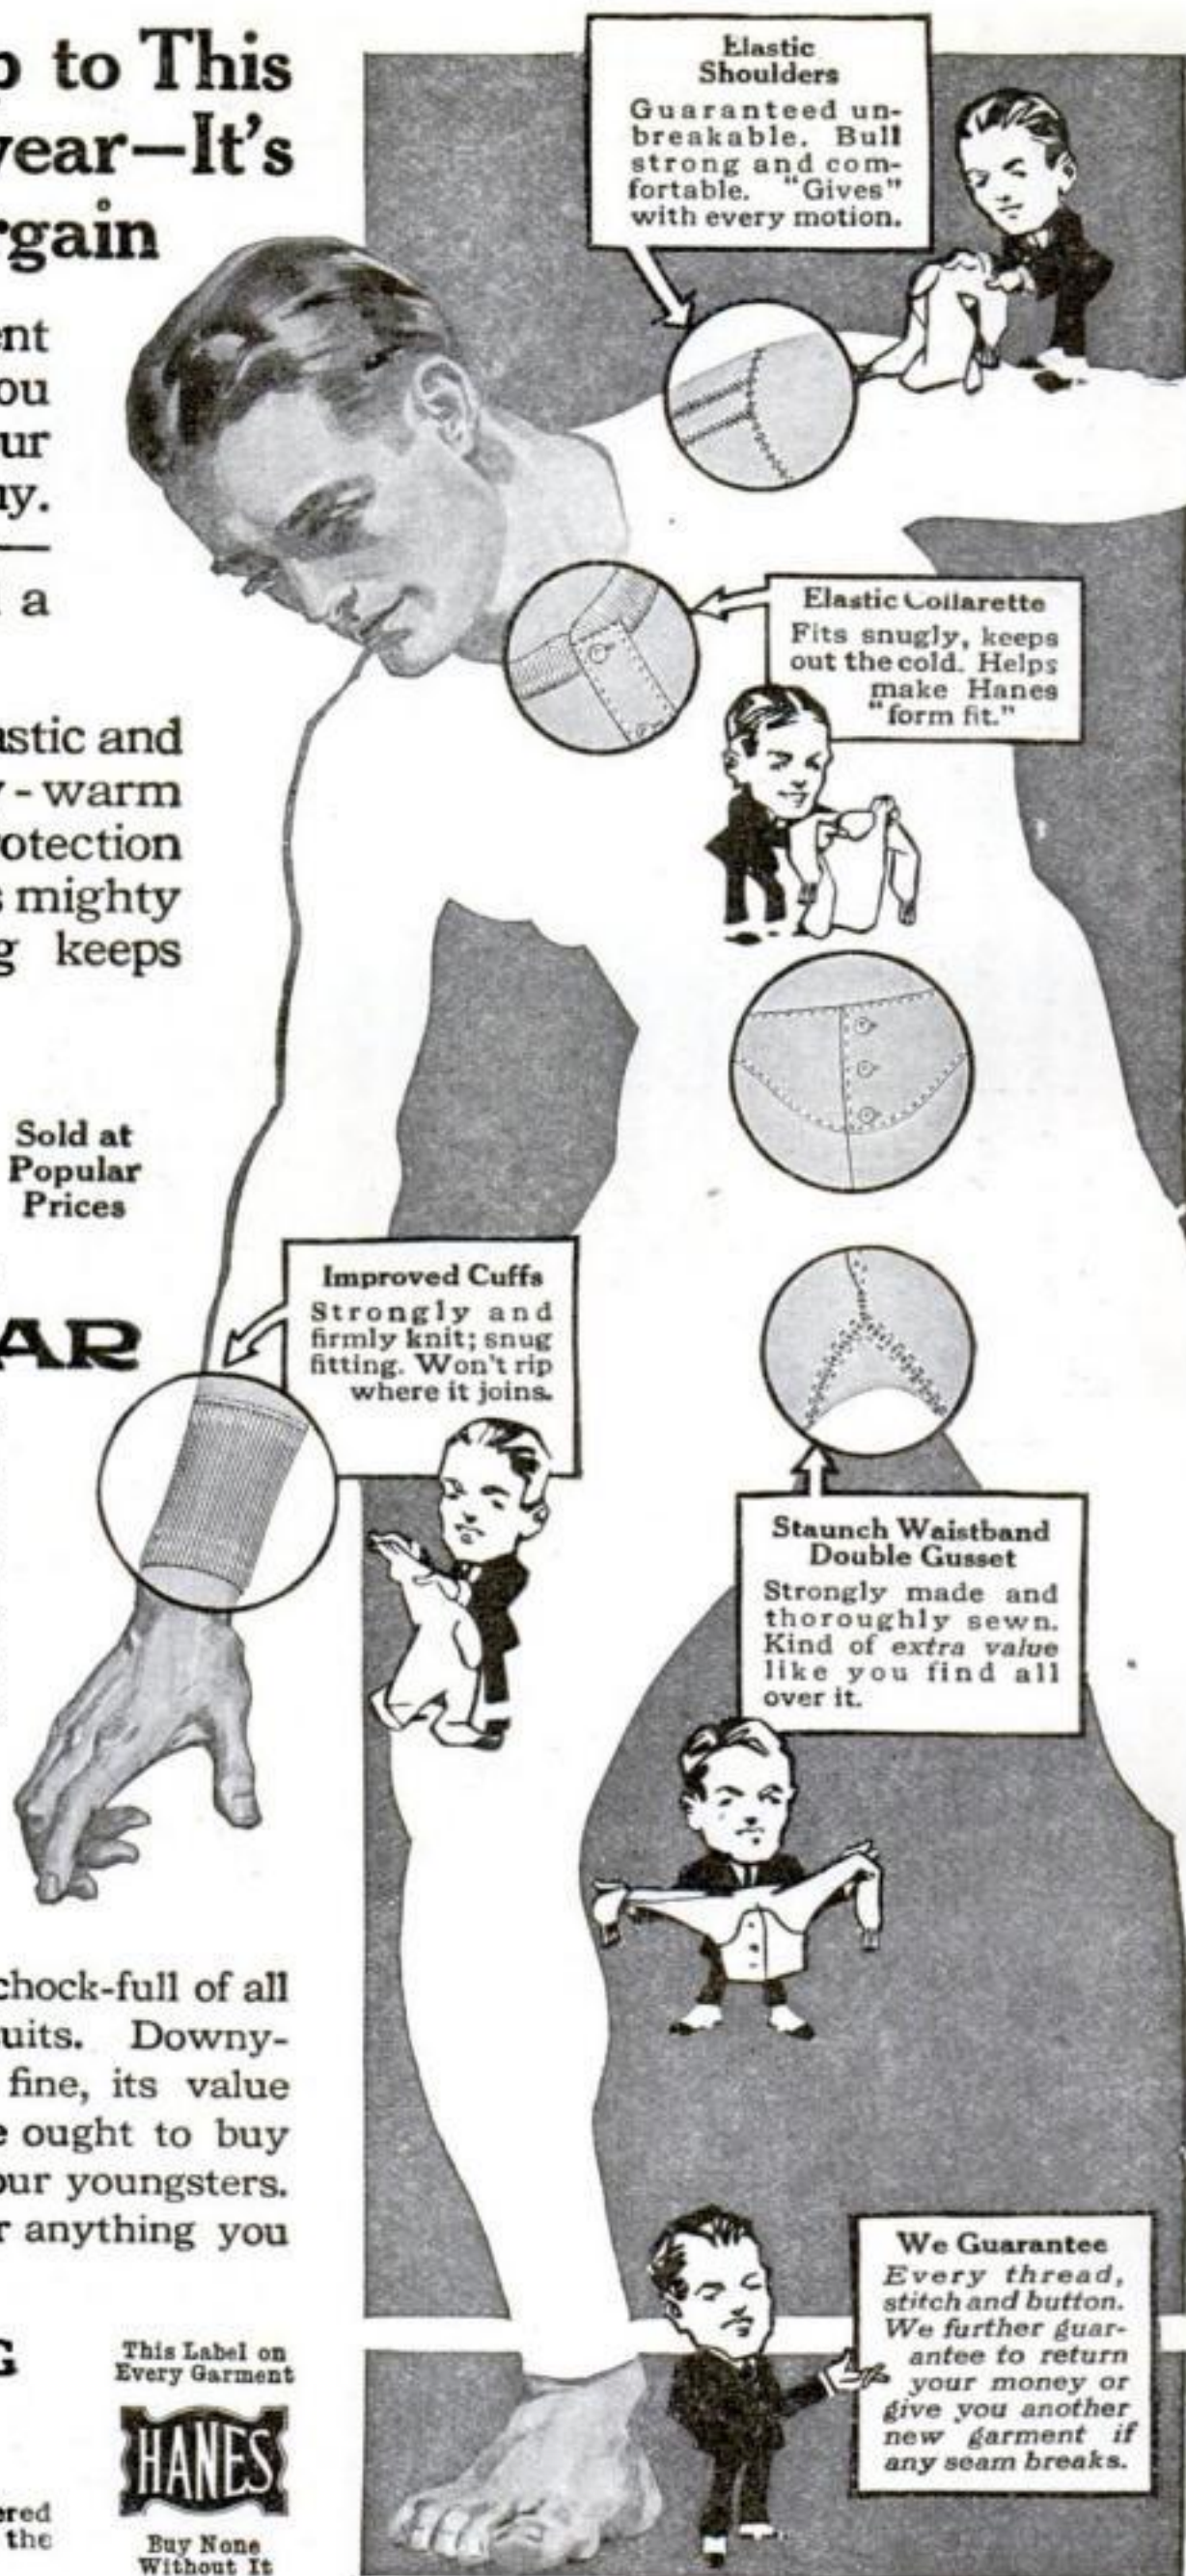





## *Pictures from Home*

Over there, with thousands of miles of sea and land between them and home, are Our Boys, smiling and fighting—fighting with bullets, against a dogged foe; with smiles, fighting homesickness and dread monotony.

It's a part of the nation's job to-day to keep those boys cheerful, to hold fast the bonds between camp and home, to make light hearts and smiling faces—and these things pictures can help to do—pictures of the home folks and the home doings, pictures of the neighbors, pictures that will enliven their memories of the days before the war—simple Kodak pictures, such as you can make. These can help.

EASTMAN KODAK CO., ROCHESTER, N. Y.



# Chesterfield

## CIGARETTES

*of Imported and Domestic  
tobaccos—Blended*



### **The new blend— and it can't be copied**

The new blend of Imported and Domestic tobaccos in this new cigarette, Chesterfield, does a new and important thing for smokers—

Chesterfields "reach home," they let you know you are smoking—they "Satisfy"!

*Yet, they're Mild!*


There is more to a cigarette than merely the good taste. Easy to prove it—try Chesterfields. Today. *Liggett & Myers Tobacco Co.*

**SEND HIM THE TIN OF 100.** We'll mail the tin for you (100 for 65c) prepaid to any address in the U.S. (training camps, etc.) if your dealer hasn't them. Address Liggett & Myers Tobacco Co., 212 Fifth Ave., New York.

*They "Satisfy"—  
and yet they're Mild!*

When writing to Advertisers please mention Popular Science Monthly



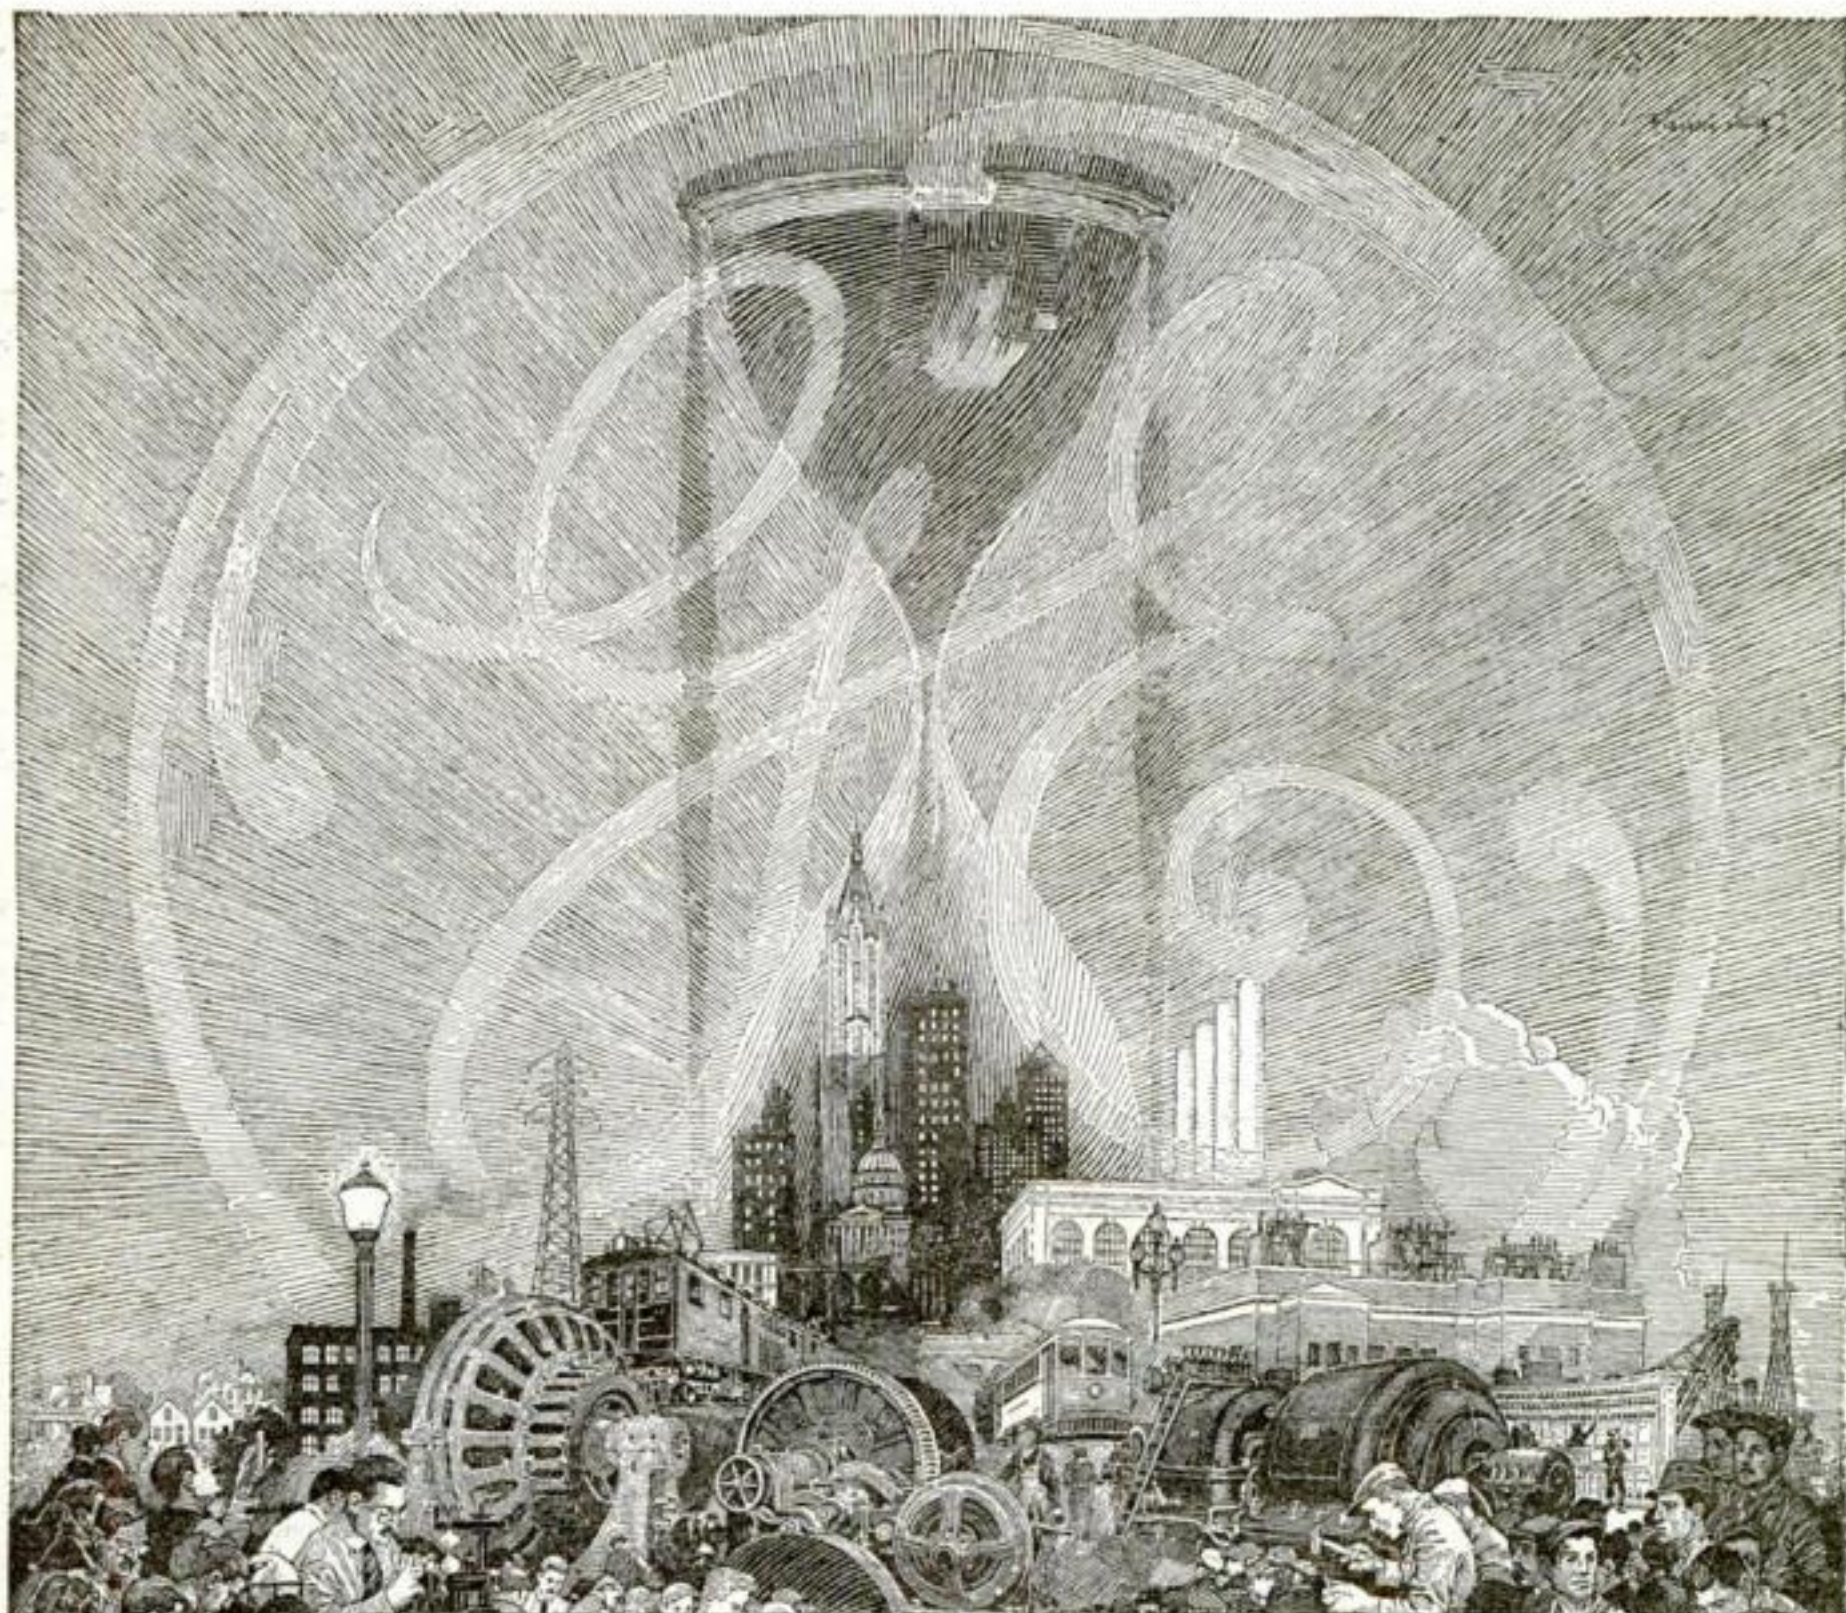

## ACHIEVEMENT

Twenty-five years ago the General Electric Company was founded. Since then electricity has sent its thrill through the whole structure of life.

Eager to turn wheels, to lift and carry, to banish dark, to gather heat, to hurl voices and thoughts across space, to give the world new tools for its work—electricity has bent to man's will.

Throughout this period the General Electric Company has held the great responsibilities and high ideals of leadership.

It has set free the spirit of research.

It has given tangible form to invention, in apparatus of infinite precision and gigantic power.

And it has gone forth, co-operating with every industry, to command this unseen force and fetch it far to serve all people.

By the achievements which this company has already recorded may best be judged the greater ends its future shall attain, the deeper mysteries it yet shall solve in electrifying more and more of the world's work.

7317

# GENERAL ELECTRIC COMPANY

When writing to Advertisers please mention Popular Science Monthly



# Science Gave Us Radiolite

Radium is a comparatively new scientific discovery. Now the world's greatest watch factories have utilized Radium to make a substance for illuminating Ingersoll hands and figures. This substance has been named Radiolite. The only watches that can be Radiolites are Ingersoll Watches.

Radiolite hands and figures double the usefulness of the Ingersoll Watch—and the Ingersoll has long been the utility watch of the world.

Radiolite glows brightly at night. It makes the hands

and figures of Ingersoll Radiolite Watches plainly visible in pitchy darkness. It is self-luminous—unlike phosphorescent paint, which can only absorb light and later throw it off.

Buy an Ingersoll Radiolite Watch. Own a proven time piece that has been perfected by one of the greatest discoveries in the history of science. Let radium tell you every minute of every hour of every night at a glance.

Look for Ingersoll on the dial—for only Ingersolls are Radiolites.

ROBT. H. INGERSOLL & BRO.

New York

Boston

Chicago

San Francisco

Montreal



Radiolite—\$2.25  
In Canada \$2.50  
The regular Ingersoll with  
a radium-lighted dial



Waterbury Radiolite \$4.50  
In Canada \$4.50  
A small, handsome jeweled  
watch

## Ingersoll


RADIOLITE WATCHES

\$2.25 to \$4.50

*Illustrations three-fifths actual size*

When writing to Advertisers please mention Popular Science Monthly



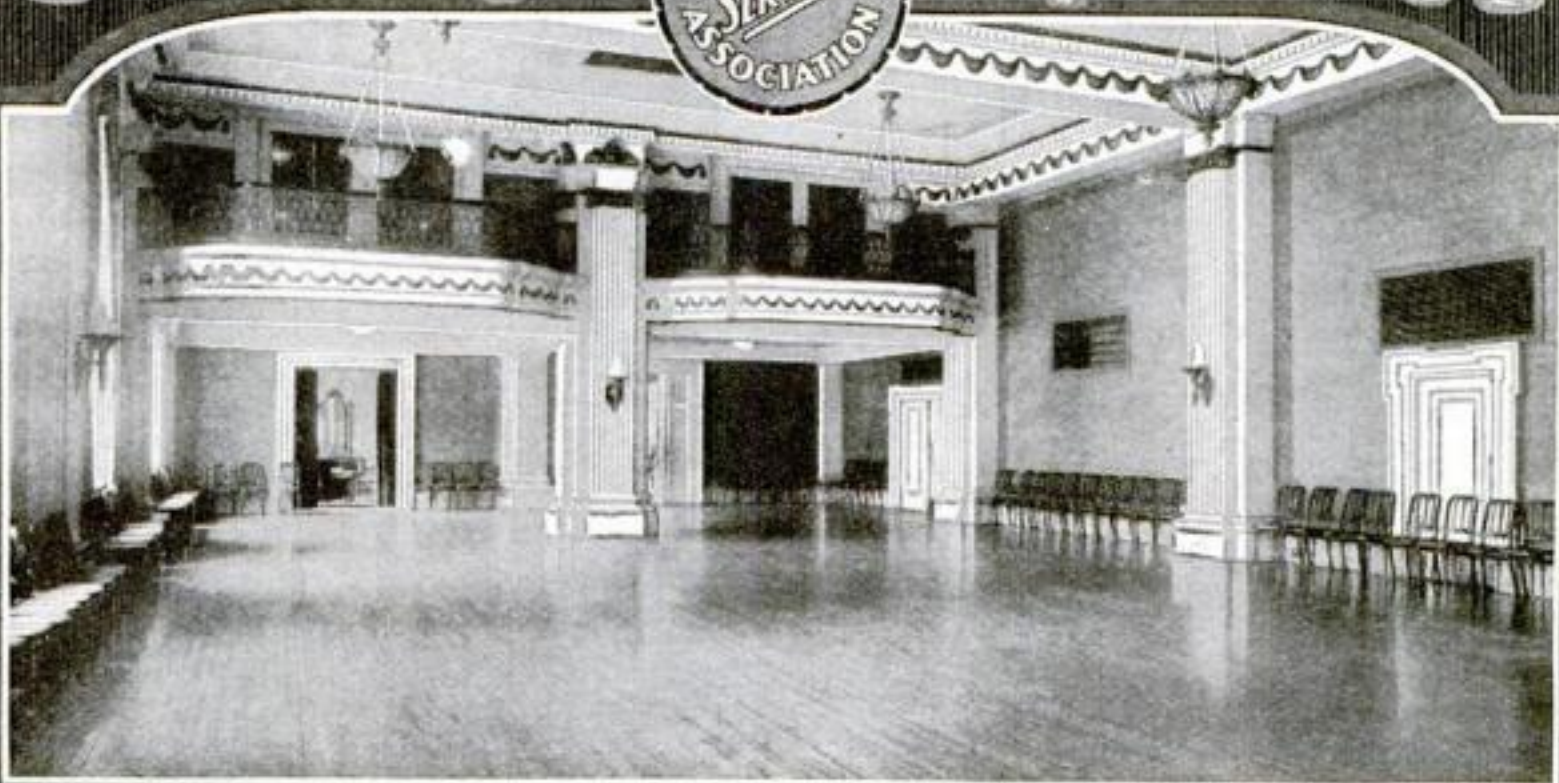

*Southern Pine floor of the ballroom in the new  
Hotel Kimball, Springfield, Mass.*

## The Floor Beautiful

FLOORS are the foundation of a successful interior both as to appearance and color scheme. A good floor is beautiful in itself and supplies the necessary background for the home furnishings. There is no better wood for flooring than—

## ***Southern Pine***

### ***"The Wood of Service"***

The "close," compact grain of Southern Pine makes a smooth floor and one that is easily finished. The wood, although naturally light in color, may readily be stained any desired color to harmonize with other woodwork.

Edge-Grain Southern Pine Flooring is quarter-sawed. Only the edge of the grain is exposed to the tread, making it very durable under severe usage. It will not sliver, buckle or curl; wears slowly and evenly; it is not affected by frequent wettings.

Edge-Grain and Flat-Sawed Southern Pine Flooring may be obtained everywhere east of the Rocky Mountains. Its lower cost is due to the fact that the wood is so very plentiful.

*"Beauty Plus Service in Floors," is the title of a handsomely illustrated booklet, sent free on request. If you are building, you should have this booklet. Address Dept. J-62.*

# ***Southern Pine Association***

NEW ORLEANS, LA.

When writing to Advertisers please Mention Popular Science Monthly





## SKATES YOU CAN DEPEND ON

**T**HESE are the days when ice skating, the king of winter sports, calls to every red-blooded man, woman and child to get into the game and enjoy the keen zest and exhilaration of gliding over the frozen stretches of river and lake. To get the maximum of enjoyment from skating, however, one needs sturdily constructed, sharp-bladed skates.

Barney & Berry skates are the logical choice of all who want the best in equipment. For more than fifty years Barney & Berry skates have been famous for their intrinsic value and beauty of design. The product of master skatecrafters, they are built with the needs of the skater ever in mind, and every pair is tested to insure the wonderful stay-sharp quality that has distinguished Barney & Berry skates for half a century.



### FOR THE BOYS

Be a member of the B & B Skaters' League. Nothing to pay. Fine lapel button sent to you by Barney & Berry when you join. Learn about this at once. It's too good to miss.

### FREE

BOOKLETS on "How to Skate," "B & B Skaters' League" and complete Illustrated Catalog of B & B Ice Skates mailed to you FREE if you will send your name and address to us.

There are forty and more styles of Barney & Berry skates for you to choose from; forty and more styles with keen, temper-tested blades of flawless steel that make their possession a source of satisfaction and pride to anyone who appreciates worth.

Somewhere in the Barney & Berry line there is just the skate to fill your particular need. Somewhere in your town there is a merchant who is anxious to serve you with the best. He has Barney & Berry skates, and will gladly help you in the selection of a pair that will meet your every requirement.

## BARNEY & BERRY, Inc.

1093 Broad Street  
SPRINGFIELD, MASS.





## Make this Christmas "the best ever" for your boy

You remember, don't you, how much you wanted a gun, how discontented you were till you got it? And will you ever forget how proud and happy you felt the first time you fitted the stock of your *own* Winchester to your shoulder and fired your first shot? Well, that lad of yours wants a rifle of his own just as badly as you ever did and—

**Now's your chance to make him happy**

Christmas is the time to make his most cherished dream come true, and that Winchester .22 will give him more pleasure this year than a whole arsenal of them could possibly give him five years from now. So make him happy while you have such a good chance.

A rifle is a wise gift, too, because it brings out the man in him; it teaches him responsibility, self-control, self-reliance; it develops in him the invaluable qualities of concentration and perseverance.

Every boy knows the reputation behind the name "Winchester," so get him the rifle he can be most proud of.

**What the name "Winchester" means**

The name "Winchester" stands for the

best in gun making. For over half a century Winchester has been the standard of pioneers and sportsmen.

The Winchester Company today is an organization of expert gun makers with 50 years of gun-making reputation behind it.

Every gun or rifle that bears the name "Winchester" is fired many times for smooth action and accuracy, and is fired with excess loads for strength.

**Get the rifle now**

Your dealer will help you to decide which one of the fine .22 Winchesters will best suit your boy. Now is the time to select it—while there are still plenty in stock. You will be surprised to find what a fine gun you can get for a low price. Get the rifle now and make the boy happy.

There is a place near you, either out in the open or at a club, where you can shoot. If you do not know where to shoot, write to us, and we will tell you where and how you can, or we will help you organize a club.

WINCHESTER REPEATING ARMS CO.  
Dept. 89 New Haven, Conn.



**Boys and Girls  
Winchester Medals for  
skill with the rifle**

The Gold Plated "Sharpshooter" Medal goes to the boy or girl under 13 who makes the first grade score with a Winchester .22 rifle and Winchester ammunition.

The Silver Plated "Marksman" Medal goes to the boy or girl who makes the second grade score.

Go to your dealer today; he will give you a sample target and booklet explaining the full conditions of the contest. This booklet also tells you how to get the best results from your Winchester. The dealer will also supply you with targets.

If your dealer cannot supply you, write to Winchester Repeating Arms Co., Dept. 89, New Haven, Conn.



MODEL 06. Take-down Repeating .22 caliber rifle, 20-inch round barrel. Shoots three sizes of ammunition. The most popular .22 caliber repeater ever placed on the market.


Take-down .22 caliber single shot rifle. A low priced, light-weight gun made in two sizes.

# WINCHESTER

World Standard Guns and Ammunition

When writing to Advertisers please mention Popular Science Monthly



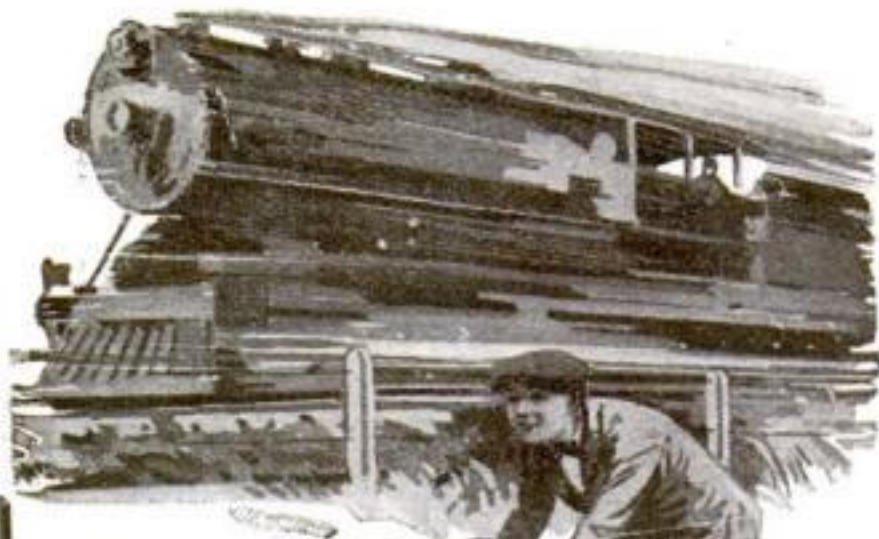

It requires ten minutes for a locomotive to develop its maximum speed, yet owing to the tremendous power of the Air Brake it can be brought to a complete stop within 22 to 24 seconds.



## What the Air Brake is to the Locomotive the Corbin Duplex Coaster Brake is to the Bicycle



Experienced cyclists the country over can testify to the reliability of this most famous of all coaster brakes. For seventeen years it has been recognized as the standard brake equipment and during that time it has been developed to the highest state of brake efficiency.

The Corbin Duplex answers every demand the rider may make on it. With Corbin equipment he has at all times complete control over his bicycle. No grade is too steep and no corner too sharp. Complete ball bearings throughout minimize friction and assure that smooth, easy action for which the Corbin Duplex has always been noted. The large brake surface provides a powerful grip, enabling the bicycle to be brought to an instantaneous or gradual stop as the occasion demands.

A slight pressure of the foot is all that is required. When coasting, the feet remain at rest and always in a convenient position to apply the necessary control.

Carefully constructed, handsomely finished, the Corbin Duplex will outlive the sturdiest bicycle and stand up under the most rigorous service.

When purchasing your new bicycle specify and insist upon the Corbin Duplex. Now is the time to do it. Equip it to your old wheel—it makes all the difference in the world.

## Corbin Control Means Safety Assured

**BOYS** send today for this hand-some Liberty Pin—It is **FREE**

Fill in the coupon as indicated and send it to us and by return mail we will send you this attractive souvenir. Write for this pin today. You will be delighted with it as is every boy who has seen it.

Just out! The new 1918 fully illustrated catalog. You should have one. Write for it.

The Corbin Screw Corporation, The American Hardware Corporation, Successor, 202 High St., New Britain, Conn.

Dear Sirs: Please send me handsomely colored Liberty Stick Pin.

The name of my bicycle is—

My name

Street

City

State

## HERMAN'S U.S. ARMY SHOES

Munson Last

Accurately following the outline of the arch, Herman's Munson makes allowance for muscle action and natural expansion and allows the foot to do its part without pain or injury. It corrects foot troubles and adds to your sure-footedness and efficiency. Every U. S. soldier has to wear it. Every civilian whose feet are complaining will find in this shoe blessed relief and matchless footwear value. All sizes and widths.

### Wear Herman's

Write for the name of a Herman dealer near you. Or you can buy from us by mail—fit and satisfaction guaranteed. Munson's black or tan, \$7. Look for the shield trade mark on the sole.

### Catalog of All Styles

FREE—Write for it.

Jos. M. Herman Shoe Co.

Army Contractors

802 Albany Bldg., Boston, Mass.



## Old Furniture Made New

Don't be troubled because use takes the new look from your furniture—just bring the "new look" back with 3-in-One oil! Simply wring out a cloth in cold water, add a few drops of

### 3-in-One Oil

and wipe, going over but a little surface at a time. Dry and polish with a woolen cloth or a cheese cloth, being careful to rub with the grain of the wood. Results are startling! Things that bore the outward signs of age—smoke stains, finger marks, grime, and scratches—look almost like newly purchased goods and grace your home as though they were. 3-in-One never turns rancid or gets gummy. Contains no acid; has no disagreeable odor.

1 oz.

15c; 3 oz.

25c; 8 oz. (1/2

pt.) 50c Also in

Handy Oil Cans, 3

oz. 25c. If your dealer

hasn't these cans, we will

send one by parcel post, full

of good 3-in-One for 30c.

**FREE**—Write for a generous

free sample and the


3-in-One Dictionary.

Three-in-One Oil Co. 165KCP. Bdw. N. Y.



When writing to Advertisers please mention Popular Science Monthly



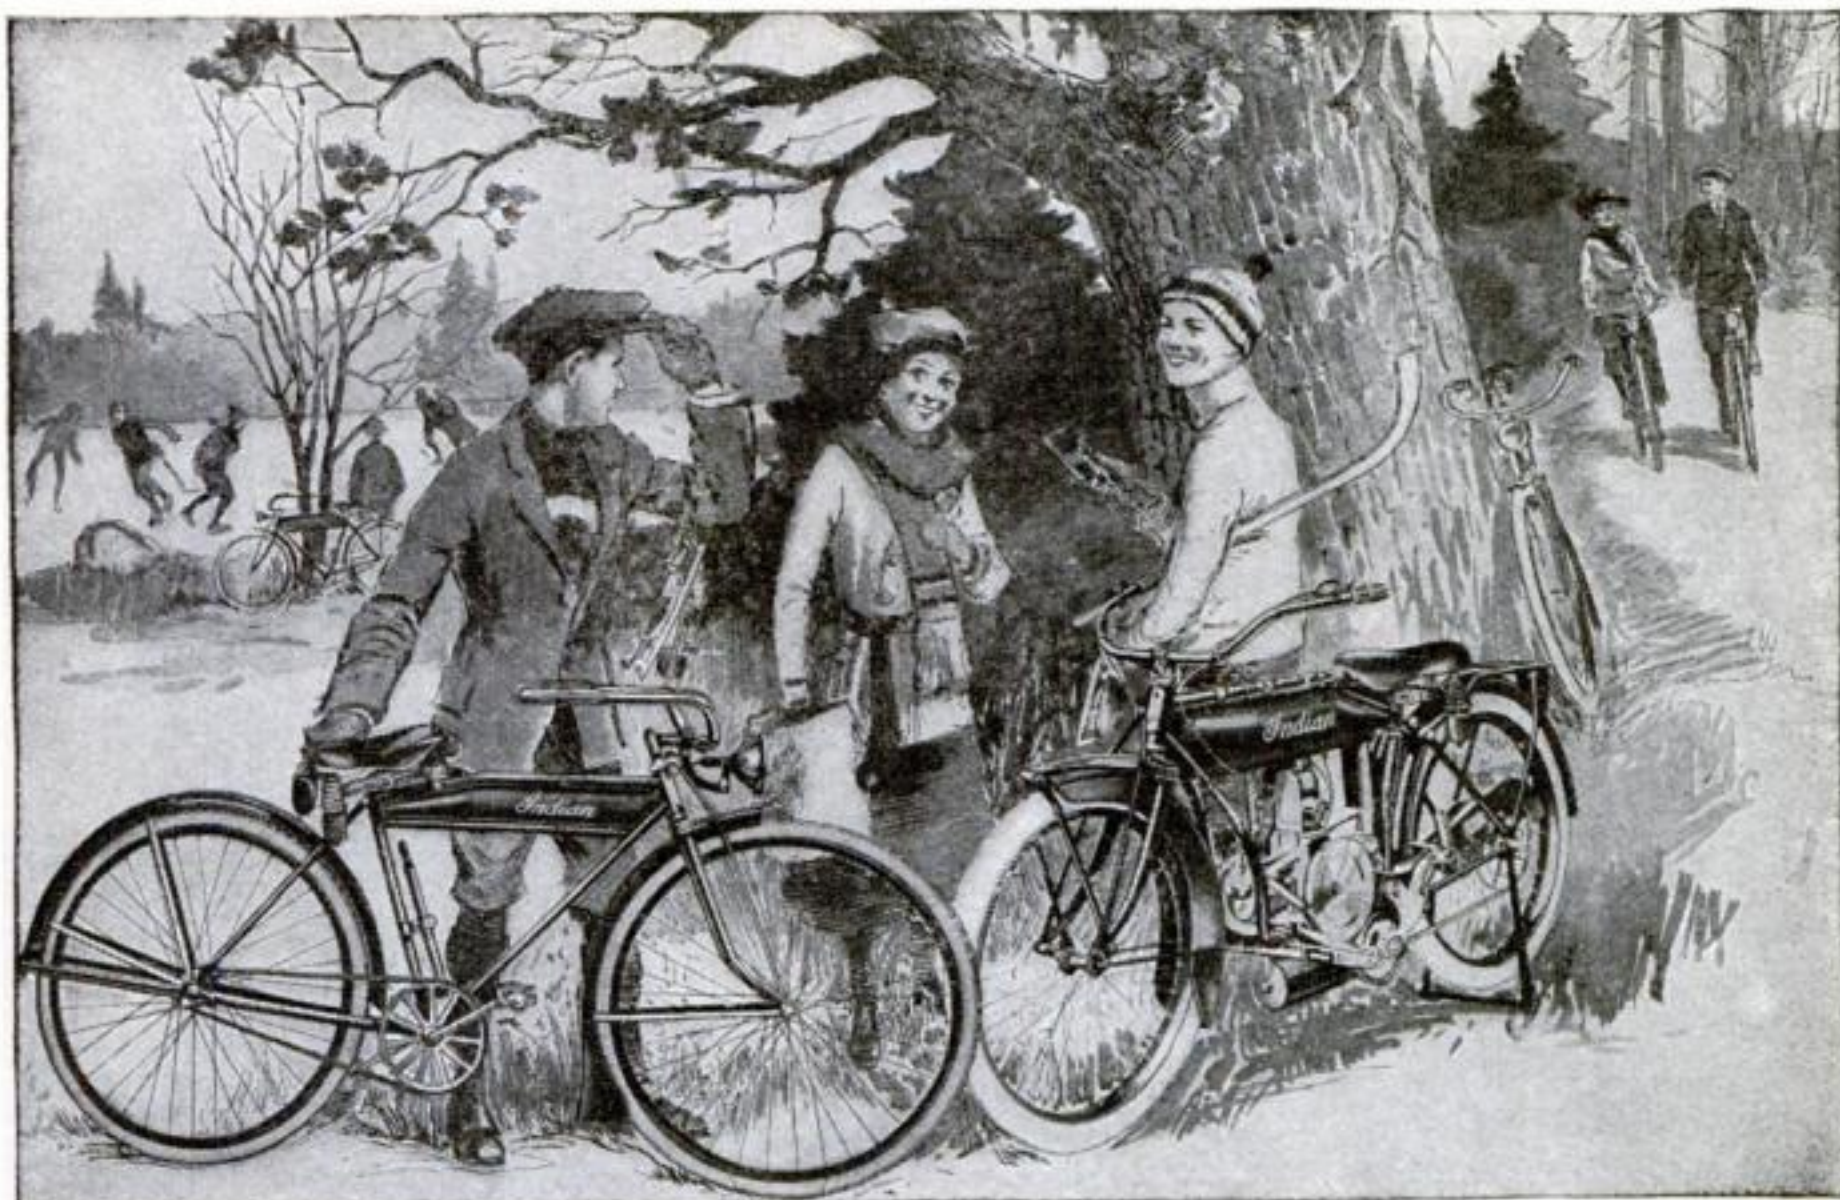

## ***The BEST Solution of the Youngsters' Christmas Gift Problem***

**N**OT a soon-forgotten toy or worthless trinket, but an economical, practical, body-building, muscle-making 1918 *Electrically Equipped*

# ***Indian* Bicycle**

Any boy or girl will glory in the possession of this most popular bicycle. Large Electric Light with Reflector, a necessity in those States requiring that bicycles be lighted; Tank Battery Holder, Triple Stem Forks, Indian Crank Hanger, motorcycle style lines throughout. Everything in equipment a bicycle should have.

Eleven other models in the 1918 Indian line, ranging in price from \$27.50 to \$50. All backed by the Indian nameplate and guarantee.

**1918 Indian Light Twin Motorcycle**—Easily-

handled, safe, dependable, mechanically simple motorcycle of modified speed and power. Has all the qualities of Indian super-construction and excellence, plus the Indian's recognized features of operating and upkeep economy. Priced to make it available for anybody who can afford any sort of high-grade two-wheel vehicle.

Give the youngsters what they want—**Indians**. Practical, economical, healthful, they furnish fun and happiness and splendid outdoor exercise the year round.

*Send for illustrated Bicycle or Light Twin Catalog, or both*

**HENDEE MANUFACTURING COMPANY, 725 State Street, Springfield, Mass.**  
(Largest Manufacturers of Motorcycles in the World)



# Lord Elgin~

## \$100-



21 Jewels  
8 Adjustments  
Ultra Thin  
Solid Gold

The watch of a gentleman.  
Sterling character, in classic design, dressed in solid gold.

The newest and finest of a fine old line. A titled timepiece, whose possession instantly brands you a connoisseur.

A priceless heirloom—the gift that lasts a lifetime.  
No man can know the fullness of *pride of possession*, till he owns the \$100 Lord Elgin.



**ELGIN NATIONAL WATCH CO., ELGIN, U.S.A.**  
*Designers and Producers*



When writing to Advertisers please mention Popular Science Monthly



# COMMUNITY PLATE

## New De Luxe GIFT CASES



Serving Salad Set  
\$6.50



Bird Carving Set  
\$6.75



Salad Set  
\$7.50



Seven-Piece Salad Set  
\$9.00



Child's Set  
\$5.00



Knife and Fork Set  
\$17.25



Butter-Knife and Sugar Shell  
\$3.75

**G**IFT SUGGESTIONS • Sets of COMMUNITY PLATE in the beautiful COMMUNITY GIFT CASES of imported seal-grain leatherette. Any of the exquisite COMMUNITY designs can be obtained in similar cases, at prices ranging from \$3.25 for a two-piece set, to the table service at \$53.00. Of dealers everywhere. At your service for fifty years.

ONEIDA COMMUNITY, Ltd.





## A Motor Car Built By Craftsmen

LET men who have always built the most luxurious, and, incidently the most expensive custom-built motor cars, design a car at a "happy medium" price—and they will very likely achieve the unusual—turn the prevailing standards topsy-turvy. And this is what has happened in the case of the Pan-American, "The American Beauty Car".

Built by designers, engineers and production men who have previously produced the most beautiful, most expensive motor cars in America, the Pan-American is a distinct innovation in automobile craftsmanship—a motor car with those finer features which have hitherto

distinguished only the very expensive car, or those of foreign build. A motor car like no other in America,—low-slung, roomy, *svette* design; specifications that read like a veritable "blue book" of materials. *The car with the white radiator.*

*Every motorist, or prospective motorist in America, should write for the beautiful Pan-American book, No. 2.*

*General Sales Offices*

PAN-AMERICAN MOTORS CORPORATION, CHICAGO  
*Factory at Decatur, Illinois*

**Pan-American**  
"The American Beauty Car"



DU PONT AMERICAN INDUSTRIES



How Many Hides  
Has A Cow?

*Uncle Sam Knows the Real Answer:*  
**NOT ENOUGH!**  
**SAVE LEATHER**  
**For Soldiers**

**T**O make America's hide supply go as far as possible, hides are being split into five or more thin sheets; but, even this saving scheme fails to meet the requirements for soldiers' shoes, harness, equipment, ship upholstery, factory needs, etc., chiefly because too much hide leather is used by the public in places where high grade leather substitutes will serve as well or better.

**Uncle Sam Has Set the Pace**

The new U. S. motor trucks and ambulances will be upholstered in leather substitutes. For several years the standard for book binding in the Government Printery has been Du Pont Fabrikoid.

The upholstery specifications for the new Merchant Marine call for



REG. U. S. PAT. OFF.

*Craftsman Quality*

What Uncle Sam has found by experience and tests good enough for the Government's severe requirements should be good enough for every loyal American.

**How You Can Help**

If you are a manufacturer using leather probably part or all of your requirements can be met by some grade of Fabrikoid. While not feasible for every use of leather, the illustrations herewith show its wide range of utility.

If you use leather in your home for any purpose, try the proper grade of Fabrikoid instead.

When buying an automobile, boat or piece of furniture prefer Fabrikoid upholstery. Help the manufacturer conserve leather by patronizing those who use good leather substitutes like Fabrikoid.

Every hide displaced by a good substitute helps supply our armies with shoes, our farms with harness and our factories with belting—it helps win the war.

Manufacturers! write us your requirements and let us co-operate with you.

Americans everywhere! write for samples and names of manufacturers of the article you want, who use Fabrikoid and of stores near you selling it by the yard.

**DU PONT FABRIKOID CO. Wilmington, Del.**

*World's Largest Manufacturers of Leather Substitutes*

Factories at  
Newburgh, N. Y.; Fairfield, Conn.; Toronto, Ont.



For  
Automobile  
Tops and  
Upholstery



For Boat  
Cushions and  
Upholstery



For Furniture  
Upholstery



For Bags,  
Trunks and  
Suitcases




For Book  
Binding



For Home  
Decorations,  
Novelties,  
Belts, etc.





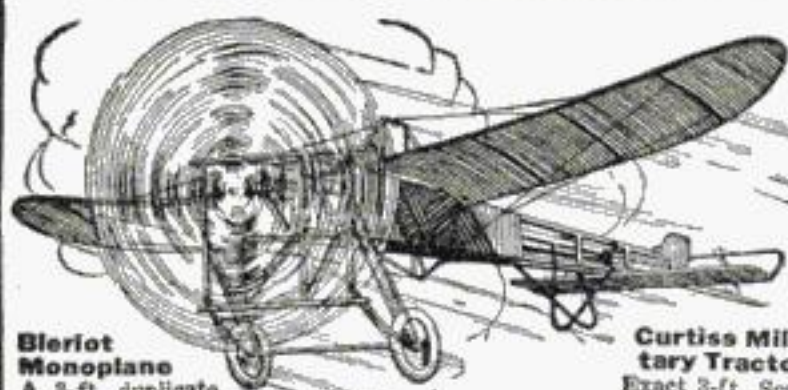

**Blériot Monoplane**



A 3-ft. duplicate of the famous Blériot XI, the first Aeroplane to fly across the English Channel. Will fly 100 ft. Complete Construction Outfit ready to put together . . . \$5.00

**Nieuport Monoplane**

Exact 3-ft. Model of the French War-Scout Plane. Will rise and fly by its own power. Complete Construction Outfit ready to put together, \$6.00


**Curtiss Military Tractor**

Exact 3-ft. Scale Model of the famous Biplane now used by U.S. Army Aviation Corps and by the English aviators. The Aeroplane which will help America win the war! Build one; it will fly like a big one. Complete Construction Outfit ready to put together . . . \$6.00

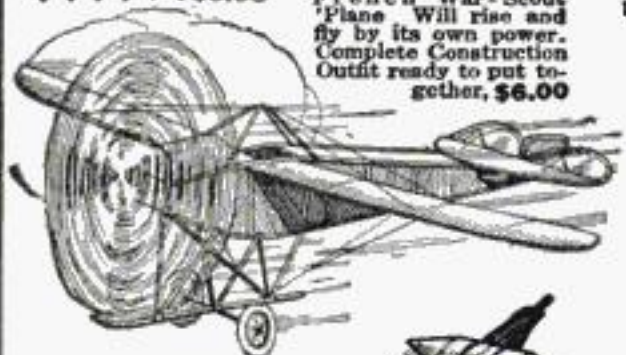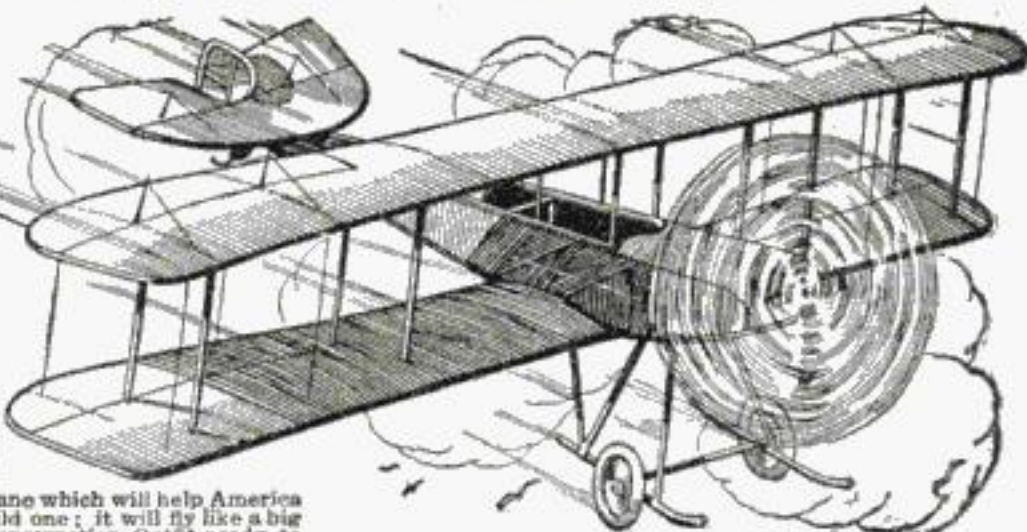

**Cessna Peoli Racer**

A real Record Racer; Official Record 1691 ft. Guaranteed to fly over 1000 feet. Complete Construction Outfit ready to build . . . \$4.00 Completely Built Ready to fly, \$9.00

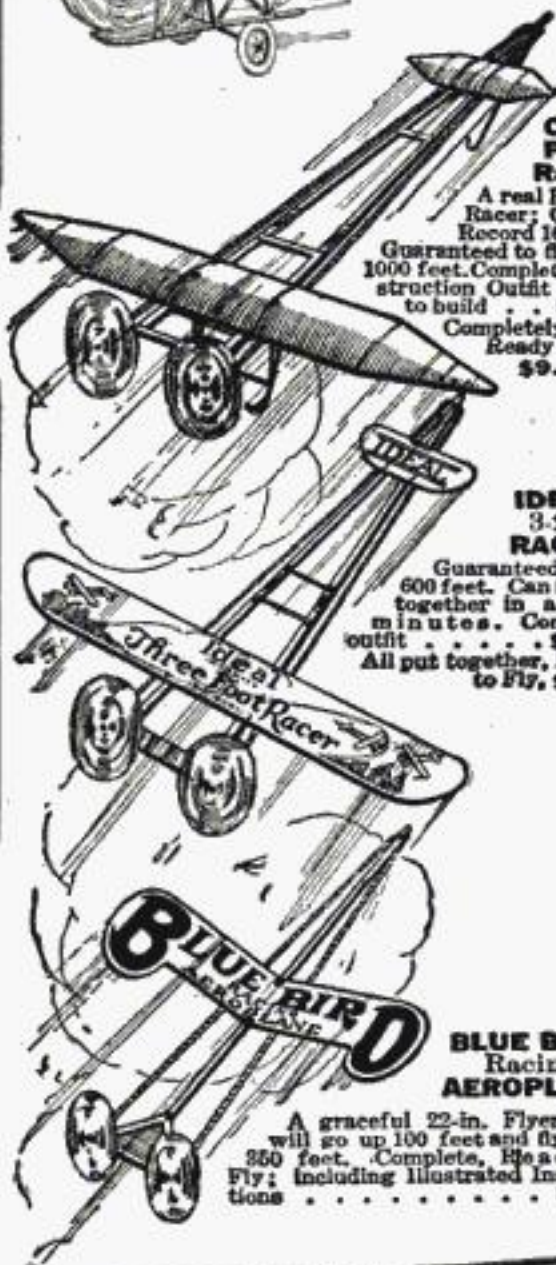

**IDEAL 3-ft. Racer**

Guaranteed to fly 600 feet. Can be put together in a few minutes. Complete outfit . . . \$2.75 All put together, Ready to fly, \$4.00

**BLUE BIRD Racing AEROPLANE**

A graceful 22-in. Flyer that will go up 100 feet and fly over 350 feet. Complete, Ready to Fly; including illustrated instructions . . . \$1.50

## Get an IDEAL Model Aeroplane for Christmas

It's great sport to build and fly Model Aeroplanes! You can study the wonderful Science of Aviation and learn how Aeroplanes are built and how they fly. It's the most fascinating fun you ever had, and a most useful and patriotic thing to do. It's easy to

### Build and Fly Your Own 3-ft. Models of Famous War Aeroplanes

that look exactly like big ones; that have rubber-tired disc wheels; adjustable planes and rudder; hand carved propeller; ball-bearing propeller shaft and other parts and fittings just like a *real* Aeroplane. These Model Aeroplanes fly like big ones; rise from the ground by their own power and fly 75 to 100 feet. It's easy to build them. Get an IDEAL Model Aeroplane Construction Outfit containing all the parts and full plans and instructions. All you have to do is put the parts together and build your own 3-ft. Model.

Tell your folks you want an IDEAL Model Aeroplane for Christmas—pick out the one you want now!

### IDEAL Racing AEROPLANES and Flying Toys are Great Sport!

Racing Aeroplanes that go "sky-high"; fly far, fast and with, against or across the wind. Flying Toys that are just the thing for younger boys. Six different kinds. Three shown at the left.

Here are four more; complete and ready to fly:—

IDEAL Speed-O-Flyer (2-ft. Racer) . . . . .	\$1.75
IDEAL Speed-O-Plane (1-ft. Flyer) . . . . .	.75
IDEAL Loop-the-Loop Glider—Fibre Planes . . . . .	.30
IDEAL Loop-the-Loop Glider—Wood Planes . . . . .	.50

### How to Get These Aeroplanes

IDEAL Model Aeroplanes, Racing Aeroplanes and Flying Toys are sold by Leading Toy, Sporting Goods and Department Stores. Ask at your store for the ones you want. Ask for "Those IDEAL Aeroplanes"! If not obtainable there, we will fill your order, delivery charges prepaid, upon receipt of price if you mention your store's name and address.

**IDEAL AEROPLANE & SUPPLY CO.**  
80-86 West Broadway, New York City

### For 25 cts.

we will send you Accurate Scale Drawings, with Building and Flying Instructions, for any one of the Aeroplanes listed below. With these Plans and your own materials you can easily build a Model Aeroplane.

Curtiss Military Tractor  
Curtiss Hydroplane  
Blériot Monoplane  
Nieuport Monoplane  
Taube Monoplane  
Curtiss Flying Boat  
Cessna Peoli Racer  
Wright Biplane  
All 8 Plans for \$1.75

### For 5 cts.

we will send you the IDEAL 48-page Aeroplane Book which tells all about Model Aeroplanes, and how they are built; about Racing Aeroplanes and Flying Toys; and lists all kinds of parts, supplies and materials for Amateur Aviators. If you want to know more about IDEAL Model Aeroplanes, send 5 cents in stamps and get this book. Tear off this corner and write your name and address in the margin. Do it now, so you won't forget.





# GILBERT TOYS



**Hello Boys!**  
REG. U.S. PAT. OFF.

Here's a straight tip for you. You don't have to be told about the loads of fun you can have building models of battleships, flying machines, cranes, skyscrapers, farming machinery, etc. Every regular fellow knows it. But—the important thing to keep in mind when buying a construction toy set is: Will your models look real—will the battleship that you build look like a regular member of Uncle Sam's floating flotilla, or will you have to hang a sign on it saying, "This is a battleship?" You know, making Erector what it is, has been serious to me. I guess I've never got over being a boy, myself. I know the importance of having things genuine. Most toy-makers are satisfied to get the first impression. But I know how a boy feels—when he realizes his toy isn't true—that the steel-work in his toy skyscraper isn't like the real building he saw or that his toy engine won't work—why he's hurt! He's done with it! Fellows! I know what I'm talking about when I tell you to be sure to get

## GILBERT ERECTOR

REG. U.S. PAT. OFF.

**"The Toy Like Structural Steel"**

and there are hundreds of thousands of other fellows who will second my motion. The square four-sided Erector girder is the thing—it's in a class by itself—it's absolutely necessary if you want models of battleships that look like battleships, skyscrapers that look like skyscrapers, and hundreds of other models that look just like the things they represent. What's the use of building stuff if it doesn't look real? The answer is: Get Erector!

Look at the battleship shown here.

Isn't it a crackerjack with its skeleton fighting turrets and gigantic guns that can be turned in any direction?

Wouldn't you enjoy building it—wouldn't

you be proud to show it to your friends? There's no limit to the fine things you can build with Erector, and no limit to the size of your models because you can constantly add to your first set with new Erector parts. Boys, tell your parents you want Erector this year for Christmas.

Learn all about the Gilbert Engineering Institute for Boys—how you can get free membership in it and win handsome Diplomas, Degrees, Gold Fraternity Pins, Gold Watches, Thirty Dollars in Salary, etc. Mail back the coupon now for a free copy of my beautiful book "How to Become a Gilbert Master Engineer," which tells the whole interesting story, and I will also send you a free copy of my magazine for boys, "Gilbert Toy Tips."

**GILBERT  
TOYS**

ERECTOR  
ELECTRICAL SETS  
TELEGRAPH SETS  
ELECTRICAL MOTORS  
CHEMISTRY OUTFITS  
SUBMARINES  
MECHANICAL TOYS  
MACHINE GUN  
PUZZLE PARTIES  
NURSES OUTFITS  
MAGIC SETS  
KIDDIKINS  
BRIK-TOR

**The A. C. Gilbert Company**  
157 Blatcheley Ave., NEW HAVEN, CONN.

*A.C. Gilbert*  
President



The  
A. C.  
Gilbert  
Company  
157 Blatcheley  
Avenue  
NEW HAVEN, CONN.

Send me a copy  
of "Gilbert Toy  
Tips" and your  
booklet, "How to  
Become a Gilbert  
Master Engineer."

Name.....

Street.....

City.....

State.....

When writing to Advertisers please mention Popular Science Monthly



# Look, Boys!



A set of Meccano is just like  
a Magic Box of fun!

## You Can Build This TANK with MECCANO

### Toy Engineering for Boys

Think of the never-ending joy of building with Meccano! You can construct Towers with electric elevators, Cranes that lift loads, Bridges that open and close, Steam Shovels that dig, Looms that weave, Clocks that keep time.

Or—you can reproduce the machines you see everywhere around you. There's no limit to what you can do. Why, it's almost magic! You can actually have a new toy every day.

The "Tank" shown above is a perfect working model of the wonderful machines which crawl over trenches and shell-holes, knock down trees and houses, and climb right over them. Yet it's only one of the hundreds pictured in the Meccano Manuals, which come with the Meccano sets. Each page is a fund of wonder; each model an inspiration.



### Send For Meccano Wonder Book


Send the name and address of yourself and three boy friends and you will receive the Wonder Book, telling all about Meccano; a free trial subscription to "The Meccano Engineer," and terms of \$1,000 Prize Contest. Send now, so you and Dad can decide on your present.



A bully  
Field Gun

You can make a new  
model every day  
with Meccano if you  
want to. You never  
get tired of Meccano,  
and it never wears  
out.

Be  
Sure  
the Name  
"MECCANO"  
is on the Box

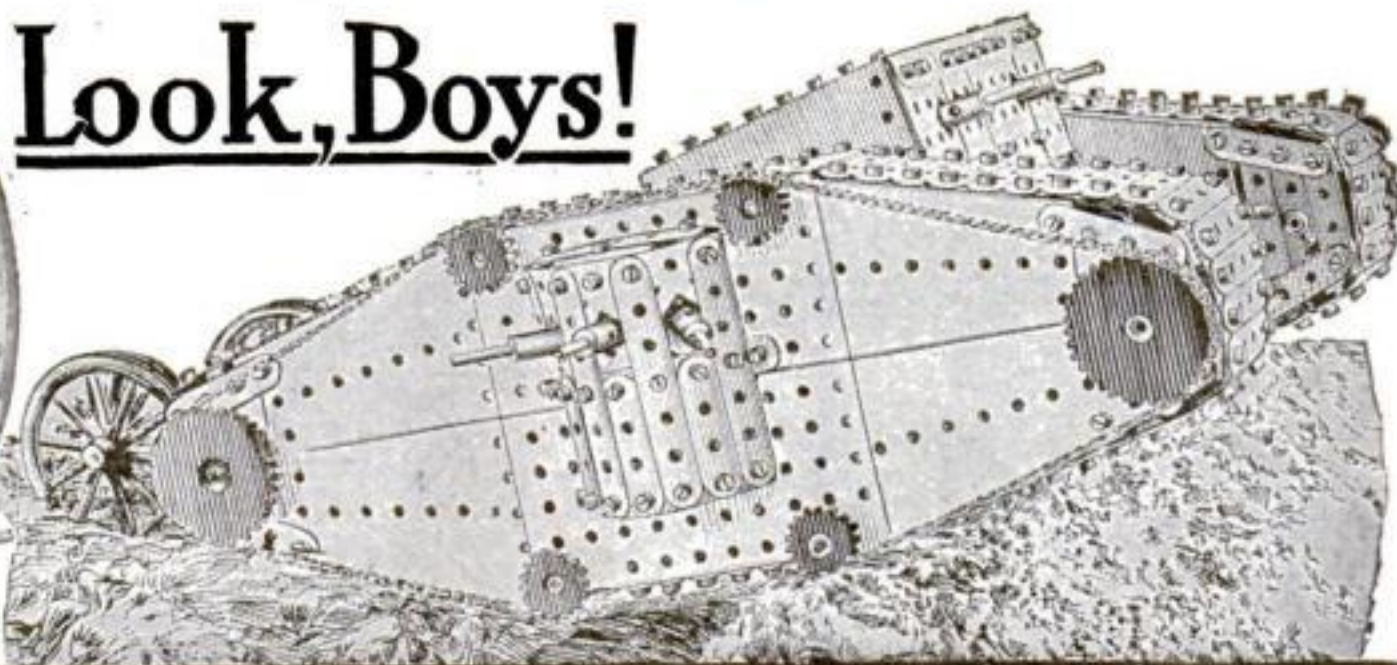

A few of the Hun-  
dreds of Models Any  
Boy can Build With  
Meccano.

A regular  
Army  
Aeroplane



Insist  
on  
Meccano  
for Christmas  
Because:

—Meccano Build-  
ing is True Engi-  
neering.

—No Other Toy will  
make such Fascinating  
Models.

—Meccano Models operate  
like Real Machinery.

—You don't need to Study; the  
Fun begins when you open the  
box.

—There is no Limit to the Number  
of Models any Boy can Construct.

—Each Set is Complete; nothing more  
to Buy.

—You can Win a Big Cash Prize.

### BE SURE YOU GET MECCANO

Be sure to get MECCANO. There isn't anything else just as good or just the same. So say the name over to yourself—MECCANO—MECCANO—MECCANO. Then tell Mother and Dad why nothing else will give you as much fun.

### Prices of MECCANO Sets


MECCANO sets include various sizes of dandy girders, plates, and perforated strips; also nuts, bolts, wheels, gears and scores of other parts—all cut from shining steel and brass, as accurately as the works of a clock. Each regular outfit, from No. 00 to No. 6, is complete with tools and full instructions. Nothing more to buy. Sets numbered 1X, 2X, 3X contain the powerful MECCANO Electric Motor. Any set sent postpaid upon receipt of price, if not at your dealer's.

No. 00....	\$1.00
No. 0....	1.50
No. 1....	3.00
No. 1X....	4.50
No. 2....	6.00
No. 2X....	7.50
No. 3....	9.00
No. 3X....	12.00
No. 4....	15.00

And up to \$40.00

**MECCANO COMPANY, Inc.**  
Building 10 K, Bush Terminal, Brooklyn, N. Y.



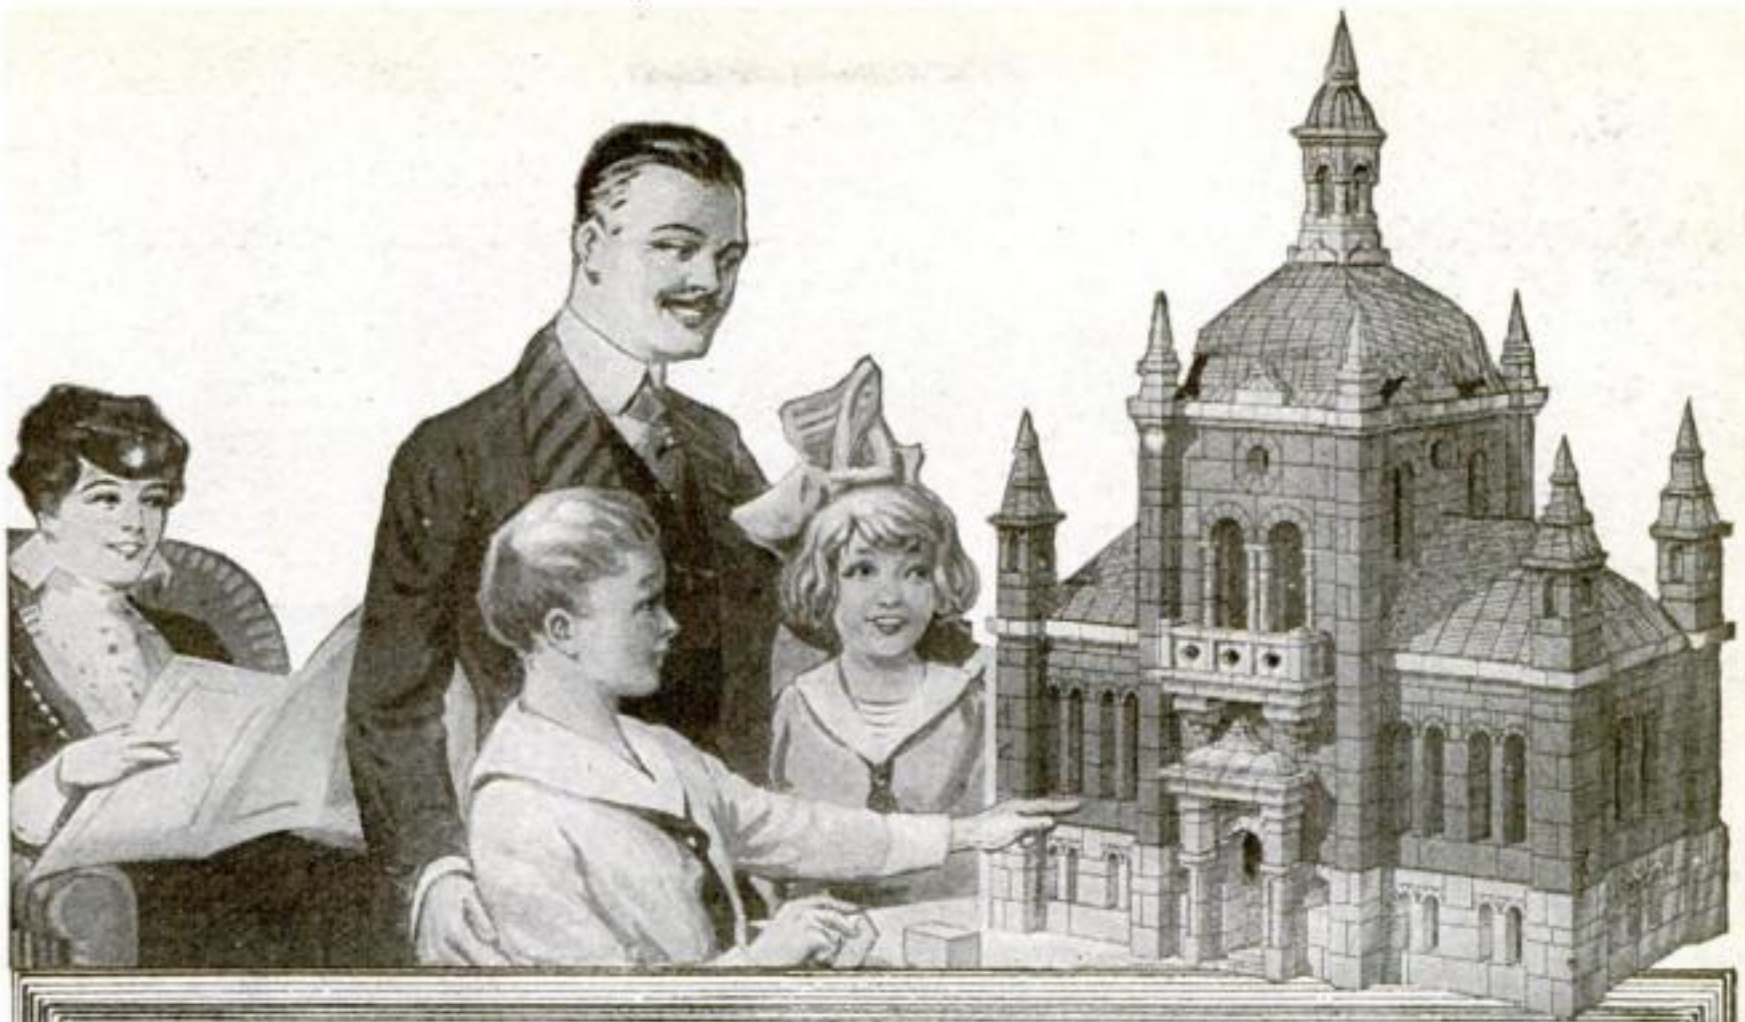

## Christmas Morning!

Give that boy or girl of yours a set of Anchor Blocks—a really wonderful architectural construction toy that will teach them while they are having real fun. These blocks are entirely different from ordinary blocks. They are made of stone in three natural colors—red brick, buff and blue slate—real building material. They last forever. They are a toy of constant wonders. They develop initiative and imagination. They offer the widest scope for the constructive tendencies that ought to be encouraged in every child.

### RICHTER'S ANCHOR BLOCKS

Castles, battlements, bridges, forts, arches, houses, towers and all sorts of buildings arise as by magic under the child's hand. Each block is made in perfect relation to the others—architecturally exact and mathematically accurate. This permits adding other blocks to the set at any time so that larger and more elaborate models can be built.

The many shapes of blocks in every set offer wonderful possibilities in building. There are no parts to rust or to hurt the child or tear its clothes, no parts to shrink or swell or fall apart. These blocks are at all times, in all climates—unchanging, correct, clean and everlasting. The models are easily dismantled. Just knock them over and start another. No time lost, no tiresome process to take them apart.

Catalog of these fine construction blocks sent on request. Sets from 50c to \$5.00. Wonderful fortress sets, new this year, \$1.50, \$3, \$6, \$12. Fill out coupon and mail now or send money order if you wish to order right away.



Cut out coupon here

F. AD. RICHTER & CO., Dept. 81  
74 Washington Street New York

Send me your booklet giving full particulars about Anchor Blocks.


Name .....

Address .....

City.....State.....

When writing to Advertisers please mention Popular Science Monthly



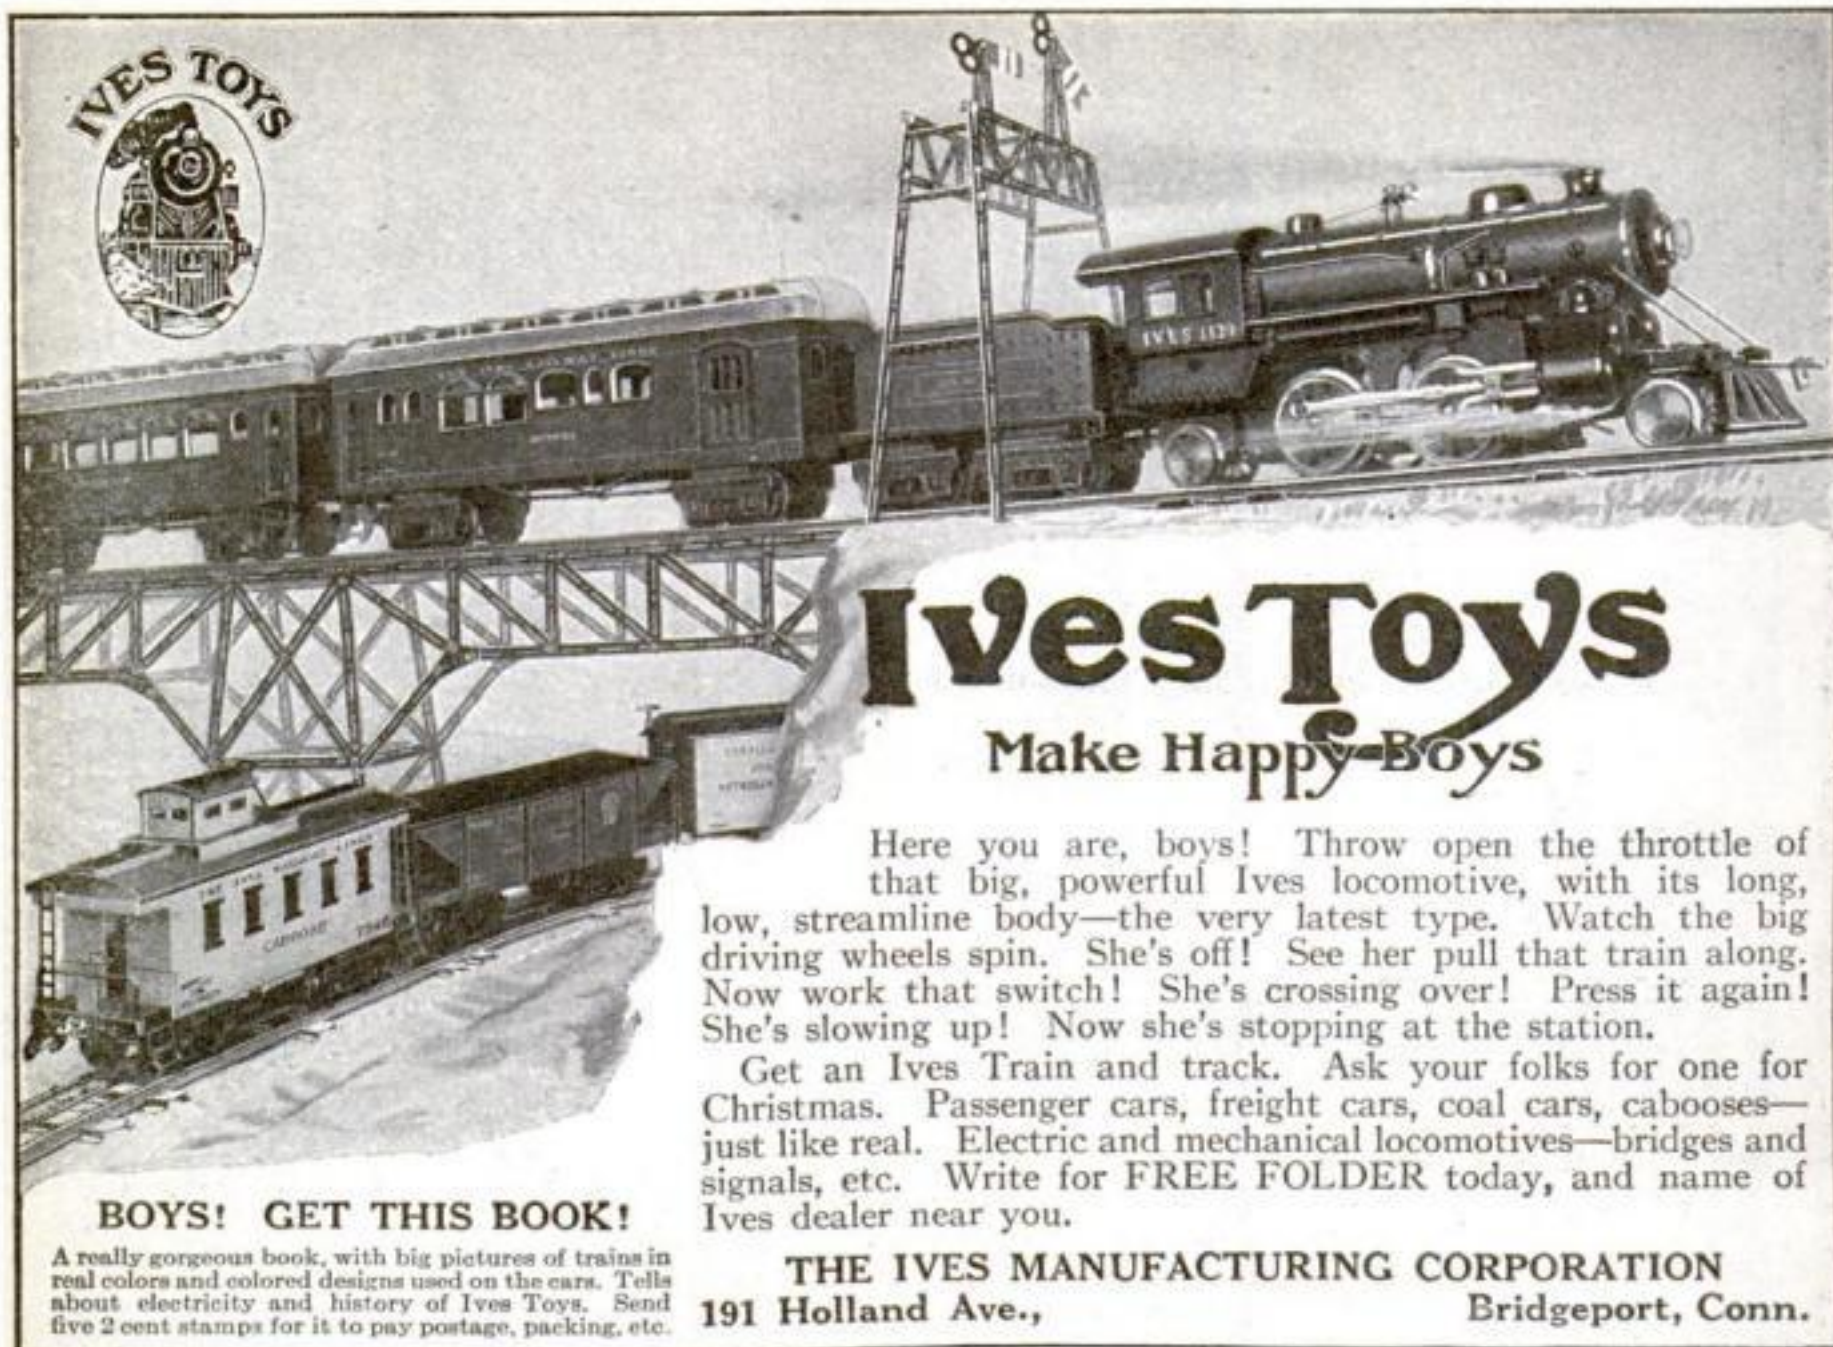

**IVES TOYS**

# Ives Toys

## Make Happy-Boys

Here you are, boys! Throw open the throttle of that big, powerful Ives locomotive, with its long, low, streamline body—the very latest type. Watch the big driving wheels spin. She's off! See her pull that train along. Now work that switch! She's crossing over! Press it again! She's slowing up! Now she's stopping at the station.

Get an Ives Train and track. Ask your folks for one for Christmas. Passenger cars, freight cars, coal cars, cabooses—just like real. Electric and mechanical locomotives—bridges and signals, etc. Write for **FREE FOLDER** today, and name of Ives dealer near you.

**BOYS! GET THIS BOOK!**

A really gorgeous book, with big pictures of trains in real colors and colored designs used on the cars. Tells about electricity and history of Ives Toys. Send five 2 cent stamps for it to pay postage, packing, etc.

**THE IVES MANUFACTURING CORPORATION**  
191 Holland Ave., Bridgeport, Conn.

## I'm Ready for Action

24 inches long  
9 inches high  
36 shots a minute

# I Am Big Dick

### American Boys Attention!

I never miss fire.  
I shoot thirty-six (36) wooden bullets as fast as you can turn the firing-crank. I shoot true as your aim and my strong iron base keeps me from "jumping".

For indoor war play I have no equal and will give you and your friends exciting fun storming the German Breast-works you can easily build.

If you are a real live American Boy you will want me.

Tell mother and father I am not dangerous and just whisper to them that Christmas is coming.

You will find me at most toy dealers and well worth the \$3.00 asked. If you don't find me at YOUR dealers send the price to my builders and they will send me direct to your home. Don't forget!

**"BIG DICK"**

**MILTON BRADLEY COMPANY** (Builders of BIG DICK)  
Dept. G Springfield, Mass.  
Makers of the World's Best Games



**Square Deal Miller says**

**WALTHAM ELGIN HOWARD ROCKFORD ILLINOIS HAMILTON**

## Any Watch YOU WANT on CREDIT

**One Customer Writes:** "I have had my watch just a year today and our watch inspector says its the best time keeper on the road. Please find enclosed my last monthly payment of \$1.00." We have thousands of such letters on file from satisfied customers, who have bought from us on

### 30 Days Trial Express Paid No Money Down

You take no chances with me. I am 'Square Deal' Miller and I trust the people. That is why I am doing the greatest credit Watch, Diamond and Jewelry business in the world.

### Watches Guaranteed for 25 Years

## I Smash the Terms

**NO REFERENCES DEMANDED**

My terms will surely suit you. You get unlimited credit. the same kind of credit you get from your grocer. No matter where you live or what your income might be, you can now own the finest of watches, a beautiful diamond or any rare jewelry and never miss the money.

### Catalog FREE

Send me your name and address so I can mail you Free and postpaid the most beautiful catalog of its kind ever printed. I want you to have this book. It's a gem. Write TODAY.

**SQUARE DEAL MILLER, Pres.**  
MILLER-HOEFER CO. 955 Miller Bldg., Detroit, Mich.

When writing to Advertisers please mention Popular Science Monthly



# Oh BOY! if you want FUN

Lionel Trains are patterned after the big electric trains. They have fine, high-power, electric motor and are full of dash and go! Built with the weight close to the track so they won't derail; handsomely enameled—unbreakable—good for years of fun. Operate economically on batteries, or on house current with Lionel Transformer.

## Send for Big Free Catalog

—showing complete line of freight and passenger sets. Over 100 fascinating pictures. Tell Dad or Mother what you want and if not at your dealer's, I'll ship prepaid on receipt of price.

J. LIONEL COWEN, Pres.

THE LIONEL MFG. CO., 48N, E. 21st St., New York City

# LIONEL ELECTRIC TOY TRAINS

& Multivolt Transformers



Ask Dad for a  
**LIONEL Electric  
TRAIN for  
XMAS**

**\$5 UP**



Electric  
Armored  
Car  
**\$5**

Price includes 6 sections "O" Gauge Track

## BOOKS

### "Practical Armature and Magnet Winding"

This book treats in a practical and concise manner this very important subject. All practical armature windings are fully explained with special attention paid to details. All questions which are apt to arise in the mind of the electrician have been completely answered. This book will prove a most valuable aid to the electrician, either in the constructing or operating department. Full Persian Morocco Leather, Pocket Size. Price, \$1.50.

### "20th Century Book of Recipes, Formulas and Processes"

This book gives you the information that represents the collection of years and the expenditure of thousands of dollars. Contains complete directions for making everything from simple glues and adhesives to the tanning of leather, the making of photographic materials, perfumes, soaps, plating of silver and gold, working of metals, etc. 800 Pages, 10,000 Subjects. Price, \$3.00.

Popular Science Monthly, 225 West 39th St., New York

## LIONEL MULTIVOLT TRANSFORMER

Runs All Kinds  
Of Electric  
Trains And Toys

ATTACHES to your house current, operates all electric toys and other small electrical apparatus; any gradation of power from 2 to 30 volts. This special \$3.40 transformer is Lionel quality, high grade, all thru. Absolutely safe. If not at your dealer's, order direct giving us his name. We will ship, charges prepaid. Other models up to \$8.00; send for catalogue.



**\$3.40**

The Lionel Mfg. Co.  
48N East 21st Street, New York City

Cheaper  
than Batteries

## Builds More For Less Money

Makes 3 times as many real working models for the same money. Can be used many times. Start with 50c or \$1.00 outfit. Add to your construction material as you learn to build—only 50c per 100 ft.

## FLEXO-BUILD

Varied colored patented thick, strong strips of flexible fibre. Can be bent two ways, cut in any number of equal lengths. Practical, inexpensive, serviceable. Taken down and set up without special tools. Makes permanent, useful, ornamental things: Baskets, lamp shades, doll houses, etc., or mechanical models and toy bridges, engines, hoists, etc., which can be taken down.

### Send for Free Catalog or Send \$1.00

Get the free Flexo-Build book showing many models or send \$1.00 for complete outfit (sent prepaid). Money back if you are not delighted when you see this Flexo-Build outfit.

GAYLORD BROS.  
511 Clinton Street  
Syracuse, N. Y.



When writing to Advertisers please mention Popular Science Monthly




# Now Industry Needs The Higher-Output Machine

—And any device that increases *production-rate* is invaluable to you who develop or operate machinery.

You can tell how improvements and developments affect output—how different operating methods compare in efficiency—when your machines are equipped with



Take the above **Set-Back Rotary Ratchet Counter**: it registers one for each reciprocating movement, recording an operation. By showing up the slightest gain in efficiency, it points the way to making the gain *bigger*. You reset counter to zero by turning knob. Price, with four figure-wheels, **\$9.50**.

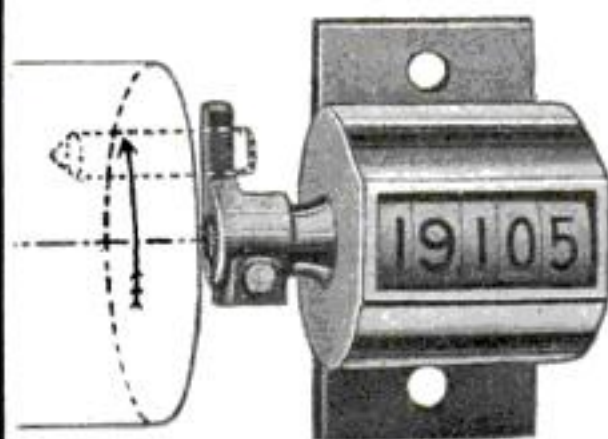

The **Revolution Counter** shown at left counts one for each complete turn of a shaft. Its action is smooth and uniform, and it will stand a very

high rate of speed, which makes it especially suitable for experimental work. If run backward, this counter will subtract. Price, **\$1.25**.

*Practically any machine you're interested in can be furnished with a Veeder Counter—ask for Booklet 44.*

**THE VEEDER MFG. CO.**  
44 SARGEANT ST., HARTFORD, CONN.

## A Merry Christmas for that Boy of Yours!



Your boy's Christmas will be the happiest ever, if you will send him **THE BOYS' MAGAZINE**. It is a gift that lasts a whole year. This splendid magazine is chock full of just the kind of reading you want your boy to have. Clean, inspiring stories by the best boys' authors. *Practical and instructive* departments devoted to Electricity, Mechanics, Athletics and Physical Training, Hunting, Camping and Fishing, Photography, Drawing, Stamp and Coin Collecting, Poultry and Pets, Boy Societies and Clubs, Joe Jolly's Joke Market, Cash Contests, etc. **THE BOYS' MAGAZINE** is beautifully illustrated throughout—each issue has a new handsome cover in colors. Get this great magazine for your own boy or for some boy in whom you are particularly interested.

### SPECIAL OFFER!

For only \$1.50 we will send you **THE BOYS' MAGAZINE** for a whole year and a copy of the most useful and practical book you ever read—"Fifty Ways for Boys to Earn Money"—and this Electric Engine. Runs forward or backward 150 to 3,000 revolutions a minute on one dry battery. Has speed control and reversing lever and has sufficient power to run other toys. Absolutely safe and easy to operate. This Electric Engine is interesting and instructive and any boy will be delighted with it.

Send in your subscription to-day and the engine and book will be forwarded at once. All transportation charges prepaid. Satisfaction or money refunded.



**THE SCOTT F. REDFIELD CO.**

1634 Main St.

Smethport, Pa.



**N. W. School of Taxidermy, 1209 Elwood Bldg., Omaha, Neb.**

## Marvelous **FREE** Book Sent

You can now learn **Taxidermy**, the wonderful art of mounting birds, animals, tanning skins, etc. Learn at home, by mail. The free book tells how. Mount your own trophies. Decorate home and den. Hunters, trappers, nature lovers, you need taxidermy. Interesting, fascinating, big profits. Join our school. 55,000 students. Success guaranteed. Get our free book without delay. Send right now—today.

## STRAIGHTEN YOUR TOES BANISH THAT BUNION



### ACHFELDT'S Perfection Toe Spring

Worn at night, with auxiliary appliance for day use.

**Removes the Actual Cause** of the enlarged joint and bunion. Sent on approval. Money back if not as represented. Send outline of foot. Use my improved In-step Support for weak arches.


Full particulars and advice free in plain envelope

**M. ACHFELDT, Foot Specialist. Estab. 1901**  
MARBRIDGE BUILDING  
Dept. 120, 1328 Broadway (at 34th St.) New York



When writing to Advertisers please mention Popular Science Monthly



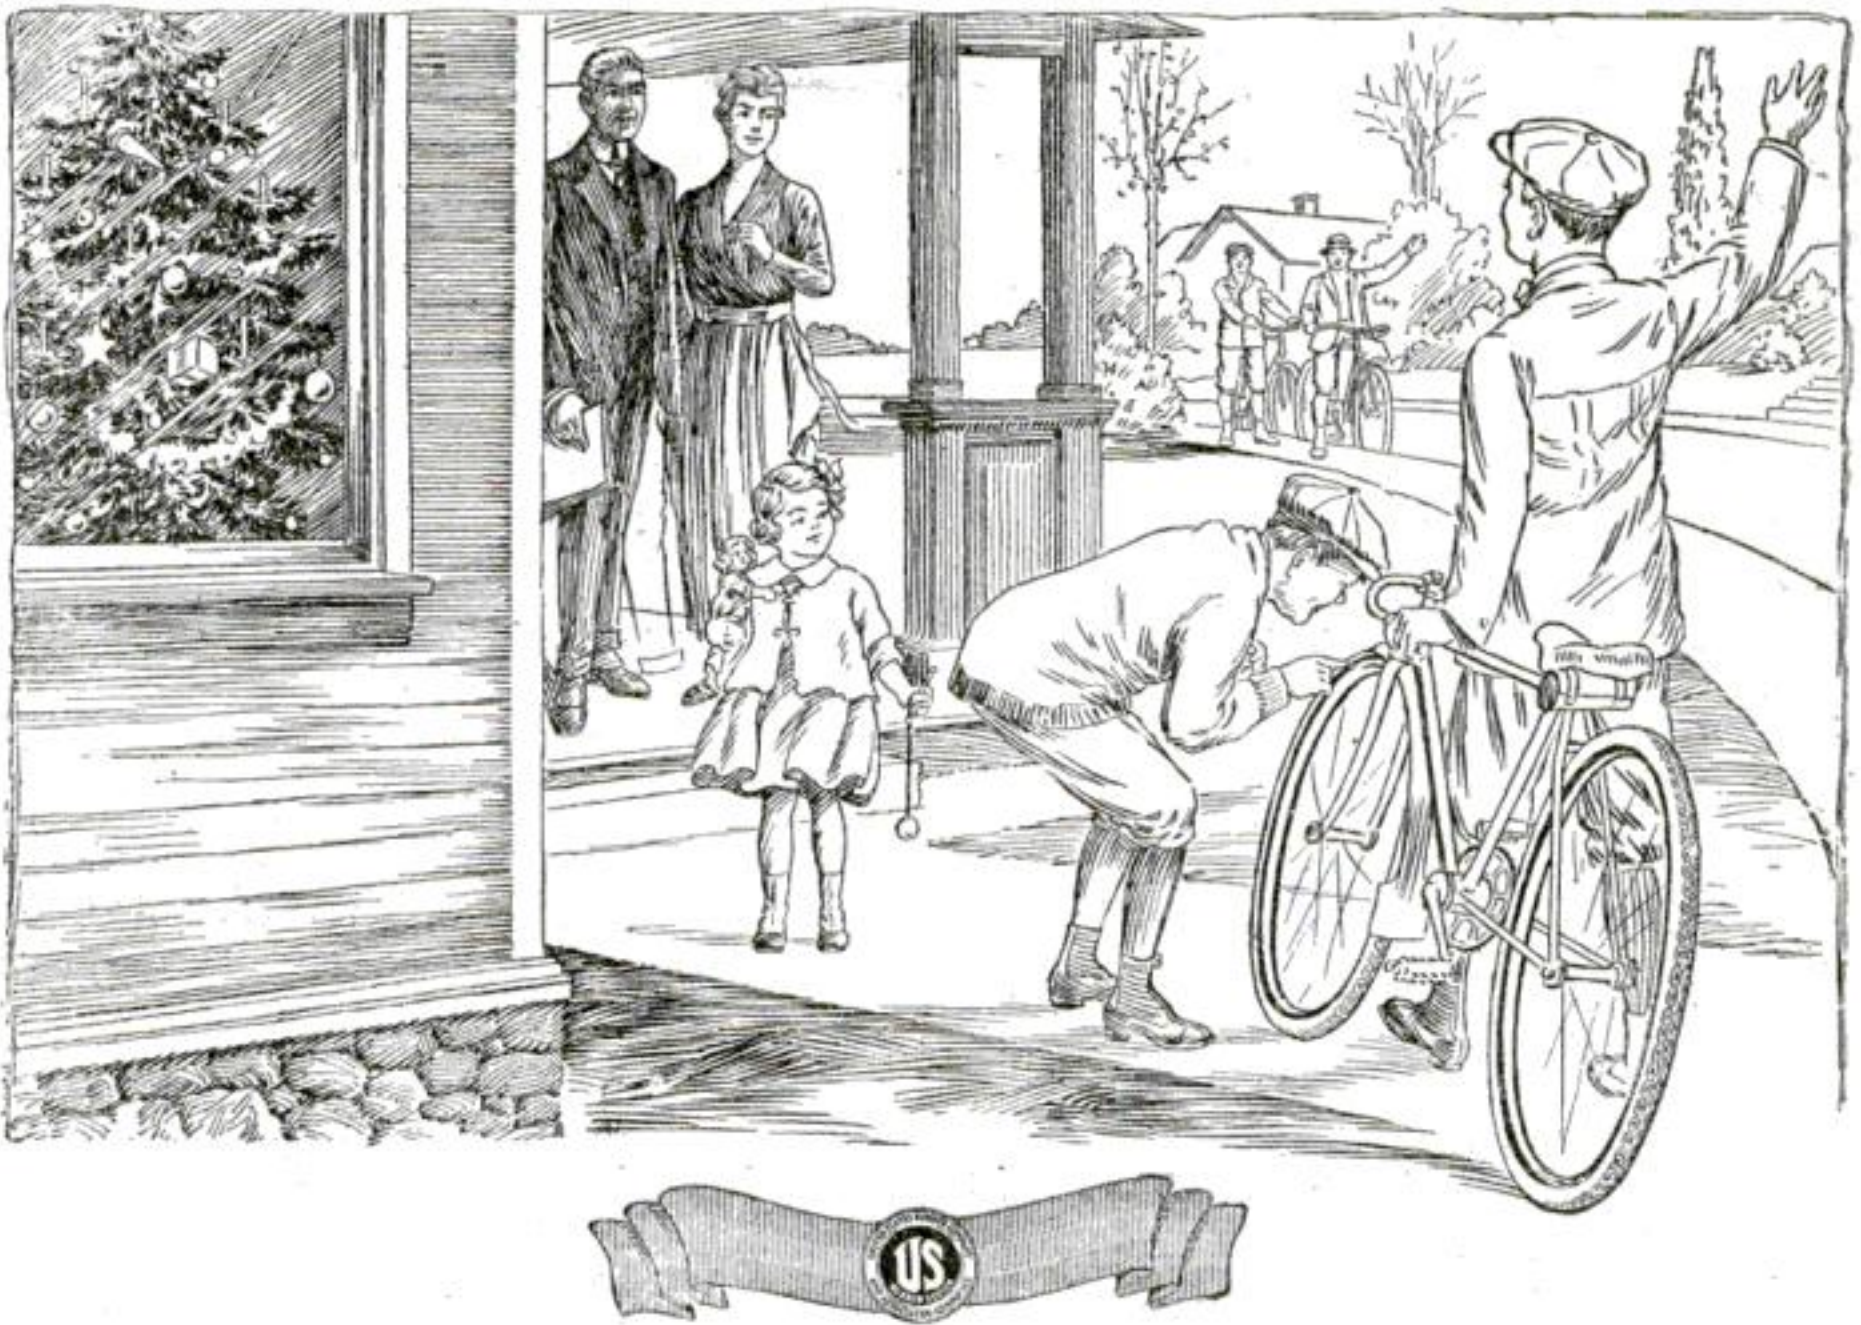

## The Tires on That Christmas Bicycle

are important. You know what the other fellows with bikes say about United States Tires. They're not only the snappiest looking tires made, but what's a lot more important, they wear longer and better on both city pavement and country roads.

Ten different treads from which to pick the one that you think will best fit your road requirements.

So when you ask Dad or Mother for a new bike for Christmas, don't forget to tell them you want it equipped with **United States Tires.**

## United States Bicycle Tires Are **GOOD** Tires

UNITED STATES TIRE COMPANY  
1790 Broadway, New York

When writing to Advertisers please mention Popular Science Monthly



## TWIN FIRE The Only Plug That Fires Two Distinct Sparks

Twin Fire Spark Plugs fire two independent sparks simultaneously. This adds vigor to the gas explosions, makes combustion complete, reduces carbon, economizes fuel and makes motor start easier and run better in cold weather.



Twin Fire plugs always fire. They are immune to soot and oil. If one point clogs, the other point still fires and the hot explosions clean the fouled one. No other multi-point plug will fire when even one point clogs. Twin Fires require less attention and cost no more than others, but give more dependable service. Get a set from your dealer, or write to us direct.

**Dealers** There's a big demand for this trouble-proof plug and our proposition is attractive. Don't stock up completely with ordinary plugs before investigating our offer. Write today for details.

**Twin Fire Spark Plug Company**  
666 Woodward Ave., Detroit, Michigan

## BOOKS

### "Practical Armature and Magnet Winding"

This book treats in a practical and concise manner this very important subject. All practical armature windings are fully explained with special attention paid to details. All questions which are apt to arise in the mind of the electrician have been completely answered. This book will prove a most valuable aid to the electrician, either in the constructing or operating department. Full Persian Morocco Leather, Pocket Size, Price, \$1.50.

**Popular Science Monthly**  
225 West 39th St., New York



**This NEW ELGIN**

**ON 30 DAYS**

**FREE TRIAL**

**Adjusted 17 Jewel Elgin**

This New Thin Model 17 Jewel Elgin is absolutely supreme where Reliability is a factor. Double sunk dial—Double Roller Escapement—Double strata 25 year Gold case. It's just the watch you've always wanted.

**Send No Money!**

**Easy Credit Terms As Low As**  
Just send your name and address for this New Elgin with our Special \$5 Gold Chain Free, and our bed-rock confidential price will surprise and delight you.

**Sent on Approval** You do not risk a cent. We send this Watch and \$5 Chain complete on your own approval—also our 160 page **FREE CATALOG**, showing all kinds of Watches, Diamonds, etc., all on smilingly easy terms. **Send your name and address today.**

The House That Sells More Elgin Watches Than Any Other Firm in the World.

**\$1.50**

**—A—**


**MONTH**

**HARRIS-GOAR CO.,** Dept. 251  
KANSAS CITY, MO.  
**WE DO AS WE ADVERTISE!**

### "20th Century Book of Recipes, Formulas and Processes"

This book gives you the information that represents the collection of years and the expenditure of thousands of dollars. Contains complete directions for making everything from simple glues and adhesives to the tanning of leather, the making of photographic materials, perfumes, soaps, plating of silver and gold, working of metals, etc. 800 Pages, 10,000 Subjects. Price, \$3.00.

**Popular Science Monthly**  
225 West 39th St., New York



North Pole people and those in mid-African jungles do not use WHITING-ADAMS BRUSHES because they do not use Brushes. Folks in other countries use Brushes, and prefer those made by

**WHITING-ADAMS**


**BRUSHES and CIVILIZATION are INSEPARABLE**

For OVER FIVE GENERATIONS, the users of ARTISTS' BRUSHES, PAINTERS' BRUSHES, TOILET BRUSHES, and ALL KINDS OF BRUSHES, have come to rely on WHITING-ADAMS for the best brushes of every style for every purpose. This confidence in WHITING-ADAMS BRUSHES has spread wherever Brushes are used. Whiting-Adams Company makes the **BRUSH YOU WANT**

If not in your dealer's stock he will get it promptly

**JOHN L. WHITING-J. J. ADAMS CO., Boston, U. S. A., Dept. O**  
Brush Manufacturers for Over 100 Years

Whiting-Adams Brushes awarded Gold Medal and Official Blue Ribbon, the highest award at Panama-Pacific Exposition, 1915



When writing to Advertisers please mention Popular Science Monthly



# Good news for owners and users of Concrete Buildings

If you have concrete floors—read this clipping. Learn how

## LAPIDOLITH

TRADE MARK

will dust-proof and wear-proof concrete floors permanently. Flush this liquid chemical on old or new floors and save repairs and losses from concrete dust. Used for years. Applied under our direction. Write for proof and sample to Department A.

**L. SONNEBORN SONS, Inc., 264 Pearl Street, New York**

Popular Science Monthly

### Chemically Hardening and Dust-Proofing Cement Floors

A LIQUID preparation for chemically hardening and dust-proofing cement floors that have begun to crumble has recently been invented by a noted scientist.

This product differs radically from the paints ordinarily used on cement floors, inasmuch as it hardens the floor through and through by a chemical reaction. It is a colorless liquid, very easily applied with a long-handled brush, which contains certain chemicals that weld the loose particles of sand and cement into a hard, solid, impenetrable mass. It does not change the color or appearance of the concrete in any way.

As this is not a mere surface coating which can wear off in time, but a preparation that changes the very nature of the concrete, its benefits are permanent and it hardens and dust-proofs cement floors for life. In factories, where the dust from cement floors gets into the intricate working parts of expensive machinery and causes serious damage, this new preparation will be particularly welcome. Moreover, it renders the floor impervious to grease, oil and dirt, so that a clean, sanitary condition is easily maintained.

An application of this preparation dries quickly so that its use does not interrupt business. If it is applied at night, the floor can be used next morning as usual.

## FINCK'S "DETROIT-SPECIAL" OVERALLS and COMBINATION SUITS



### Better Wear—More Comfort

When you've once tried Finck's "Detroit-Special" overalls or combination suits you'll never wear any other kind. Two million enthusiastic buyers prove it. At your dealer's. If he hasn't them, sent direct, prepaid, on receipt of price and size.

Overalls \$1.75 and \$2.00  
Jackets \$1.75 and \$2.00  
Combination Suits \$3.00

**W. M. FINCK & CO.,**  
1161 Gratiot Ave.,  
Detroit, Mich.

Branches: St. Louis, Missouri; Livingston, Montana; Seattle, Washington; San Francisco, California, and Dallas, Texas.

**"They Wear Like  
a Pig's Nose"**



## To Earn More —Learn More

Self culture breeds success. Read your own books and fit yourself for a better job. Develop your personality through mental growth. A sure foundation for your future development should be an individual library of

## Globe- Wernicke Sectional Bookcases

Begin with one section—add others as your books increase—each section a milestone in your mental progress—the whole a record of achievement of which you can be justly proud—an ornament to your home.

Write today for a list of "The World's Best Books," and illustrated catalogue No. 1309 of Globe-Wernicke Sectional Bookcases.

**The Globe-Wernicke Co.**  
Cincinnati, U. S. A.

When writing to Advertisers please mention Popular Science Monthly



**GENUINE**  
**DIAMONDS**  
**\$70**  
**PER CARAT**

**FROM THE DIAMOND CUTTERS DIRECT TO YOU BY MAIL AT THE DIAMOND CUTTER'S PRICES**



**A125 \$8.95**  
Solid Gold laval-  
liere and chain. 3  
fine diamonds \$8.95

**\$25.00**  
A131 14K cluster  
scarf pin. 7 blue-  
white diamonds.  
Complete, \$25.00

**\$39.00.** A126  
14K cluster platinum  
top. 7 blue-white dia-  
monds. Complete \$39.00

**A127 \$10.00**  
14K Ear screws  
2 blue-white diamonds.  
Per pair \$10.00

**A128 \$25.00**  
14K stud. 1/4 carat  
diamond.

**\$16.75**  
A129 14K ladies' solitaire  
1/4 carat diamond.

**\$36.65**  
A132 14K ladies'  
solitaire. 1/2-carat  
diamond. Com-  
plete \$36.65

**\$57.50**  
A130 14K man's sol-  
itaire. 3/4-carat dia-  
mond. Complete  
\$57.50

**\$2.75.**  
A133 14K ladies'  
belcher solitaire. 1  
diamond. Com-  
plete \$2.75


**FREE EXAMINATION—NO OBLIGATION**  
To convince you beyond the shadow of a doubt that our values are absolutely unequalled, we will gladly forward you any article from this ad or from our Catalog, care of your bank or express office, for your examination and approval. We prepay all charges.

**YOUR MONEY BACK IN FULL ANY TIME WITHIN ONE YEAR**  
Our ironclad guarantee gives you the right to return the diamond to us any time within one year and we give you back the full price you paid without even one cent being deducted. This guarantee is final evidence of the superior values we offer.

**BIG 1918 CATALOG FREE**  
This new 1918 Catalog is a wonderful guide to the selection of Christmas Gifts and gifts for all other occasions. It contains 244 pages of intensely interesting and valuable information written by recognized experts on Diamonds, Watches, Jewelry, etc., and quotes thousands of money-saving prices. Write us a letter or postcard for this book NOW.

**FREE!** We will mail you, postpaid, a beautiful Red, White and Blue Enameled Flag Button with our Catalog, free, if you mention this magazine.

**I. PRESS & SONS**  
IMPORTERS AND CUTTERS OF DIAMONDS  
WHOLESALE JEWELERS  
890-C CHESTNUT ST.  
PHILADELPHIA, PA.

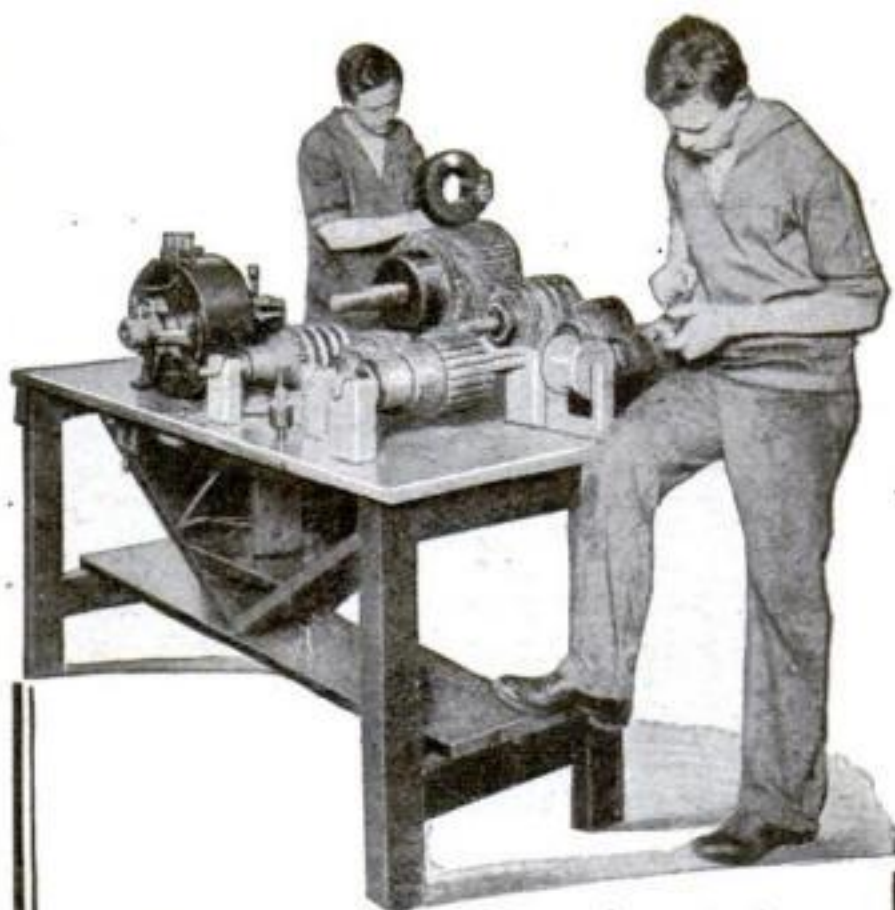

## "The Construction of Small Alternating Current Motors"

By A. E. Watson, E. E., Professor of Electrical Engineering in Brown University, Providence, R. I.

This book contains complete instructions for building small alternating current motors in several sizes. The designs will be found to be in harmony with those of the very best manufacturers.

Some of the subjects taken up are "Characteristic features of alternating current motors," "Construction of a one-half horse-power, single-phase induction motor," "Construction of a one-kilowatt, two-phase or three-phase alternating current generator or a one horse-power synchronous motor," "Procedure in testing and using an alternating current generator or synchronous motor," "Construction of a one-half horse-power single-phase compensated series motor."

Clear, concise directions and careful drawings are features of this book. 79 Pages, 47 Illustrations. Price, \$1.00

Book Department

**Popular Science Monthly**

239 Fourth Avenue, New York City

When writing to Advertisers please mention Popular Science Monthly



## Make your Ford a Winter Car

**The J.&B. Gasoline Injector**



Gasoline does not vaporize easily on a cold day. If your motor is equipped with the J. & B. Gasoline Injector, one or more light pulls on the "injector ring" which projects through the radiator will spray gasoline directly into the manifold at the intake port of the cylinders; starting the motor is then as easy as on a hot day. Ask your garage man, or write us. Price east of the Miss.issippi River \$3.00 net in the West, price \$3-25 net.

**"One Turn Starts It"**

**J.&B. Mfg. Co.**  
Pittsfield, Mass.



## Keep HIM Fit with "COMFYKIT"

**Most Complete KIT on the Market!**

*Contains Everything Needed by the SOLDIER or SAILOR*




Thousands Now Used in the ARMY & NAVY.  
17 Standard Articles: Safety Razor, Trench Mirror, Comb, Brush, Sewing Outfit, Soap, First-Aid Comfort, Tooth Brush & Paste, Foot Powder Etc.

**Price Complete \$5.00**

At Dealers or Direct on Receipt of Price

**NATHAN NOVELTY MFG. CO. Dept. K 88 Reade St. New York**

## Effecto FINISHES

MAKE OLD AUTOS NEW

## Save Over 1/2 ON A STANDARD \$100 Underwood

I am the largest typewriter rebuilder in the world. I will send you a high-grade visible writing Underwood, with back spacer, tabulator, stencil attachment, two-color ribbon, etc., at less than 1/2 manufacturer's price.

### 5-Year Guarantee

I give a written 5-year guarantee, allow 10 days free trial. You can rent, buy on easy terms, or secure cash discount. You easily earn through agency plan; no canvassing. Ask for Offer No. 77

E. W. S. Shipman, Pres., TYPEWRITER EMPORIUM  
Est. Quarter Century. 34-36 Lake St., Chicago

**RENT  
OR  
BUY**

The  
Standard





## Our Sales Plan Calls for Additional Distributors

Controlling the local exclusive selling rights of

# Kor-Ker

AMERICA'S STANDARD

# TIRE TREATMENT

*We want big men who can organize and conduct a selling organization—appoint sub-agents, supply the auto accessory trade, etc., and finance their initial order in return for exclusive selling rights.*

The man who wants a job need not apply.

Only the man who can build up and carry on an efficient selling organization will be acceptable

**KOR-KER** is being advertised in such national magazines as *Literary Digest*, *Collier's*, *Life*, *Leslie's*, *National Geographic*, *System*, *Metropolitan*, *Review of Reviews*, *The World's Work*, *Harper's*, *American Magazine*, *Motor*, *Everybody's*, *Every Week*, *The Independent*, etc.



*Diagram Showing the Action of Kor-Ker*

**KOR-KER** seals punctures on the go. Stops slow leaks. Keeps tires up to normal inflation. Preserves rubber. Doubles the life of inner tubes. Reduces blowouts to a minimum. Tubes can be changed from one casing to another.

**KOR-KER** is a compound boxed in powder form. Is mixed with water and readily installed through valve stem. **KOR-KER** will do a great deal more than we claim for it. These are facts that can be readily substantiated.

We have distributors in U. S., Canada, England, France, Russia, Norway, Sweden, Holland, Spain, Portugal, India, Egypt, South Africa, South America, Australia, New Zealand, Java, Philippines and Trinidad.

There's a big, liberal profit in it for you. But first make us prove to your own satisfaction that we've got the goods. Then let us tell you what other dealers are doing with **KOR-KER**. We invite the most thorough investigation.

If you want further details write fully and frankly regarding yourself to the General Manager.

**ALCEMO MANUFACTURING CO.,**  
6 Bridge Street, Newark, N. J.

When writing to Advertisers please mention Popular Science Monthly



# Popular Science Monthly's New Book Catalogue FREE to Our Readers

You can't get on in the world unless you read—read the books which will make you more valuable to those for whom you work. You don't have to go to college. Edison never went to college. But he has probably the finest library of technical books in this country.

If you want helpful, practical books on electricity, mechanics, mechanical engineering, wireless, airplanes, sheet metal work, repairing, write for Popular Science Monthly's new BOOK CATALOGUE. The books described in it have been carefully selected by experts as best adapted to the needs of Popular Science Monthly readers.

Send the coupon below (or copy it). Check the subject you are interested in. You can be sure that the books supplied by Popular Science Monthly will be satisfactory. The Book Department will supply any book you want, even if it is not contained in the catalogue.

*Check your subject and mail coupon today*

Popular Science Monthly, 225 West 39th Street, New York

Please send me, free of charge, your new Book Catalogue.

Name.....

Street.....

Town.....

State.....

Check below the subject in which you are particularly interested.

Electricity

Wireless

Mechanics

Mechanical Drawing

Gas Engines

Aeroplanes

Furniture Making

Wood Working

Architecture

Carpentry

Plumbing

Steam Heating

Steam Engineering

Concrete Construction

Automobiles

Sheet Metal Work

When writing to Advertisers please mention Popular Science Monthly





# Amazing Opportunities in the AIRPLANE INDUSTRY




AIRPLANE BUILDER



AIRPLANE MECHANIC



AIRPLANE ENGINEER

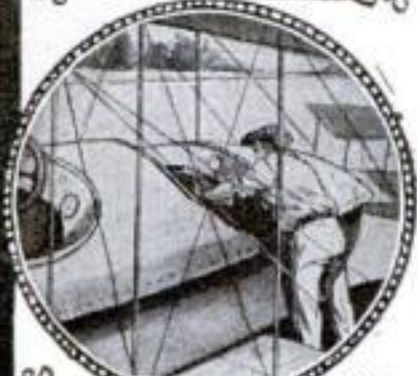

INSPECTOR

Never before have ambitious men had such a glorious chance as is offered today in this wonderful new industry. The war news only proves that the Airplane has come to stay—that thousands and hundreds of thousands of airplanes will be demanded for commercial uses when peace returns.

Meanwhile an army of *trained men* must be found to man the new aeroplane factories that are now being built everywhere. This makes the big chance for you—a chance of a lifetime. Enroll NOW for our complete Course of training in Practical Aeronautics and the Science of Aviation and prepare yourself in a few short months to double or treble your present salary.

## We Teach You By Mail In Your Spare Time at Home

Our new, scientific Course has the endorsement of airplane manufactures, aeronautical experts, aviators and leading aero clubs. Every Lesson, Lecture, Blue Print and Bulletin is self-explanatory. You can't fail to learn. No book study. No schooling required. Lessons are written in non-technical, easy-to-understand language. You'll not have the slightest difficulty in mastering them. The Course is absolutely authoritative and right down to the minute in every respect. Covers the entire field of Practical Aeronautics and Science of Aviation in a thorough, practical manner. Under our expert direction, you get just the kind of practical training you must have in order to succeed in this wonderful industry.

## Special Offer NOW

Send This Coupon Today

It is our duty to help in every possible way to supply the urgent need for graduates of this great school. We have facilities for teaching a few more students and to secure them quickly we are making a remarkable Special Offer which will be withdrawn without notice. Write today—or send the coupon—for full particulars. Don't risk delay. Do it now.

### Prepare for one of these positions

- Aeronautical Instructor \$80 to \$150 per week.
- Aeronautical Engineer \$100 to \$300 per week.
- Aeronautical Contractor Enormous profits.
- Aeroplane Repairman \$80 to \$75 per week.
- Aeroplane Mechanician \$40 to \$60 per week.
- Aeroplane Inspector \$50 to \$75 per week.
- Aeroplane Salesman \$5000 per year and up.
- Aeroplane Assembler \$40 to \$65 per week.
- Aeroplane Builder \$75 to \$200 per week.

AMERICAN  
SCHOOL  
OF AVIATION  
431 S. Dearborn Street,  
Dept. 274C,  
Chicago, Illinois

Without any obligations on my part, you may send me full particulars of your course in Practical Aeronautics and your Special LIMITED Offer.

Name.....

Address.....

**American School of Aviation**  
431 S. Dearborn Street, Dept. 274C, Chicago, Ill.



USED IN THE ARMIES AND NAVIES OF THE WORLD



For Christmas give  
**PARKER**  
*LUCKY CURVE*  
**SAFETY-SEALED**  
**FOUNTAIN PENS**

**FOR** the boys at the front, for relatives, friends and sweet-hearts. The enduring gift, always appreciated, always useful. Parker Self-fillers are *safety-sealed*; the new type "no holes in the wall" fountain pens.

Ink can't get out to soil clothes or person. In event of accident to interior mechanism, the pen automatically changes from a Self-filler to a non-Self-filler without interruption of service. Because of these exclusive features it's the pen for the army and navy, where only dependable pens are wanted.

The name **PARKER** is your guarantee of quality.

**PARKER PEN COMPANY**  
244 Mill St. Janesville, Wis.  
N. Y. Retail Store, Woolworth Bldg.

*In Dainty Gift Boxes*

No. 20-\$2.50  
No. 21- 3.50  
No. 51- 3.50  
No. 24- 4.00  
No. 14-Sterling, 5.00  
No. 14-Gold Plate, 6.00

Parker Clips  
25c extra  
Ink tablets in place of fluid ink for soldiers' use, box of 36 for 10 cents.  
**AT LEADING DEALERS**


# The New EXCELSIOR

Military Model  
Series 19

## The Master Motorcycle

Preeminent on the Hills,  
Supreme in Speed,  
Reliability and Endurance

Proven in Public Tests  
and Private Service.

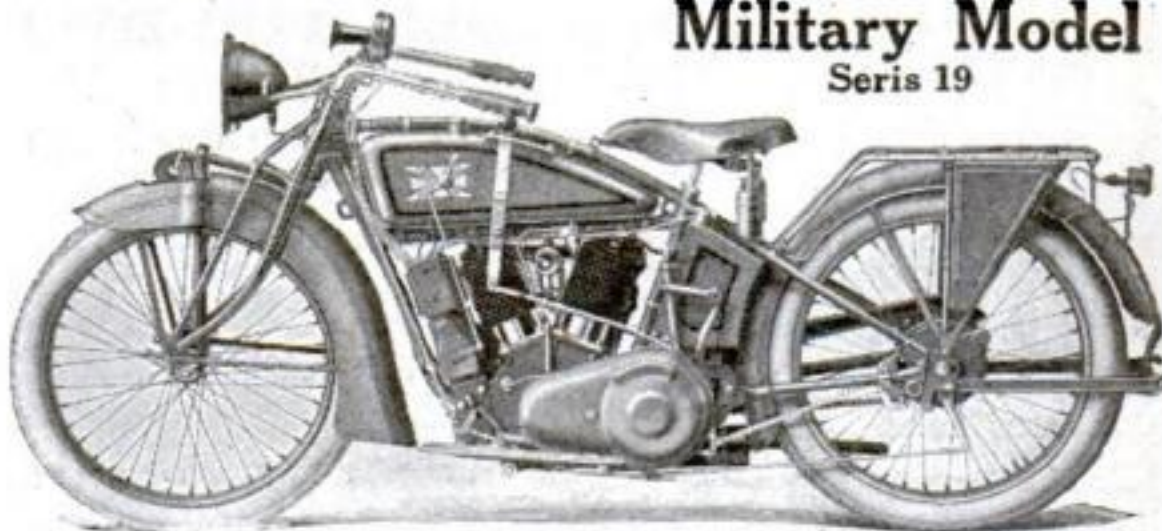

Standard Equipment, \$290.00. Electrical Equipment, \$320.00

In the new model is embodied all the details of motorcycle perfection that have been developed in the production of a powerful and dependable machine for Army service which simply means power and stability to meet all possible road conditions without weakness at any point and the least possible necessity of repairs or adjustment.

### SOME OF THE SPECIAL FEATURES

**Extra Large, Roller Bearing, Multiple Disc Clutch,** with removable bearing faces.

**Double Truss, Military Type Front Fork,** the strongest fork ever put in a motorcycle.

**Excelsior Cushion Sprocket** equalizes the pull and conserves every ounce of power delivered by the motor.

**Removable Center Bar** permits quick and easy access to the motor and removal of cylinders without interference with any other part of the power plant.

**Inclosed Clutch and Motor Drive Chain,** protects these important parts from dirt and road grit.

**Foot Starter and Automatic Compression Control,** assure a quick and easy start, always,—in any kind of weather.


**Tubular Steel Luggage Carrier with Steel Tool Box.** Rustproof, Military Olive Drab Finish, including hubs, spokes, etc.

See the dealer or write us for new catalog describing the Military Model, Excelsior Lightweight and Sidecar.

**EXCELSIOR MOTOR MFG. & SUPPLY CO.** 3709 Cortland St. CHICAGO

When writing to Advertisers please mention Popular Science Monthly



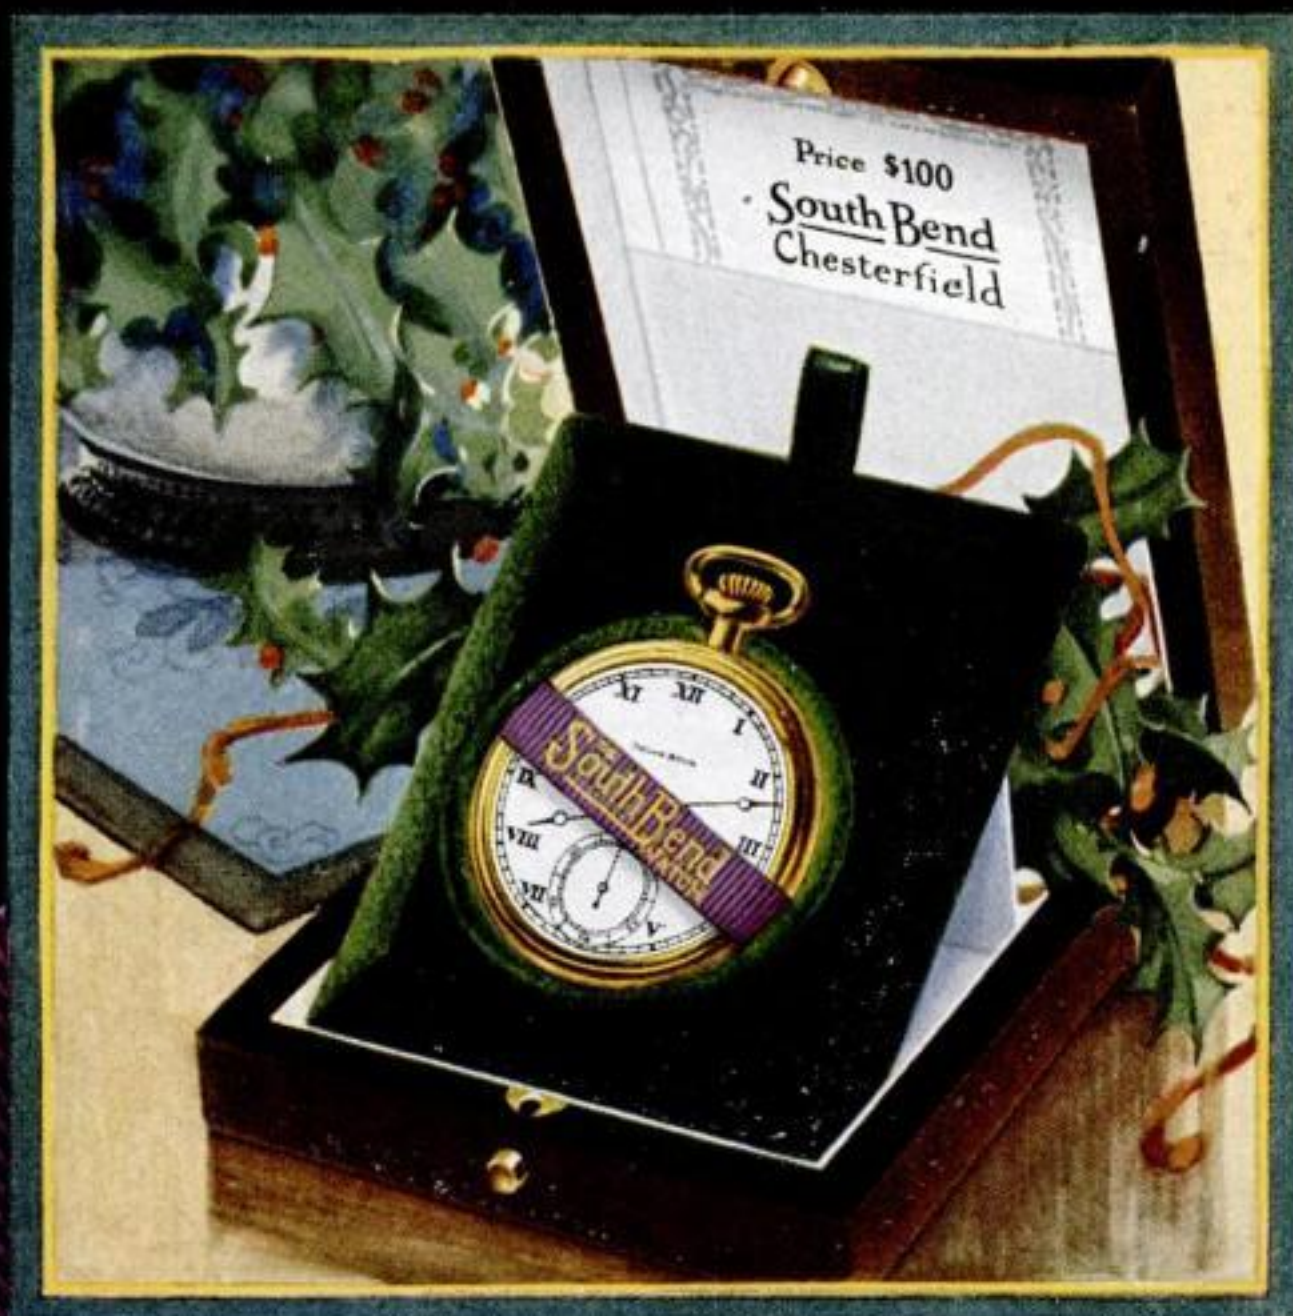

## *The Gift that endures*

When you give a South Bend Watch you not only confer great pleasure for the moment, but you give, as well, a life-time gift of accurate service and beauty of design that will always be distinctive and in good taste.

Forty different combinations of movements, dials and cases, \$16 to \$125, at your Jeweler's.

South Bend Watch Company, 212 Studebaker St., South Bend, Ind.

*For Years, Makers of Standard Railroad Watches*

# South Bend

*The Watch with the Purple Ribbon*



# MARMON 34

The major car of the major class; a half ton lighter than others, yet constructed to hold the road better and ride with unmatched luxury.

Here is a stylish roadster, built of aluminum and steel, with ample room to seat four in comfort and power to carry them anywhere.

NORDYKE & MARMON  
COMPANY

Established 1851 : Indianapolis







# THE Bausch and Lomb BALOPTICON

—is an IDEAL CHRISTMAS GIFT. It fulfills the desire of young and old alike for a real "picture machine," not a toy. There are many models, but the F.C.M.E. BALOPTICON particularly appeals to all. With it you can project colored post-cards, photo prints, solid objects, etc., on a screen for the enjoyment of your family and friends. Fitted with new gas-filled Mazda lamp which attaches to any socket and runs itself. Extremely simple to operate. Price, including aluminum-coated screen, \$35.00. Other models for lantern slides, \$26.50 and up.

Write for booklets about the Balopticon—also price lists.

**Bausch & Lomb Optical Co.**

509 St. Paul Street, Rochester, N. Y.

New York Washington Chicago San Francisco

Leading American Makers of High Grade Optical Products.

Pictures sharp and brilliant to the corners—not dull and hazy.

Type like this—not like this

## "Dead!"

A keen eye, steady aim and gun with quick action, score "dead."

# HOMOL

*The Real Sportsmen's Oil*

in the patented can with the disappearing spout—the clickiest oil in the world for gun actions, reels, tackle, traps, typewriters, phonographs and all household uses.

Lubricates, polishes, prevents rust.

If your dealer hasn't Homol yet, send us his name and a quarter and we'll send you a 5-ounce can, carriage prepaid.

William Peterman, Inc., 200 Fifth Ave., New York City



## A pencil for every use

For drawing the finest, most delicate lines—for shading where the pencil must be absolutely responsive—for every purpose inbetween—there is a

# DIXON'S ELDORADO

*"the master drawing pencil"*

This superior pencil is used and endorsed by leading engineers, architects and artists. The leads are strong, firm, gritless and true to grade in each of the 17 degrees.

Send 16c in stamps for full-length samples worth double the money.

**JOSEPH DIXON CRUCIBLE COMPANY**  
Dept. 120-J, Jersey City, N. J.





**\$1 DOWN****FREE TRIAL****Big Fun—Little Cost**


You can have your own Billiard and Pool Table at home and play while paying for it. The most delicate shots, calling for the highest skill, can be executed on a

**BURROWES****Billiard and Pool Table**

Set it on your dining or library table or on its own legs or folding stand. No special room is needed. Put up or down in a minute. Sizes range up to 4½ x 9 ft. (standard). Prices of Tables \$15 up (\$1 or more down). Balls, cues, etc., free.

The original Burrowes Home Billiard and Pool Tables are world-famous. They are splendidly built in every particular. Many experts use them for home practice. Burrowes Regis High-Speed Rubber Cushions are the best made. Burrowes Tables are now on sale in many cities and towns.

**FREE TRIAL**—Write us for catalog (illustrated), containing free trial offer, prices, terms, order blanks, etc. The E. T. Burrowes Co., 52 Spring Street, Portland, Me. Also San Francisco and Los Angeles Offices.

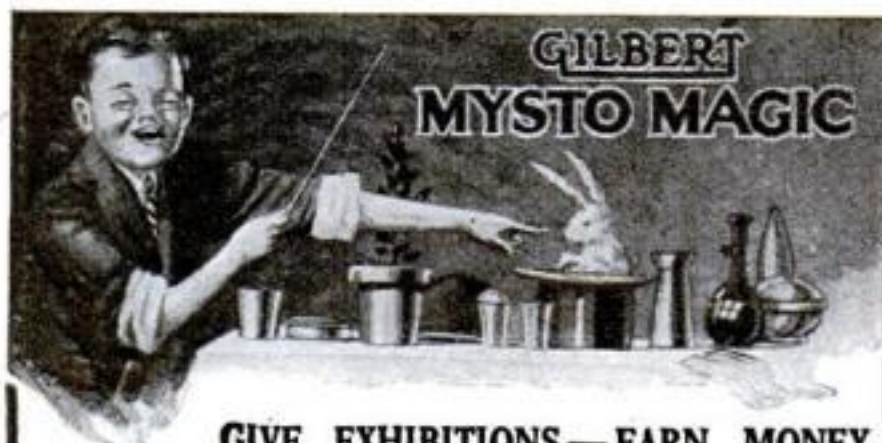**GILBERT MYSTO MAGIC****GIVE EXHIBITIONS—EARN MONEY**

Great fun, boys! With one of these Gilbert Mysto Magic Sets you can do wonderful tricks just like real magicians, give regular shows at parties, churches, halls, and earn money.

**FAMOUS TRICKS OF GREAT MAGICIANS**

These Sets contain apparatus and instructions for some of the best tricks of famous professionals. Any boy can do them with a little practice. You couldn't have a Christmas present that would give you more fun.

**Gilbert Mysto Magic Set No. 2004**

Contains many really wonderful tricks, with Magician's Wand, large poster and Gilbert Manual of Magic Knowledge, the greatest book on Magic ever written. It shows how to do a number of mystifying tricks, besides all those in the Set. Also tells "How to Become an Entertainer" and gives a great monologue for shows. Price of No. 2004 Set \$5 (in Canada, \$7.50).

Other Sets \$1. to \$10.00. (Canada \$1.50 to \$15.00.)

**Magic Catalog FREE**

Fully illustrated. Tells what's in every Set. Write for it now. Ask to see these Sets, sold in all toy and department stores.

THE A. C. GILBERT CO., 307 BLATCHLEY AVE., NEW HAVEN, CONN.  
Canadian Representatives: Menzies & Co., Limited, Toronto, Ontario.

**Bristol Steel Fishing Rods and Meek Reels***Will These Be on Your Christmas Tree?*

Have Santa Claus put at least one "Bristol" Rod and one Meek Reel on your Xmas tree.

**Two Catalogues Free**

describing "Bristol" Rods and the Meek and Blue Grass Reels. If your dealer does not seem interested in getting the outfit you want—if he hasn't it in the store—we will supply you by mail at no extra cost.

The 1918 "Bristol" Art Calendar is ready. The subject is full of the "outdoors," very attractive, and will be sent only on receipt of 15c.

**THE HORTON MFG. CO.**

197 Horton St., Bristol, Conn.

**RELIABILITY**

Reliability in the power plant in your boat or in the one you expect to own means greater efficiency, greater power and greater economy. You want a FRISBIE—the Reliable Motor.

THE FRISBIE MOTOR CO., 25 Center Street, Middletown, Conn.

**MOTORCYCLE BARGAINS**

Secure a bargain NOW in a high grade slightly used motorcycle and save money. We are the largest dealers in U. S.; over 75 machines always in stock; including the well known Excelsiors, Indians, Harley-Davidsons, Pope, 4 cyl. Hendersons, etc. Some with side cars 1916 and 1917 models, all in first class condition; fully equipped, from \$35 up. Bulletin No. 10 free on request. Describes every machine we have. Write for it TO-DAY. Gotham Sporting Goods Co., 57 Warren St., N. Y. City

**Wear Your "HOME STATE" Watch Fob**

Cannot be bought anywhere for less than 35c.

To pay the cost of manufacturing and advertising upon receipt of 22c in coin or stamps we will send you any state fob you desire.

Money Refunded if not Satisfactory. Abmall Novelty Co., Detroit, Mich.

**CONVERT YOUR BICYCLE INTO A****MOTOR-CYCLE** Motor fits any wheel.

BEST, MOST RELIABLE. Best hill climber. More STEFFEYS in use than all others. Stamp for circulars.

Steffey Mfg. Co., Dep't S., 5025 Brown Street, Phila., Pa.

**Print Your Own Cards, Handbills**

Programs, Circulars, Book, Paper, With an Excelsior Press. Increases your receipts, CUTS your EXPENSES. Easy to use, printed rules sent. Boy can do good work. SMALL OUTLAY, pays for itself in a short time. Will last for years. Write factory TO-DAY for catalog of presses, type, outfit, samples. It will pay you. THE PRESS CO., D-33, MERIDEN, CONNECTICUT

**HAVE YOU A MOTOR?****"NO-LEAK-O"**

**LISTEN!** See that groove controlling the oil? The groove full of oil forms a dam. Gas cannot get down, surplus oil cannot get up. That's why motor has more power, no carbon. ISN'T THAT A REASON?

Ford size and under 50 cents Write for Booklet 3

AUTOMOBILE ACCESSORIES CO., Baltimore, Md.



# Christmas Bicycles

Choose from 44 styles, colors, and sizes in the famous "RANGER" line of bicycles. All are pictured in natural colors in our big new catalog. There are many other models also—in fact the most complete line of bicycles in the world, all at FACTORY PRICES, from \$16.75, \$17.75 up. There is a Mead bicycle to suit the taste of every rider—electric lighted Motorbike models, Racers, Juniors for children; Ladies' models too—all at prices made possible only by our Factory-direct-to-Rider selling policy.

**Delivered to You Free** We send the "RANGER" bicycle, FREIGHT CHARGES FULLY PREPAID TO YOUR TOWN, for 30 days free trial—actual riding test. We pay return charges if you decide not to keep it, and make no charge for wear and tear during trial. We make no effort to influence your decision. The trial is all at our expense.


**Factory-to-Rider** Back of your "RANGER"—if you decide to keep it—is the oldest and most successful bicycle concern in the world, with a Service department that cares for the parts and repair needs of more than a million riders. With every "RANGER" we ship, goes a Certificate of Guarantee for Five Years.

**Parts & Repairs** Lamps, Horns, ready-to-use front and rear wheels, Inner Tubes, Tool Kits, etc., etc. Repair parts for all bicycles and coaster-brakes, all accurately pictured and described in the sundry pages of the big new Ranger Catalog. All the latest imported and American novelties in equipment and attachments at prices so low they will astonish you.

**Rider Agents** wanted everywhere to ride and exhibit "RANGER" bicycles. Select the model you prefer and, while you ride and enjoy it, make money by taking the orders of your neighbors who want a bicycle like yours.

**Send No Money** but write today for this big new catalog, also full particulars of the great new offer to send, all charges prepaid. the "RANGER" bicycle you select for 30 Days Free Trial. You cannot afford to buy a bicycle, tires or sundries without first learning what we offer.

**MEAD CYCLE COMPANY**  
DEPT. S109, CHICAGO, U.S.A.

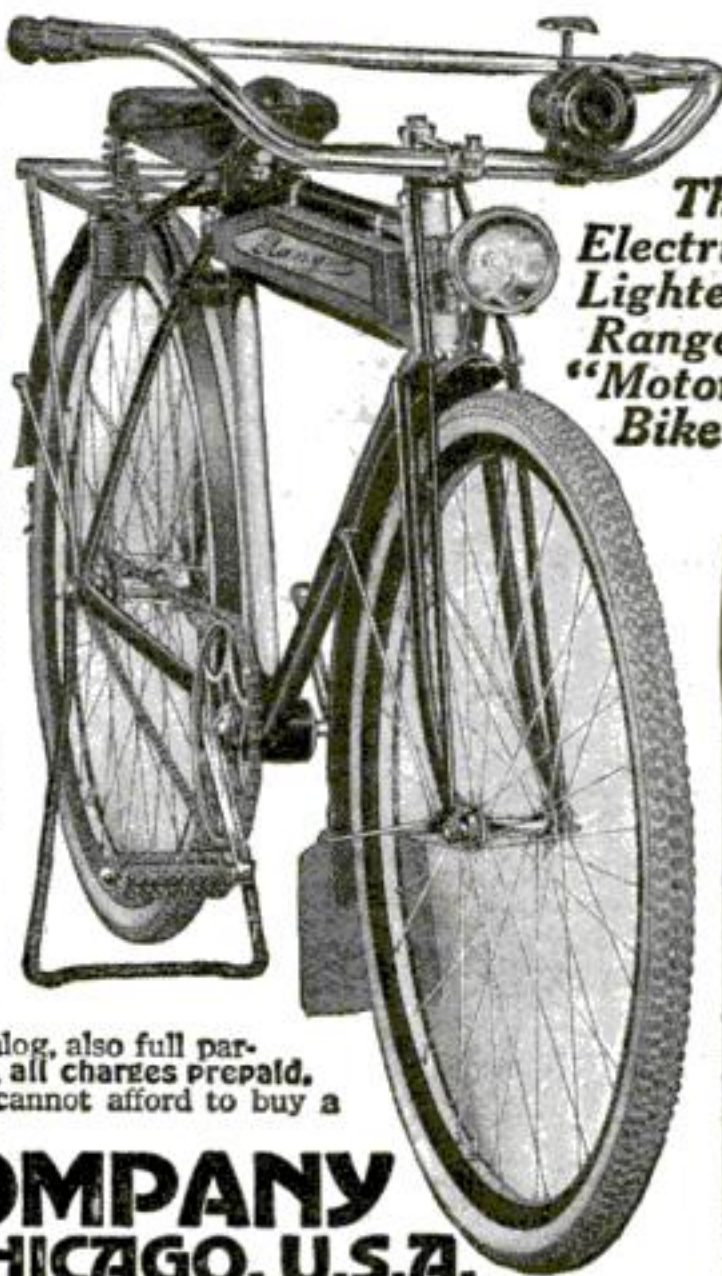

The Electric Lighted Ranger "Motor-Bike"

**WRITE NOW** for truly superb 1918 Catalog, Beautiful, instructive, packed with money-saving offers. Everything in Cameras, Lenses, Kodaks, Photo Supplies on 10 Days Free Trial—Money Back Guarantee.

**DAVID STERN COMPANY**  
1222 Davisco Building  
In Business Since 1885  
1027 Madison St., Chicago, Ill.

**Save Camera Money**

## BIG PROFITS with this BATTERY CHARGER

Hundreds of garage owners are clearing \$20 to \$60 profit every month with this 500-Watt H-B quick-charging equipment. Recharges one to seven batteries at a time, at cost of about 15c per battery. Autoist pays 75c to \$1.50. At least \$4.50 profit each capacity run.

**\$15 Puts This Money-Maker in Your Garage**

Balance in eight monthly payments of \$20 each. Earnings will quickly pay for machine. Every outfit fully guaranteed. Tear out this ad and send with name for full particulars.

**HOBART BROS. CO., Box 12S, Troy, Ohio**



## HOME GUARD ARMY BARGAINS

- |                      |                         |
|----------------------|-------------------------|
| 20,000 Rifles        | 200 Machine Guns        |
| 5,000 Revolvers      | 100 B/L Field Cannons   |
| 5,000,000 Cartridges | 50 B.L. Navy Cannons    |
| 300,000 Equipments   | 15 Revolving Cannons    |
| 40,000 Knapsacks     | 50,000 Explosive Shells |
| 2,500 Tents          | 25,000 Uniforms (Blue)  |

We have supplied from our largest in the world stock of army auction goods, the U. S. Government and many states and cities with obsolete serviceable rifles and equipments, some of which were sold to us just prior to the U. S. Declaration of War.

High Army Officers say: "Bannerman's stock is a Godsend to us." Six hours after receipt of order from State of Massachusetts 4,000 rifles and 6,000 equipments were en route. Gov't auction sale terms, cash with order. Examination and testing at our arsenals. Immediate deliveries.

Large illustrated 428 pp. encyclopedia catalog, mailed 50c.  
**FRANCIS BANNERMAN, 501 Broadway, N. Y.**



Bring them joy!

Give a real

# Flexible Flyer

The famous steering-sled with non-skid runners

You're bound to delight any boy or girl! It'll give them fun and vigor and health!

And it's just the sled they've wanted—with grooved runners of chrome nickel steel that prevent skidding, increase speed, and give easier control. With all-steel front that absorbs shocks and keeps wooden seat and hand rails from splitting. No dragging of feet to get wet and wear out shoes! Prevents colds and saves doctor's bills.

### Outlasts 3 Ordinary Sleds

Strong and scientifically constructed. Nine sizes—3 to 8½ feet long. Sold by hardware and department stores.

**S. L. ALLEN & CO.**  
Box 905L Philadelphia

Unless it bears this trademark it isn't a Flexible Flyer

Free Offer. Send postal for cardboard model, which shows how Flexible Flyers steer.







## What are you kicking about?

—You men who think you're underpaid

The men who get big pay are those who are **trained** to earn it. Your pay is small because you have no special training—and **you only are to blame.**

You can **learn to earn** more. No matter what your job, where you live or how old you are, if you can read and write, the International Correspondence Schools can train you for a **better position** and **bigger pay.**

If you want to get out of the ranks of the "hard-ups" and be somebody, prove your ambition by marking and mailing the coupon on this page today. Thousands of others **just like you** who have used this coupon are now occupying positions of power and high pay. You can join them. **Grit your teeth, say "I will" and mail the coupon NOW.**

TEAR OUT HERE

### INTERNATIONAL CORRESPONDENCE SCHOOLS Box 5838, SCRANTON, PA.

Explain, without obligating me, how I can qualify for the position, or in the subject, before which I mark X.

- |   |  |
|---|--|
| <input type="checkbox"/> ELECTRICAL ENGINEER        | <input type="checkbox"/> SALESMANSHIP              |
| <input type="checkbox"/> Electric Lighting          | <input type="checkbox"/> ADVERTISING MAN           |
| <input type="checkbox"/> Electric Car Running       | <input type="checkbox"/> Window Trimmer            |
| <input type="checkbox"/> Electric Wiring            | <input type="checkbox"/> Show Card Writer          |
| <input type="checkbox"/> Telegraph Expert           | <input type="checkbox"/> Outdoor Sign Painter      |
| <input type="checkbox"/> Practical Telephony        | <input type="checkbox"/> RAILROADER                |
| <input type="checkbox"/> MECHANICAL ENGINEER        | <input type="checkbox"/> ILLUSTRATOR               |
| <input type="checkbox"/> Mechanical Draftsman       | <input type="checkbox"/> DESIGNER                  |
| <input type="checkbox"/> Machine Shop Practice      | <input type="checkbox"/> BOOKKEEPER                |
| <input type="checkbox"/> Gas Engineer               | <input type="checkbox"/> Stenographer and Typist   |
| <input type="checkbox"/> CIVIL ENGINEER             | <input type="checkbox"/> Cert. Public Accountant   |
| <input type="checkbox"/> Surveying and Mapping      | <input type="checkbox"/> Railway Accountant        |
| <input type="checkbox"/> MINE FOREMAN OR ENGINEER   | <input type="checkbox"/> Commercial Law            |
| <input type="checkbox"/> Metallurgist or Prospector | <input type="checkbox"/> GOOD ENGLISH              |
| <input type="checkbox"/> STATIONARY ENGINEER        | <input type="checkbox"/> Teacher                   |
| <input type="checkbox"/> Marine Engineer            | <input type="checkbox"/> Common School Subjects    |
| <input type="checkbox"/> ARCHITECT                  | <input type="checkbox"/> CIVIL SERVICE             |
| <input type="checkbox"/> Contractor and Builder     | <input type="checkbox"/> Railway Mail Clerk        |
| <input type="checkbox"/> Architectural Draftsman    | <input type="checkbox"/> AGRICULTURE               |
| <input type="checkbox"/> Concrete Builder           | <input type="checkbox"/> Textile Overseer or Supt. |
| <input type="checkbox"/> Structural Engineer        | <input type="checkbox"/> Navigator                 |
| <input type="checkbox"/> PLUMBING AND HEATING       | <input type="checkbox"/> Poultry Raising           |
| <input type="checkbox"/> Sheet Metal Worker         | <input type="checkbox"/> AUTOMOBILES               |
| <input type="checkbox"/> CHEMICAL ENGINEER          | <input type="checkbox"/> Auto Repairing            |
|   | <input type="checkbox"/> Spanish                   |
|   | <input type="checkbox"/> German                    |
|   | <input type="checkbox"/> French                    |
|   | <input type="checkbox"/> Italian                   |

Name \_\_\_\_\_

Occupation & Employer \_\_\_\_\_

Street and No. \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_

If name of Course you want is not in this list, write it below.

### Acetylene Blow Torch

## Prest-O-Torch

Quicker and cheaper than a gasoline blow-torch for brazing and soldering

For factories, repair shops, linemen, dentists, jewelers, the Prest-O-Torch saves time and money. Used with Prest-O-Lite Tanks—ready-made gas. Intense, concentrated flame instantly lighted. No depreciation, safe and convenient. Style A, price, \$1.25 (Canada, \$1.35) will braze up to 3/4 inch round rod. Style "C" for heavier work, \$2.75 (Canada, \$2.85). Special styles for dentists. Write for literature or send order now. Money refunded if not satisfied.

**The Prest-O-Lite Co., Inc.** 844 Speedway  
Indianapolis, Ind.  
Canadian General Office, Dept. A-11, Toronto, Ont.

### Red or Black "Vulcan" Ink Pencils

The ONLY perfect, non-leakable ink pencils at moderate prices.

Order today. **\$1**

Two Sizes—  
4 1/4 and 5 1/4 inches.  
Extra Size—8 inches  
(black only) \$1.25. Your name in gold inlay 35c. FREE—Liberal supply of ink with retail orders. Agents wanted. Big profits.

**J. F. ULLRICH & CO., 27 Thames St., New York**

## Beautiful Christmas Kodak Enlargements for Gifts

8x10 mounted, 35c. Send only the negative. **Best Kodak Developing**—any size roll for 10c and 6 prints **Free** with first roll. Or send 6 negatives, any size, and 10 cents for 6 prints. Ask for big catalog cameras, albums, etc.

**Roanoke Photo Finishing Co., 213 Bell Ave., Roanoke, Va.**

### "Best" Hand Lantern

A powerful portable lamp, giving a 300 candle power pure white light. Just what the farmer, dairyman, stockman, etc. needs. Safe—Reliable—Economical—Absolutely Rain, Storm and Bug proof. Burns either gasoline or kerosene. Light in weight. Agents wanted. Big Profits. Write for Catalog.

**THE BEST LIGHT CO.**  
475 E. 5th St., Canton, O.

### You Can't Lose Pen or Pencil

Get this UP-TO-DATE combination clasp and yearly calendar. Prevents loss of pen or pencil. **Saves Time.** Best thing out. At all good stationers or from us—15c. Send stamps or coin.

State for Pen or Pencil  
**ARGUS MFG. CO., Dept. A.**  
402 N. Paulina St., CHICAGO, ILL.


### Try to Match at 60% More

A Stunning Christmas Special. 1/2-1/8, 1/64 kt. exact guaranteed weight of this perfectly cut, genuine diamond of high degree of perfection, and satisfactory color, we feel sure. Gentlemen's 14-kt. solid gold mounting. Try to match at double our price. **Guaran. \$29.00** tied Cash Loan \$25.00. Unpaid Loan Price. Liberty Bonds accepted as cash.

**Write for Jos. DeRoy & Sons Bulletin**  
No obligations. Hundreds of unpaid loan bargains in diamonds and watches, offered by a House over 60 years in diamond banking business—rated over \$1,000,000. Special Christmas Offers ready. Write today.

**Jos. DeRoy & Sons (Only Opp.) 4733 Post Office DeRoy Bldg. Pittsburg, Pa.**



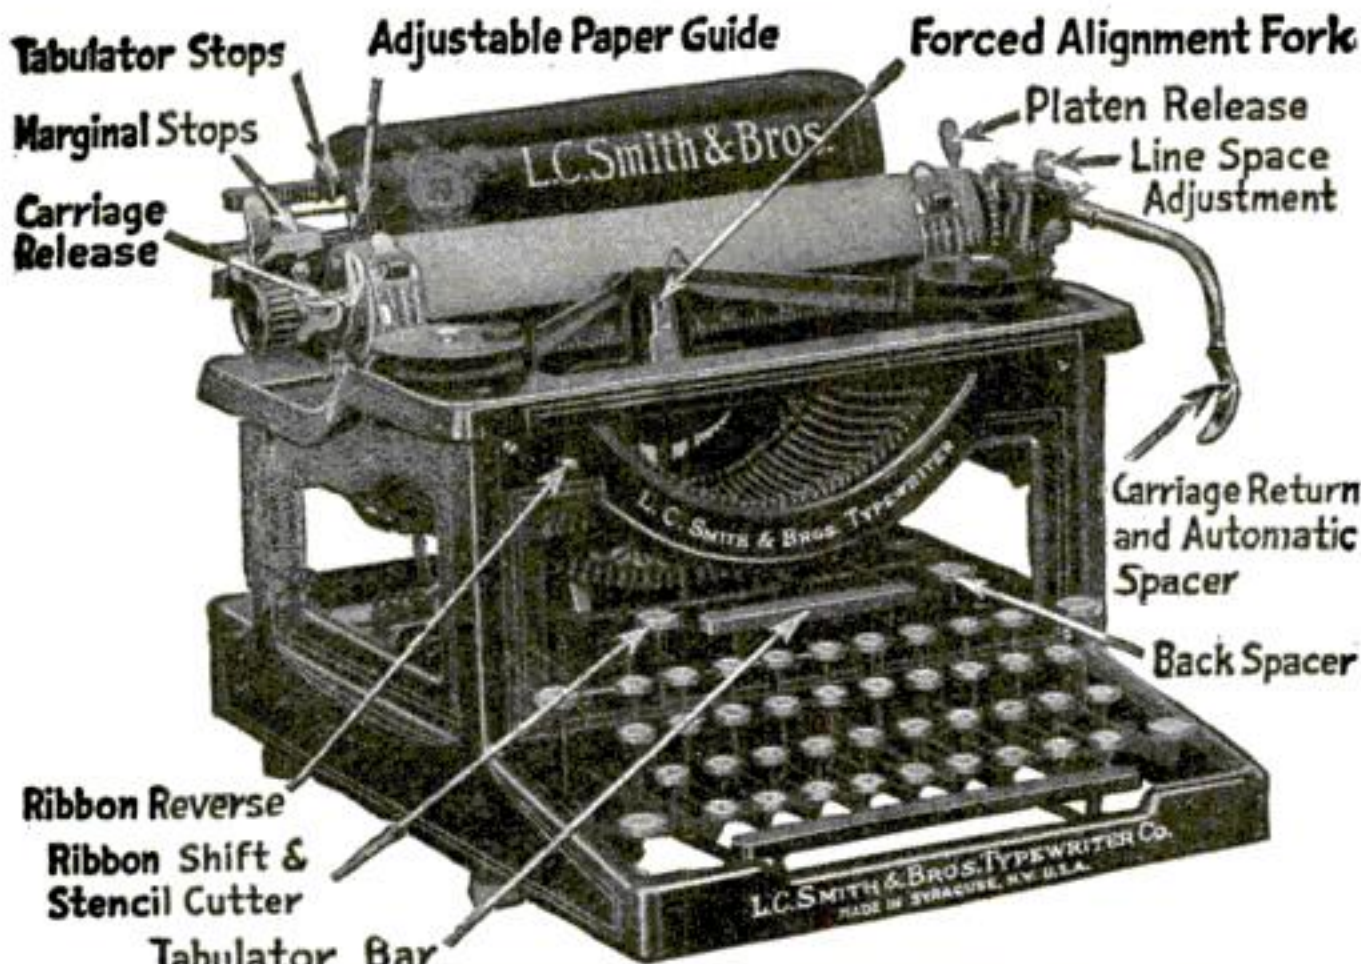

I want, through this advertisement, to establish as friendly business relations with you as I possibly can. I want you to realize also, that it is my earnest effort and intention to give you full honest value for every dollar that you spend with me. This is the only way I can succeed. My advertisement has appeared in this magazine continuously for more than four years.

I am building up my business on the foundation of good value and square dealings. I am saving thousands of satisfied customers thousands of dollars, by supplying, perfect—late style—visible writing—typewriters, at remarkably low prices.

All my transactions are handled throughout by personal correspondence. I assure you every courtesy and consideration, in your dealings with me. Your order will have my prompt, careful, personal attention. I will be glad to do business with you.

*Harry A. Smith*

**ALL LATEST IMPROVEMENTS**

# TYPEWRITER SENSATION

**Free TRIAL—Use As You Pay**

**Send me only \$2.50 a month until the low total price of \$48.80 is paid, and the machine is yours**

This is absolutely the most generous typewriter offer ever made. Do not rent a machine when you can pay \$2.50 a month and own one. Think of it—Buying a \$100.00 machine for \$48.80. Cash price, \$45.45. Never before has anything like this been attempted.

**STANDARD L. C. SMITH**  
**VISIBLE**

Perfect machines, standard size, keyboard of standard universal arrangement—universally used in teaching the touch system. The entire line of writing completely visible at all times, has the inbuilt tabulator with billing devices, the two color ribbon—with automatic reverse and key controlled shift, automatic flexible paper feed—automatic paper fingers, the back spacer—ball bearing carriage action—ball bearing shift action—ball bearing type bars—in fact, every late style feature and modern operating convenience. Comes to you with everything complete, tools, cover, operating book and instructions, ribbon, practice paper—nothing extra to buy. **You cannot imagine the perfection of this beautiful reconstructed typewriter until you have seen it.** I have sold several thousand of these perfect latest style L. C. Smith machines at this bargain price, and every one of these thousands of satisfied customers had this beautiful, strictly up-to-date machine on five days' free trial before deciding to buy it. I will send it to you F. O. B. Chicago for five days' free trial. It will sell itself, but if you are not satisfied that this is the greatest typewriter you ever saw, you can return it at my expense. You won't want to return it after you try it—you cannot equal this wonderful value anywhere.

**You Take No Risk—Put In Your Order Now**

When the typewriter arrives deposit with the express agent \$8.80 and take the machine for five days' trial. If you are convinced that it is the best typewriter you ever saw, keep it and send me \$2.50 a month until my bargain price of \$48.80 is paid. If you don't want it, return it to the express agent, receive your \$8.80 and return the machine to me. I will pay the return express charges. This machine is guaranteed just as if you paid \$100.00 for it. It is standard. Over one hundred thousand people own and use these typewriters and think them the best ever manufactured.

The supply at this price is very limited, the price will probably be raised when my next advertisement appears, so don't delay. Fill in the coupon today—mail to me—the typewriter will be shipped promptly. There is no red tape. I employ no solicitors—no collectors—no chattel mortgage. It is simply understood that I retain title to the machine until the full \$48.80 is paid. You cannot lose. It is the greatest typewriter opportunity you will ever have. Do not send me one cent. Get the coupon in the mails today—sure.

**HARRY A. SMITH, 306-231 N. Fifth Ave., Chicago**

**H. A. SMITH**  
Room 306-231 N. Fifth Ave.  
CHICAGO, ILL.

Ship me the L. C. Smith F. O. B. Chicago, as described in this advertisement. I will pay you the \$40.00 balance of the SPECIAL \$48.80 purchase price, at the rate of \$2.50 per month. The title to remain in you until fully paid for. It is understood that I have five days in which to examine and try the typewriter. If I choose not to keep it I will carefully repack it and return it to the express agent. It is understood that you give the standard guarantee for one year.

Name .....

Address .....

Pop. Sci. Mo. Dec.

When writing to Advertisers please mention Popular Science Monthly



## "When I Buy My Diamond, What Security Is Given Me?"

THE ANSWER



We sell diamonds of the finest quality at attractive prices. Buying diamonds direct and with less "overhead" than large, showy, expensive offices we offer better value for the same money. **To insure your confidence** in our claims and in the genuineness of our offer to refund full purchase price if you are dissatisfied, **MASS. BONDING CO.**, a \$1,500,000 corporation, **bonds every diamond we sell.** By this arrangement, in addition to our own certificate of guarantee, we give with each diamond purchase Mass. Bonding Co.'s certificate that the diamond is bonded with them and that if you are dissatisfied and return it within 30 days they guarantee **YOUR MONEY BACK.**

We are the first and only diamond merchant offering **THIS DOUBLE BARRELLED SECURITY.** Goods sent for inspection to your nearest bank or express office—without cost to you. Order safely by **MAIL To-day.** Ask for **CATALOG No. 43.**

**FRANK N. NATHAN CO.**  
373 Washington St., Boston, Mass.  
Diamond Merchants over 27 years.

THIS BOOK FREE



Write To-day

Tells how to order diamonds and jewelry by mail without risk. **No money in advance.** Free examination of goods—no obligation. Write for free catalog No. 43, with latest supplement, which describes articles of distinctiveness and good taste in personal adornment.

Distinctive Gentleman's Ring



Large, brilliant diamond of splendid color. Handsome 14 Kt. Solid Gold mounting. Diamond set in Solid Platinum. Only \$95.

## Do YOUR OWN Plumbing or Heating Our New EASY WAY Buy From Us Direct—Save 1/2



### Send for Our Big Valuable "Handy-Man" Book

Shows over 10,000 different fixtures and supplies in plumbing and heating goods at Wholesale, with our new easy adjustable installing features.

**OUR HANDY-MAN BOOK** shows and tells you how to properly install our new cut-to-fit **STEAM, HOT WATER, or HOT AIR HEATING PLANTS**, or plumbing outfits, and how to make any plumbing or heating repairs. Any handy man with a few ordinary tools, and the help of our free planning service, can properly do the work himself.

### "Our New Hardin Easy Way"

To avoid sending this large 236 page, well-bound, valuable book broadcast, we ask a temporary deposit of 25c, which will be refunded on first order. Or if you are not satisfied, return book, and we will refund your money at once.

Every home owner, contractor, farmer, institution, etc., needs this **BIG HANDY-MAN BOOK.** Write Today.

**HARDIN LAVIN CO.**

40 Years at  
4534-44 Cottage Grove Avenue  
Dept. B, CHICAGO, ILL.



## ACORN UNI-LITE FREE

Turns night into day. 300 candle power. Carry as a lantern; use anywhere as a lamp. Weather proof. For house, barn, garage, camp and around the farm. Write for big free offer. Special opportunity to farmers, stockmen and motorists. Agents make big money.

Write tonight for new 1917 offer  
**ACORN BRASS MFG. CO., 232 Factory Bldg., Chicago**



## Class Pins

**RINGS-MEDALS-FOBS**

Free Book. 36 pages, 600 designs. Special designs made when desired. Save retailer's profits.

**C. K. GROUSE CO.,**  
108 Bruce Avenue,  
North Attleboro, Mass.




## FREE \$20.00 VIOLIN

Ukulele Guitar, Mandolin, Hawaiian Guitar or Cornet

Yes, absolutely free to first pupils in each locality. We have the most wonderful, new, system for learning by mail to play by note, Piano, Organ, Violin, Mandolin, Guitar, Ukulele, Hawaiian Guitar or Cornet. Very small charge for lessons only expense. We guarantee success or no charge. Complete outfit free. Write now. No obligations.

**Slingerland School of Music, Dept. 205, Chicago, Ill.**

## An Easy Way to Make Money

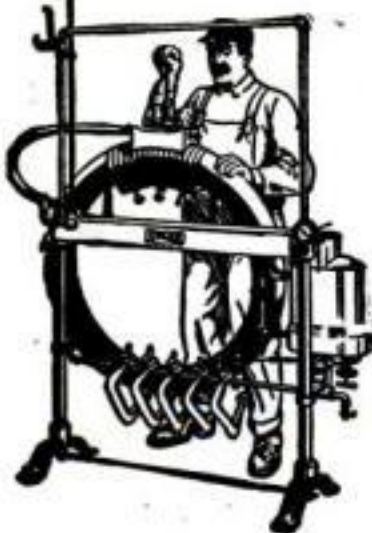

**Don't be content to plod along on a small salary. Be independent.** Go in the tire repairing business and make \$60 or more a week. One man made \$45 the first day he received his outfit. **Others are making \$25 a day and hundreds of wide-awake men are making \$200 to \$500 a month.**

No experience needed. We teach you how. Very little capital required. But slight risk, as every car owner in your town is a possible customer. Jobs are plentiful because tires blow out and puncture every day.

## SHALER Tire Repair Outfit, \$65

will do as much and as perfect work as the big \$250 to \$500 vulcanizing outfits. A boy can vulcanize perfectly with this simple machine. It's the only vulcanizer that has **Automatic Heat Control.** It must vulcanize just right. It can't undercure or overcure a tire. Requires no watching or regulating. You can learn to do expert tire vulcanizing in half an hour with the Shaler.

**WRITE FOR FREE BOOK "HOW TO OPEN A TIRE REPAIR SHOP"** and complete Catalog which gives full information.

**C. A. SHALER CO., 2111 Fourth Street, WAUPUN, WIS.**

When writing to Advertisers please mention Popular Science Monthly



# DIAMONDS-WATCHES ON CREDIT

CHOOSE YOUR  
GIFTS FROM  
OUR CATALOG

The Above Handsome  
**Solid Gold La Valliere**

No. 925, is our big leader. Four beautiful, perfect cut

**Genuine Diamonds**

\$5 Down **\$25** \$2.50 a Month

**Send for Free Catalog**

There are over 2,000 photographic illustrations of Diamond Rings, Diamond La Vallieres, Diamond Ear Scraps, Diamond Scarf Pins, Diamond Studs, Signet and Emblem Rings, Watches, Wrist Watches, Bracelets, Cuff Links, Brooches, Lockets, Chains, Charms, Silverware, Clocks, Toilet Sets; also our wonderfully showy assembled Solitaire Diamond Clusters.

Whatever you select will be sent, all shipping charges prepaid. You see and examine the article right in your own hands. If satisfied, pay one-fifth of purchase price and keep it; balance divided into eight equal amounts, payable monthly.

**Suggestions for Christmas Presents**

A few of the many desirable articles shown in our large handsome Catalog. Every article listed below can be furnished at prices given and up to any price you wish to pay. All are popular selections, of exceptional value. We can fill any requirement.

Diamond Rings, Solitaire .	\$10 up	Diamond Cuff Links . . .	\$5 up
Loftis Solitaire Diamond Cluster Rings . . .	\$50 up	Diamond Scarf Pins . . .	\$3 up
Diamond La Vallieres .	\$10 up	Pearl Necklaces, Diamond-set Clasp . . .	\$3.50 up
Diamond-set Cameo La Vallieres . . .	\$12 up	Wrist Watches . . .	\$10 up
Diamond Brooches . . .	\$7 up	Watches, gold filled . . .	\$12 up
Diamond Ear Scraps .	\$10 up	Bracelets, solid gold . . .	\$12 up
Diamond Studs . . .	\$10 up	Cameo Rings, Diamond-set .	\$12 up
		Vest Chains, solid gold . .	\$12 up

**21 JEWEL WATCHES That Will Pass Railroad Inspection \$2.50 a Month**

Our Catalog illustrates and describes all the new models—15, 17, 19, 21, 23 Jewels, adjusted. All sizes for men and women. Choice of popular designs. Our watches are guaranteed by the factory and further guaranteed by us.

Send for Catalog, make selections, and have as many articles as you wish charged in one account.

Any diamond purchased from us for a present may be exchanged for other selection at the full price paid, should the recipient desire to do so later on.

With this privilege you need have no anxiety in choosing gifts.

**LOFTIS  
BROS. & CO.**



Tells  
All  
About  
Our  
Easy  
Credit  
System.

OVER 2000  
ILLUSTRATIONS.

Send for Your Copy  
of This Catalog

**LOFTIS**  
BROS & CO. EST'D. 1858

**National Credit Jewelers**  
Dept. G871 108 N. State St., Chicago, Ill.  
STORES IN LEADING CITIES

When writing to Advertisers please mention Popular Science Monthly





Thomas  
A.  
Edison

## Mr. Edison's Wonderful New Phonograph

The world's greatest inventor has made the music of the phonograph life-like, at last. Success—after years of labor on his favorite invention! Read our offer on his wonderful new phonograph.



Only  
**\$1.00** and  
after trial

An astounding offer—the New Edison, Mr. Edison's great new phonograph with the new Diamond Stylus reproducer and your choice of all the brand new Diamond Amberol Records will be sent to you on free trial without a penny down. The finest, the best that money can buy at very, very much less than the price at which imitations of the genuine Edison are offered—a rock-bottom offer direct from us.

## Entertain Your Friends

Hear all the latest up-to-date song hits of the big cities. Laugh at the side-splitting minstrel shows. Entertain your family and your friends with everything from Grand Opera to Comic Vaudeville—then if you choose, send the outfit back to us at our expense.

## Rock-Bottom Direct Offer

If you wish to keep Mr. Edison's superb new instrument, send us only \$1.00 after the free trial. Pay the balance on the easiest kind of monthly payments.

Think of it—a \$1.00 payment, and a few dollars a month to get this outfit of Mr. Edison's new phonograph with the Diamond Stylus reproducer, the life-like music—the same Diamond Amberol Records—all the musical results of the highest priced outfits—yes, the greatest value for \$1.00 down, balance on easiest monthly terms. Convince yourself—a free trial first! No money down, no C. O. D., not one cent to pay us unless you choose to keep the instrument.

To  
F. K. Babson  
Edison  
Phonograph Distributors  
1209 Edison Bldg.  
Chicago, Ill.

Gentlemen: Please send me your New Edison Catalog and full particulars of your free trial offer on the new model Edison Phonograph

## Our New Edison Catalog Sent Free

Your name and address on a postal or a letter (or just the coupon) is enough. No obligation in asking for the catalog. Get this offer—while this offer lasts. Fill out coupon today.

F. K. BABSON  
Edison Phonograph Distributor  
1209 Edison Block  
Chicago, Ill.

Canadian Office:  
355 Portage Ave.  
Winnipeg,  
Manitoba.

Name.....

Address.....

## MAKE YOUR BIKE A MOTORCYCLE

at a small cost, by using our attachable-outfit. Fits any Bicycle. Easily attached. No special tools required.

### "Used His Four Years"

Harry A. Hyatt, of Boreas River, New York, writes: "About four years ago I received my motor attachment, and wish to say that I am satisfied with it in every way, for it has certainly given me good service. Anyone wanting a motorcycle or attachment, I would recommend them to the Shaw Manufacturing Co."

**FREE BOOK** Write today for bargain list and free booklet, fully describing the SHAW Bicycle Motor Attachment. Motorcycles all makes, new and second-hand, \$35.00 up.

**SHAW MANUFACTURING CO.**  
Dept. 169 GALESBURG, KANSAS



Statement of the Ownership, Management, Circulation, etc., required by the Act of Congress of August 24, 1912, of Popular Science Monthly published monthly at New York, N. Y., for October 1, 1917. State of New York, County of New York, ss. Before me, a notary public, in and for the State and county aforesaid, personally appeared O. B. Capen, who, having been duly sworn according to law, deposes and says that he is the Business Manager of the Popular Science Monthly and that the following is, to the best of his knowledge and belief, a true statement of the ownership, management, etc., of the aforesaid publication for the date shown in the above caption, required by the Act of August 24, 1912, embodied in section 443, Postal Laws and Regulations, printed on the reverse of this form, to wit:

1. That the names and addresses of the publisher, editor, managing editor and business managers are: Publisher, The Modern Publishing Company, Inc., 239 Fourth Avenue, New York, N. Y. Editor, Waldemar Kaempffert, 239 Fourth Avenue, New York, N. Y. Managing Editor, Waldemar Kaempffert, 239 Fourth Avenue, New York, N. Y. Business Manager, O. B. Capen, 239 Fourth Avenue, New York, N. Y. 2.—That the owners are: The Popular Science Publishing Company, Inc., 239 Fourth Avenue, New York, N. Y. Stockholders of Popular Science Publishing Company, Inc., Henry J. Fisher, 22 William Street, New York, N. Y.; Oliver B. Capen, 239 Fourth Avenue, New York, N. Y.; Robert Cade Wilson, 683 Springfield Ave., Summit, N. J.; Waldemar Kaempffert, 239 4th Ave., New York, N. Y.; George B. Agnew, 22 William St., New York, N. Y.; Susan D. Bliss, 22 William St., New York, N. Y. 3.—That the known bondholders, mortgagees, and other security holders owning or holding 1 per cent or more of total amount of bonds, mortgages, or other securities are: Importers and Traders National Bank, 247 Broadway, New York, N. Y.; H. J. Fisher, 22 William Street, New York, N. Y.; S. D. Warren and Co., 200 Devonshire St., Boston, Mass.; 4.—That the two paragraphs next above, giving the names of the owners, stockholders, and security holders, if any, contain not only the list of stockholders and security holders as they appear upon the books of the company, but also, in cases where the stockholder or security holder appears upon the books of the company as trustee or in any other fiduciary relation the name of the person or corporation for whom such trustee is acting, is given; also that the said two paragraphs contain statements embracing affiant's full knowledge and belief as to the circumstances and conditions under which stockholders and security holders who do not appear upon the books of the company as trustees, hold stock and securities in a capacity other than that of a bona fide owner; and this affiant has no reason to believe that any other person, association, or corporation has any interest direct or indirect in the said stock, bonds, or other securities than as so stated by him.

(Signed) O. B. CAPEN, Business Manager.

Sworn to and subscribed before me this 2nd day of October, 1917.

Jos. Schwinger, Notary Public, Kings Co.; Certificate filed in New York Co. No. 513.

(Seal) My commission expires March, 1919.

If You Want an Electrical Book and don't know where to get it, write Book Department, Popular Science Monthly, 239 Fourth Avenue, New York City.



**Get This Book**  
BEFORE  
BUYING A  
**TYPEWRITER**  
**We Save You Money**



**ALL MAKES \$10 to \$50**

Why pay high prices for a typewriter when we can supply you with any standard make of machine at less than one-third the manufacturer's price? All machines rebuilt by the famous "Young Process." Every machine guaranteed and sold under a TEN DAY trial plan. Before investing a cent in a machine read our book. Catalog free. Send NOW.  
**YOUNG TYPEWRITER CO., Dept. 271, Chicago**

**SUPERIOR - SINCE 1904**  
Over 100,000 in Use  
Mostly sold through  
recommendation  
For Personal Desk or  
General Office  
It checks mental calculations  
Buy through your stationer  
Write for 10-day Trial Offer  
P. E. Ganther, A. A. M. Co.  
148 Duane St., New York  
**Agents Wanted**



**Golden Gem**  
PORTABLE  
Adding Machine  
\$10  
Multiplies - Subtracts

**FOR XMAS-A TYPEWRITER!**

Show the Xmas Spirit in a big way for little money. Our **Factory Rebuilt Typewriters** are ideal Xmas Gifts for children, students, business people. They save you \$25 to \$75 on your purchase. Standard Makes, thoroughly rebuilt, trademarked and guaranteed the same as new. Branch stores in leading cities give prompt service. Send today for catalogue.

**American Writing Machine Co., Inc., 339 Broadway, N. Y.**



**LEPAGE'S**  
**GLUE** **HANDY TUBES**  
**STRONGER THAN NAILS**



**Mobiloils**

*A grade for each type of motor*

**PATENTS**

WRITE for Free Hand Books on Patents, Trade Marks, etc.—or send sketch, description or model of your invention—for free and confidential opinion regarding patentability.


Oldest firm of patent attorneys — 71 years' experience. **PROMPT, SKILLFUL SERVICE**—candid advice for the inventor. Patents procured through us receive free Special Notice in

**SCIENTIFIC AMERICAN**

**MUNN & CO.**

683 Woolworth Bldg., NEW YORK.  
627-F Street, WASHINGTON, D. C.

When writing to Advertisers please mention Popular Science Monthly

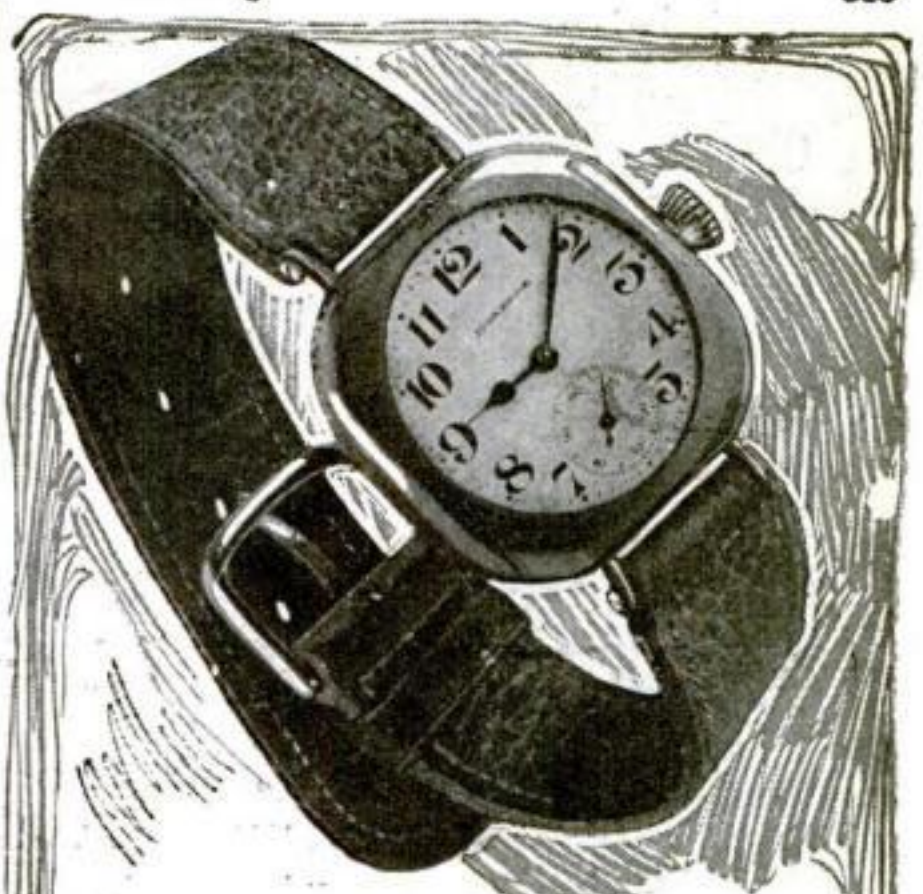

## A Real Man's Wrist Watch

**THE** day of the wrist watch is here! A wrist watch is part of every officer's equipment in the European armies. Practically every officer in the U. S. army wears one. *It has been proven the most convenient watch in the world.*

And here is the Aviator's model. This New Burlington was built for aviators and is adjusted to keep time to the second anywhere. Fully jeweled—finest nickel movement. Square design. Clear, distinct, military dial. Extra heavy hands. Buckles with sturdy pigskin strap that cannot slip. Send coupon today for beautifully illustrated catalog.

**Radium Dial!** We furnish this watch with radium dial when desired using only the highest grade radium. The same as is used on the very best scientific instruments. We know positively that this quality of radium will not lose its luminosity for many years, in fact we believe it will last a lifetime. Although we can't claim this definitely as radium has been discovered only a comparatively short time.

**The Burlington**  
**\$2.50 a Month**

Yes,—all of this for \$2.50—only \$2.50 a month for this masterpiece of watch manufacture. Now sold direct to you at positively the exact price that the wholesale dealer would have to pay.

Write for **FREE Book** showing the latest designs in our New Regular Model Watch.

**Send the Coupon for Watch Book**

Get the Burlington Watch Book by sending this coupon now. You will know a lot more about watch buying when you read it. You will know why a man who has become accustomed to the convenience of a wrist watch would never go without one again. Send the coupon today for book and our special offer. Mail it now.

**Burlington Watch Company**  
Dept. 1209  
19th and Marshall  
Boulevard,  
Chicago, Illinois

**Burlington Watch Company**  
19th and Marshall Blvd.  
Dept. 1209 Chicago, Illinois

Please send me (without obligations and prepaid) your free book on watches with full explanation of your cash or \$2.50 a month offer on the Burlington Watch.

Name.....

Address.....



# 10¢ a Day

## now buys this superb Farny Violin

**A**n exquisite instrument—perfect in tone and superbly finished. Made by the great French violin maker, Henri Farny, and now offered to you at the rock-bottom price. You may pay this rock-bottom price at the rate of only 10 cents a day. 10 days' free trial. Write for special circular—send coupon at once.

### Your Choice of Instruments

This Farny violin is only one of the bargains we have to offer. Write today for our new Violin catalog. There you will find illustrated products of the leading violin makers of the world—Farny, Baader, Giler, Heberlein, Fiedler, Wurlitzer and many others. Violins of the highest grade, as well as those of moderate prices—all special values. Priced from \$2.70 to \$50.00, and from \$60.00 to \$250.00. Write now.

#### Rare Old Violins

Our collection of rare old violins is one of the largest in America. Write today for Special Art Catalog.

## WURLITZER

200 years of instrument making

Get the benefit of our mammoth facilities for buying in large quantities. The house that supplies the United States Government now makes a startling money-saving offer direct to you. Write for circular.

### One Week Free Trial

You cannot judge a violin by seeing it in the store or by playing upon it once. Play on one of these instruments in your own home, in your own way, for one full week. Then you will be able to decide. If you are not satisfied send it back at our expense. If you wish to buy, pay only the rock-bottom price—at the rate of only a few cents a day.



#### 10c a Day

now buys this superb Lyric Cornet. Exquisite triple-silver-plated long model Lyric Cornet direct to you on a startling offer. One week free trial before you decide to buy. Liberal allowance for old instruments. Write today for 194-page Catalog—showing 2561 instruments that you have to choose from.

### The Rudolph Wurlitzer Co.

Dept. 4049  
S. Wabash Ave., Chicago, Ill.  
4th Street, Cincinnati, Ohio

Gentlemen:—Please send me without obligations, free and prepaid the catalog matter checked below:

- ☐ The special violin circular.
- ☐ Special low priced violins under \$15.00
- ☐ Your 225 page illustrated catalog of musical instruments.
- ☐ Catalog of music stands, cases and stringed instrument accessories.
- ☐ Art catalog of rare old violins.

### Send the Coupon

Put your name and address on the coupon now and indicate catalog matter you wish us to send you. Absolutely no obligation in sending the coupon. Do it now. Find out about the startling money-saving offer we are making. Write today—send Coupon or a Letter or a Post-card.

### The Rudolph Wurlitzer Co.

Dept. 4049  
East 4th Street,  
Cincinnati, O.  
S. Wabash  
Avenue,  
Chicago

Name.....

Address.....

When writing to Advertisers please mention Popular Science Monthly

# How to Relieve DEAFNESS

Science has at last devised a remarkable instrument for the treatment of Deafness. Just a few minutes' application in your own home each day is required. Users testify to wonderful restoration of hearing. If you have head noises—if you are only slightly hard of hearing or almost totally deaf, don't delay—the Aurasage may be the means of bringing back your hearing.

### Wonderful New Method

The Aurasage calls into play the dormant powers of the ear, strengthens them by exercise and breaks down the catarrh congestion which causes 95% of all deafness. Try the Aurasage ten days free in your own home without a penny in advance—we gladly send it to you by prepaid parcel post—no cost to you if it fails to help your hearing. Write today for valuable booklet and our great FREE offer of the new 96 Tone Mears Ear Phone. Address

### MEARS EAR PHONE CO.

Dept. 2012, 45 W. 34th St.

New York City

## \$60 A WEEK AND THIS FREE AUTOMOBILE



Every Agent Can Get an Auto Free. NO CONTEST.

You can make \$60 a week and get Free Auto. I want hustlers, money-makers, to work with me, to advertise, sell and appoint agents. Biggest thing in years. City conveniences without plumbing. Used in any room. Sells on sight. Demonstrating tub furnished. Folds small, self-emptying, non-leakable. Guaranteed 10 years.

### AGENTS MAKE SALES EASILY

Two sales daily means \$60.00 a week. Leggett, Ohio. "Worked two hours, took two orders, profit \$10.00." Hayhurst, Nebr. "Took 11 orders in 4 1/2 days—profit \$55.00, ordered 12 more tubs." Manning, Iowa. "Sold 10 tubs in one day—profit \$50.00." Delut, Nebr. "Sold 12 tubs in three days—profit \$60.00." And hundreds of others making big money. 70 per cent of homes have no bath tubs. Experience and capital unnecessary. Credit given to the right man. Get full particulars and "special plan," all FREE.

H. S. Robinson, Pres., THE ROBINSON CABINET MFG. CO.  
4773 Factory Building  
TOLEDO, OHIO

## Voice Thrower 10 cts.

Learn to throw your voice into a TRUNK under the bed, out in the hall or anywhere. Lots of FUN fooling the Teacher, Janitor, Policeman, Parents, Neighbors or Friends.

### The Ventrilo

is a little instrument that fits into the mouth out of sight. BOYS or Girls can use it. NEVER FAILS! A 32 page book on Ventriloquism sent with the VENTRILO for TEN Cents.

Royal Novelty Co., Dept. 90 SO. NORWALK, CONN.



### Boy Electrician with 75 Illustrations for making

Wireless, Dynamos, Motors, Telegraph apparatus, Telephone, Lights, Bells, Alarms, Coils, Batteries, Current Reverser, Electric Engine, Etc. By Electrical Experts so that anyone can understand it. With Cat. All 10c Postpaid.



### Boys' Own Toy Maker

Tells how to make a Talking Machine, Camera, Electrical Motor, Bicycle Boat, Canoe, Boomerang, Bobsled, Wind Mill, Microscope, Water Wheel and Motor, Stilts, Toboggan, Snow Coaster and Sail Boat, Telephone, Electric Bell, Railroad, Wind Mobile, Paddle Raft, Traps, Kites, etc. All 10c, postpaid.

### Instructive & Entertaining Popular Books

Chemical Wonders, Secrets & Mysteries	10c	Fun, Magic & Amusement	10c	How to Play Piano	25c
Money-Making Secrets	10c	How to Dance (New and old)	25c	" " " Violin	25c
Amateur Electrician	10c	Year Pocket Dictionary Indexed	25c	" " " Mandolin	25c
150 Parodies on Latest Songs	10c	" " " Guitar	25c	" " " " "	25c
Comic Recitations	10c	Clog Dancing Made Easy	15c	Astronomy Made Easy	10c
Ventriloquism	10c	Hunters' and Trappers' Guide	25c	Birthday Readings	25c
Humorous Dialogues	10c	How to become American Citizen	10c	Collection of 75 National Songs with Music	10c
Humorous Recitations	10c	Egyptian Witch Dream Book	10c	Ready Made Speeches and Toasts	25c
Complete Letter Writer	25c	Jolly Joker's Joke Book	10c	Rare Coin Guide	10c
Vaudeville Joke Book	10c	Minstrel Show (Start to finish)	10c	Book of Great Secrets	25c
Song and Joke Book	10c	Fortune Telling by Cards	25c	Brudger Gardeners' Stamp Speeches	25c
Irish Song & Joke Book	10c	Old Secrets and New Discoveries	25c	Mock Trials	25c
Star Toy Maker	10c	Rabbits: How to Breed	10c	125 Tricks With Cards	25c
Star Little Book	10c	Comic Songs and Recitations	25c	New Guide to Beauty	25c
300 Popular Toasts	10c	Complete Guide to Boxing	25c	How to Play Checkers, Chess and Dominoes	25c
Hoyle's Card Games	25c	Etiquette and Politeness	25c		
Lightning Calculator & Short-Cut Arithmetic	60c	Old Dr. Brown's Great Book of Secrets, Wrinkles, Formulas, etc. (Contains over 400 pages)	\$1.00		
Tricks with Coins	25c				

All 10 cent Books 3 for 25c; All 25 cent Books 5 for \$1.00  
J. C. DORN, Dept. 49, 707 S. Dearborn St., Chicago, Ill.



# ELECTRICITY



## I TEACH BY MAIL

**YOUNG MAN**, the fastest growing profession of all—needs you. The most Profitable and Fascinating Business on Earth—WANTS YOU. I will train you to become an Electrical Expert in a few months' time. My graduates hold the best positions.

### Practical Training IN YOUR OWN HOME

I'll teach you by mail what a practical Electrical Engineer must know. I'll train you in the necessary theory and the actual practice of Electricity. My simplified course is just what you have hoped to find. It is broad, deep and full. It is thorough and practical. Don't be afraid that Electricity is too hard for you. My course simplifies the subject, tells about it in plain words, and illustrates everything. I will teach you until you know you know.

### FREE ELECTRICAL OUTFIT

I will furnish you with a splendid outfit of Electrical Tools and Materials, absolutely free. With these tools and materials you can start right out and do Electrical jobs for money during your spare time. This outfit is valued at \$17.00.

### WRITE ME TODAY

I am Chief Engineer of the Chicago Engineering Works. I want to send you my wonderful book of "Electrical Opportunities." Now be prompt, and I will send you this book free—address

**CHIEF ENGINEER COOKE**

Room 532

441 Cass St., CHICAGO, ILL.

## No. 68 Carleton Generator

7 Volts 7 Amperes (49 C. P.)

solves the lighting problem.


Steady light with or without storage batteries. Special brackets for Ford, Saxon and Metz cars, but easily applicable to any car, cycle, boat or miniature stationary plant. Highest quality construction and moderate price, not to be confounded with cheap, permanent magnet generators. Also Automatic Cutouts, Storage Batteries, Governors and Ammeters. Descriptive Bulletin explains.

**SPECIAL 12-Volt, 10-Ampere Generators** for boats or stationary work.

Local demonstrating agents wanted where there are no dealers.

**178 SUMMER, BOSTON**

The Carleton Company

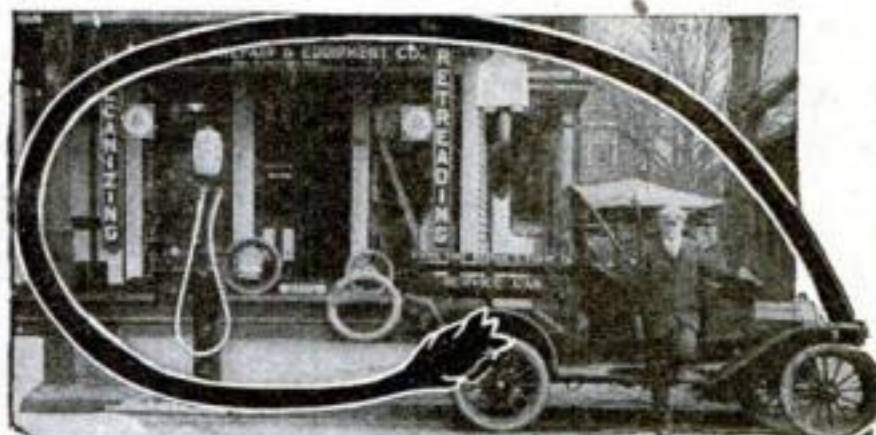

## \$400 a Week

"Just a year in the business and now doing \$400 to \$450 a week at a good round profit" tells the story of this Haywood shop. Scores of men have found their independence in the Tire Repair business, have opened Haywood shops and are making big money. The coupon below or a post card with your name and address will tell you how to start.

### More Men Wanted 30,000,000 Tires to Repair

The demand for tire repairing is now so great that more Haywood stations must be established at once throughout the country. We want capable, energetic, ambitious men in charge of each—men who are dependable—competent. **You can have this opportunity. Make \$3,000 a Year or Better!**

### A Wonderful Opportunity

The coupon—your name and address, brings full particulars. How to start. How to tie up with the Haywood Service. We'll give inside facts and figures about costs and profits—explain in detail our Co-operative Business Building Plans. Write today without fail. Learn how you can start at once.

**Haywood Tire & Equipment Co.**  
794 N. Capitol Avenue  
INDIANAPOLIS, IND.

*The Haywood Shop of Paul R. Fredricks, Wallingford, Conn.*

*The Money Making Haywood Machine*

*Get the Facts*

*Mail This Today*


### OPPORTUNITY COUPON

**Haywood Tire & Equipment Co.**  
794 North Capitol Avenue  
Indianapolis, Indiana







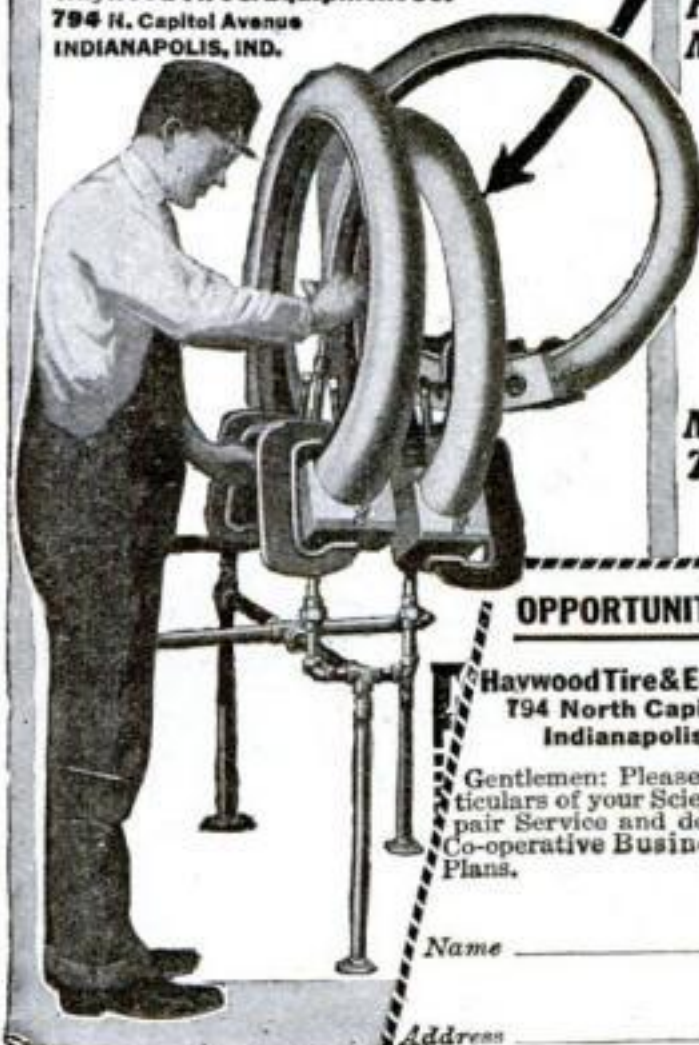



Gentlemen: Please send full particulars of your Scientific Tire Repair Service and details of your Co-operative Business Building Plans.

Name \_\_\_\_\_

Address \_\_\_\_\_





 <p><b>999</b> 2 VOLTS 10 AMP</p>	 <p><b>FREE</b></p>	 <p><b>9204</b></p>	 <p><b>103</b></p>	 <p><b>2904</b> TELEGRAPH CODES</p>
Chronic Plunge Battery for students. Wt. 1 lb. \$0.50	Free 228 page cyclopaedia, 400 illus. See below	All-metal House 'phones, with bell. Wt. 3 lbs. \$2.10	Exper. Elec. Course in 20 lessons, 160 pgs. Prep'd. \$0.55	2 real telegraph instruments, codes, wire, etc. Learn telegraphy in 30 days. Wt. 2 lbs. Set \$1.25
 <p><b>810</b> 8 VOLTS 10 AMP</p>	 <p><b>1800</b> E. I. CO. N. Y.</p>	 <p><b>5000</b></p>	 <p><b>1024</b></p>	 <p><b>1355</b></p>
8 Volt 10 Amp. Dynamo, Battery charging and lighting. Wt. 20 lbs. \$11.00	Silent High frequency test buzzer. Wt. 1 lb. \$0.90	Rheostat Regulator, Porcelain base. Wt. 1 lb. \$0.60	Real Telephone Receiver. Wt. 1 lb. \$0.50	Boutonnieres flag light. Works on any flashlight. Wt. 4 oz. \$0.60

**BOYS** When ordering any of the above include postage, else goods go by express collect. Ship's wts. are given. Goods shown here are only a fraction of our wonderful assortment illustrated and described in our famous 228-page Cyclopaedia Catalog containing 400 illustrations. Treatise on Wireless Telegraphy, Code Chart and 20 coupons for Free Wireless Course. Cyclopaedia sent free for 4c to cover postage only. Send for your copy today.

**THE ELECTRO IMPORTING COMPANY, 229 Fulton Street, New York City, N. Y.**

## Super-Sensitive Microphone **ONLY \$7.50**



This instrument is offered at an extremely low price. It is excellent for building your own amplifier. Can also be used in many experiments where a sensitive microphone is required.

### Detectagraph, \$15

This detecting instrument of marvelous sensitivity can be used for detecting secret conversations. Outfit consists of Sensitive Transmitter, 25-ft. Black Cord, Receiver, Headband, Case and Battery.



Detectagraph, \$15

Send for One Today and Convince Yourself

### THE \$15 MICROPHO DEAF-PHONE

is a super-sensitive instrument which has been developed to meet the demands for a practical and efficient hearing device at an extremely low price. It is equal to any \$50 instrument made and superior to most of them. The outfit consists of One Super-Sensitive Transmitter, with cord connector; One Super-Sensitive Ear Piece with small black cord; One Black Single Headband; Black Case and Two Batteries.



**MICROPHO-DETECTOR COMPANY**  
Gaston Boissonnault, President  
**25 CHURCH STREET NEW YORK**  
Makers of Super-Sensitive Microphone Apparatus

## LEARN TELEGRAPHY



at home in shortest possible time. Morse or Wireless. **OMNIGRAPH AUTOMATIC TRANSMITTER**, connected with Sounder or Buzzer, sends you messages at any speed, just as expert operator would. Adopted by U. S. Govt. 6 styles. Catalog free.

**OMNIGRAPH MFG. CO.**  
39-H Cortlandt St., New York.

## "DON'T SHOUT"

"I hear you. I can hear now as well as anybody. 'How?' With **THE MORLEY PHONE**. I've a pair in my ears now, but they are invisible. I would not know I had them in, myself, only that I hear all right."

**"The Morley Phone for the DEAF"**

is to the ears what glasses are to the eyes. Invisible, comfortable, weightless and harmless. Anyone can adjust it."

Over one hundred thousand sold. Write for booklet and testimonials. **THE MORLEY CO., Dept. 797, Perry Bldg., Phila.**

## Red Seal Dry Batteries Are Guaranteed

to give absolute satisfaction for Automobiles, Motor Boats, Gas or Gasoline Engine Ignition, Medical Batteries, Telephone, Door Bells, Annunciators, Wireless Apparatus or any other open circuit work.

**ASK YOUR DEALER**

Send for Our New Edition of Our Catalog A28  
Ready About December 15th

It will be pocket size, 8x 4½ and will contain 248 pages with over 1,100 illustrations, describing in plain, clear language all about Bells, Push Buttons, Batteries, Telephone and Telegraph Material, Electric Toys, Burglar and Fire Alarm Contrivances, Electric Call Bells, Electric Alarm Clocks, Medical Batteries, Motor Boat Horns, Electrically Heated Apparatus, Battery Connectors, Switches, Battery Gauges, Wireless Telegraph Instruments, Ignition Supplies, etc.

Send for a copy now

**MANHATTAN ELECTRICAL SUPPLY COMPANY, Inc.**

NEW YORK, 17 Park Place CHICAGO, 114 So. 5th Ave. ST. LOUIS, 1106 Pine St. SAN FRANCISCO, 604 Mission St.



When writing to Advertisers please mention Popular Science Monthly



## The Electrical Experimenter



Here is **THE** electrical magazine for you. For the Dabbler and the "How-to-make-it" fiend. Chuck full of experiments and the latest electrical doings. Non-technical—in plain English. One of the foremost authorities on **WIRELESS** in U. S.

208 Illustrations, 90 big pages, Over 100 articles.  
One copy will convince you  
At All News Stands 15c  
\$1.50 a year. (Foreign \$2.00)  
Send 25c for 3 numbers  
**THE ELECTRICAL EXPERIMENTER**  
235 Fulton St., New York

## 20th Century Book of Recipes, Formulas and Processes

This book gives you the information that represents the collection of years and the expenditure of thousands of dollars. Contains complete directions for making everything from simple glues and adhesives to the tanning of leather, the making of photographic materials, perfumes, soaps, plating of silver and gold, working of metals, etc. 800 Pages, 10,000 Selected Subjects. Price, \$3.00.

**POPULAR SCIENCE MONTHLY, 225 West 39th St., N. Y. C.**

## "Electricity Made Simple"

A book devoid of technicalities. Simple, plain and understandable. Students and electrical workers whose opportunities for gaining information on the underlying principles of electricity have been limited will find this book of inestimable value. 233 Pages, 108 Illustrations. Price, \$1.00.

**Popular Science Monthly, 225 West 39th St., N. Y.**

## Learn in Spare Time to be a CIVIL ENGINEER

### Earn \$1500 to \$5000 Yearly

Here's your big chance to become a full-fledged Civil Engineer! With this set of books you can fit yourself to make big money, in the greatest outdoor profession on earth! Offer fully explained in coupon. Good only within boundaries of U. S. and Canada.

### Great Books Shipped FREE 50c a Week

if you keep them after 7 days' FREE TRIAL. Nine big leather-bound volumes; 3900 pages, 7x10 inches; 3000 plates, maps, diagrams, etc. Written by world's greatest civil engineers. Books tell you—  
ALL ABOUT surveying; highway construction; railway engineering; earth work; specifications; estimating contracts; bridge engineering; masonry; reinforced concrete; water supply; sewers and drains; water power equipment; irrigation engineering—etc., etc. Written in simple language—every point made plain.

### Consulting Service Free

A \$12 Consulting Membership solves your difficult problems for a whole year. FREE with the set of books.


**SEND NO MONEY—JUST THE COUPON!**



**American Technical Society**  
Dept. C. 1209  
Chicago, U. S. A.

Please send Library of Civil Engineering for seven days' examination, express prepaid. I will send \$2.00 within seven days and \$2.00 a month until I have paid \$29.50 or notify you and hold books subject to your order. Title not to pass until fully paid.

Name.....  
Address.....  
Reference.....

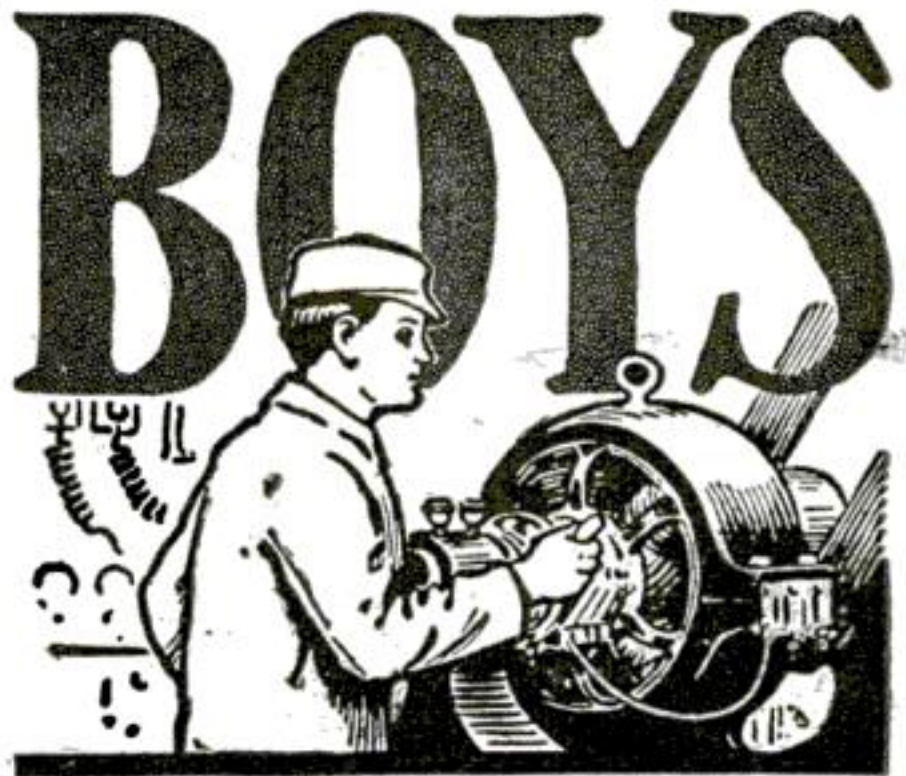

## Big Money in Electricity

The electrical industries offer wonderful opportunities to boys with a liking for Electricity. The salaries paid to trained men are large, promotion comes rapidly and, best of all, the work is fascinating.

The discovery and development of new lines (such as wireless telegraphy and telephony), from time to time, promise attractive and paying fields to those who wish to specialize. The *will to do* and *Special Training* will bring success to you.

The International Correspondence Schools can help you to become an expert in electrical work, no matter what branch you like best. Thousands of young men have already won success through I. C. S. help. You can do as well as anybody, *if you try*. Everything is made so clear that you can learn in your spare time, regardless of where you live or what your work. No books to buy.

There's big money in Electricity. Get after it by marking and mailing the Coupon today. *Finding out costs you nothing.*

## INTERNATIONAL CORRESPONDENCE SCHOOLS

Box 5837, SCRANTON, PA.

Explain, without obligating me, how I can qualify for the position, or in the subject, before which I mark X.

- |   |  |
|---|--|
| <input type="checkbox"/> ELECTRICAL ENGINEER        | <input type="checkbox"/> CHEMICAL ENGINEER         |
| <input type="checkbox"/> Electrician                | <input type="checkbox"/> SALESMANSHIP              |
| <input type="checkbox"/> Electric Wiring            | <input type="checkbox"/> ADVERTISING MAN           |
| <input type="checkbox"/> Electric Lighting          | <input type="checkbox"/> Window Trimmer            |
| <input type="checkbox"/> Electric Car Running       | <input type="checkbox"/> Show Card Writer          |
| <input type="checkbox"/> Heavy Electric Traction    | <input type="checkbox"/> Outdoor Sign Painter      |
| <input type="checkbox"/> Electrical Draftsman       | <input type="checkbox"/> RAILROADER                |
| <input type="checkbox"/> Electric Machine Designer  | <input type="checkbox"/> ILLUSTRATOR               |
| <input type="checkbox"/> Telegraph Expert           | <input type="checkbox"/> DESIGNER                  |
| <input type="checkbox"/> Practical Telephony        | <input type="checkbox"/> BOOKKEEPER                |
| <input type="checkbox"/> MECHANICAL ENGINEER        | <input type="checkbox"/> Stenographer and Typist   |
| <input type="checkbox"/> Mechanical Draftsman       | <input type="checkbox"/> Cert. Public Accountant   |
| <input type="checkbox"/> Machine Shop Practice      | <input type="checkbox"/> Railway Accountant        |
| <input type="checkbox"/> Gas Engineer               | <input type="checkbox"/> Commercial Law            |
| <input type="checkbox"/> CIVIL ENGINEER             | <input type="checkbox"/> GOOD ENGLISH              |
| <input type="checkbox"/> Surveying and Mapping      | <input type="checkbox"/> Common School Subjects    |
| <input type="checkbox"/> MINE FOREMAN OR ENGINEER   | <input type="checkbox"/> CIVIL SERVICE             |
| <input type="checkbox"/> Metallurgist or Prospector | <input type="checkbox"/> Railway Mail Clerk        |
| <input type="checkbox"/> STATIONARY ENGINEER        | <input type="checkbox"/> Textile Overseer or Supt. |
| <input type="checkbox"/> ARCHITECT                  | <input type="checkbox"/> AGRICULTURE               |
| <input type="checkbox"/> Architectural Draftsman    | <input type="checkbox"/> Navigator                 |
| <input type="checkbox"/> PLUMBING AND HEATING       | <input type="checkbox"/> Poultry Raising           |
| <input type="checkbox"/> Sheet Metal Worker         | <input type="checkbox"/> Automobiles               |
|   | <input type="checkbox"/> Spanish                   |
|   | <input type="checkbox"/> German                    |
|   | <input type="checkbox"/> French                    |
|   | <input type="checkbox"/> Italian                   |

Name.....

Present Occupation.....

Street and No. ....

City..... State.....

If name of Course you want is not in this list, write it below.





## Here's Health

—vim, vigor, vitality! The keen, vivid relish of youth for work and pleasure! Snap, ginger, punch in every thought and action! The joy of glorious health, strength, power, life—yours through vibration.

Wake up that sluggish circulation! Send the rich, red blood leaping along through every vein and artery! Tune up those jangled nerves! Stir up those sluggish organs! Flood your whole body with health! Don't be satisfied with mere existence! **Begin to live!**

## Arnold Vibrator

Try this wonderful machine yourself. Test it on your own body. Notice the difference after the very first treatment. See how pleasant and easy it is to use—how marvelous the results. And don't forget that these results are permanent because vibration gets right at the cause of things—goes to the very root of the trouble. Aches and pains vanish like magic. You don't need to take anybody's word for these things—you can find out for yourself.

## 10 Days' Trial Free

Get the facts about our generous free trial offer. Learn how you may get these things yourself at our risk, and if you are familiar with the prices asked for ordinary vibrators you will be



amazed to find how much less it costs to own the genuine guaranteed Arnold Vibrator. When there is so much at stake why risk buying an unknown imitation machine. Insist on the Arnold. Ask for it by name.

**80-Page Book Free**

Your name and address on the coupon or a postal or letter brings you valuable 80-page book on Vibration free and full particulars of our special offer.

ARNOLD ELECTRIC CO., 1492 W. 12th St., Racine, Wis.

### Mail Coupon For FREE Book

ARNOLD ELECTRIC CO., 1492 W. 12th St., Racine, Wis.

Please send me your big illustrated Book and 10 DAYS' TRIAL REDUCED PRICE OFFER, all free.

Name \_\_\_\_\_

Street \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_

## \$1,000,000.00 Idea

One of the patents I procured is worth a million dollars. Your idea may mean your fortune. Send sketch or model for actual search and report. 1917 Edition 90 page Patent Book Free.

GEORGE P. KIMMEL, Patent Lawyer  
38-L Barrister Bldg., Washington, D. C.

## INVENTORS

We specialize in manufacturing new patented articles, make models—dies—and do experimental work.

LEO J. GERDING MFG. CO., Opera Place, Cincinnati, Ohio

## PATENTS

C. L. PARKER

Formerly Member Examining Corps, U. S. Patent Office.

PATENT LAWYER

McGill Bldg., WASHINGTON, D. C.

Patents, Trade Marks, Copyrights, Patent Litigation  
Pamphlet of Instructions Sent Upon Request



## Patent Secured or Fee Returned

Hundreds of inventions sold yearly. We help market yours without cost. Our new book is Free. Send model or sketch for free opinion.

A. M. BUCK & CO., 210 2nd National Bank Bldg., Washington, D. C.

## PATENTS ON EASY PAYMENTS

Send model or sketch for Free Search and opinion as to patentability. Write today for our free book on Inventions Wanted and How to Obtain Patent on Easy Fee Payments. We furnish our clients with list of patent buyers and assist inventors to sell their patents.

C. C. Himes & Co., 592-A Loan & Trust Bldg., Washington, D. C.

## PATENTS

Send me your ideas. Manufacturers want patents I procure. Prompt, confidential, personal service by successful patent attorney with highest references. Honest advice and "The Truth About Patents" free.

J. R. KELLY, 742 Woodward Bldg., Washington, D. C.

## BRISTLING WITH INVENTORS!

**PATENTS AND PATENT POSSIBILITIES**

SUCCESS IN INVENTION

Your country needs improved military designs to win the war. Manufacturers are waiting for patented aviation inventions. Fortunes can be made supplying these demands.

Get the right man by sending for this free book. It is chock full of ideas and practical advice for inventors, telling how to get a patent and where to sell it. Write for it today.

H. S. Hill, 803 McClallen Bldg., Washington, D. C.

**GET THIS BOOK!**

## Competent Patent Service

By a Former Examining Official of the U. S. Patent Office

**NORMAN T. WHITAKER**

Lawyer and Engineer

28 Legal Bldg.,

Wash., D. C.

INQUIRIES INVITED



# PATENTS TRADE-MARKS AND COPYRIGHTS

**LARGEST PATENT FIRM  
IN THE WORLD**

## SPECIAL OFFER

### Free Opinion as to Patentability

Before sending your invention to any attorney or manufacturer or disclosing your invention, write for our free blank form **PROOF OF CONCEPTION** in order to protect your invention and secure your rights.

This should be signed and witnessed and returned to us, together with a model or sketch and description of your invention, and we will give a **FREE OPINION** as to the patentability of the invention. If we report the invention patentable we will furnish a Certificate of Patentability.

**This Certificate of Patentability, together with our blank form Proof of Conception will protect the inventor and serve as proof of the invention until the case can be filed in the U. S. Patent Office.**

**Obtaining Assistance for Inventors**—Our certificate is of great assistance to inventors who require financial aid to obtain patents.

## OUR FIVE BOOKS MAILED FREE

(See Coupon Below)

to any address. Send for these books—the finest publications ever issued for free distribution.

### How to Obtain a Patent

Our illustrated eighty-page Guide Book is a book of reference for inventors and contains 100 mechanical movements, illustrated and described. Tells how to invent for profit.

### What to Invent

Contains a valuable list of inventions wanted and suggestions concerning profitable fields of inventions; also information regarding prizes offered for inventions amounting to

**One Million Dollars**

### Millions in Trade-Marks

Shows the value of Trade-Marks and information regarding unfair competition.

**We Advertise Our Clients' Inventions Free** in a list of Sunday newspapers, in manufacturers' journals and in World's Progress. Sample Copy Free. We save you time and money in securing patents. After the patent is granted we assist you to sell your patent.

## WANTED NEW IDEAS

Prepare Now to meet the Demands of Industry in All Fields for New Ideas and New Inventions. We are constantly receiving requests from manufacturers who consult us when purchasing patents for inventions in all lines. We invite manufacturers and promoters to address our Sales Department regarding the purchase or leasing of a number of meritorious patents secured by us.

### List of Patent Buyers

Contains requests from manufacturers, mail order houses and promoters for patents secured by us and suggestions as to **New Ideas** they wish to purchase. We place our clients in touch with capital free of charge. We have recently received over 300 requests from manufacturers.

### Foreign Patents

We have direct agencies in all the principal foreign countries and secure foreign patents in the shortest possible time and at the lowest cost. Write for our illustrated Guide Book on Foreign Patents, sent free to any address.

VICTOR BUILDING



VICTOR J. EVANS



**FREE COUPON!**

## VICTOR J. EVANS & CO.

New York Offices:  
1001 Woolworth Bldg.

PATENT ATTORNEYS  
Pittsburg Office: 514 Empire Bldg.

Philadelphia Offices:  
1429 Chestnut St.

Main Offices: 760 Ninth St., WASHINGTON, D. C.

Name.....Address.....

When writing to Advertisers please mention Popular Science Monthly



# PATENTS

## THAT PROTECT and PAY

Advice Free. Terms reasonable. Highest references. Best results.


Send sketch or model for FREE examination and opinion.

BONDED and recommended Patent Lawyer in the Rand-McNally Directory of Bankers and Attorneys, published by Rand-McNally & Co., Chicago, Ill. Recommended Patent Attorney in the Bankers Register and special list of selected lawyers published by the Credit Company, Pontiac Building, Chicago, Sharp & Alleman's Directory of Lawyers and Bankers, published at Philadelphia, and Martindale's American Legal Directory of New York City.

**ALL BUSINESS GIVEN PROMPT AND PROPER ATTENTION**

A large list of strong recommendations furnished free

**WATSON E. COLEMAN, Patent Lawyer, 624 F St., Washington, D. C.**

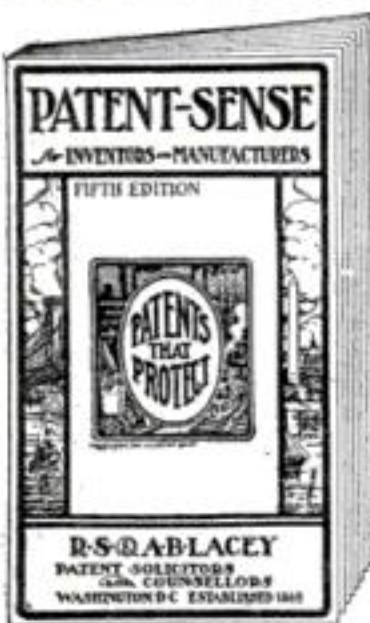

### "The Book the Inventor KEEPS"

Worth more than all other patent books combined. FREE.

Write

**R. S. & A. B. LACEY,**  
121 Barrister Bldg.,  
Washington, D. C. Established 1869

### R. MORGAN ELLIOTT & CO.

PATENT ATTORNEYS

MECHANICAL, ELECTRICAL & CHEMICAL EXPERTS

714-722 WOODWARD BUILDING

WASHINGTON, D. C.

## U.S. PATENTS



**FREE**  
BOOK-BULLETINS & ADVICE

REGISTERED ATTORNEYS

**LANCASTER & ALLWINE**

274 OURAY BLDG.,

WASHINGTON, D. C.

### Don't Lose Your Rights

We publish forms called "Evidence of Conception" by which you can establish your rights before sending the invention to anyone. It is your best protection. We issue up-to-date bulletins of improvements wanted; aid inventors to promote their rights; render reliable opinions free of charge and secure valuable patents and trade marks on reasonable terms. Personal service assured by our Service Guarantee Contract. References 2nd National Bank, Washington, J. P. Roth Packing Co., Cincinnati.

#### SIMPLY MAIL COUPON

LANCASTER & ALLWINE, 274 Ouray Bldg., Washington, D. C.

Send me free, book "Inventions—Patenting & Promoting," Bulletin of Improvements Wanted and blank form, "Evidence of Conception."

Name .....

Address .....

### Patents Promptly Procured

Send sketch or model for actual search and report. It should never require more than 2 days to report upon the patentability of your invention; nor longer than 10 days to prepare your case for filing. 1917 Edition 90 page Patent Book Free.

**GEORGE P. KIMMEL, Patent Lawyer**  
39-L Barrister Bldg. Washington, D. C.

### Protective Patents

procured promptly. Strictly professional service. No fee refund, no certificate guarantee no so-called prize or free search schemes used in our business. Inventor's 104 page Blue Book on Patents sent on request. **ROBB & ROBB, 240-244 Southern Building, Washington, D. C.**



### Inventions Wanted!

Manufacturers constantly writing us for patents. List of inventions actually requested and book "How to Obtain a Patent" sent free. Send rough sketch for free report regarding patentability. Special assistance given our clients in selling patents. Write for details of interest to every inventor.

**Chandlee & Chandlee, Patent Attorneys**  
Est. 21 Years 563 7th St., Washington, D. C.

## PATENTS

TRADE MARKS. COPYRIGHTS

### Prompt, Personal, Reliable Service

Over 30 years' active practice. Difficult and Rejected Cases Solicited. Write for terms. Book Free. Address

**E. G. SIGGERS**  
Box 1, N. U. Building. Washington, D. C.



# Wanted—Ideas

**Inventors! Send for these Remarkable FREE BOOKS, Today**

## “Inventions Needed”

This book lays before you a description of the active and profitable field of invention. It tells you the inventions the world needs today, the devices manufacturers are seeking for their business, the ideas for which the public will pay big money.

## “How to Get Your Patent”

This book is a guide to the inventor. If you have invented something and desire to learn what it will cost you to get your patent and what you must do to find your market, read this book.

## “Special Bulletin of Patent Buyers”

This bulletin contains letters from men who are seeking to purchase patents. We act as intermediary without one cent of charge, between the man who invents and the man who invests.

**Send Model or Sketch and description of your invention for Free Opinion as to patentability**

*Rejected and Difficult  
Cases are Our  
Specialty*

**RANDOLPH & CO.**


130 F St., N.W., Washington, D.C.

**RANDOLPH & CO.**

130 F St., N. W., Washington, D. C.

Gentlemen: Please send me without obligation on my part, the books indicated on margin of this coupon. (Write on margin of coupon, names of books desired.)

NAME .....  
STREET .....  
CITY ..... STATE .....

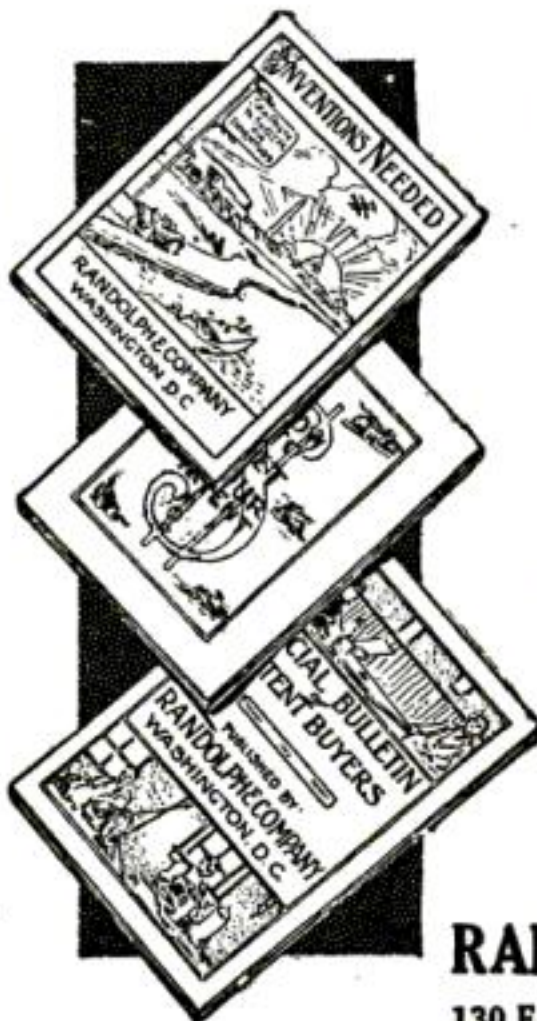

# AMERICA NEEDS YOUR IDEAS

Submarines, torpedoes, flying machines, machine guns, immense howitzers, the British “tanks,” and an untold number of other products of American brains, are dominant factors in the Great War. We are just starting, our—YOUR—ingenuity must lead to Victory. Uncle Sam—the whole civilized World—is seeking ideas that will aid in the fight. Can’t you help with even ONE of thousands of simple things that will win recognition—perhaps fortune for you?

The need is for inventions of peace, too. Never before was there such a demand for new ideas of all kinds—never before have so many manufacturers, and other patent buyers, written me for good things protected by OWEN PATENTS. There is, to-day, a market for thousands of ideas—including YOURS. Write for my free booklets and see—read for yourself the hundreds of requests recently received.

You incur no obligation by writing me. My advice costs nothing and I make no charge for an opinion as to patentability of your idea. If my opinion is favorable I will back it up by a *Guarantee Contract* which protects you fully. If you want to sell your invention, I will help you, and will advertise it, free of charge, in “INVENTION AND MANUFACTURING.”


A simple request will bring to you at once, my four free books:—“SUCCESSFUL PATENTS,” a 72 page guide telling how to proceed, gives references, etc.; “STEPPING STONES” tells the truth about prizes for inventions, gives hundreds of hints of inventions wanted, etc.; “PATENT BUYERS” publishes over 400 requests of manufacturers and others who want OWEN PATENTS, together with ideas they want; “PATENT PROMOTION” tells you how to sell, why some inventors fail, discusses the value of your idea, etc.

Write for these books to-day. I will send you a signed agreement that will protect you before you disclose your invention.

**RICHARD B. OWEN** Patent Lawyer


6 Owen Bldg Washington D.C. 22760 Woolworth Bldg New York

When writing to Advertisers please mention Popular Science Monthly

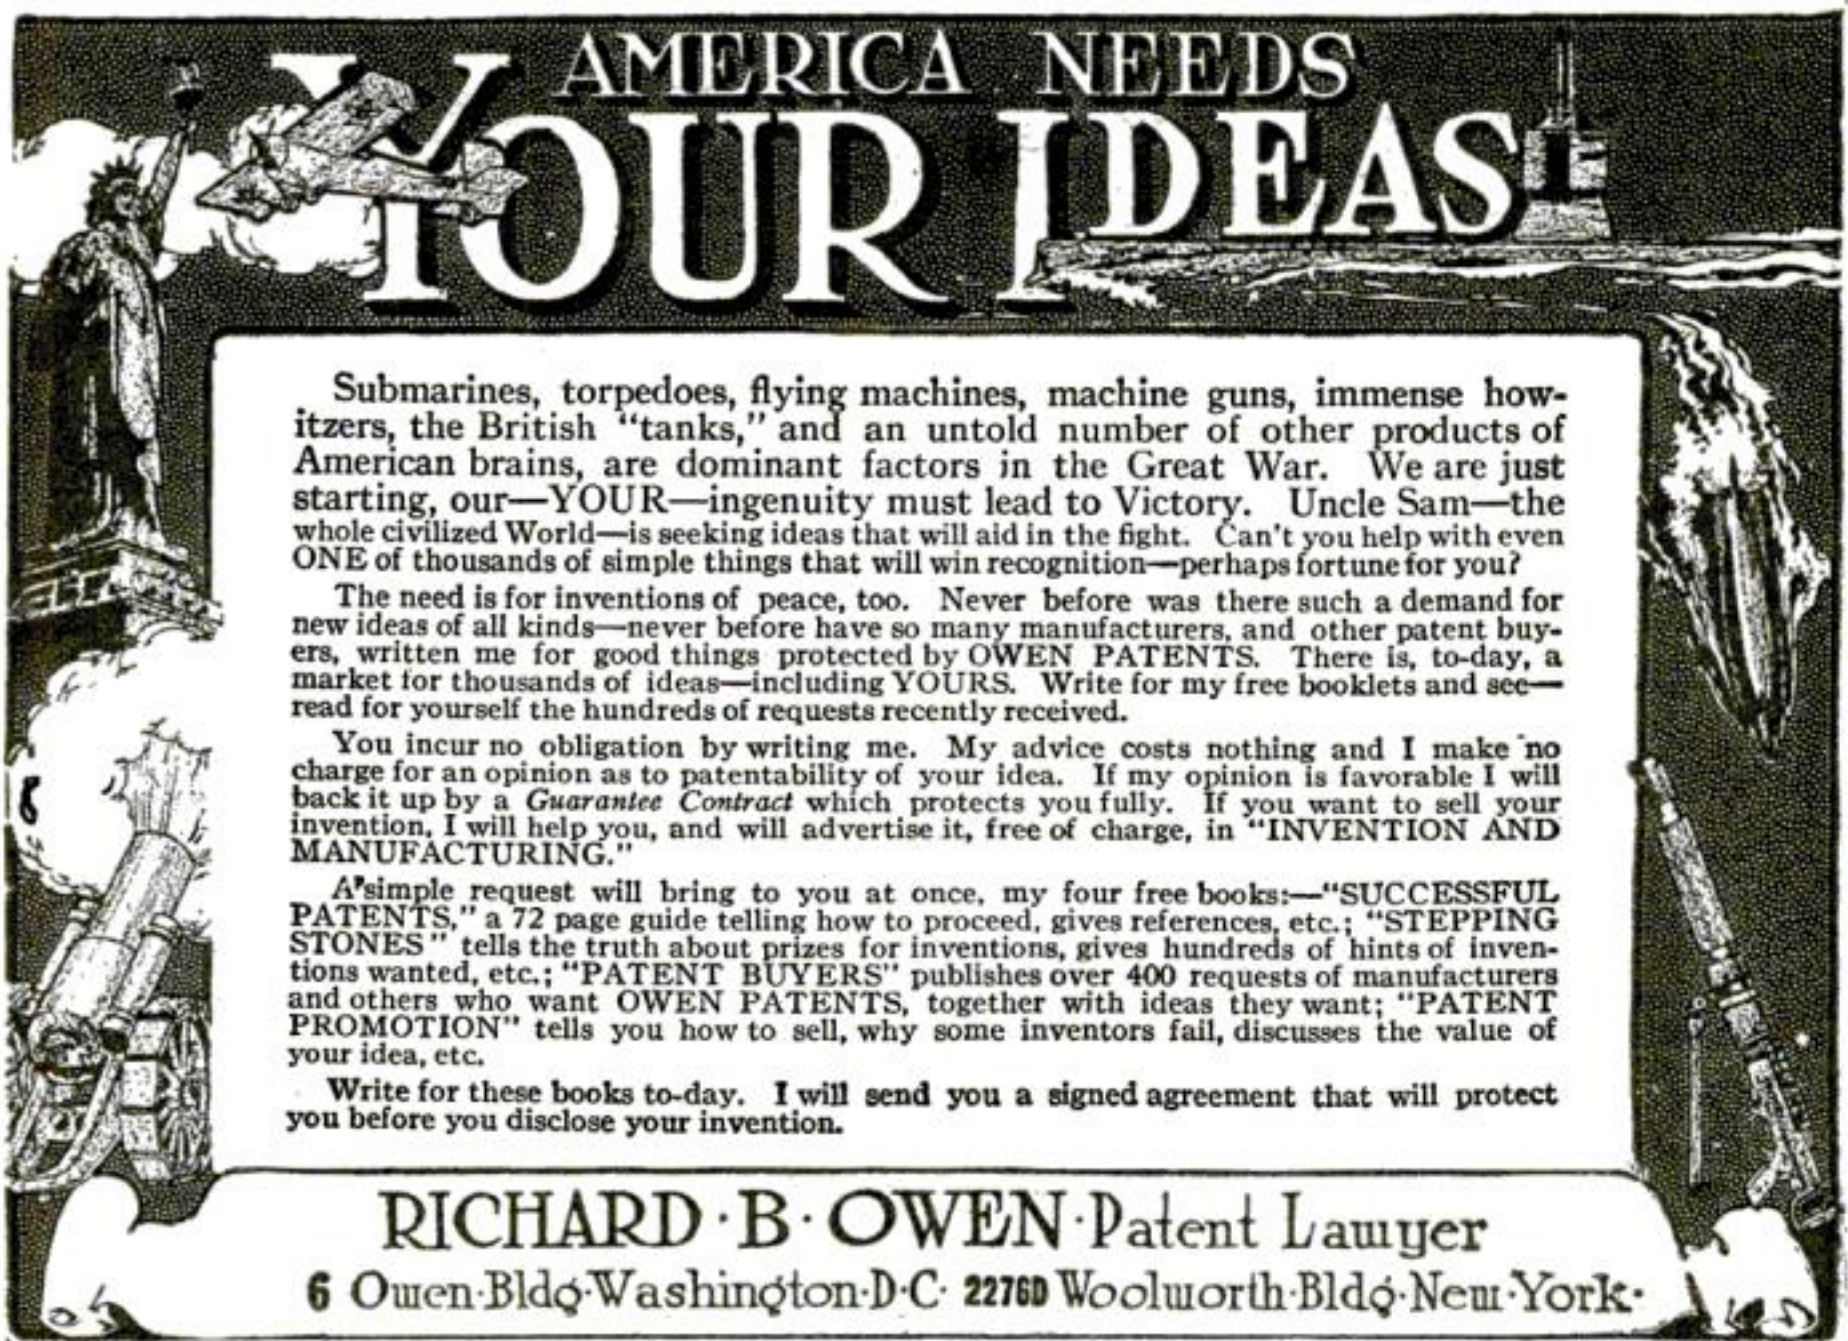



# SUGAR-4c

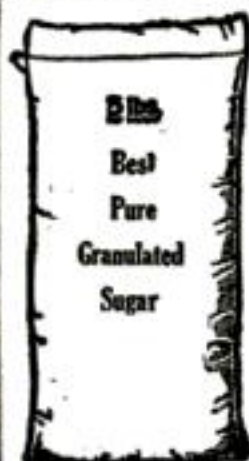

**M**AIL order houses waste thousands of dollars daily, sending expensive catalogues to people that don't mean business. We eliminate this waste and sell for less by sending our catalogs only to people that prove their sincerity by taking advantage of the big saving offered in the following trial assortment.

**HERE** is your opportunity to become a customer of a Real Wholesale Grocery that can save you big money on groceries every day in the year. Indications point to unheard of high prices on all lines for the winter months. Our customers can be protected. Send your trial order and get our catalog. It's brim full of bargains that you need and want. Get it today and lay in a supply for the winter.

**NOTE! We reserve the right to limit each customer to only two assortment orders**

**GUARANTEE** Each and every item we sell is guaranteed to be exactly as represented—the best that money can buy. You cannot buy the same quality of goods at such low prices from any other firm on earth. However, should you be in any way dissatisfied simply return the entire shipment and get your money back. We guarantee that you will never lose a penny in your dealings with us.

**DON'T FORGET** We send our catalog only to those who buy this special assortment. We do not sell a part of the order or any item in it separately, but our Big Bargain Catalog contains hundreds and hundreds of these great bargains which you are privileged to buy in any amount you want. Get this catalog and save money. Send your trial order today. Simply enclose money order or check for \$2.99 and say "Send assortment number E-81."

**Moneyworth Wholesale Grocers**  
Dept. E-81 14th and Ashland CHICAGO, ILL.

**BEST  
PATENT  
FAMILY**

**FLOUR** 196 LB. BBL. **\$8.50**

WITH GROCERY ASSORTMENTS

**Money Back If You Are Not More Than Pleased**

GROCERY ASSORTMENT	No. E-81
Approximate Retail Price	Our Wholesale Price to you
Approximate Weight, 19 lbs.	
\$0.50—5 lbs. Best Pure Granulated Sugar	\$0.21
.12—1 Large Size Package of Quaker Oats	.06
.08—1 Package Uneda Biscuits	.02
.08—1 Bar Ivory Toilet Soap	.03
.15—1 Can Campbell's Tomato Soup	.08
.07—1 Bar Kirk's Flake White Laundry Soap	.02
.07—1 Bar American Family Soap	.02
.25—1 Can Sardines, French Style	.14
.93—2 lbs. Moneyworth Brand Coffee	.70
.80—1 lb. Tea, highest grade, uncolored Japan	.57
.50—1 lb. Guaranteed Baking Powder	.39
.39—1 Bottle Concentrated Bluing	.23
.63—1 lb. Pure Breakfast Cocoa	.33
.50—1/4 lb. Pure Ground Cinnamon	.20

**\$5.01 Our Special Catalog Free!**  
**OUR WHOLESALE PRICE TO YOU \$2.99**  
Approximate Saving to You of \$2.02

**NOTE:—The above firm is reliable. Send them your order. Independent State Bank, Chicago.**

## A WONDERFUL OFFER

The Ansco Vest Pocket Camera—most compact and efficient Camera on the market. Takes pictures  $1\frac{1}{8} \times 2\frac{1}{2}$ . Is equipped with a high grade Achromatic Lens and Shutter of various speeds. Covered with Genuine Leather, at

**\$6.65**

Can also be equipped with the f:7.5 Anastigmat Lens and Actus Shutter at

**\$14.25**

or with the f:6.3 Anastigmat Lens and the Binoic Shutter at

**\$22.25**

Just the thing for the Soldier or Sailor. Always ready for instant action. Send for our free

### BARGAIN BOOK AND CATALOG

the most complete in America, listing hundreds of new Cameras and Kodaks at a great saving and used machines at a saving of 25 to 60%. We have pleased many and can do the same for you. Every item is sold on our

### 10 Day Free Trial Guarantee

or money back in full if unsatisfactory. Write us if you want to trade your Camera, Kodak or Lens.

**CENTRAL CAMERA CO.** 124 So. Wabash Av. Dept. 131-9, Chicago, Ill.

## "Handy Electrical Dictionary"

Contains upward of 4,800 words, terms and phrases employed in the electrical profession, with their definitions given in the most concise, lucid and comprehensive manner. Although the book is small enough to fit in the vest pocket, we venture the assertion that there is contained within its covers more reliable and useful information for the electrician, than was ever before published in a single volume. Full Leather, Gold Edges, Indexed. Price 50 Cents. Popular Science Monthly, 239 Fourth Ave., New York City.

## I Would Not Part with it for \$10,000

So writes an enthusiastic, grateful customer. "Worth its weight in gold," says another. In like manner testify over 100,000 people who have worn it.

## The Natural Body Brace

For MEN and WOMEN. Develops erect, graceful figure, overcomes WEAKNESS and AILMENTS of Women and Men.

Brings womanly beauty and manly strength, restful relief, ability to work and enjoy life.

### Banishes All These Troubles

Does away with the strain and pain of standing and walking; replaces and supports misplaced internal organs; reduces enlarged abdomen; straightens and strengthens the back; corrects stooping shoulders; develops lungs, chest and bust; relieves backache and nervousness. Comfortable and easy to wear.

### Wear It 30 Days Free at Our Expense

Write today for illustrated booklet, measurement blank, etc., and read our very liberal proposition.

**HOWARD C. RASH, Pres. Natural Body Brace Co.**  
241 Rash Building SALINA, KANSAS

When writing to Advertisers please mention Popular Science Monthly



# Pay-Raising Books at Reduced Prices!



Here's your chance to get—at a bargain price—a set of books that will fit you for a better job and bigger pay. Yes, and you may pay the bargain price at the rate of only 50c a week. But you must act now! The rising cost of paper and binding materials won't permit us to continue this offer indefinitely.

No matter what your occupation, one of the sets listed below is bound to suit your needs. They are written in easily-understood language by recognized authorities, and contain thousands of photographs, full-page plates, diagrams, etc., that make difficult points as simple as A-B-C.

Handsomely bound in half or full morocco leather, gold stamped.

## Shipped for 7 Days' Free Trial

We'll gladly send any set of books to you for seven days' free examination, shipping charges fully prepaid. Examine them carefully—use them at your work for an entire week. If, at the end of that time, you feel they aren't worth many times what we ask, send them back to us. If you keep them, pay the specially-reduced price on the easy terms explained below.

## Practical Home Study Books

	Vols.	Pages	Size of Page	Illus.	Reg. Price	Spec'l Price
<b>Civil Engineering</b>	9	3900	7x10	3000	\$45.00	<b>\$29.80</b>
<b>Architecture, Carpentry and Building</b>	10	4760	7x10	4000	50.00	<b>24.80</b>
<b>Accountancy and Business</b>	10	8680	7x10	1987	50.00	<b>24.80</b>
<b>Steam Engineering</b>	7	3300	7x10	2500	35.00	<b>19.80</b>
<b>Applied Electricity</b>	7	3000	7x10	2600	35.00	<b>19.80</b>
<b>Automobile Engineering</b>	5	2400	5½x8¾	2000	25.00	<b>17.80</b>
<b>Telephony and Telegraphy</b>	4	1728	7x10	2000	20.00	<b>12.80</b>
<b>Modern Shop Practice</b>	6	2300	5½x8¾	2500	30.00	<b>16.80</b>
<b>Heating, Plumbing and Sanitation</b>	4	1600	7x10	1600	20.00	<b>14.00</b>
<b>Mechanical and Architectural Drawing</b>	4	1720	7x10	1037	20.00	<b>12.00</b>
<b>Motion Picture Work</b>	2	600	7x10	300	12.00	<b>6.00</b>
<b>Law and Practice (with Reading Course)</b>	13	6000	7x10	24	72.00	<b>39.80</b>

## Only 50c a Week

Not only can you buy these books at a rock-bottom price, but we offer them to you on the easiest of monthly payments. If, after seven days' examination, you decide to keep the set you have selected, simply send us \$2 and then \$2 a month until the present low price has been paid. Have you ever heard of a more generous offer?

Don't wait. This means money in your pocket if you act now. Remember, you take no chances whatever—it costs nothing to inspect and you are not obliged to keep the books if you do not care to buy. This offer is open to every man living within the boundaries of the U. S. and Canada. Mail the coupon now—before you turn the page!

**AMERICAN TECHNICAL SOCIETY**  
Dept. X-1209 CHICAGO, U. S. A.

### SPECIAL DISCOUNT COUPON

American Technical Society, Dept. X-1209 Chicago, U.S.A.

Please send me set of.....

for 7 DAYS' FREE examination, express prepaid. I will examine the books thoroughly and, if satisfied, will send \$2 within 7 days and \$2 each month until I have paid the special price of..... If I decide not to keep the books, I will notify you at once and hold them subject to your order. Title not to pass to me until the set is fully paid for.

L.W. 10-17

NAME.....

ADDRESS.....

REFERENCE.....

When writing to Advertisers please mention Popular Science Monthly




**Ladies' Ring  
No. 12B1010**

This solid gold solitaire is the most popular ladies' ring in the world. It is set with a one carat Lachnite Gem of fiery brilliance.

Price.....\$15.75  
Deposit.....3.75  
M'thly Paym'ts 2.00

**Man's Ring  
No. 12B1004**

Men buy more of these rings than of any other. It is handsomely made and has that indefinable mark of the aristocrat. Set with a 3-4 carat Lachnite Gem of supreme brilliance.

Price.....\$15.75  
Deposit.....3.75  
M'thly Paym'ts 2.00

# We'll Send a Lachnite on 10 Days' Free Trial

Don't send us a penny. We'll send you a genuine Lachnite Gem mounted in solid gold—so that you can wear it for for ten full days. These exquisite gems have the eternal fire of diamonds. They are cut like diamonds, stand all diamond tests, and are guaranteed forever. And we will send you *prepaid* either of the superb rings shown above—if you will fill in the the coupon on the left and mail today. Don't send a penny. Wear it for 10 days before you decide to buy. Then if you can tell it from a diamond send it back.

## Pay As You Wish Order from This Ad

When the ring comes just make the first small deposit (\$3.75) with the express agent and then put the ring on your finger. Wear it everywhere you go for 10 full days. After the free trial—if you decide to buy you may pay the balance at the rate of \$2.00 a month without interest. There is no red tape. No mortgages. Your credit is good. And remember, if you aren't more than enthusiastic about your Lachnite—send it back—and your deposit will be refunded instantly.

It isn't necessary for you to fill out an order blank to get a Lachnite on 10 days trial. Just put your name and address in the coupon on the left. Don't send us a penny. We'll send you the Lachnite—mounted in solid gold, fully prepaid. Be sure to give us the size of your finger. To do this, cut a strip of paper just long enough to meet over second knuckle of the finger on which you wear ring.

**Free Trial  
Coupon**

Harold Lachman Co., Dept. 1209  
12 N. Michigan Ave., Chicago

Send me prepaid Ladies' Ring on 10 days' free trial. When it comes I will deposit \$3.75 with the express agent. After 10 days I will either return the ring or send you \$2.00 a month until the balance has been paid. Total cost to me, \$15.75. If I return the ring you will refund me \$3.75 immediately.

## Send the Coupon for Catalog

If you wish to see our handsome catalog before ordering send us the coupon on the right. The catalog is free. You will be under no obligations. It is printed in full colors and shows scores of illustrations of beautiful jewelry. Write today for free catalog.

Harold Lachman Co., Dept. 1209  
12 N. Michigan Ave. Chicago

**Free Catalog  
Coupon**

Harold Lachman Co., Dept. 1209  
12 N. Michigan Ave., Chicago

Gentlemen:—Please send me, absolutely free and prepaid, your new Jewelry Book and full particulars of your free trial, easy payment p.a.n. I assume no obligations.

Name.....


Name.....

Address.....

Address.....

When writing to Advertisers please mention Popular Science Monthly



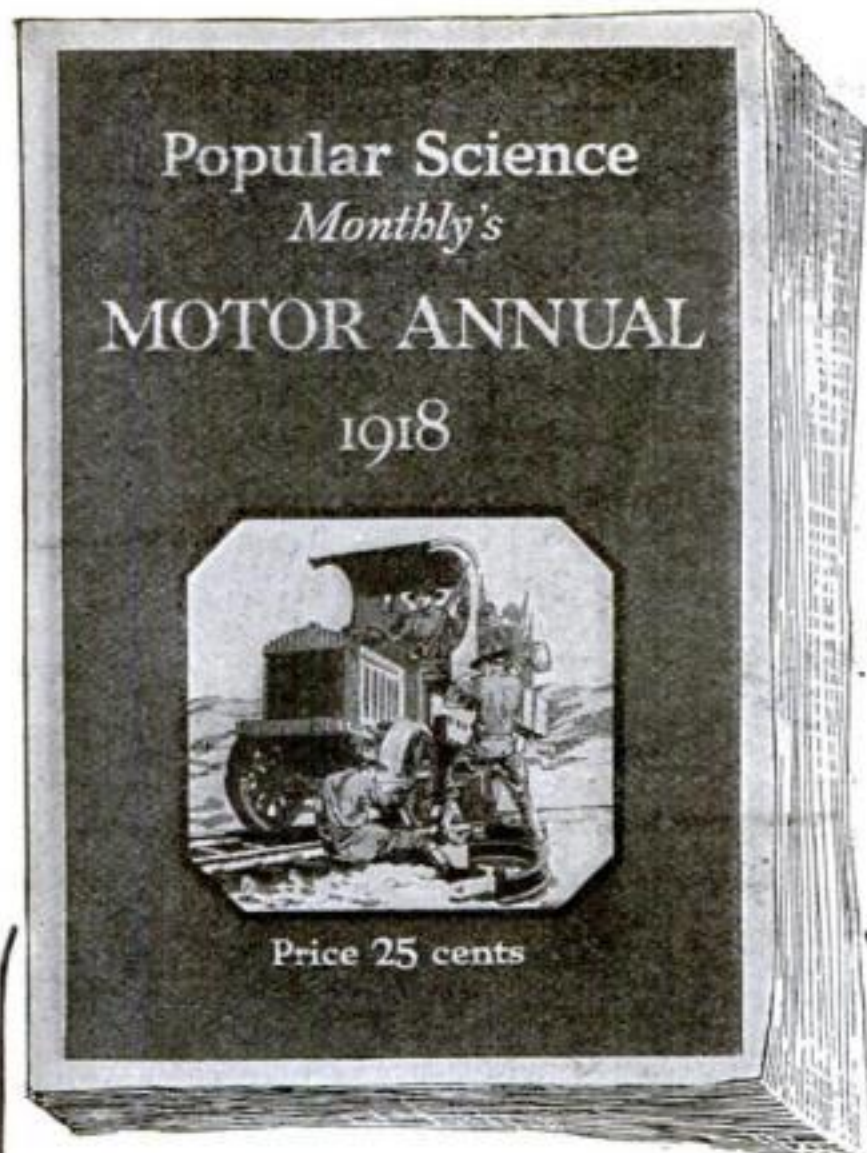

**T**HIS big volume presents, in brief, simple worded articles and with hundreds of pictures, all the important improvements that have been made in cars, trucks and accessories during the past year.

It is an illustrated hand-book of the newest motor information. It contains articles by experts on making tires last long, on secrets of lubrication and other important topics. It is edited by the best authority on automobile matters in the country, Waldemar Kaempffert.

Men who don't mind getting grease on their hands, men who sell and repair cars, men who want to keep posted on all the newest accessories and kinks for motor cars and motor trucks, will find the 1918 Motor Annual an absolute necessity.

The Motor Annual will contain 160 pages, and over 300 illustrations. Ready November 15th. Edition limited. Enter your order now and make sure of getting a copy.

Price, Postpaid, 25 Cents

MAIL THIS COUPON TO-DAY

Popular Science Monthly  
225 West 39th Street, New York

Please send me a copy of the 1918 Motor Annual as soon as published. I enclose 25 cents.

Name .....

Address .....



## "I Got the Job!"

"I'm to be Manager of my Department starting Monday. The boss said he had been watching all the men. When he found I had been studying at home with the International Correspondence Schools he knew I had the right stuff in me. Now we can move over to that house on Oakland Avenue and you can have a maid and take things easy. I tell you, Nell, taking that course with the I. C. S. was the best thing I ever did."

Spare-time study with the I. C. S. is winning promotions for thousands of men and bringing happiness to thousands of homes all over the world. In offices, shops, stores, mines, mills and on railroads, I. C. S. trained men are stepping up to big jobs, over the heads of older men, past those whose only qualification is long service.

## There is a Job Ahead of YOU

Some man is going to be picked for it. The boss can't take chances. He is going to choose a trained man with sound, practical knowledge of the work.

Get busy right now and put yourself in line for that promotion. You can do it in spare time in your own home through the International Correspondence Schools, just as nearly two million men have done in the last twenty-five years, just as more than 100,000 men are doing today.

The first step these men took was to mark and mail this coupon. Make your start the same way—and make it right now.

## INTERNATIONAL CORRESPONDENCE SCHOOLS Box 5841, SCRANTON, PA.

Explain, without obligating me, how I can qualify for the position, or in the subject, before which I mark X.

- |   |  |
|---|--|
| <input type="checkbox"/> ELECTRICAL ENGINEER        | <input type="checkbox"/> SALESMANSHIP            |
| <input type="checkbox"/> Electric Lighting          | <input type="checkbox"/> ADVERTISING             |
| <input type="checkbox"/> Electric Railways          | <input type="checkbox"/> Window Trimmer          |
| <input type="checkbox"/> Electric Wiring            | <input type="checkbox"/> Show Card Writer        |
| <input type="checkbox"/> Telegraph Engineer         | <input type="checkbox"/> Sign Painter            |
| <input type="checkbox"/> Telephone Work             | <input type="checkbox"/> Railroad Trainman       |
| <input type="checkbox"/> MECHANICAL ENGINEER        | <input type="checkbox"/> ILLUSTRATING            |
| <input type="checkbox"/> Mechanical Draftsman       | <input type="checkbox"/> Cartooning              |
| <input type="checkbox"/> Machine Shop Practice      | <input type="checkbox"/> BOOKKEEPER              |
| <input type="checkbox"/> Gas Engine Operating       | <input type="checkbox"/> Stenographer and Typist |
| <input type="checkbox"/> CIVIL ENGINEER             | <input type="checkbox"/> Cert. Public Accountant |
| <input type="checkbox"/> Surveying and Mapping      | <input type="checkbox"/> TRAFFIC MANAGER         |
| <input type="checkbox"/> MINE FOREMAN OR ENGINEER   | <input type="checkbox"/> Railway Accountant      |
| <input type="checkbox"/> Metallurgist or Prospector | <input type="checkbox"/> Commercial Law          |
| <input type="checkbox"/> STATIONARY ENGINEER        | <input type="checkbox"/> GOOD ENGLISH            |
| <input type="checkbox"/> Marine Engineer            | <input type="checkbox"/> Teacher                 |
| <input type="checkbox"/> ARCHITECT                  | <input type="checkbox"/> Common School Subjects  |
| <input type="checkbox"/> Contractor and Builder     | <input type="checkbox"/> Mathematics             |
| <input type="checkbox"/> Architectural Draftsman    | <input type="checkbox"/> CIVIL SERVICE           |
| <input type="checkbox"/> Concrete Builder           | <input type="checkbox"/> Railway Mail Clerk      |
| <input type="checkbox"/> Structural Engineer        | <input type="checkbox"/> AUTOMOBILE OPERATING    |
| <input type="checkbox"/> PLUMBING AND HEATING       | <input type="checkbox"/> Auto Repairing          |
| <input type="checkbox"/> Sheet Metal Worker         | <input type="checkbox"/> Navigation              |
| <input type="checkbox"/> Textile Overseer or Supt.  | <input type="checkbox"/> AGRICULTURE             |
| <input type="checkbox"/> CHEMIST                    | <input type="checkbox"/> Poultry Raising         |

- ☐ Spanish  
☐ German  
☐ French  
☐ Italian

Name .....

Present Occupation .....

Street and No. ....

City ..... State .....

When writing to Advertisers please mention Popular Science Monthly



# Automatic Repeating Rifle

**Fires  
20 Shots in  
One Loading**



Only  
**25c**  
Postpd

This is a regular size automatic revolver. Shoots B.B. shots obtainable anywhere, same as other rifles and guns. Repeats 20 times with one loading. Very handsomely finished. No caps or load necessary, as it works with a spring and shoots with rapidity and accuracy. Simply load with 20 B. B. shot, then press the trigger. Nothing to explode—absolutely harmless and safe. Remember, it is not a mere toy, but the same size and shape as a REGULAR AUTOMATIC. Sent complete with a round of shot for ONLY 25c postpaid. **Johnson Smith & Co.**



## LUMINOUS PAINT

**Make Your Watches, Clocks, Etc., Visible by Night**

The very latest discovery in the scientific world. Hitherto, practically unobtainable except at an exorbitant price, we have at last succeeded in producing this remarkable LUMINOUS PAINT, which, applied to the surface of any article, emits rays of white light, rendering it perfectly visible in the dark. THE DARKER THE NIGHT, THE MORE BRILLIANT IT SHINES. Quite simple to use. Anyone—you can do it. A little applied to the dial of your watch or clock will enable you to tell the time by night. You can coat the push buttons or switch plates of your electric lights, match boxes, and innumerable other articles; make your own Luminous Crucifixes, Luminous Rosaries, etc. Bottle containing sufficient to coat several small articles. Price 25c. Larger sizes 50c and \$1 postpaid. **Johnson Smith & Co., Dept. 112 54 W. Lake St., Chicago**

## INVISIBLE INK

The most confidential messages can be written with this ink, for the writing **MAKES NO MARK**. Cannot be seen unless you know the secret. Invaluable for many reasons. Keep your postals and other private memorandums away from prying eyes. Great fun for playing practical jokes. Only 15c Bottle

## VANISHING INK

Writing written with this remarkable ink vanishes entirely in a few weeks (sooner if desired), leaving the paper **QUITE BLANK**. 15c p.p.d. **LUMINOUS INK** writing can be READ ONLY IN A DARK ROOM; writing shines like fire. Quite invisible at daytime. Very remarkable. 15c



PIANO  
PLAYING  
MADE  
EASY

**New  
Vamping  
Card**

**NO TEACHER NEEDED—SURPRISINGLY SIMPLE SYSTEM**  
Persons having neglected their Musical Education need not despair, for with the aid of our new VAMPING CARD (placing the card upright over the piano keys), you can at once vamp away to thousands of Songs, Ballads, Waltzes, Rag Time, etc., equal to a Professional Musician. No knowledge of music is required. After using it a few times, you will be able to dispense with the aid of the Vamping Card entirely. The price of this very clever invention is only 15 cts. postpaid.

## TRUMPET KAZOO

With the Trumpet Kazoo you can, without previous practice whatsoever, play any tune right off, imitate any bird or animal, bagpipe, snare drum, Punch and Judy, etc. No holes to finger. It is simplicity itself. Produces excellent music. You do not blow into it, but sing, speak, laugh or make any desired imitation. Used with astonishing results at society meetings, home, club or church entertainments, dances, serenades, picnics, outings, excursions. Just the thing for choruses and shows, bicycle and marching clubs, etc. Excellent for vocal or instrumental accompaniments, either with or without other musical instruments. Price, 15c.



## MAGIC FLUTE

**Wonderfully Sweet Toned and Musical**  
A marvelous musical instrument. No other instrument produces sweeter music, whether it be the joyous notes of a quick-step or the solemn strains of a church hymn—in fact, any class of music can be played upon the Humantone without practice, as it is almost a self-playing instrument. When played with a piano accompaniment, the effect is charming. Full printed instructions for playing with each instrument. Price 15 cents. **JOHNSON SMITH & CO.**

## All the Latest Surprising and Joke Novelties

Pharo's Serpents Eggs, box	10c	Mesmerized Penny (defies the law of gravitation)	20c
Miniature Water Pistol	10c	Mysterious Tumbler and Vanishing Coin Trick	25c
Cleopatra's Snake (very lifelike)	15c	Enchanted Bottle (won't lay down)	6c
False Mustache (fool your friends)	6c	Magic Plate Lifter	20c
Ford Auto Puzzle (Latest)	15c	Imitation Gold Teeth	3 for 10c
Magic Flute (anyone can play it)	15c	Great Burglar Puzzle	10c
Rubber Razor (very formidable)	20c	Wire Puzzles, 10c. 22 different	\$1.95
Rubber Dagger (sensational)	20c	"Elec-Trick" Push Button	10c
Window Smashers (great joke)	25c	Inkless Pen (writes with water)	10c
Pocket Detective (see behind you)	15c	Imitation Bed Bugs	10c
Great Mind Reading Mystery Cds.	10c	Squirt Ring	20c
Thurston's Mysterious Trick Cds.	10c	Trick Bill Book	10c
Fighting Roosters, pair	10c	Glass Revolver	25c
Cover the Spot Trick, a scien. nov.	10c		
X Ray Novelty	10c		

**Johnson Smith & Co., Dept. 112, 54 W. Lake St., Chicago**


When writing to Advertisers please mention Popular Science Monthly

# Moore's Universal Assistant and Complete Mechanic

CONTAINS 1016 PAGES, 500 ENGRAVINGS, AND OVER 1,000,000 INDUSTRIAL FACTS, CALCULATIONS, RECEIPTS, PROCESSES, TRADE SECRETS, FOR EVERY BUSINESS!

FOR STERLING VALUE, ELEGANCE, AND LOW COST, THIS WORK HAS NO COMPEER IN THE ENGLISH LANGUAGE.

PRICE \$2.00

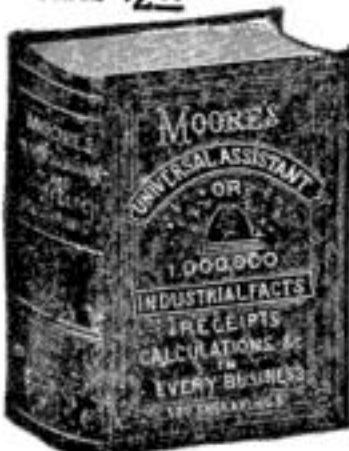

The Work contains 20,000 items for Gas, Steam, Civil and Mining Engineers, Mechanics, Iron Founders, Plumbers, Metal-burgers, Assayers, Miners, Builders, Metal and Wood Workers, Manufacturers, etc. Full details (with 500 Engravings) for constructing, operating, and Repairing Mill and Steam Machinery of every kind, setting of Valves, Link and Valve Motion, Eccentric, Indicator Diagrams, Injectors, Steam Boilers, Gages, Machinists' Tools, Mechanical Movements, Tunnelling, Mining and Rock Drilling Machinery, Wheel Gearing, Gas Meters, Diagrams for Sheet Metal Workers, Views of Noted Buildings, Bridges, Piers of Mills, etc.

FULL INSTRUCTIONS TO ENGINEERS, FARMERS, HOUSE MAKERS, ENGINE AND CAR BUILDERS, ETC. Proportion of Engines, Repairing Locomotive Break-Downs on the Road, Boiler and Steam Pipe Covering, Cement—60 kinds, Bright Polish—4 kinds, Boats Preservatives—10 kinds, to Clean Waste, Details for Cotton, Woolen, and Filling Mill Machinery; disto, for Flour, Outmeal, Saw, Shingle, Planing, Paper and Wood Mills, Grain Elevators, Sugar, Oil, Marble and Rolling Mills, Blast Furnaces, Gas Works, Water Works, Mill Dams, Water Wheels, Hydraulic, Cotton Presses, Speed of Wheels, Pulleys, Drums, Circular Saws, Wood-working Machinery, Horse Power of Steam, Boils, Strength of Metals, Timber, Building Materials, etc. Seasoning of Timber—12 ways, Growth of Forest Trees, Logging, Cost of Supplies, Stream Driving, Lumber Measurement and Surveyors' Tables, full and complete. Views of Lumbering Scenes, Saw Mills, Saw Filing, 12 Engravings. Carpentry, with Diagrams of Roofs, Tonnage Tables, Proportion of Stowage in Ships, Solid Contents of Boxes, Bales, Blanks, Barrels, Timbers, etc.

500 Processes, Tables and Engravings for WATER-MARKING, JEWELLERY, GLASS, PLASTER, COLORED, GILDING, SILVER-PLATING, OPTICIAN, LAPIDARIAN, DIAMOND CUTTING, ENAMELING, Watch Repairing, full details. 800 Items, Estimates, Tables, etc., for Printers and Publishers, Correcting Proofs, Broads and Gold Printing, Inks, Hardening Goggles, Driers, etc. Calculations for Gas Companies, etc. 500 Receipts for France, Morocco, India, CARRIAGE AND ORNAMENTAL PAINTERS, GRASSHOPPER, CARTERS, POLISHERS, GILDERS, CARPENTERS, PLANO, ORGANS, AND PICTURE FRAME MANUFACTURERS. Glass Gliding—6 ways, Wood Filing—12 kinds, Polish—17 kinds, Stains for Wood—64 kinds, to Clean Pictures, to Restore Old Paintings.

ESTIMATES, TABLES, PROCESSES, ETC., FOR BARBERS, CONTRACTORS, PLASTERERS, ROOFERS, BRICK WORKERS, 600 Reliable Remedies for Physicians, DRUGGISTS, FAMILIES; on Bathing, Hygiene, etc. Rules for Emergencies, etc. 10,000 Items for FARMERS, LAND, GRAIN, HAY AND CATTLE MEASUREMENTS, Fencing, Flogging, Fanning, Seed, and Breeding Tables, Contents of Granaries, Corn-crills, etc., at sight, Food Values, to Secure Large Crops, Kill Farm Pests, Root Out Weeds, 16 Powerful Fertilizers, Horse and Cattle Remedies, Rotation of Crops, to Break Train and Shoo Horses, Compound Food for Stock, Steam Power on Farms, Rural Economy; on Bee and Bee-keeping, Illustrated, Construction of Hives, Plans for Bards, etc., Butter and Cheese Making, Baking Stock, etc. 200 Receipts for Paper Makers, Dyers, Bleachers, Furriers, Hatters, Straw Work, Waterproofing, Cleaning, Laundry Secrets, Soaps, Washing Powders, Aniline Colors, etc. Matches, Colored Fires, Fire Kindlers, Composition, Souffles, etc.


400 ITEMS FOR HUNTERS, TRAPPERS, TAXIDERMISTS, TANNERS, CURRIERS, BOOT, SHOE, AND HAT MAKERS, BROWN MANUFACTURERS. 200 Items for BAKERS, COOKS, etc. Items for CARRIAGES AND WAGON MAKERS, CARPENTERS, MARBLE AND STONE CUTTERS, ARCHITECTS, ETC. Strategies, Triumphs, and Portraits of Noted Engineers, 10,000 Trade Secrets and Scientific Facts, 60 Tables, with over 100,000 calculations in every Occupation, Business Forms, all kinds Patent Office Rules, Fees, etc. For MERCHANTS AND BUSINESS MEN: Cardinal Rules for Success in Trade, Advertising, Attracting Customers, Business Locations, Marking of Goods, Buying and Selling, Cash and Credit Systems. How to deal with Insolvent who never pay. Arrangement of Goods in Store, on Commercial Travellers. How to do Business with Banks, Legal Advice, etc.; a Synopsis of the Special Laws of 49 States, Territories, and Provinces in the United States and Canada, relating to the Collection of Debts, Exemptions from Forced Sale, Homestead Laws, Mechanics' Lien, Assignment, Garnishment, Arrest and Attachment for Debt, Collection of Bills and Notes, the Jurisdiction of Courts, Judgments, Executions, Mortgages, Transfer of Real Estate, Deeds, Rights of Married Women, Wills, Limit of Time in Actions for Debt, Interest and Usury Laws, etc.

**JOHNSON SMITH & CO., Dept. 111, 54 W. Lake St., Chicago**

## NEW BOOK ON ROPE SPLICING

Useful Knots, Hitches, Splices, etc.

How Different Knots Are Made and What They Are Used For  
**PRICE 20c**

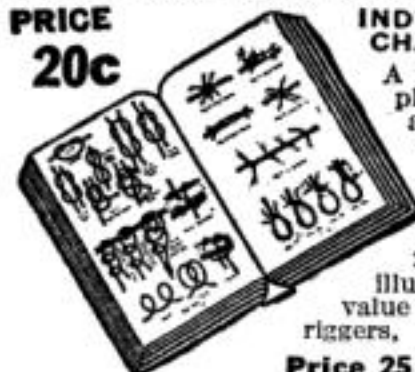

**INDISPENSABLE TO EVERY MECHANIC AND RIGGER.**

A most practical handbook giving complete and simple direction for making all the most useful knots, hitches, rigging, splices, etc. Over 100 illustrations. All about wire rope attachments, lashing, blocks, tackles, etc. 37 Heraldic Knots Illustrated. Of great value to mechanics, riggers, campers, boatmen.

Price 25 cents postpaid.

**JOHNSON SMITH & CO., Dept. 112, 54 W. Lake Street, Chicago**

## HOW TO BREED AND MANAGE RABBITS



The breeding of rabbits is a very fascinating hobby, as well as a very profitable employment. Rabbits are most prolific breeders, very easy to manage, summer or winter. Cold weather does not affect them. In some countries the breeding of rabbits has grown to such an extent that it is quite an industry. As a food, cooked Rabbit is most appetizing and deliciously tender. This book treats on the matter both as a pet, and as a matter of profit. Tells how to arrange their houses, gives careful instruction as to their food and treatment in both health and disease. PRICE 10c, postpaid.

**JOHNSON SMITH & CO., Dept. 112, 54 W. Lake Street, Chicago**

## Sneezing Powder STAGE MONEY



Place a very small amount of this powder on the back of your hand and blow it into the air, and everyone in the room or car will begin to sneeze without knowing the reason why. It is most amusing to hear their remarks, as they never suspect the real source, but think they have caught it one from the other. Between the laughing and sneezing you yourself will be having the time of your life. For parties, political meetings, car rides, or any place at all where there is a gathering of people, it is the greatest joke out. Price 12 cents, or Three Packages for 30 cents.

With a bunch of these bills, it is easy for each person of limited means to appear prosperous. By flashing a roll of these bills at the proper time and peeling off a genuine bill or two from the outside of the roll, the effect created will be found to be all that can be desired. Prices, postpaid: 15 Bills 10c, 50 Bills 25c, 125 for 50c, or \$3.50 thousand.

**JOHNSON SMITH & CO., Dept. 112, 54 W. Lake St., Chicago**



# HERE IT IS

**Final Solution of the  
Vibrator Problem  
Absolutely Astonishing  
NEWEST  
and Greatest  
Invention**



You know that Vibration means new life, power, health, beauty. You know it is Nature's way to banish pain and to give you new energy and vitality. You know all this, but do you know that the BIG problem of science has been to devise a hand vibrator that would be absolutely satisfactory in every way! That problem has vanished. We solved it. Our NEW, wonderful Vitapulser is GUARANTEED to effect ALL the astonishingly beneficial

results made possible by this approved method of treatment.

## THE VITAPULSER

Is practical. It requires no connection with electric wires—supplies its own power. Safe, light, compact, easy to handle and cannot get out of order. It is the modern choice of physicians and thousands of careful buyers.

**EVERYONE CAN AFFORD  
This Marvelous Instrument**

If you have not been able to afford a Vibrator on account of the high price, here is your opportunity to own one. *No income too modest to afford The Vitapulser:* sells for a fraction of price of others. Don't be dull, weak, mentally or physically depressed. Learn about the Vital Impulse; how to gain real health and Natural beauty. *The Vitapulser will make you over.* Give us a chance to prove it! SENT ANYWHERE ON APPROVAL for testing purposes. No obligation to buy. Write today for Free remarkable book "The Vital Impulse" and Special Approval offer.

**Commonwealth Electric Mfg. Company,  
405 Rialto Building, St. Louis, Mo.**

## FREE!



A flying model aeroplane and all materials to build your own scale model, *Free* with our great Home Course in the Principles of Aviation. **Write at once—before this offer is withdrawn.** Learn the Science of Aviation at Home—under guidance of Experts. Tremendous demand for men who know aviation. Wonderful future. Prepare now. Write us today. **NATIONAL AERO INSTITUTE, Dept. 9209, Morton Bldg., CHICAGO**

Write for a Copy of our Classified Rate Card. It gives full particulars about Classified Advertising in this magazine, and contains a complete list of headings which are arranged to cover thoroughly the numerous subjects that may be advertised effectively in this section. Popular Science Monthly, 225 W. 39th Street, New York City.

## TELEGRAPH INSTRUMENTS

\$1.10  
to  
\$21  
This  
Set  
\$1.90



Learn telegraphy at home on one of our instruments. Our Catalog of Electrical Merchandise illustrates and describes high quality keys, sounders, private line sets, relays, learner's outfits and automatic telegraph transmitters, and quotes low prices. It is a book every boy interested in telegraphy should have. Send for your copy today. Ask for Electrical Merchandise Catalog No. 91P18.

**SEARS, ROEBUCK AND CO.  
CHICAGO**



## Your Choice Sent on Free Trial

**HERE** you can get any known instrument sent to you for a free trial of one week in your own home.

And every article is offered at the rock-bottom price. You will be astonished at these values. And then—this rock-bottom price may be paid at the rate of only a few cents a day. Ten cents a day buys an exquisite triple silver-plated Lyric Cornet. But first write for our new catalog.

## WURLITZER

200 years of instrument making

The name "Wurlitzer" stamped on musical instruments has stood for the highest quality for nearly two centuries. We are manufacturers or importers of every known musical instrument and every one is sold direct to you at the rock-bottom, direct-from-the-manufacturer's price. We supply the U.S. Government.

**10c a Day** You will be astonished at the many instruments you may pay for at the rate of 10c a day. On this great special offer you have over 2000 items to choose from. *Any one of these will be shipped to you for one week's free trial in your own home.* The Cornet, Violin and Saxophone illustrated here are but three out of the thousands of remarkable offers that we make.

## Send the Coupon

But first put your name and address on the coupon now and get our big, new catalog absolutely free. Just state what instrument you are interested in and we'll send you the big 176-page book free and prepaid.

**The Rudolph Wurlitzer Co.**  
Dept. 1209  
E. 4th St., Cincinnati, O.  
S. Wabash Av., Chicago

The Rudolph  
Wurlitzer Co.  
Dept. 1209  
E. 4th St.,  
Cincinnati,  
O.  
S. Wabash Av.,  
Chicago

Gentlemen: Please send me your 176-page catalog absolutely free. Also tell me about your special offer direct from the manufacturer. I am interested in:

(Name of instrument here)

Name.....

Address.....

When writing to Advertisers please mention Popular Science Monthly



**"Spare Time Study Does It"**

# ELECTRICAL ENGINEERING

**in 18 Months!**

Study our thorough, simplified, practical, complete course in Electricity in spare time for 18 months.

Train for a career as Electrical Engineer. The work is intensely fascinating.

You do the experiments yourself just as if you were actually engaged in the work.

You learn theories and their practical application.

## ELECTRICITY

### The Eleven Billion Dollar Industry

offers wonderful opportunities for experts. Training is absolutely essential for the big electrical manufacturing companies and Light and Power Plants cannot turn over their costly equipment to incompetents.

**\$2500 to \$5000**

**A Year, for You**

Others are earning these big salaries **and so can you.** It's simply a matter of **training.** And the training you need to put you in one of these positions can be obtained right in your own home.

### SEND THE "SUCCESS" COUPON

American  
School of  
Correspondence,

Dept. E-1209,  
Chicago, U. S. A.

Please send me your  
free book on Electrical  
Engineering.

Put your name and address  
on the coupon or send letter  
or postcard for big free book  
that points the way to  
success in Electrical En-  
gineering.

**Hundreds  
of splendid posi-  
tions open.**

**Mail the  
Coupon**

**NOW**

Name.....

Address .....

## Practical 25-Cent Handbooks

*for the Student, Experimenter and  
Practical Worker*

### How to Make Wireless Instruments

This book contains complete directions for making a Two-Mile Wireless Telegraph Set and also numerous approved wireless apparatus for both high and low power sets. 94 pages, 30 Different Instruments, 80 Illustrations. 25c postpaid.

### Construction of Induction Coils and Transformers

Tells how to design and build magnetic leakage transformers, high frequency apparatus, low voltage transformers, induction coils, condensers, gaps, etc., and gives dozens of valuable hints. 96 pages, 72 Illustrations. 25c postpaid.

### Popular Science Monthly

225 W. 39th St., New York, N. Y.

## "Electricity Made Simple"

A BOOK devoid of technicalities. Simple, plain and understandable. Students and electrical workers whose opportunities for gaining information on the underlying principles of electricity have been limited will find this book of inestimable value. 233 Pages, 108 illustrations. Price \$1.00.

**POPULAR SCIENCE MONTHLY**  
225 W. 39th St., New York

## Handy Electrical Dictionary

Contains upward of 4,800 words, terms and phrases employed in the electrical profession, with their definitions given in the most concise, lucid and comprehensive manner. Although the book is small enough to fit in the vest pocket, we venture the assertion that there is contained within its covers more reliable and useful information for the electrician, than was ever before published in a single volume. Cloth, Red Edges, Indexed. Price, 25 Cents. Full Leather, Gold Edges, Indexed. Price, 50 Cents.

**Popular Science Monthly**  
225 W. 39th St., New York City

When writing to Advertisers please mention Popular Science Monthly



# New KEROSENE LIGHT BEATS ELECTRIC OR GASOLINE

10 Days FREE—Send No Money

Men With  
Rigs or Autos  
Make

**\$100 to \$300  
Per Month**

Our trial delivery plan makes it easy. No previous experience necessary. Practically every farm home and small town home will buy after trying. One farmer who had never sold anything in his life before writes: "I sold 51 the first seven days." Christensen, Wis., says: "Have never seen an article that sells so easily." Norring, Iowa, says: "92 per cent of homes visited bought." Phillips, Ohio, says: "Every customer becomes a friend and booster." Kemerling, Minn., says: "No flowery talk necessary. Sells itself." Thousands who are coining money endorse the Aladdin just as strongly.

**No Money Required.**

We furnish stock to get started. Sample sent prepaid for 10 days' free trial and given absolutely without cost when you become a distributor. Ask for our distributor's plan. State occupation, age, whether you have rig or auto; whether you can work spare time or steady; when can start; townships most convenient for you to work in.

BURNS  
94%  
AIR



**TWICE THE LIGHT  
ON HALF THE OIL**

**Get One FREE**

We don't ask you to pay us a cent until you have used this wonderful modern white light in your own home ten days, then you may return it at our expense if not perfectly satisfied. We want to prove to you that it makes an ordinary oil lamp look like a candle; beats electric, gasoline or acetylene. Passed by Insurance Underwriters. Children handle easily. Tests by U. S. Government and 35 leading Universities show that the new **ALADDIN**

**Burns 50 Hours on One Gallon**

common kerosene (coal oil), no odor, smoke or noise, simple, clean, won't explode. Over three million people already enjoying this powerful, white, steady light, nearest to sunlight. Won Gold Medal at Panama Exposition. Greatest invention of the age. Guaranteed.

**\$1000 Reward** will be given to the person who shows us an oil lamp equal to the new Aladdin in every way (details of offer given in our circular). We want one user in each locality to whom we can refer customers. To that person we have a special introductory offer to make, under which one lamp is given free. Write quick **Yours FREE** for our 10-Day Free Trial Offer and learn how to get one free, all charges prepaid. **Yours FREE**

**MANTLE LAMP CO., 315 Aladdin Building, CHICAGO, ILL.**  
Largest Kerosene (Coal Oil) Mantle Lamp House in the World

## Sexual Knowledge ILLUSTRATED

By Winfield Scott Hall, M.D., Ph.D.

**Make Sex Facts Plain**—What every young man and young woman, young wife and husband, father, mother, teacher and nurse should know.

Cloth Binding—320 pages, illustrated.

Table of contents, and commendations, on request.

**AMERICAN PUB. CO., 1217 Winston Bldg., Philadelphia**

**Complete**

**\$1.00**

**Postpaid**

Mailed in plain wrapper

Our New Book Catalog containing hundreds of electrical, mechanical and scientific books together with synopsis and price of each will be sent anywhere on request. A postcard will do. Book Department, Popular Science Monthly, 225 West 39th Street, New York City.



## WIZARD KEY CUTTER

can be attached to any hand or power grinder. Cuts keys for Yale and all other cylinder locks in a jiffy. Used for years by Locksmiths, Hardware Dealers, Hotels,

Office Buildings, and Apartment Houses. Absolutely accurate. Price complete... **\$8.50**

**MONEY REFUNDED IF NOT SATISFIED.** Made only by **Specialty Manufacturing Co., Arlington, Mass.**

Make easy money cutting keys. Write for particulars.

**SEND TODAY FOR**



**VENTRILOQUISM**

Taught almost anyone at home. Small cost. Send today 2c stamp for particulars and proof.

**O. A. SMITH, Room R. 555 - 823 Bigelow Street, Peoria, Illinois**

## ASBESTOS

We are miners and shippers of Crude Asbestos in any quantity. We produce all grades at our world famous **BELL ASBESTOS MINES**, in Canada. We also card fibres, spin yarns, weave cloths, and make all sorts of Asbestos products.

For anything you want in Asbestos, turn to

**KEASBEY & MATTISON COMPANY,**  
Dept. S-4, AMBLER, PENNA., U. S. A.


**Owners of the world's largest Asbestos Mines.**



## Tool Cases

for Machinists and Tool Makers, none better; seventeen styles. Quartered oak and covered. Ask for booklet, "Built for Service."

**The Pilliod Lumber Co.**  
Swanton, Ohio

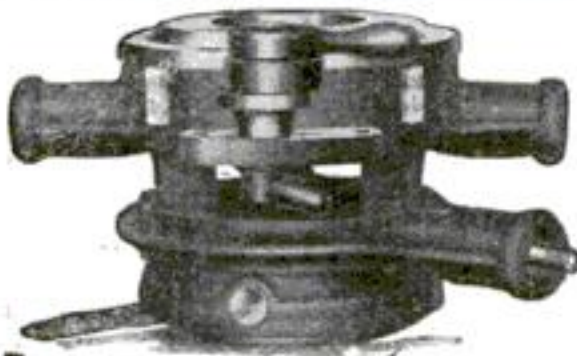


## OSTER BULL-DOG DIE-STOCKS

**WHEN** threading pipe take advantage of the 5 Big Oster Features. They save time, fuss and labor.

- (1) Self-Locking, adjustable dies.
- (2) Self-Centering pipe guides.
- (3) Dies open up at end of cut and tool lifts off pipe without "unwinding."
- (4) Three-lever control, doing away with loose parts, bushings and lock-nuts.
- (5) No small, breakable parts.

**No. 102 Ratchet**  
**1/4 in. to 1 1/4 in.**

**The Oster Mfg. Co., 2180 East 61st St., Cleveland, Ohio**

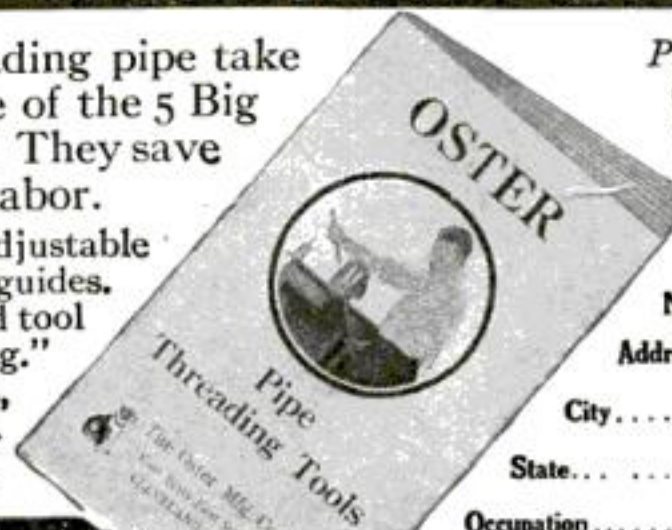

Please send free  
Catalog of  
20 tools, plain  
or ratchet.

Name.....

Address.....

City.....

State.....

Occupation..... (2180)

When writing to Advertisers please mention Popular Science Monthly





# OSTER

## Threading Machines

THREADING straight pipe, bent pipe, nipples and bolts, and requiring only a few square feet of floor space, an Oster


pays big dividends in money saved over hand-threading; three days' work a month pays a profit on the investment.

Twenty-five years of specialized study and experience have made OSTER Machines so simple in design and construction that a boy can operate them.

**THE OSTER MANUFACTURING COMPANY**  
2180 East 61st Street

CLEVELAND, OHIO, U. S. A.

Send for  
List 30.

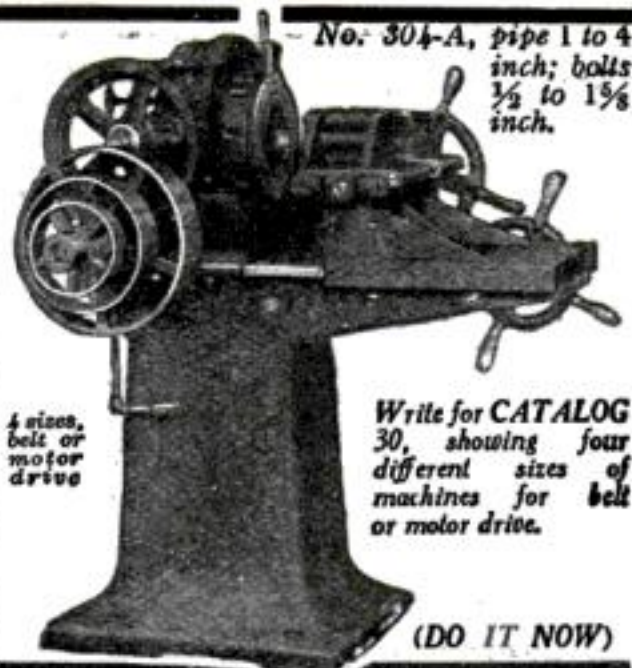

No. 304-A, pipe 1 to 4 inch; bolts 1/2 to 1 1/8 inch.

4 sizes, belt or motor drive

Write for CATALOG 30, showing four different sizes of machines for belt or motor drive.

(DO IT NOW)

### BIG PROFITS with this BATTERY CHARGER

Hundreds of garage owners are clearing \$20 to \$60 profit every month with this 500-Watt H-B quick-charging equipment. Recharges one to seven batteries at a time, at cost of about 15c per battery. Autoist pays 75c to \$1.50. At least \$4.50 profit each capacity run.

#### \$15 Puts This Money-Maker In Your Garage

Balance in eight monthly payments of \$20 each. Earnings will quickly pay for machine. Every outfit fully guaranteed. Tear out this ad and send with name for full particulars.

**HOBART BROS. CO., Box S12, Troy, Ohio**



Dealers  
Wanted



\$7.50

—GRIND YOUR OWN TOOLS  
—SHARPEN YOUR OWN CUTLERY  
—POLISH YOUR OWN SILVER  
with this guaranteed

### Universal Motor

A. C. or D. C. 110-130 volts


Attached to any socket it will save money and perform many household or shop duties. Complete with emery, wheel, buffer, cord and plug for \$7.50. A life sized motor at a low price—write today.

**RACINE UNIVERSAL MOTOR CO.**  
609 Monadnock Bldg., Chicago

Makers of Fans, Vacuum Cleaners, Motor Appliances of All Kinds

### KEROSENE ENGINES

OTTAWA LATEST DESIGN



Durable, powerful, reliable, massive, built to last; to do hard, heavy work. Uses cheapest fuel, pulls 1/2 to 1 1/2 H. P. more than rated. Three Months' Trial, Easy Terms. Sizes 1 1/2 to 22 H. P. Easy to start. No cranking. No batteries. Ten Year Guarantee. Most practical engine ever built.

**ENGINE BOOK FREE, A POSTAL BRINGS IT.**

**OTTAWA MANUFACTURING CO., 1951 King St., OTTAWA, KANSAS**

\$1.00

Oh Boys! Here's a magazine after your own heart. It has the punch. It's a Crackerjack and Fuli of Pep. One dollar brings it to your home for one year. Send that dollar today.

### EVERYDAY ENGINEERING,

846 Aeolian Building

33 West Forty-second Street New York



**THE MIDGET SLIDE RULE** will add, subtract, multiply, divide, solve problems involving even and uneven roots and powers. It will also give the Logarithms of numbers and the Sines, Cosines Tangents and Cotangents of all angles.

An arrow points to the answer of every problem that is solved on this slide rule. Its operation is very simple and anyone can quickly learn to solve any mathematical problem. For example—What is the cube root of 9,800? Answer 21.4. Time required to solve this problem using a Midget Slide Rule, 10 seconds.

This instrument is made of wood and metal and is adapted for shop as well as office use. It is small enough to be carried in the pocket, being 3 1/4 inches in diameter.

Price with complete instructions, 75c. Your money back if you are not satisfied.

**GILSON SLIDE RULE CO., Niles, Mich.**

### SAVE MONEY ON ENGINES

Buy direct from my factories, where I build a powerful, economical, reliable, perfectly designed Galloway Masterpiece Engine from the highest quality materials and sell to you at lowest manufacturers' price. Tens of thousands in satisfactory use. All sizes from 1 1/2 to 16 h.p. portable, stationary, saw rigs, pumping outfits. They operate on

#### GASOLINE OR KEROSENE

Also build manure spreaders, cream separators. 200,000 satisfied customers, come near you. Close shipping points save freight. My free catalog describes Galloway goods. Get it before buying.

**WM. GALLOWAY CO., Box 4005 Waterloo, Iowa**



Quality  
First



### TOOL CASES

for  
Machinists and Toolmakers

Write for our booklet showing the best built and most practical selection of Tool Cases on the market. We ship direct from factory and guarantee to please you or refund all money.


*J. Gerslauer & Sons.*

50 Columbia St. Dayton, Ohio

Cut your own glass circles, auto headlights, etc., with this

## "RED DEVIL" CIRCULAR GLASS CUTTER

Cuts circles and curves from plain and plate glass 2 to 20 inches in diameter. Steel cutting wheel, adjustable rod. Rubber cloth mat to prevent from slipping on glass. Style No. 033, sample 50c postpaid. Glaziers' Tool Booklet free.

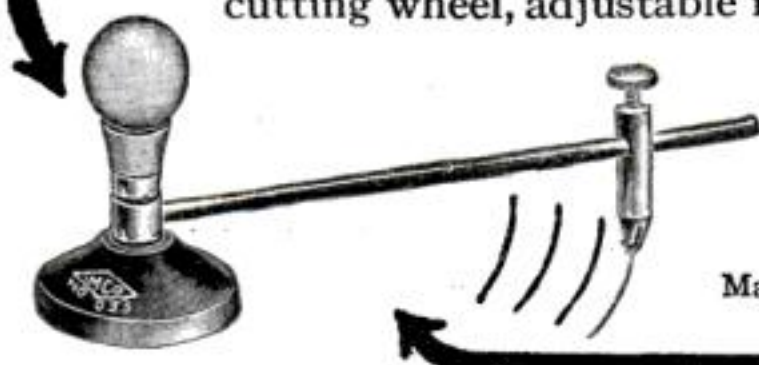

**SMITH & HEMENWAY COMPANY, Inc.**

126 Coit Street, Irvington, N. J.

Manufacturers of "RED DEVIL" Pliers, Bits, Screw Drivers, Hack Saws, Mitre Boxes, Glass Cutters, etc. To be obtained from all good dealers.





Our Latest

No. 17


— 84 pages (illustrated) —

## You Will Find This Booklet A Decided Help When You Order Tools

Contains a fund of information and data on tools for electrical construction and repairs of all kinds. Write for a copy. Sent gratis, postpaid, on request.

Ask for No. 17

**MATHIAS KLEIN & SONS, Mfrs.**  
CANAL STA. 3 CHICAGO



**1/2 and 1 H.P. Multi-Motor**

Most powerful and simplest little engine made. Economical and dependable power for farm and home. Burns gas or gasoline. Light, indestructible, low-priced. Write for folder and factory-to-you price.

THE MAYTAG CO. Dept. 231 Newton, Iowa

A  
B  
A  
R  
G  
A  
I  
N



O  
R  
D  
E  
R  
  
N  
O  
W

**\$3** Cash with order buys this  
**BENCH LATHE**  
Swing 3 in. 8 in. C. to C. Shipping Wt. 10 Lbs.  
Peter Austin, 910 W. First St., Muncie, Ind.

## FOR HIS CHRISTMAS—\$1.30

will purchase one of our patented **Compound Lever VEST POCKET SNIPS**. They are 7 inches long and stamped from the same grade of crucible tool steel that our larger shears are made from. Guaranteed to cut 24 gauge metal. Highly polished and packed in individual boxes. Sent postpaid in U. S. or Canada upon receipt of price. If desired we can furnish in nickel-plated finish for 50 cents additional.

**DROP-FORGED Compound Lever Snips \$2 to \$4.60 FOR HIS XMAS**

Made for hardest service. Highly tempered crucible tool steel, drop forged. Cuts keen. Holds the edge. Cuts 18-gauge metal at point easily—cutting power three times that of ordinary straight snip. For sale by dealers or sent postpaid in the United States at these prices:

- 8-inch . . . \$2.00
- 10-inch . . . 3.00
- 12-inch . . . 4.00
- 14-inch . . . 4.60

**BARTLETT MFG. CO., 31 E. Lafayette Ave., Detroit, Mich.**

When writing to Advertisers please mention Popular Science Monthly



# Three Hands Working Here

Study this operation. Screw-driving brings up many similar situations. Your left hand holds in place the object to be fastened. The "YANKEE" Screw-holder Bit—the third hand—holds and places the screw. Your right hand simply pushes. A spring in the screw-driver brings the handle back—QUICK—and steadies the drive. Not a moment is lost—not a slip made. So, there's a third hand for you in this combination:

## "YANKEE"

**No. 130**  
SPIRAL RATCHET  
(right, left and rigid)  
QUICK RETURN

## Screw-driver

# \$2.40

with 3 sizes of regular bits

## Screw-holder Bit

# 45c

Other attachments: Screw-eye Holder; Chuck and Eight Drill Points; Countersink.

No. 131—Heavy Size, \$3.15  
No. 135—Light Size, \$1.85  
with 3 sizes of bits

**Your Dealer Can Supply You**

"YANKEE" Tool Book of boring, drilling and screw-driving tools free for the asking.

**NORTH BROS. MFG. CO.**  
PHILADELPHIA

# "YANKEE" TOOLS

## Make Better Mechanics



# BROWN & SHARPE TOOLS



## Make Skilled Hands More Skillful

Of all the world's craftsmen none depend so much on the tools of their trade as the machinist and toolmaker. Their skillful hands must be supplied with tools of proved accuracy and known reliability. That's why so many manufacturers equip their tool cribs and so many machinists, toolmakers and apprentices equip their kits with Brown & Sharpe Tools—the choice of three generations of mechanical workers.

Among the thousand varieties contained in this line there's the right tool for every precision requirement.

## Have You a B & S Tool Catalog 27 For Your Tool Kit?

*Copy Sent Free on Request*

**BROWN & SHARPE MFG. CO.,**  
Providence, R. I., U. S. A.

# ACCURACY

# Stanley Tools

## "No. 34"

A Hand-Book full of interesting information for

Carpenters  
Machinists  
Masons  
Plumbers  
Amateurs

Pattern Makers  
Cabinet Makers  
Millwrights  
Wheelwrights  
Householders

It not only illustrates and describes over four hundred Stanley Tools, but also contains a number of very handy tables.

Convenient size to carry in the pocket.

Sent postage prepaid to any part of the United States or Canada without charge.

*Ask for Catalog No. 34L*

Address

**STANLEY RULE & LEVEL CO.**  
NEW BRITAIN, CONN. U.S.A.

## Pattern Maker's Tool Chest

Style J—



**Patternmakers' Special**  
Leatherette covered. Solid mahogany fronts. Extension drawer slides. Felt lined throughout. A real tool chest to meet your particular requirements. Guaranteed.

Eighteen other styles and sizes—quartered and plain oak and leatherette covered. Perfectly designed. Guaranteed.

## Buy This "UNION" TOOL CHEST

and stop the nuisance of lost tools. Has a place for every tool to keep it safe, clean, free from knocks and moisture—you know immediately if one is mislaid or borrowed. Write for our Catalog and Prices. If we have no dealer near you, get our special offer.

**UNION TOOL CHEST WORKS** 24 Railroad St.  
Rochester, N. Y.

## Genuine Armstrong Stocks and Dies



Some of the advantages of Genuine ARMSTRONG Stocks and Dies:

Can be adjusted to the variations in the size of fittings. Results are accomplished with less work and time. Can be sharpened without drawing the temper. The Dies are interchangeable in the stocks.

**Have You a Set in Your Kit?**

Our catalog tells the rest of this interesting story, send for it *to-day*.

**THE ARMSTRONG MFG. CO.**  
337 Knowlton Street - Bridgeport, Conn.



# SIMONDS



Artisans give preference to SIMONDS SAWS because they know the quality that is "built" right in them.

They do their work faithfully like all good saws should—easily—quickly—smoothly.

It's a pleasure rather than a task to use a SIMONDS SAW, whether for metal or wood.

You will find it so.

Send for your Simonds Booklet.

**Simonds Manufacturing Co.**  
 "The Saw Makers"  
 Est. 1832  
 FITCHBURG, MASS.  
 Five Factories Eleven Branches



## GAGES—

whether screw pitch, thickness, radius, tap, taper, wire or drill—you will find them useful in determining thickness, radii of fillets, comparisons of screw pitches, and measuring tapering parts.

## Starrett Gages

are made in a compact pocket design with thin leaves. The teeth of the screw pitch gages are accurate profiles of standard threads—figures can be easily read.

Many Starrett Tools have a wide range of general utility.

Send for 342-page catalog No. 21W which describes rules, squares, levels, calipers, micrometers, vernier calipers, gages, and hack saws.

42-570

**The L. S. Starrett Co.**  
 The World's Greatest Tool Makers  
 Athol, Mass.



When writing to Advertisers please mention Popular Science Monthly




# Oxy-Acetylene Welding and Cutting

## Most Metal Manufacturers Can Save by Welding

**T**HE manufacture of metal beds strikingly illustrates the advantages of oxy-acetylene welding—the decided savings of time, labor and materials. Parts formerly riveted required boring, which decreased strength and increased labor costs. By welding, these parts are now fused into one piece of uniform strength. The welding process, as used today, has virtually revolutionized metal bed manufacture.

Stronger, neater products, simplified production, lower costs and *minimized material waste*—these all-important factors are open to every manufacturer of metal products.

Oxy-acetylene welding has proved its value in nearly every line of metal manufacture from the making of delicate jewelry to massive locomotives. It is, in many instances, supplanting the bolt, rivet and threaded joint, when two pieces of metal are to be joined.

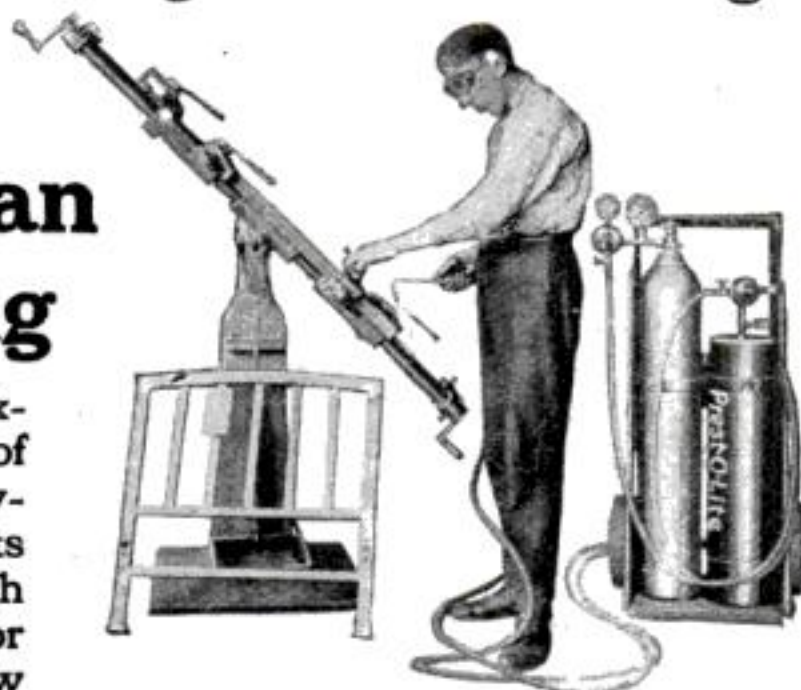

*One of the oxy-acetylene welding operations employed in metal bed manufacture by The Simmons Company factories at Kenosha, Wisconsin*

## Prest-O-Lite PROCESS

Insures better welds, quicker work and lower operating costs. Offers a simple, inexpensive welding outfit for all classes of work. Prest-O-Lite Dissolved Acetylene is furnished in convenient cylinders, making the welding outfit portable for use inside or outside the shop. The Prest-O-Lite System of exchanging empty cylinders for full ones insures universal, perpetual service. Avoids large initial investment and depreciation.

Millions of dollars' worth of valuable castings, machine parts and tools are being reclaimed from the scrap-heap by this process. Railroads, foundries, mines, machine shops and garages—using it exclusively for repair work—are realizing big returns. One quick repair may save the entire cost of a Prest-O-Lite outfit by avoiding a tie-up through the break-down of an important machine. Wherever metal parts are to be joined, welding merits investigation.

Our literature shows hundreds of profitable uses for the Prest-O-Lite Process, in manufacturing, construction and repair work. Write for it.

### A Profitable Business for Garages and Repair Shops

The substantial profits to be made on oxy-acetylene welding work present a splendid opportunity to enterprising service garages and repair shops. The demand for welding is large and growing fast. The cost of necessary equipment is low. Send for full details—today.

**The Prest-O-Lite Co., Inc.**

U. S. Main Offices and Factory  
830 SPEEDWAY, INDIANAPOLIS  
Canadian General Office  
Dept. A-3 TORONTO, ONT.

59 Branches and Charging Plants



## World's Largest Makers of Dissolved Acetylene



# For the Home Workshop

**W**HETHER used in the line of business or for amusement, a lathe in your workshop opens up a new world of possibilities — a sort of fourth dimension. It enables you to make models, patterns, small machines, in wood or metal, that were utterly impossible before. The Amateur Bench Lathe fills this need at the least expense consistent with quality. It is well made, of good materials, excellent design, and accuracy sufficient for all ordinary uses. It takes work up to 12 inches in length and has a swing of 7 inches. The lathe proper is furnished complete as shown, with a saw arbor and a three-jawed chuck in addition.

With various attachments that you can get from us or make yourself, it is possible to do almost any wood or metal work within the capacity of the machine.

For more information about the lathe, or about the 1500 other good tools, send for the complete catalog.


**GOODELL-PRATT COMPANY**

*Toolsmiths*

GREENFIELD, MASS.

*Partial List of  
Goodell-Pratt Tools*

Hacksaws	Screw-drivers
Drills	Micrometers
Levels	Calipers
Grinders	Mitre Boxes
Vises	Bit Braces
Squares	Glass Cutters

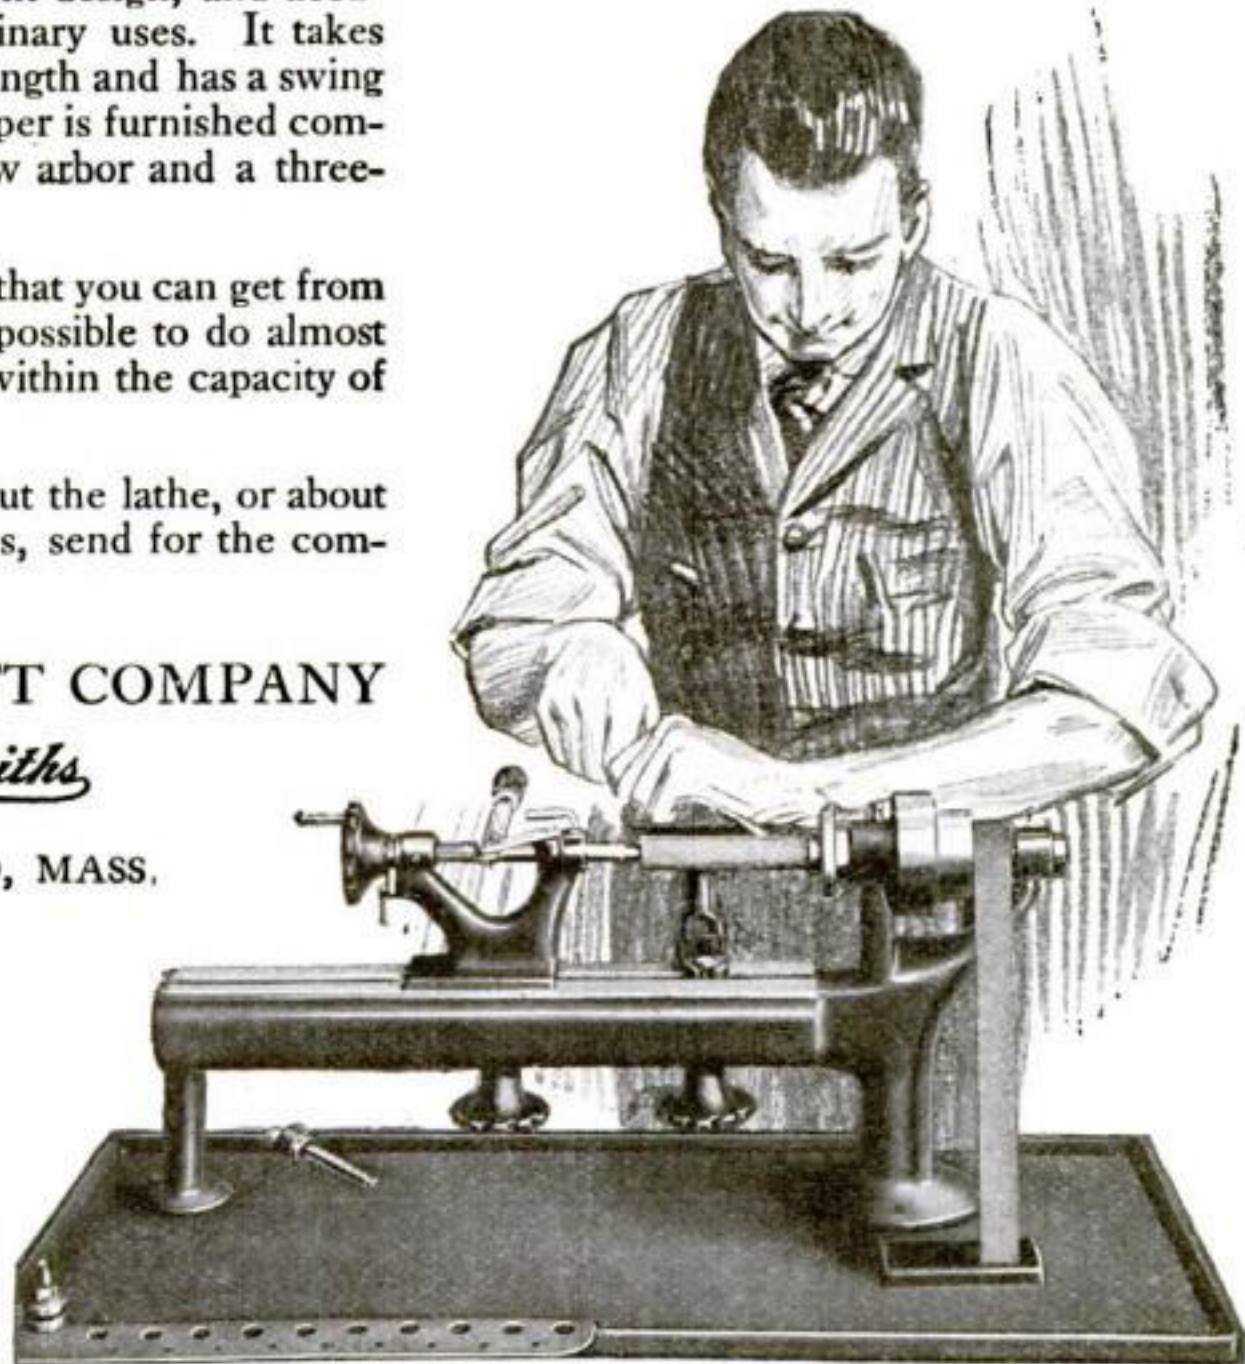


# GOODELL PRATT

## 1500 GOOD TOOLS

When writing to Advertisers please mention Popular Science Monthly



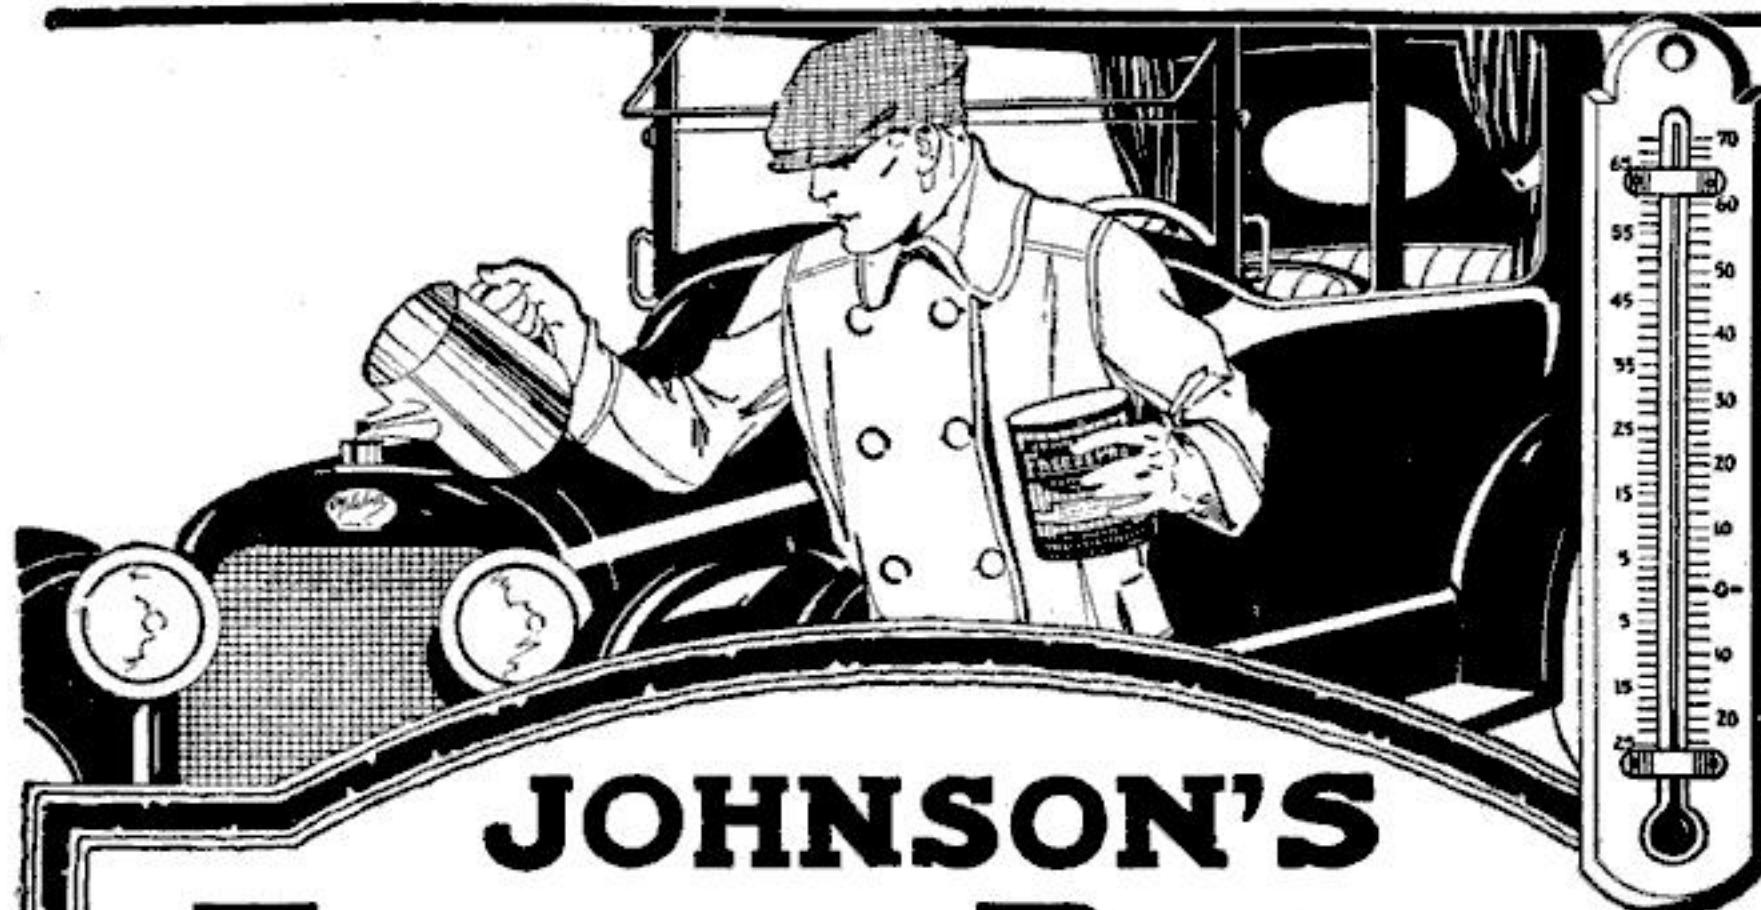

# JOHNSON'S FREEZE-PROOF

## *Prevents Frozen Radiators*

**T**HE only way you can be positively sure that your radiator won't freeze up is to use a non-evaporating anti-freeze preparation. You can never be sure of Alcohol or any other product which evaporates with the water.

### *Does Not Evaporate or Steam*

Johnson's Freeze-Proof does not evaporate with the water. One application is sufficient for the whole winter unless the solution is weakened by leakage of the radiator or hose connections, through the over-flow pipe or by boiling water.

### *Economical and Easy*

Johnson's Freeze-Proof is the most economical anti-freeze compound on the market. It is very easy to use—simply dissolve in water and pour into the radiator. One package is sufficient to protect a Ford to 5° below zero; for large cars use two packages to protect to 5° below zero, and three packages to protect to 20° below zero.

### ----- USE THIS COUPON -----

**S. C. JOHNSON & SON, Dept PSM12 Racine, Wis.**

I enclose \$1.50 for which please send me prepaid one package of Johnson's Freeze-Proof.

NAME.....

ADDRESS.....

CITY & STATE.....

MY DEALER IS.....

### *Absolutely Harmless*

Johnson's Freeze-Proof does not injure rubber, cloth, packing or metal of any kind. It does not rust or corrode metal. There is less rust with Johnson's Freeze-Proof than there is with water alone or a combination of water and alcohol.

### *Raises the Boiling Point of Water*

The boiling point of water is 212°. The boiling point of alcohol is 131°. The boiling point of Johnson's Freeze-Proof and water is from 225° to 250° depending upon the amount of Freeze-Proof used.

If your dealer cannot supply you, we will fill your order direct by prepaid Parcel Post to points in U. S. A. East of the Rockies.

Insist upon your dealer supplying you with Johnson's Freeze-Proof. It is readily procurable as practically all jobbers have it in stock. Johnson's Freeze-Proof is put up in packages containing 6½ lbs. net which retail at \$1.50 each in U. S. A.

*Write for our Folder on Keeping Your Car Young—it's Free.*

**S. C. JOHNSON & SON, Dept PSM12 Racine, Wis.**



1994 20 21 22 23

**This One**



**ZACT-Z8X-192A**



# SHEAFFER'S

## Self Filling FOUNTAIN PEN and SHARP POINT PENCIL

THE WORLD'S BEST  
WRITING INSTRUMENTS

*There's a style to suit the taste  
and purse of every giver*

29 1-2 S. 14K  
Solid  
Gold Band  
\$4.50  
Same in  
Long

36 E. M. 18K  
1-10 Gold  
Filled  
\$10

B. A.  
Sterling  
Silver \$2.50  
C. A. Gold  
Filled \$3.00  
Fancy  
Silver Filled  
\$1.50

The Gift  
of Gifts  
for Soldiers  
and Sailors

C. C. 20 year  
Gold  
Chased  
\$3.50  
B. C. Ster-  
ling \$3.00

IN selecting a Sheaffer Pen or Sharp  
Point Pencil for a Christmas gift,  
you can feel sure that it will not only  
meet with instant appreciation but  
will become doubly prized as time  
proves its daily usefulness and reli-  
ability. For the Sheaffer Pen does not  
blot nor leak and the Sharp Point  
Pencil is always sharp and always  
ready for use.

Sold by Good Dealers Everywhere

UNDER MONEY BACK GUARANTEE

W. A. SHEAFFER PEN CO.

Ft. Madison, Iowa

Service Stations

203 Broadway, New York City  
1004 Consumers Bldg., Chicago  
Monadnock Bldg., San Francisco

No. 2 Long  
or Short  
with Clip  
Cap \$2.75  
without clip  
\$2.50

21 S. C. 18K  
1-10 Gold  
Filled  
Ring End  
\$3.50

29 14K Solid  
Gold Band  
\$5.00  
Same in  
Short

No. 4 Long  
or Short  
with clip  
cap \$4.25  
without clip  
\$4.00



# Will there be a Victrola in your home this Christmas?

Will Santa Claus usher into your home on Christmas morning the artistic Genius of all the world—the singers, the instrumentalists, the composers, the comedians who rule as the monarchs of Art and Laughter?

Caruso, Alda, Calvé, De Luca, Farrar, Galli-Curci, Gluck, Hempel, Homer, Kreisler, Martinelli, McCormack, Melba, Ruffo, Schumann-Heink, Scotti, Tetrassini, Victor Herbert, Harry Lauder, Sousa—these are names that promise you the greatest music and entertainment that the world has to offer. All these illustrious artists—and many more—make records exclusively for the Victor.

The Victrola is the supreme gift—enjoyed by all the family every day in the year.

There are Victors and Victrolas in great variety of styles from \$10 to \$400, and there are Victor dealers in every city in the world who will gladly demonstrate them and play any music you wish to hear.

"Victrola" is the Registered Trade-mark of the Victor Talking Machine Company designating the products of this Company only. The use of the word **Victrola** upon or in the promotion or sale of any other Talking Machine or Phonograph products is misleading and illegal.



# Victrola



